







## **Diesel operated Arm Lift Mobile Crane** Max. Capacity Kg. 12.000





## Valla **CAPACITY** OUT **REACH** (kg) (mm) 7.000 2.000 4.000 3.500 7.000 1.900





## **TECHNICAL DATA**

**CRANE FRAME:** Six-wheelers frame fabricated from preformed and welded steel plate with built-in counterweight.

**ENGINE**: Diesel 4 cylinders water cooled with electric starter and automatic fuel switch off.

TRANSMISSION: Automatic (hydrostatic) "automotive". Differential axle. Max speed 14 Km/h.

**BRAKES:** foot hydraulically operated brakes (disc on front, drums on rear wheels). Parking hand brake mechanically operated.

**SUSPENSION:** oscillating rear axle with mechanical lock.

**STEERING:** power steering with hydraulic cylinder and 140° articulation. Safety valves and filter.

WHEELS: Nr. 2 rear pneumatic 250 R15- Nr. 4 front superelastic 250 R15

**BOOM**: fabricated from preformed and welded quality steel plate. Nr.4 sections: 1 fixed; 3 hydraulically telescoping. Fitted with nylon wear pads adjustable wear pads on the sides.

LMI: Electronic Load Moment Indicator. Display showing lifted load, max allowed load, lifting percentage, operating radius, angle, telescope and light indicators on the operative mode.

TOTAL WEIGHT: approx. Kg. 13.000 MAX. CAPACITY: Kg. 12.000

Options on request: hydraulic winch, chain hoists, carry-deck, manual and hydraulic jibs, man bucket, remote control, full set of road lights.











- Crane complies with the following standard:
- -2006/42/CE
- -UNIEN13000 -I.S.P.E.S.L.

mm.



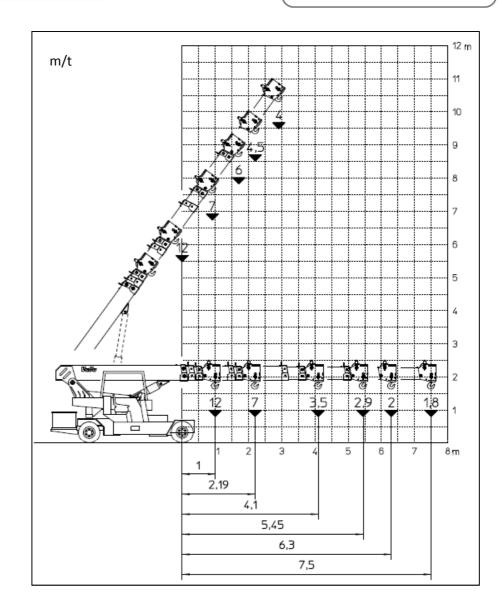







Data above are subject to be changed without any previous notice. Pictures may differ from descriptive leaflet.