




Altec AH150 Telescopic/Articulating Material Handler



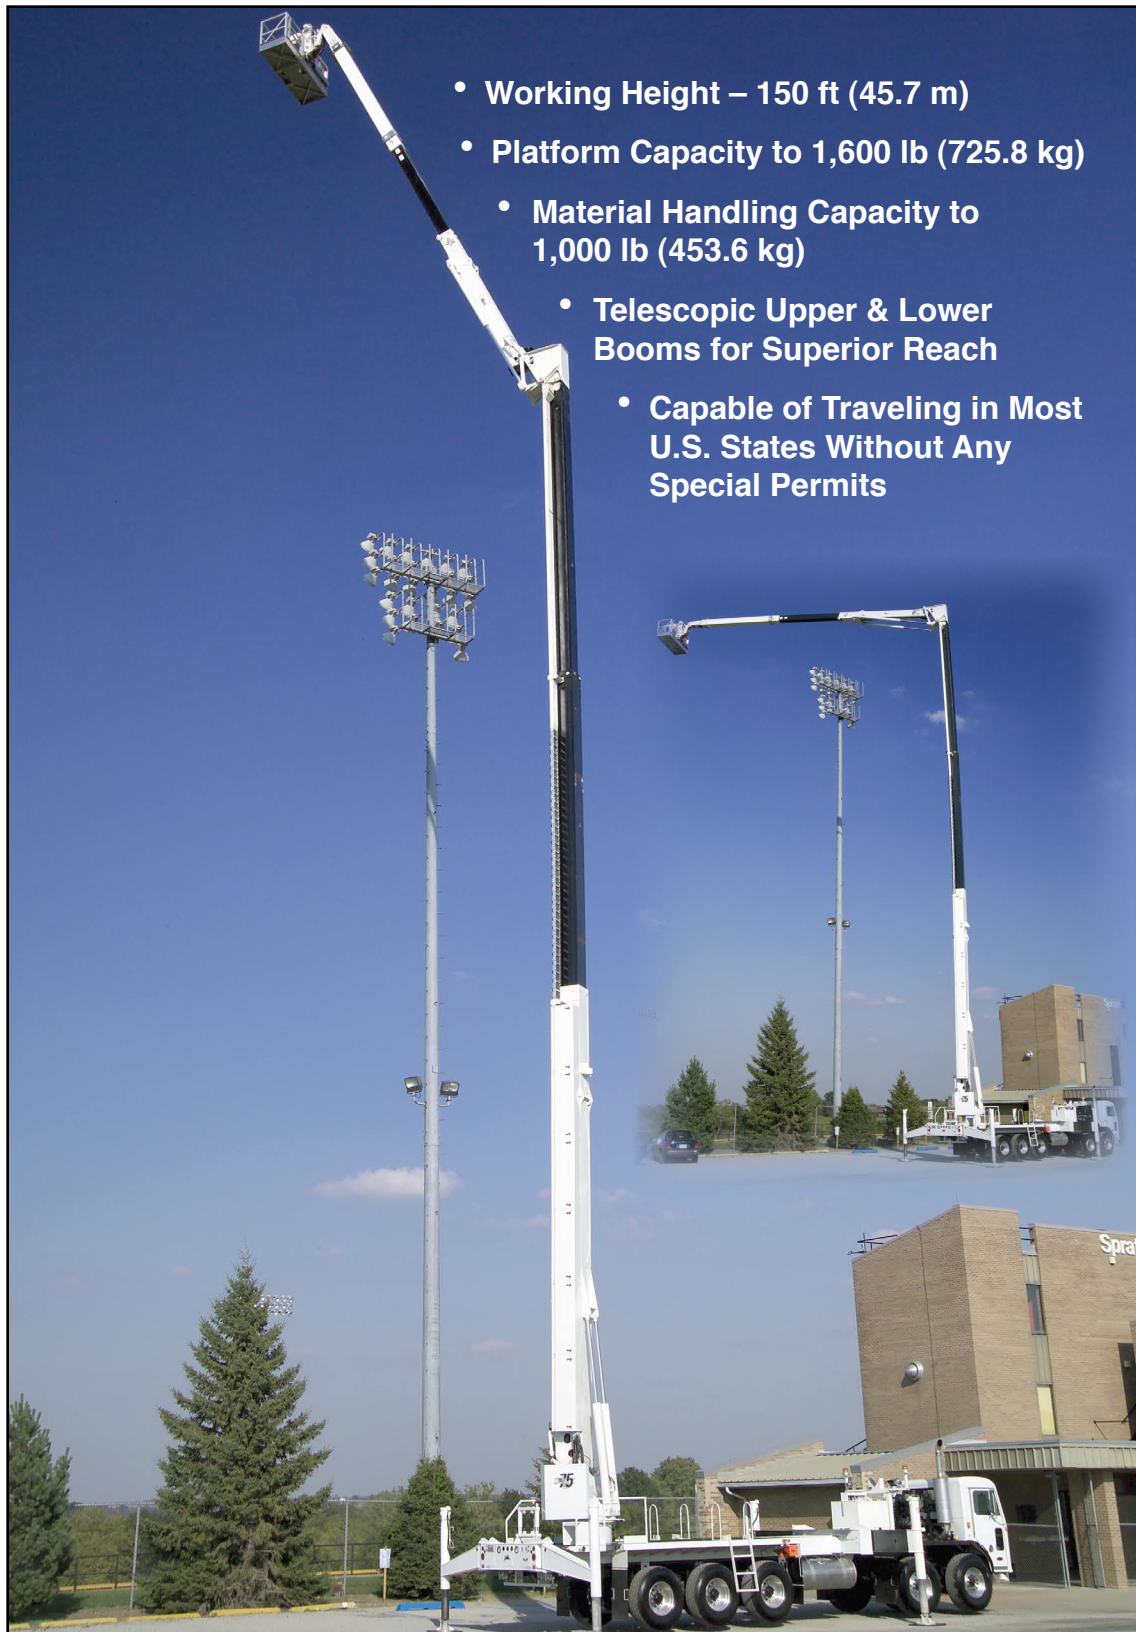

Altec AH150 Specifications

STANDARD FEATURES

- Outrigger Boom Interlock System
- Outrigger Motion Alarm
- Outrigger Pads
- Back-Up Alarm
- Hydraulically Telescopic/Articulating Jib Winch Material Handling System
- 180° Rotation

RECOMMENDED FEATURES

- Fall Protection System
- Wheel Chocks

GENERAL SPECIFICATIONS

Specifications	AH150	
Ground to Bottom of Platform*	145 ft	44.2 m
Working Height*	150 ft	47.7 m
Maximum Reach From Centerline Of Rotation to Lip of Platform (at working height)	60.3 ft 71 ft	18.8 m 21.6 m
Maximum Reach From Centerline Of Rotation to Lip of Platform (at working height)	55 ft 120 ft	16.8 m 36.6 m
Stowed Travel Height* Approximate (58 inch cab height)	12.7 ft 13.4 ft	3.9 m 4.1 m
Stowed Travel Length	44.8 ft	13.64 m
Stowed Travel Width	101 in	256.5 cm
Upper Boom Isolation Gap, Min (based on 138 kV rating)	14.2 ft	4.3 m
Max. Boom Dielectric Rating**	500 kV***	
Maximum Platform Capacity 36" x 96" aluminum	1,600 lbs	726 kg
Maximum Jib Capacity	1,000 lbs	453.6 kg
Maximum Combined Capacity, Platform & Jib	1,600 lbs	726 kg
Upper Boom Articulation, degrees	0 to 160	
Lower Boom Articulation, degrees	0 to 87	
Upper Boom Telescopic Extension	12.7 ft	3.9 m
Lower Boom Telescopic Extension	49.8 ft	15.18 m
Rotation	Continuous	
*** 765 KVAC rating is available as a special option. Consult Altec HiLine Engineering for details.		


Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.

PLATFORM OPTIONS

- End Mounted Fiberglass Platform
- 40 x 60 x 42 in (1016 x 1524 x 1067 mm); 800 lb (363 kg) capacity
- End Mounted Aluminum Platforms
- 36 x 70 x 42 in (914 x 1,778 x 1,067 mm); 1,100 lb (498.9 kg) capacity
- 36 x 96 x 42 in (914 x 2,438 x 1,067 mm); 1,600 lb (725.7 kg) capacity



When folded in the road travel position on commercially produced chassis, the AH150 is 44.75 ft (13.64 m) in length, 13.3 ft (4.05 m) in height and meets the legal weight requirements, including bridge formula, in most US states.

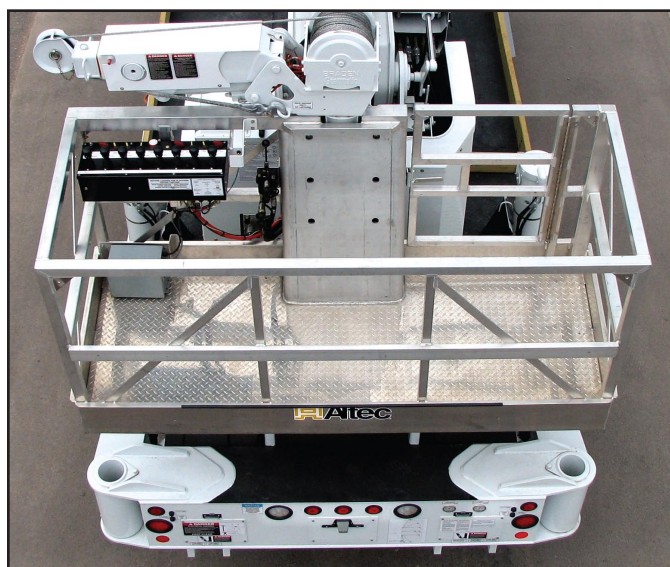

Hydraulically extendible jib may be manually rotated on its base and pinned in 5 working positions. Jib pinned perpendicular to upper boom (90°) is capable of lifting at maximum capacity, while located out of the way of operators inside the platform.

Altec Sales and Service



Manufacturing and Service Facilities Located
Throughout the United States and Canada
www.altec.com

Altec HiLine, LLC

P.O. Box 16288
1255 Port Terminal Drive
Duluth, MN 55802
800-346-0081