



Altec AT200AV Specifications

STANDARD FEATURES

- Two-Stage Telescopic Non-Insulated Aerial Device
- Hydraulically Extended Boom
- 370° Non-continuous Rotation
- Side-Mounted Gravity Leveled Crawl Thru Platform 24 x 24 x 42 in (610 x 610 x 1067 mm)
- Platform Capacity 350 lb (159 kg)
- Engine Start/Stop at Upper and Lower Controls
- 120 VAC Circuit in Boom With Outlets at the Platform
- Open Center Hydraulic System

RECOMMENDED FEATURES

- Fall Protection System
- Wheel Chocks

GENERAL SPECIFICATIONS

| | | |
|-------------------------------|---------------------|--------|
| Ground to Bottom of Platform* | 30.9 ft | 9.4 m |
| Working Height | 35.9 ft | 10.9 m |
| Stowed Travel Height | 9.8 ft | 2.98 m |
| Platform Capacity | 350 lb | 159 kg |
| Boom Articulation | -13.5° to 80° | |
| Rotation | 370° Non-continuous | |
| Weight of Unit | 1610 lb | 730 kg |

*Based on 40 inch (1016 mm) Chassis Frame Height

Altec Aerial Devices meet or exceed all applicable ANSI Standards as of the date of manufacture. Altec reserves the right to improve models and change specifications without notice or obligation.




Easy Platform Access from the Ground

OPTIONS

- Rectangular Walk-In Platform with Door
- Positive or Hydraulic Leveling
- Two Speed Controls
- Choice of Reservoirs: Bed-Mounted or Pedestal-Mounted
- Airline to Platform
- Interior Bridgemount Pedestal
- Canopy and Curtain Assembly
- Diagnostic Pressure Test Kit
- Emergency Operating System
- Emergency Lowering System
- Heater for Platform
- Seat for Platform
- Tool Pouches and Trays

REACH DIAGRAM

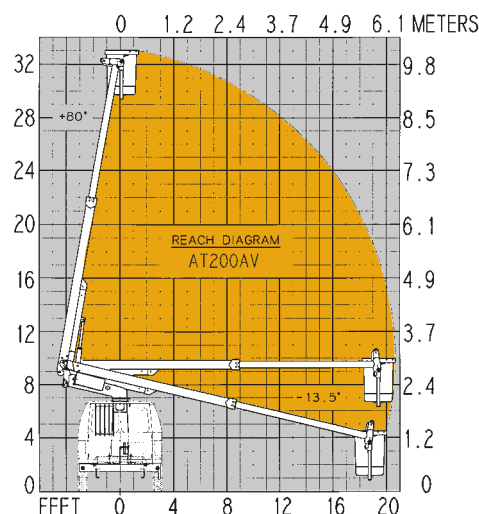

Optional Bridgemount Pedestal

Altec Sales and Service



Manufacturing and Service Facilities Located
Throughout the United States and Canada

Altec Industries, Inc.

Post Office Box 10264
Birmingham, Alabama 35202
Phone 205/991-7733
Fax 205/991-9993