




American Crane Corporation
Wilmington, North Carolina



GENERAL DESCRIPTION 800 Series Truck Crane

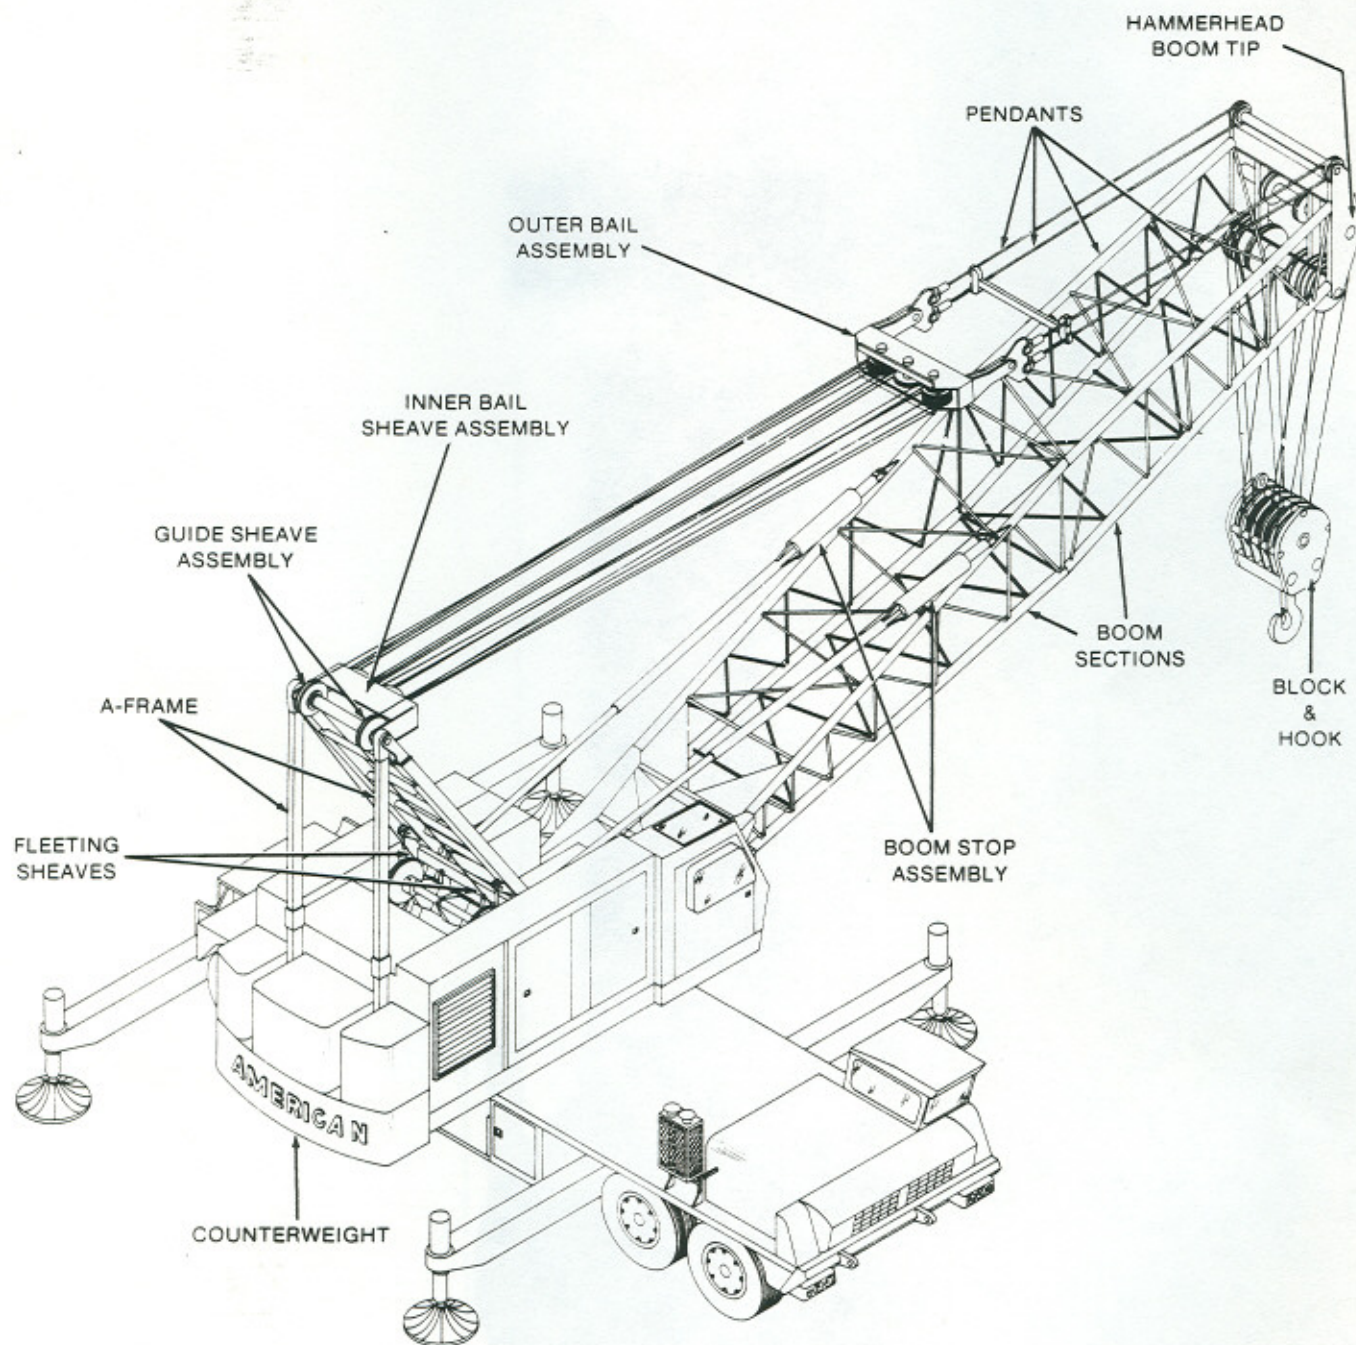

Truck Crane Booming (Typical)

TM 0000063



American Crane Corporation
Wilmington, North Carolina



GENERAL DESCRIPTION
800 Series Truck Crane

CARRIER DESCRIPTION

GENERAL

The following paragraphs describe the American Model 8460, 165 ton, 265 inch wheelbase, 8 x 4 carrier.

Power Train

Engine

Two engines are available for use on the carrier:

Detroit Diesel (GM) 8V-71-N Model No. 7087-7040 diesel engine, 8 cylinder, 4-1/4 inch bore by 5 inch stroke, 568 cu. in. displacement, rated 318 HP at 2100 RPM.

Optional engine - Cummings NTC-350 diesel engine, 6 cylinder, 5-1/2 inch bore by 6 inch stroke, 855 cu. in. displacement, rated 350 HP at 2100 RPM.

Clutch

Spicer AS 1402, two plate, dry type, angle spring clutch hydraulically actuated.

Transmission, Main

Fuller Model T955ALL modified to give 5+1 speeds forward and 1+1 reverse.

Ratios:

Low	26.54:1	Fourth	1.16:1
First	6.35:1	Fifth	1.00:1
Second	3.75:1	Reverse	6.48:1
Third	2.04:1	Reverse Low	27.09:1

Transmission, Auxiliary

Spicer Model 1241C, four speed.

Ratios:

First	2.37:1
Second	1.24:1
Third	1.00:1
Fourth	0.81:1

Propel Shaft

Spicer 1710 Series and 1810 Series.

Printed in U.S.A.
3/80

Rear Axles

Clark planetary 91000 tandem assembly, non-spin differential on leading axle; ratio 9:00:1.

Front Axles

Shuler FTCA-34-L-30 tandem. Highway capacity 48,000 lbs.

Running Gear

Suspension

Hendrickson solid mount with rubber bushed torque rods front and rear.

Service Brakes

Air on all wheels with 14.5 CFM air compressor and two reservoirs; lining area 20" x 7" (1000 sq. in.) rear; 17-1/2" x 4" (495 sq. in.) front; 1495 sq. in. total lining area.

Emergency Brakes

Spring set, air release system on both rear axles with operator's control on dash panel; air reservoir for release of spring set chambers.

Wheels

Cast spoke front; rear integrally cast with axles; 10.00 x 24 rims.

Tires

Michelin 14:00 x 24XRB—Three Star.

Hydraulic Outriggers

Two independent housings fabricated from 100,000 PSI yield steel; outrigger beams with horizontal and vertical hydraulic movements; automatic check and manual shutoff valves in hydraulic jacks to assure maximum safety for all lifts; hardened chromed plated rams, fitted with 42" dia. spun high strength steel floats, pin connected and removable; maximum stroke of vertical jacks is 12 inches; maximum lift under floats is 7 inches; outrigger controls for RH outriggers on RH side of carrier and controls for LH outriggers on LH side.




American Crane Corporation
Wilmington, North Carolina



GENERAL DESCRIPTION
800 Series Truck Crane
8460

GENERAL DIMENSIONS (8460)

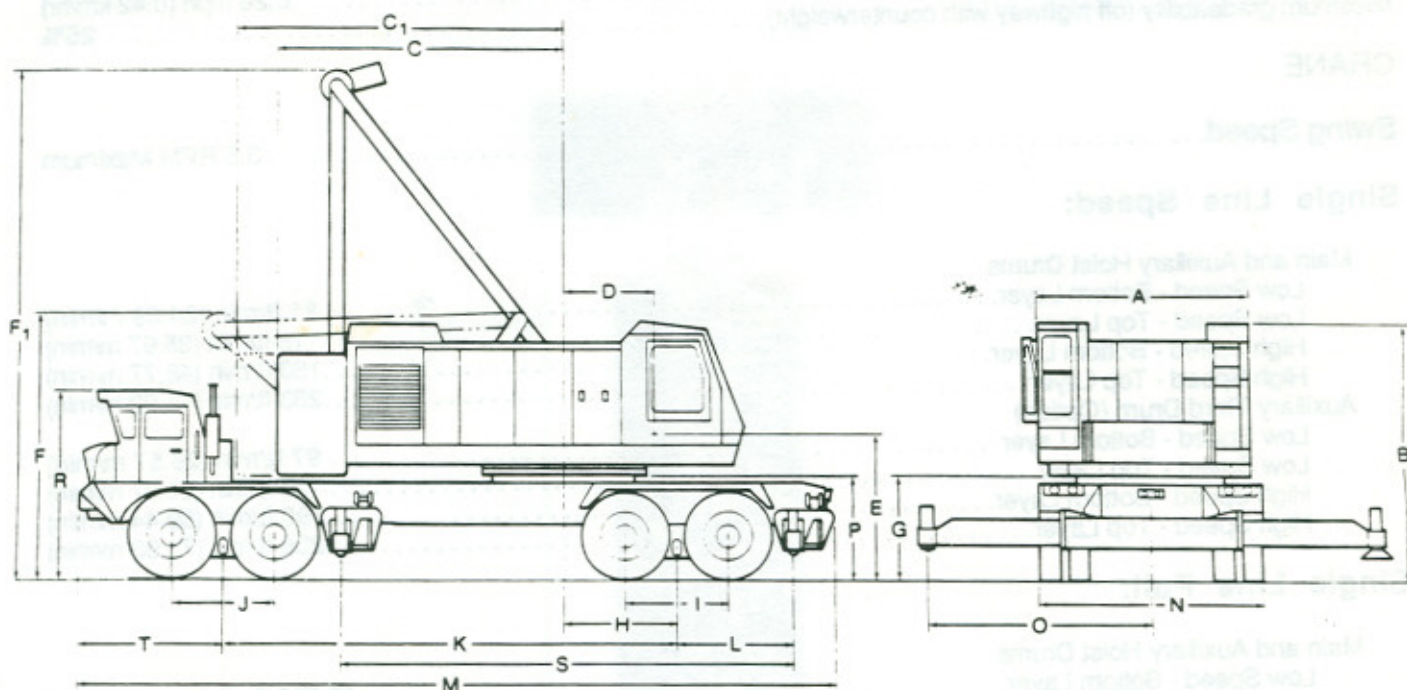

- | | | | | |
|---|--------------------|---|-------------------------------------|--------------------|
| A. Width of cab | 10' 4" (3.15 m) | K. Centerline of rear bogie to | centerline of front bogie | 22' 0" (6.71 m) |
| B. Height to top of cab | 13' 0" (3.96 m) | L. Centerline of rear bogie to | centerline of rear outrigger | 6' 3-3/4" (1.92 m) |
| C. Tailswing—ctwt. Retracted | 14' 0" (4.26 m) | M. Overall length | 37' 1-3/4" (11.32 m) | |
| C ₁ . Tailswing—ctwt. Extended | 16' 0" (4.88 m) | N. Overall width | 11' 0" (3.35 m) | |
| D. Centerline of rotation to | | O. Outriggers extended | 11' 0" (3.35 m) | |
| centerline of boom foot | 4' 6" (1.37 m) | P. Height over mounting plate | 5' 0-1/2" (1.54 m) | |
| E. Ground to centerline boom foot .. | 7' 2-3/4" (2.20 m) | R. Height over carrier cab | 9' 4" (2.84 m) | |
| F. Height over A-Frame (lowered) | 13' 2" (4.01 m) | S. Centerline of rear outrigger to | centerline of front outrigger | 22' 0" (6.71 m) |
| F ₁ . Height over A-Frame (raised) | 25' 2" (7.68 m) | T. Distance from front bogie to | front bumper | 7' 2-1/2" (2.20 m) |
| G. Ground to bottom of | | Turning radius | 65' 0" (19.81 m) | |
| counterweight | 5' 3-1/2" (1.61 m) | Clearance (under rear equalizing | beam) | 7-1/2" (2.15 m) |
| H. Centerline of rotation to | | Clearance (under rear differential) | 12" (3.66 m) | |
| centerline of rear bogie | 5' 6-1/4" (1.68 m) | | | |
| I. Distance between rear axles | 5' 0" (1.52 m) | | | |
| J. Distance between front axles | 5' 0" (1.52 m) | | | |

General Dimensions (8460)

TM 0000105



American Crane Corporation
Wilmington, North Carolina



GENERAL DESCRIPTION
8460 TRUCK CRANE

PERFORMANCE

CARRIER

Maximum governed speed..... 45 mph (72.4 km/hr)
Minimum speed (1000 RPM)..... 0.26 mph (0.42 km/hr)
Maximum gradeability (off highway with counterweight)..... 25%

CRANE

Swing Speed..... 3.5 RPM Maximum

Single Line Speed:

Main and Auxiliary Hoist Drums	
Low Speed - Bottom Layer.....	81 ft/min (24.69 m/min)
Low Speed - Top Layer.....	118 ft/min (35.97 m/min)
High Speed - Bottom Layer.....	160 ft/min (48.77 m/min)
High Speed - Top Layer.....	233 ft/min (71.02 m/min)
Auxiliary Third Drum (Option)	
Low Speed - Bottom Layer.....	97 ft/min (29.57 m/min)
Low Speed - Top Layer.....	119 ft/min (36.27 m/min)
High Speed - Bottom Layer.....	195 ft/min (59.44 m/min)
High Speed - Top Layer.....	236 ft/min (71.93 m/min)

Single Line Pull:

Main and Auxiliary Hoist Drums	
Low Speed - Bottom Layer.....	45,000 lb (20412 kg) SLP
Low Speed - Top Layer.....	30,000 lb (13608 kg) SLP
High Speed - Bottom Layer.....	22,500 lb (10206 kg) SLP
High Speed - Top Layer.....	15,000 lb (6804 kg) SLP
Auxiliary Third Drum (Option)	
Low Speed - Bottom Layer.....	37,300 lb (16919 kg) SLP
Low Speed - Top Layer.....	29,600 lb (13426 kg) SLP
High Speed - Bottom Layer.....	18,650 lb (8460 kg) SLP
High Speed - Top Layer.....	14,800 lb (6713 kg) SLP

Boom Speed:

Time to raise 50' (15.24m) boom from ground to minimum radius..... 1.9 minutes
Time to lower 50' (15.24m) boom from minimum radius to ground..... 1.67 minutes

NOTE

In accordance with varying material situations, and the Company's policy of constant product improvement, these specifications subject to change without notice and without incurring responsibility to units previously sold.