




Snelmontagekraan
Grue à montage rapide
Schnelleinsatzkran
Self erecting crane

ARCO 19S

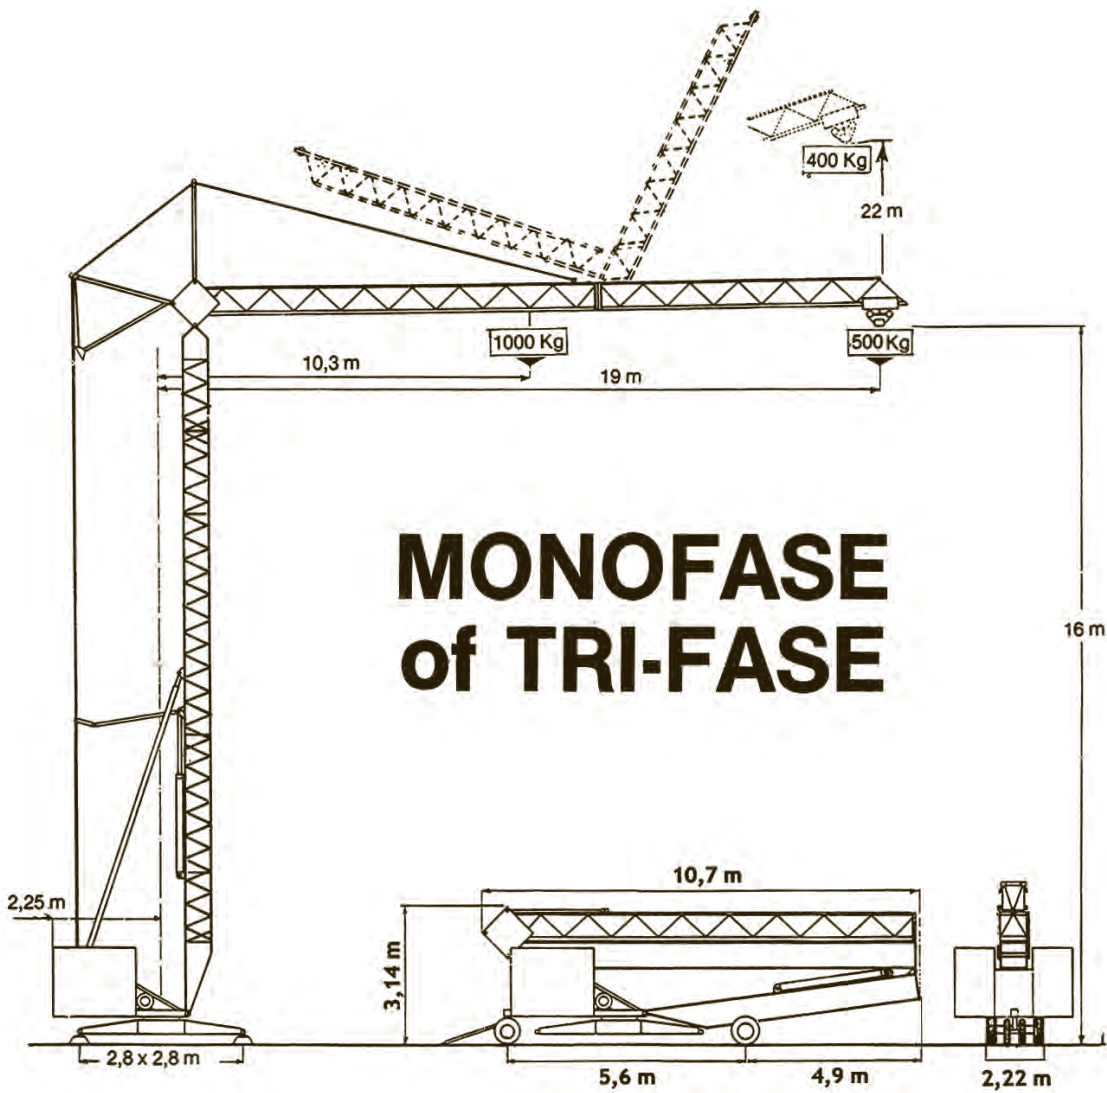

MONOFASE of TRI-FASE

BEWEGING BEWEGUNG MOVEMENT MOTIONS	SNELHEDEN GESCHWINDIGKEIT VITESSE SPEED RATE	VERMOGEN KRAFTBEDARF PUISSANCE RATING	TECHNISCHE GEGEVENS TECHNISCHE DATEN DONNEES TECHNIQUES TECHNICAL DATA
Hijzen Heben Levage Hoisting	  400/500 1000 Kg Mono: 22 11 m/m' Tri : 40 20 m/m'	HP-PS-CV 2,2-2,2	Benodigd vermogen Kraftbedarf Puissance électrique nécessaire Necessary electric power 2,5 Kv KVA Kw
Loopkat rijden Katzfahren Chariot Jib trolley	30 m/m'	1	Voeding mono of tri Drehstrom Courant Main supply 220-380 v 50 periodi Hz periodes cycles
Zwenken Drehen Orientation Slewing	g/m' Vpm f/m rpm 1	0,6	Ballast Gegengewicht Contrepoids Counterweight 7,5 ton
Montage Montage Montage Assemblage	3 m'	2	Gewicht zonder ballast Konstruktions gewicht ohne ballast Poids de la grue sans lest Weight of the crane without ballast 4,7 ton



ARCOMET

Industrieweg 139 - 3583 Paal-Beringen - BELGIUM - T +32 (0)11 450 950 - EMAIL arcomet@arcomet.com - www.arcomet.com

WIJZIGINGEN VOORBEHOUDEN - SOUS RÉSERVE DE MODIFICATIONS - SUBJECT TO MODIFICATION - AENDERUNGEN VORBEHALTEN - SOTTO RISERVA DI MODIFICHE - MODIFICACIONES RESERVADAS
ARCO 19S - 02 - © ARCOMET 2009

