



AC15-101 Articulating Crane

|--|

Opecinications						
Number of Extensions	1-Hydraulic	2-Hydraulic	3-Hydraulic	4-Hydraulic	5-Hydraulic	
Crane Rating*	101,300 ft-lb (14 tm)					
Max. Horizontal Reach	20' 2" (6.14 m)	26' 7" (8.10 m)	33' 4" (10.16 m)	40' 1" (12.23 m)	47' (14.31 m)	
Max Vertical Reach Hydraulic	31' 6" (9.6 m)	37' 9" (11.5 m)	44' 4" (13.5)	50' 10" (15.5 m)	57'9" (17.6 m)	
Max. Capacity	12,240 lb (5,550 kg)	11,680 lb (5,300 kg)	11,240 lb (5,100 kg)	11,020 lb (5,000 kg)	10,780 lb (4,900)	
Max Capacity @ Max Reach	4,940 lb (2,240 kg)	3,530 lb (1,600 kg)	2,600 lb (1,180 kg)	1,940 lb (880 kg)	1,342 lb (610 kg)	
Crane Weight**	3,240 lb (1,470 kg)	3,530 lb (1,600 kg)	3,790 lb (1,720 kg)	4,010 lb (1,820 kg)	4,620 lb (2,100 kg)	

^{*}Crane rating (ft-lb) is the rated load (lb) x the respective distance (ft) from centerline of rotation with all extensions retracted and the inner and outer booms in a horizontal position, per ANSI B30.22.

^{**}Crane weight does not include outrigger

Specifications				
Outrigger Foot Diameter	7.09" (180 mm)			
Crane Storage Height	93" (2,340 mm)			
Mounting Space***	33.66" (855 mm)			
Rotational Torque	1,350 ft-lb (1825 daNm)			
Rotation	380°			
Oil Reserve Capacity	26.4 gal (100 L)			

Optimum Pump Capacity	6.6 gpm (25 L/min)		
System Pressure	4,210 psi (290 bar)		
Outrigger Extension Span	Outrigger Extension Span		
Standard (manual out, hydraulic down)	13' 2" (4.01 m)		

Minimum Chassis Specifications

· · · · · · · · · · · · · · · · · · ·	
Gross Vehicle Weight Rating (GVWR)	39,672 lb
Resistance to Bending Moment (RBM)	801,368 in-lb

Notes

A. Weight distribution calculations are required to determine final axle loading. The use of service bodies, diesel engines, or longer wheelbase, can increase the minimum chassis requirements. Please contact Auto Crane for details.

B. GAWR (Gross Axle Weight Rating) is the total weight of the vehicle including the (chassis, driveline, occupants, cargo, etc.) that is allowed by the manufacturer requirements, for the vehicle to go down the road safely. This is a critical factor in purchasing a truck for the crane application. All chassis and crane applications must be tested by engineering and the final assembler to ensure stability per ANSI B30.22.

System Characteristics

Rotation System

Our Articulating Cranes utilize a rack and pinion rotation system which provides high torque for demanding applications. The column turns on bushings made of an advanced composite material for long service life. The rotation cylinders are protected by a load holding valve and flow controls to ensure safe and precise operation.

Cylinder Holding Valves

Flanged load holding valves on hydraulic cylinders provide smooth load control and load holding. In the event of a hose failure, they lock the cylinder in place to prevent uncontrolled crane movement or falling loads.

Hydraulic Overload System

Providing the Hydraulic Overload protection are main relief and port relief valves, as well as counterbalance valves.

The hydraulic system is open-center as standard. Included on the crane is a hydraulic oil reservoir, return line filter, high-pressure filter(1), and control valve with dualside controls(2). An optional closed-center valve is available on request.

- (1) Cranes with manual controls do not have high pressure filter
- (2) Cranes with radio controls do not have dual-side controls



4707 N. Mingo Road Tulsa, OK 74117 918-836-0463 www.autocrane.com


^{***}Allow an additional 10" between the cab and crane base for swing clearance.




AC15-101 Articulating Crane

Capacity Charts


AC15-101 1 Hydraulic Extension




AC15-101 3 Hydraulic Extension




AC15-101 2 Hydraulic Extension



AC15-101 4 Hydraulic Extension



AC15-101 5 Hydraulic Extension






4707 N. Mingo Road Tulsa, OK 74117 918-836-0463 www.autocrane.com




AC15-101 Articulating Crane

Geometric Configurations (Dimensions)

AC15-101 5 Hydraulic Extension (mm)

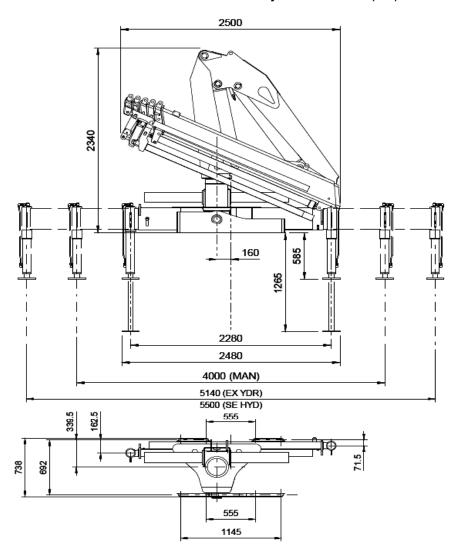

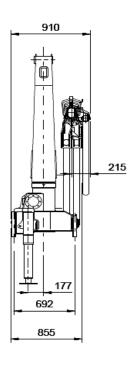

Special Features (on select models)









4707 N. Mingo Road Tulsa, OK 74117 918-836-0463 www.autocrane.com