




Böcker Truck Crane AK 37/4000 PLC on a 13,5t truck

07/2010

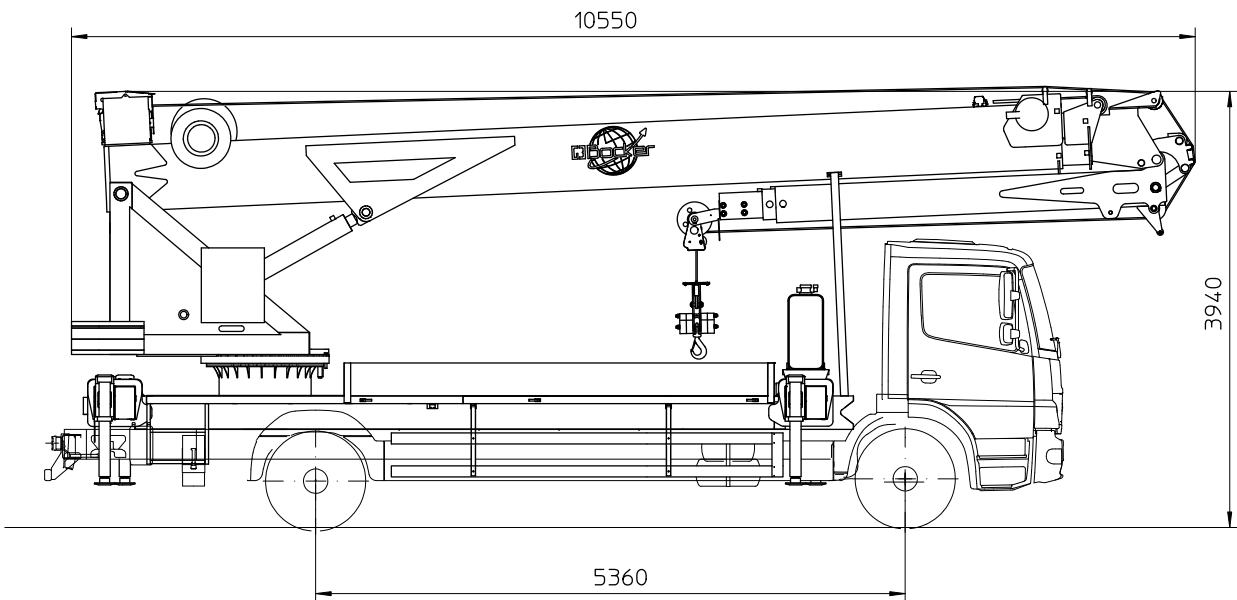

Dimensions / Specifications


Telescope arm angle	approx.	87 degrees	Max. Range of crane operation with 15,5 t truck	
Jib angle	approx.	165 degrees		
Swivel area	approx.	620 degrees	500 kg Lifting capacity	approx. 26.30 m
Working height up to jib	approx.	28.00 m	1000 kg Lifting capacity	approx. 19.50 m
Max. extension length including mech. extension (2.0 m)	approx.	37.00 m	2000 kg Lifting capacity	approx. 12.60 m
Max. extension length	approx.	35.00 m	4000 kg Lifting capacity	approx. 7.00 m
Extendible Jib				
Basic length	approx.	4.55 m		
Max. extendible length	approx.	8.90 m	Max. Range of platform operation	
Current of hydraulic pump	approx.	100 litres	PK 250-D	
Hook speed	approx.	60 m/min	100 kg Lifting capacity	approx. 28.60 m
Support length	approx.	6.05 m	250 kg Lifting capacity	approx. 26.00 m
Support width	approx.	5.74 m	Max. working height	approx. 35.00 m
One-sided support	approx.	4.15 m		
Length vehicle	approx.	10.55 m	Truck Data	
Width vehicle	approx.	2.55 m	Min. wheelbase	5360 mm
Height vehicle DB / MAN	approx.	3.94 / 3.99 m	Gross vehicle weight	13.5 t
Body weight	approx.	8700 kg	Max. dead weight	4.7 t

All rights reserved for changes in dimension and construction!




Boöcker INFO

Work diagram

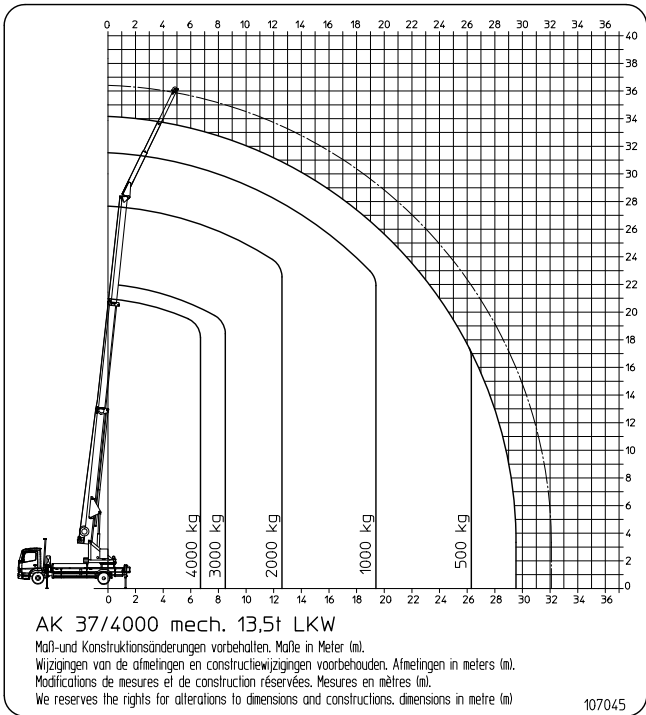

PK 250-D

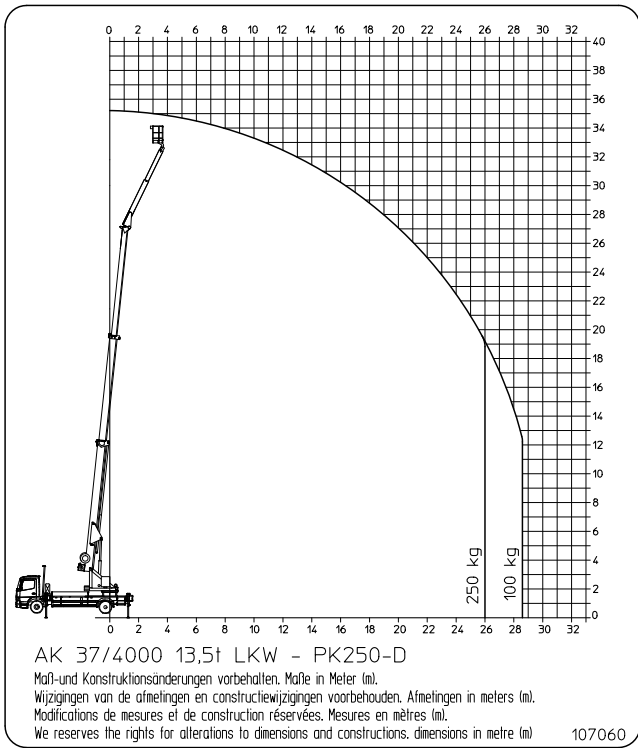

All rights reserved for changes in dimension and construction!