




Böcker-Truck Crane AK 41/6000 PLC

as at 07/2010

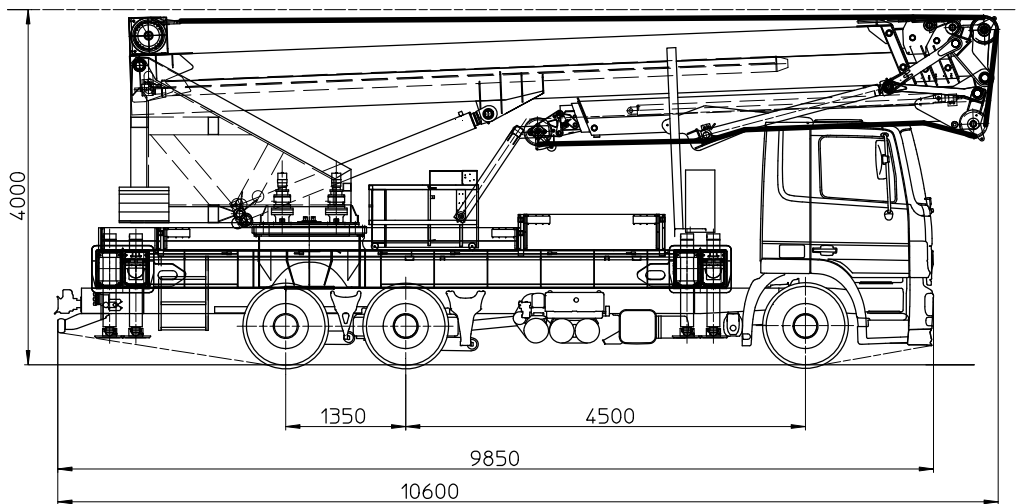

Dimensions /Specifications

Angle of telescope arm	approx. 85 degree	Max. range of crane operation	
Angle of jib	approx. 155 degree	6000 kg Lifting capacity	approx. 7,00 m
Swivel range	approx. 620 degree	3000 kg Lifting capacity	approx. 12,10 m
Working height up to jib	approx. 32,50 m	2000 kg Lifting capacity	approx. 15,20 m
Max. extension length	approx. 41,00 m	1000 kg Lifting capacity	approx. 23,00 m
Extendible jib:		500 kg Lifting capacity	approx. 29,00 m
Basic length	approx. 5,00 m	Max. range of platform operation	
Extendible max.	approx. 11,00 m		
Capacity hydraulic pump	approx. 140 litre	250 kg Lifting capacity	approx. 30,00 m
Hook speed	approx. 57 m/min	Max. working height	approx. 41,00 m
Support length	approx. 6,50 m	Truck Data	
Support width	approx. 5,35 m		
One- sided support	approx. 3,96 m		
Length vehicle	approx. 10,60 m		
Width vehicle	approx. 2,55 m		
Height vehicle	approx. 4,00 m	Wheelbase min.	4500/1350 mm
Body weight	approx. 16.000 kg	Gross vehicle weight	26,00 t
		Max. dead weight	8,00 t


All rights reserved for changes in dimension and construction!



Böcker INFO



2 / 2

Work diagram

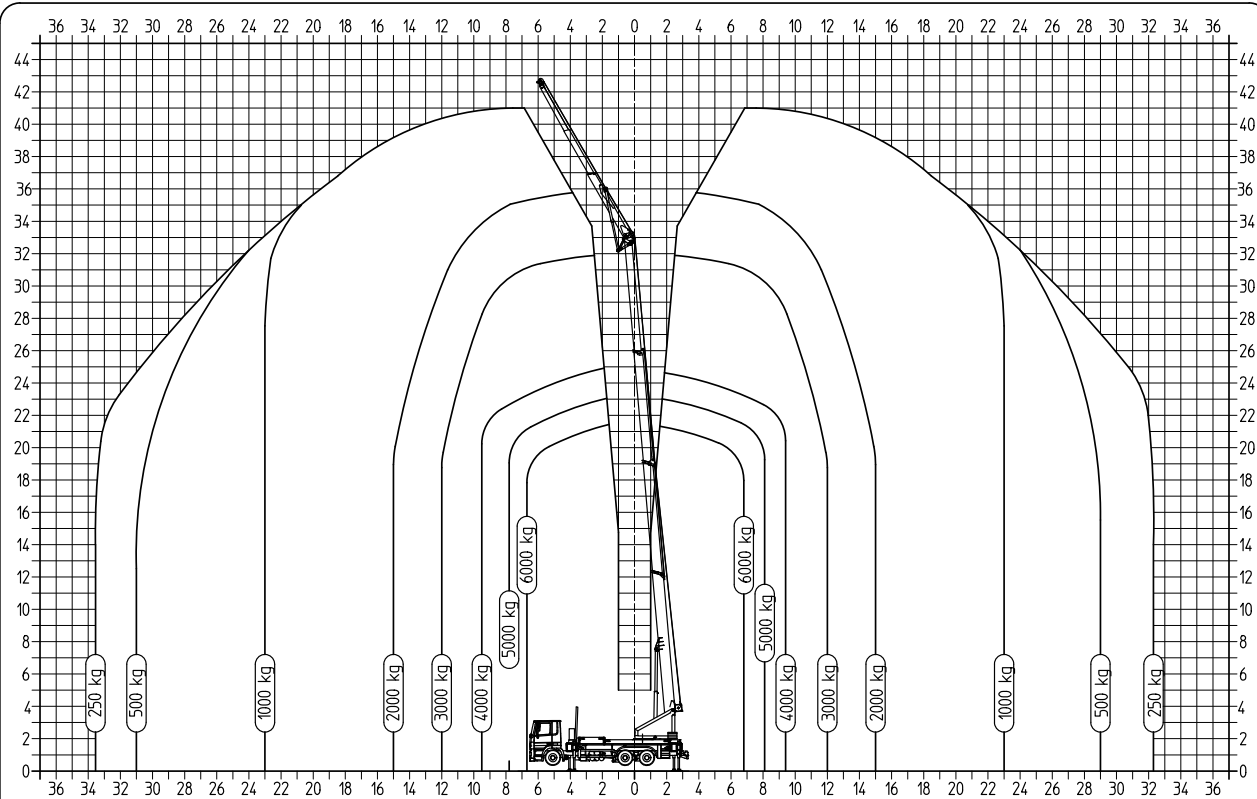

AK 41/6000 Max. Reichweiten bei ganz ausgefahrenen Stützen
Maße in Meter (m). Maß- und Konstruktionsänderungen vorbehalten !

103161

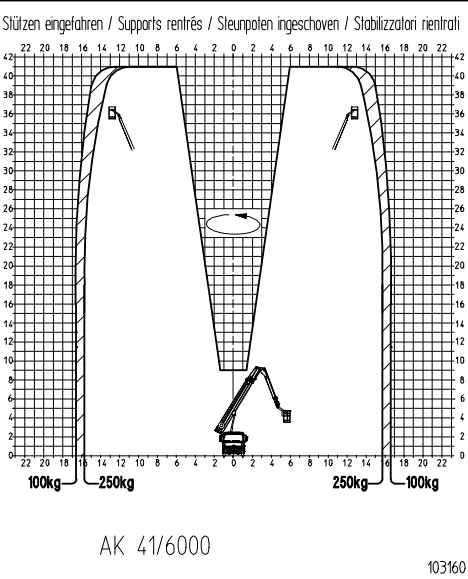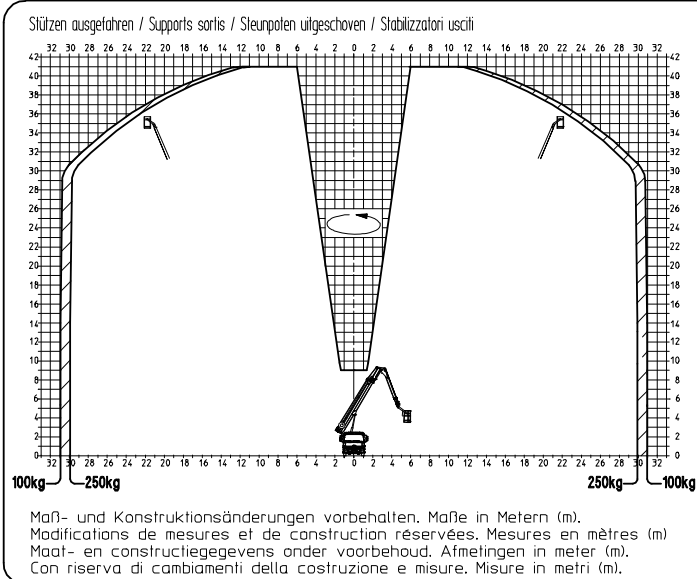

103160

All rights reserved for changes in dimension and construction!