




Böcker Truck Crane AK 44/4000 PLC on a 15,5t truck

07/2010

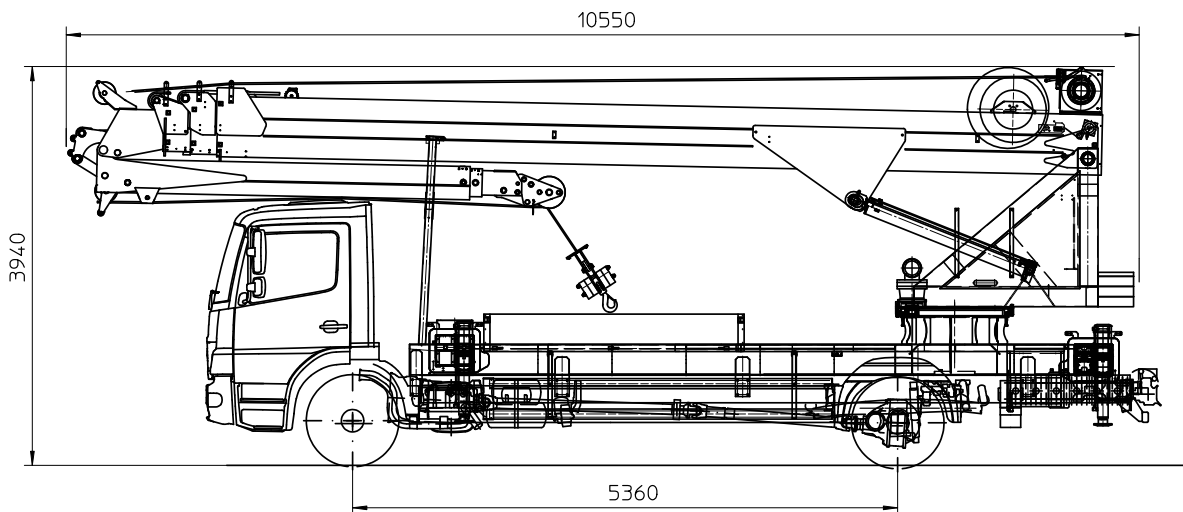

Dimensions / Specifications


Telescope arm angle	approx.	87 degrees	Max. Range of crane operation with 15,5 t truck		
Jib angle	approx.	165 degrees			
Swivel area	approx.	620 degrees	500 kg Lifting capacity	approx.	30.00 m
Working height up to jib	approx.	33.00 m	1000 kg Lifting capacity	approx.	22.00 m
Max. extension length including mech. extension (2,0 m)	approx.	44.00 m	2000 kg Lifting capacity	approx.	14.00 m
Max. extension length	approx.	42.00 m	4000 kg Lifting capacity	approx.	8.20 m
Extendible Jib					
Basic length	approx.	4.55 m			
max. extendible length	approx.	8.90 m	Max. Range of platform operation		
Current of hydraulic pump	approx.	100 litres	PK 250-1 PK 250-D		
Hook speed	approx.	60 m/min	100 kg Lifting capacity	approx.	33.00 33.00 m
Support length	approx.	6.05 m	250 kg Lifting capacity	approx.	30.00 30.00 m
Support width	approx.	5.74 m	Max. working height	approx.	41.50 38.00 m
One-sided support	approx.	4.15 m			
Length vehicle	approx.	10.55 m	Truck Data		
Width vehicle	approx.	2.55 m	Min. wheelbase	5360 mm	
Height vehicle DB/MAN	approx.	3.94 / 3.99 m	Gross vehicle weight	15.5 t	
Body weight	approx.	9,600 kg	Max. dead weight	5.3 t	

All rights reserved for changes in dimension and construction!




INFO


Work diagram

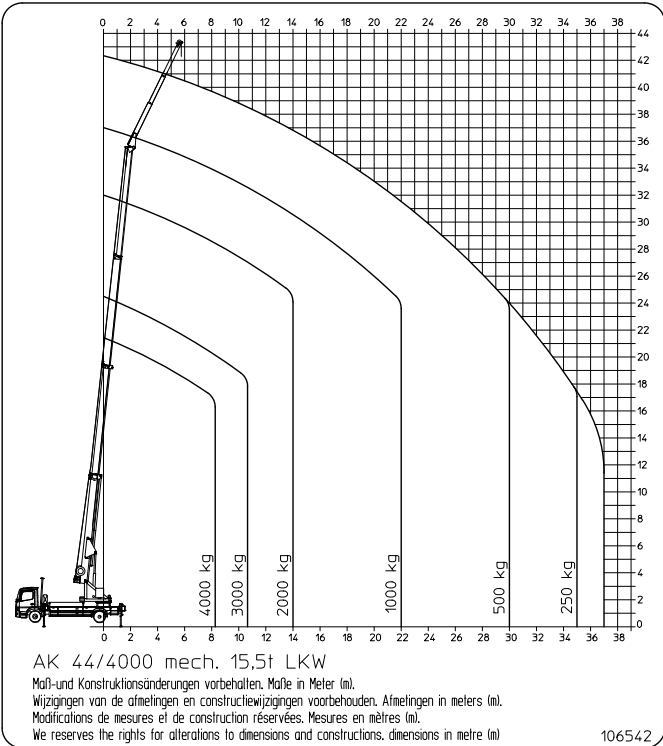

PK 250-1

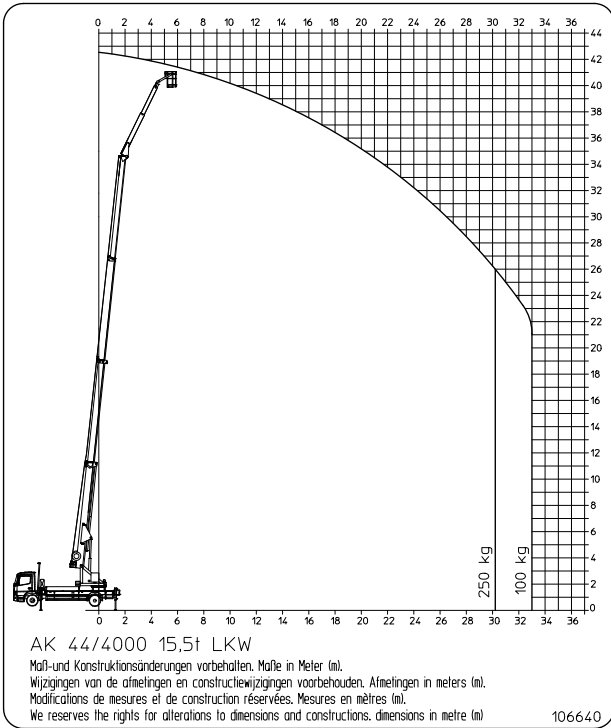

PK 250-D

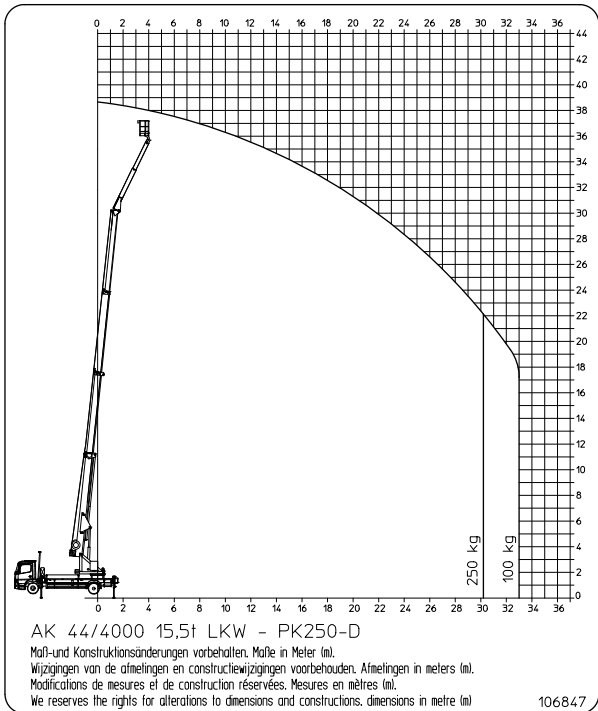

All rights reserved for changes in dimension and construction!