




CLARK

1500-C


Specifications

Crawler Crane

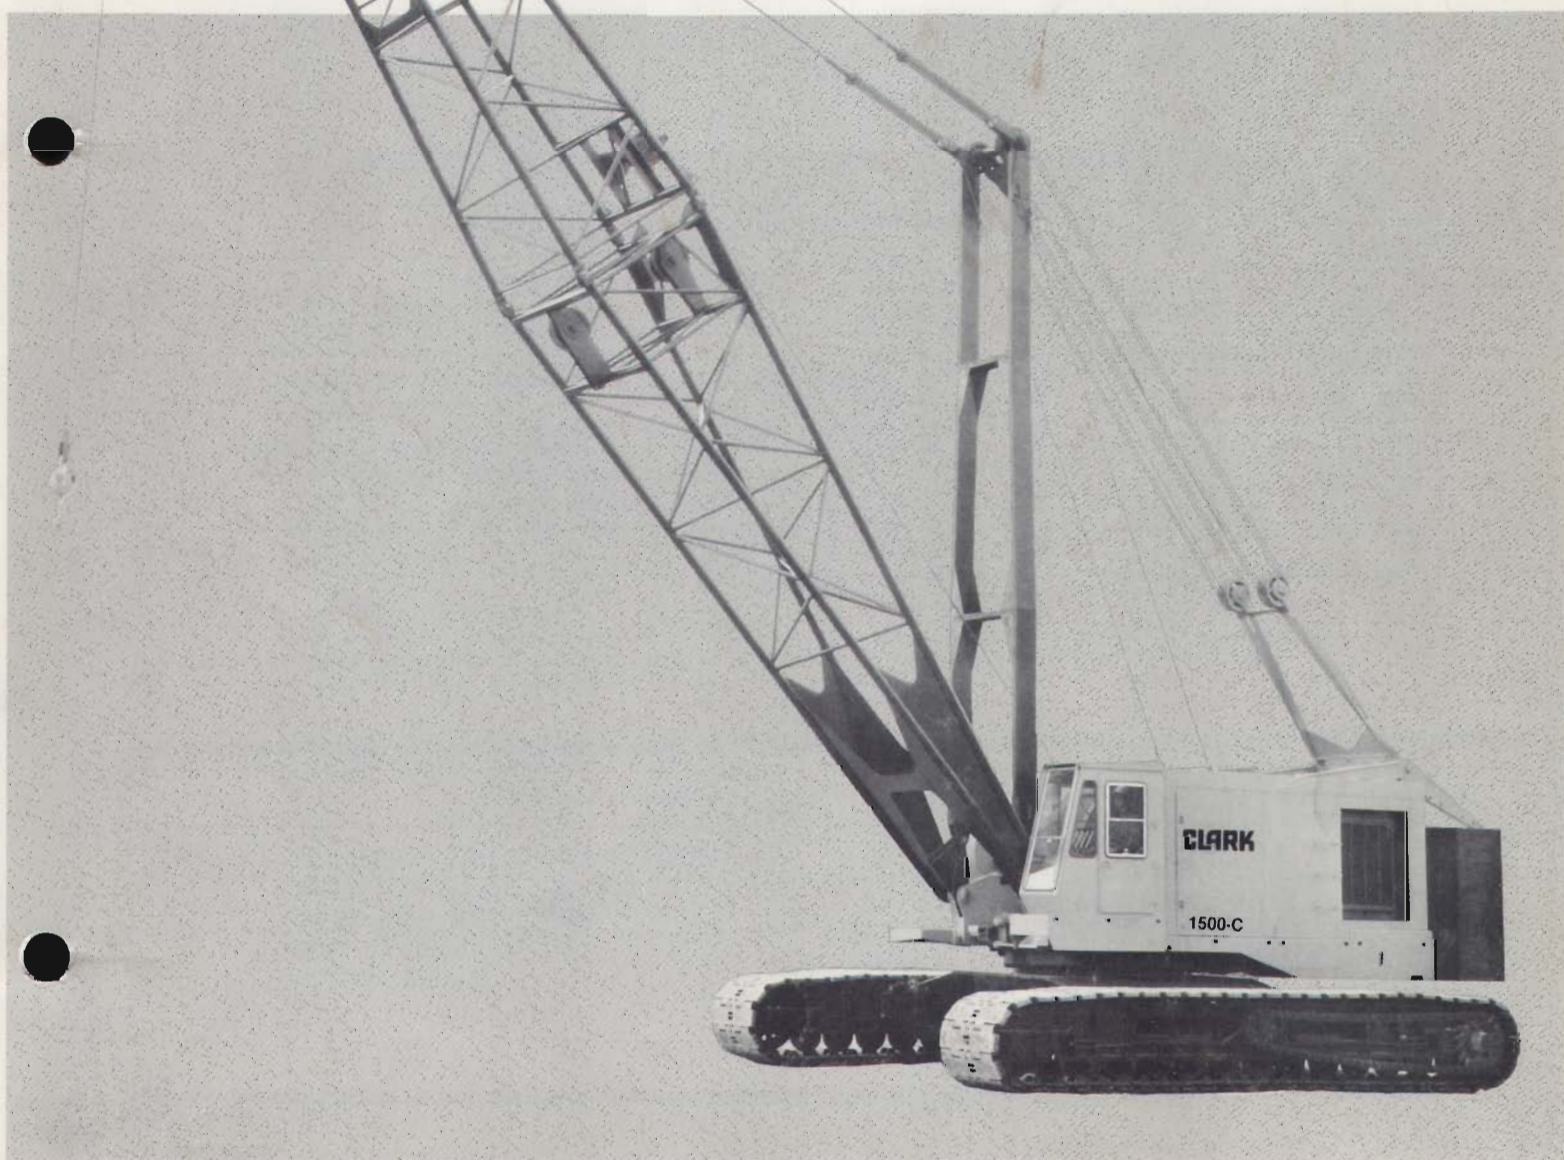



CLEARANCE AND DIMENSIONS

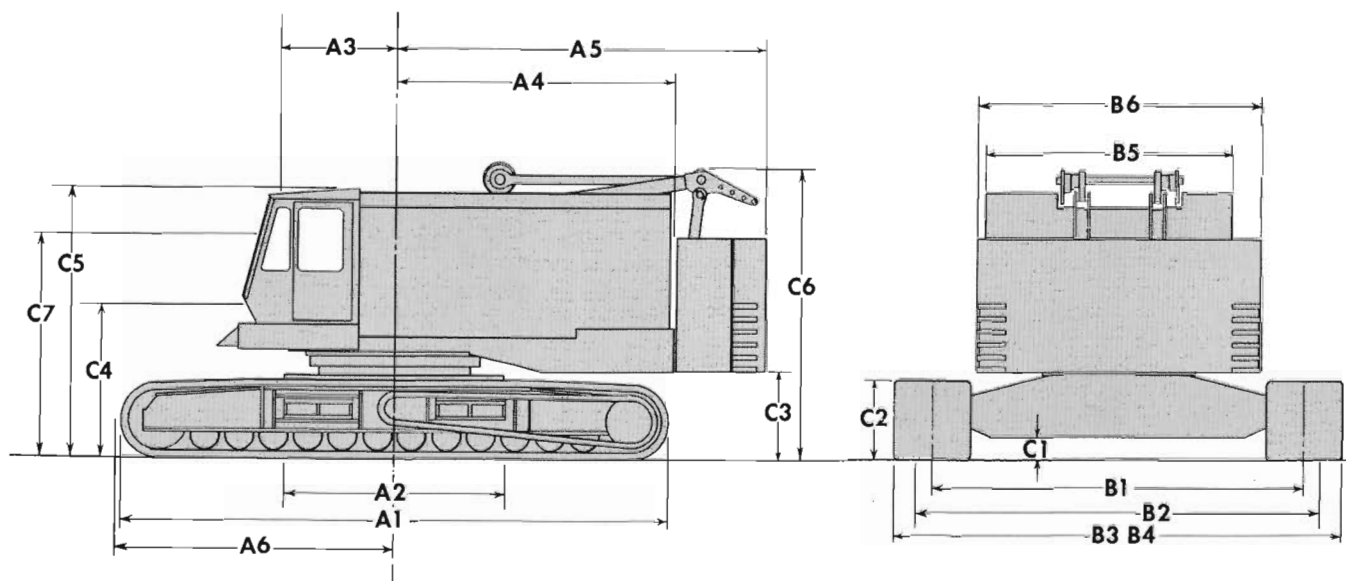

FRONT TO BACK

A1.	Crawler Length	24'-9½"
A2.	Truck Base Length	10'-2¼"
A3.	C Boom Foot to C Rotation	5'-3½"
A4.	Rear End Swing — Rotating Unit	14'-8½"
A5.	Rear End Swing — 57,500# C'w't	16'-8¾"
	Rear End Swing — 100,000# C'w't	17'-6½"
	Rear End Swing — Gantry Lowered	18'-0¼"
A6.	Over Corners — 32" Treads	15'-10"
	Over Corners — 42" Treads	16'-1"

SIDE TO SIDE

B1.	C to C Tread Rollers	17'-0"
B2.	Overall Length of Axles	18'-5½"
B3.	Overall Width Crawlers with 32" Treads	19'-8"
B4.	Overall Width Crawlers with 42" Treads	20'-6"
B5.	Overall Width Cab	11'-2½"
B6.	Overall Width, Rotating Unit and Counterweight	13'-0"

VERTICAL

C1.	Ground Clearance	10'½"
C2.	Ground to Top Crawler (Maximum)	3'-6⅞"
C3.	Ground to Bottom of Counterweight	3'-11"
C4.	Ground to C of Boom Foot Pin	6'-10⅞"

C5.	Ground to Top of Cab	12'-1⅝"
C6.	Overall Height Backhitch Gantry	13'-5⅛"
C7.	Eye Level Standard Cab	10'-11⅜"





CRANE WORKING RANGES

RECOMMENDED REEVING FOR HOOK BLOCK

Load in Pounds	Parts of Line
To 25,000	1
Over 25,000	2
Over 50,000	3
Over 75,000	4
Over 100,000	5
Over 125,000	6
Over 150,000	7
Over 175,000	8
Over 200,000	9
Over 225,000	10
Over 250,000	11
Over 275,000	12

Requires 1" Dia. Wire Rope
having a Minimum Breaking
Strength of 89,800 lbs.

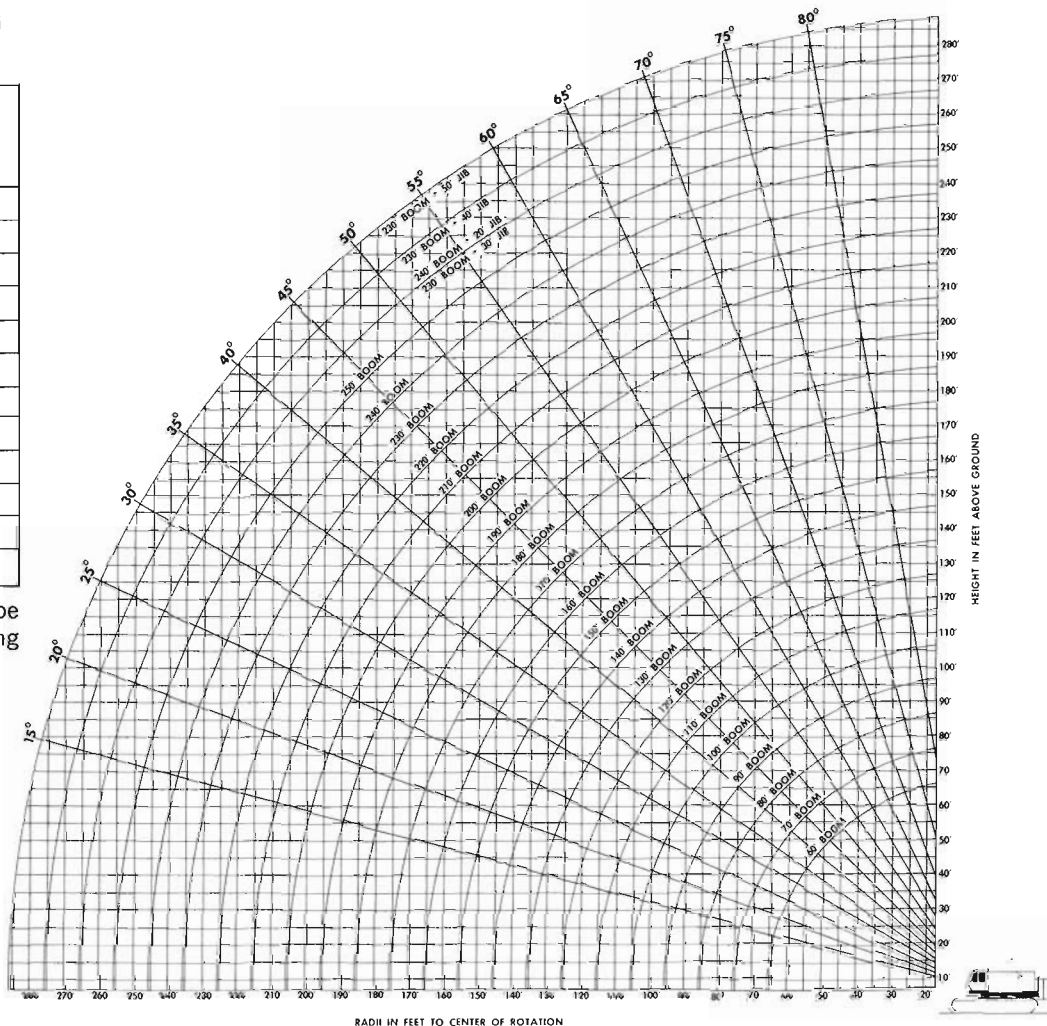

JIB DATA

LENGTH	RATING	WEIGHT	OFFSET	EFFECTIVE WEIGHT
20'	18 Tons	1,885#	6'-11"	1,905#
30'	12 Tons	2,305#	12'-9"	2,800#
40'	9 Tons	2,725#	18'-9"	3,895#
50'	7 Tons	2,995#	24'-8"	4,670#

Jib capacities are approximately the same as boom capacities at any given radius, but not to exceed the rating listed above. Effective jib weight to be subtracted from boom capacity chart if load is raised on boom point when jib is assembled on boom.

**MAXIMUM LENGTH
BOOM OR BOOM
PLUS JIB THAT
CAN BE HANDLED
HORIZONTALLY**



	OVER SIDE	OVER END WITH WEDGES
BOOM	230'	250'
Boom Plus Jib	220' + 20'	240' + 20'
	210' + 30'	230' + 30'
	210' + 40'	230' + 40'
	210' + 50'	230' + 50'



CRANE LIFTING CAPACITIES

150 Ton Class 17-898				Lifting Capacities 75% Tip Loads								Maximum Counterweight — 100,000 Lbs.							
Boom			Capacity Side/End	Boom			Capacity Side/End	Boom			Capacity Side/End	Boom			Capacity Side/End	Boom			Capacity Side/End
Lgth.	Rad.	Angle		Lgth.	Rad.	Angle		Lgth.	Rad.	Angle		Lgth.	Rad.	Angle		Lgth.	Rad.	Angle	
60'	17'	79.7	*300,000	120'	30'	78.6	135,000	170'	40'	78.6	88,375	210'	45'	79.4	73,550	250'	50'	79.9	62,250
	20'	76.8	*255,000		35'	76.2	107,775		45'	76.8	74,825		50'	78.0	63,200		60'	77.6	47,500
	25'	71.8	178,525		40'	73.7	89,150		50'	75.1	64,550		60'	75.2	48,550		70'	75.2	37,575
	30'	66.7	135,150		45'	71.2	75,675		60'	71.6	50,000		70'	72.3	38,650		80'	72.9	30,425
	35'	61.3	108,175		50'	68.6	65,425		70'	68.0	40,175		80'	69.4	31,550		90'	70.4	25,025
	40'	55.7	89,825		60'	63.4	50,950		80'	64.3	33,125		90'	66.5	26,175		100'	68.0	20,825
	45'	49.6	76,500		70'	57.9	41,175		90'	60.5	27,775		100'	63.5	21,975		110'	65.5	17,450
	50'	42.8	66,375		80'	52.0	34,150		100'	56.5	23,625		110'	60.4	18,625		120'	62.9	14,675
	60'	25.3	52,075		90'	45.6	28,825		110'	52.3	20,275		120'	57.2	15,850		130'	60.3	12,350
					100'	38.4	24,700		120'	47.9	17,525		130'	53.9	13,550		140'	57.6	10,375
70'	20'	78.7	*254,900	130'	30'	79.5	134,975	180'	40'	79.2	88,175	220'	45'	79.9	73,525	260' + 20'	50'	79.9	63,175
	25'	74.5	178,500		35'	77.3	107,750		45'	77.6	74,600		50'	78.6	63,175		60'	77.6	47,500
	30'	70.2	135,125		40'	75.0	89,125		50'	76.0	64,300		60'	75.9	48,500		70'	75.9	37,575
	35'	65.7	108,150		45'	72.7	75,650		60'	72.6	49,700		70'	73.2	38,575		80'	74.8	30,400
	40'	61.1	89,800		50'	70.3	65,400		70'	69.3	39,850		80'	70.4	31,450		90'	72.5	25,000
	45'	56.3	76,425		60'	65.6	50,925		80'	65.8	32,775		90'	67.6	26,075		100'	70.1	20,800
	50'	51.2	66,300		70'	60.6	41,150		90'	62.3	27,425		100'	64.8	21,875		110'	67.8	17,425
	60'	39.5	51,950		80'	49.8	28,800		100'	58.6	23,250		110'	61.9	18,500		120'	65.3	14,650
	70'	23.3	42,250		90'	43.7	24,675		110'	54.8	19,900		120'	58.9	15,725		130'	62.8	12,325
					100'	36.8	21,325		120'	50.7	17,150		130'	55.7	13,425		140'	60.3	10,350
80'	25'	76.5	178,475	140'	35'	78.2	107,625	190'	40'	79.8	87,950	230'	45'	79.1	73,525	270' + 40'	50'	79.9	63,175
	30'	72.8	135,100		40'	76.1	88,975		45'	78.3	74,350		50'	76.5	47,775		60'	77.3	37,900
	35'	69.0	108,150		45'	74.0	75,475		50'	76.7	64,050		60'	73.9	30,775		70'	71.3	30,775
	40'	65.0	89,700		50'	71.8	65,200		60'	73.6	49,425		70'	68.7	25,400		80'	68.7	25,400
	45'	61.0	76,300		60'	67.4	50,675		70'	70.4	39,575		80'	67.2	22,500		90'	65.9	21,225
	50'	56.8	66,125		70'	62.9	40,900		80'	67.2	32,500		90'	63.8	27,150		100'	63.2	17,850
	60'	47.6	51,750		80'	58.2	33,850		90'	63.8	27,150		100'	60.4	22,975		110'	60.3	15,100
	70'	36.8	42,025		90'	53.2	28,525		100'	56.9	19,600		110'	57.4	12,775		120'	57.4	12,775
	80'	21.7	35,050		100'	47.9	24,375		110'	53.2	16,850		120'	54.4	10,825		130'	54.4	10,825
					110'	42.0	21,025		120'	49.3	14,550		130'	51.3	9,150		140'	51.3	9,150
90'	25'	78.0	178,450	150'	35'	79.0	107,400	200'	40'	78.9	73,975	240'	45'	79.5	62,425	280' + 50'	50'	79.5	62,425
	30'	74.7	135,075		40'	77.0	88,750		45'	77.4	63,600		50'	77.1	47,750		60'	77.1	47,750
	35'	71.4	108,125		45'	75.1	75,225		50'	74.4	48,925		60'	74.6	37,875		70'	74.6	37,875
	40'	68.0	89,675		50'	73.1	64,950		60'	71.4	39,025		70'	72.1	30,750		80'	72.1	30,750
	45'	64.5	76,275		60'	69.0	50,425		70'	68.4	31,900		80'	69.6	25,375		90'	69.6	25,375
	50'	60.9	66,100		70'	64.8	40,625		80'	65.2	26,525		90'	67.0	21,175		100'	67.0	21,175
	60'	53.2	51,700		80'	60.5	33,575		90'	62.0	22,325		100'	64.4	17,775		110'	64.4	17,775
	70'	44.7	41,975		90'	56.0	28,250		100'	55.3	16,200		110'	61.7	15,000		120'	61.7	15,000
	80'	34.6	34,975		100'	51.3	24,075		110'	51.7	13,875		120'	58.9	12,675		130'	58.9	12,675
	90'	20.4	29,700		110'	46.1	20,750		120'	48.0	11,925		130'	56.1	10,700		140'	56.1	10,700
100'	25'	79.2	178,425	160'	35'	79.7	107,225	210'	40'	78.9	73,975	250'	45'	79.5	62,425	290'	50'	79.5	62,425
	30'	76.3	135,050		40'	77.0	88,750		45'	77.4	63,600		50'	77.1	47,750		60'	77.1	47,750
	35'	73.3	108,100		45'	75.1	75,225		50'	74.4	48,925		60'	74.6	37,875		70'	74.6	37,875
	40'	70.3	89,650		50'	73.1	64,950		60'	71.4	39,025		70'	72.1	30,750		80'	72.1	30,750
	45'	67.2	76,250		60'	69.0	50,425		70'	68.4	31,900		80'	69.6	25,375		90'	69.6	25,375
	50'	64.0	66,050		70'	64.8	40,625		80'	65.2	26,525		90'	67.0	21,175		100'	67.0	21,175
	60'	57.4	51,650		80'	60.5	33,575		90'	62.0	22,325		100'	64.4	17,775		110'	64.4	17,775
	70'	50.3	41,950		90'	56.0	28,250		100'	55.3	16,200		110'	61.7	15,000		120'	61.7	15,000
	80'	42.3	34,950		100'	51.3	24,075		110'	51.7	13,875		120'	58.9	12,675		130'	58.9	12,675
	90'	32.7	29,650		110'	46.1	20,750		120'	48.0	11,925		130'	56.1	10,700		140'	56.1	10,700
100'	19.3	25,650	120'	40.5	18,000	130'	39.6	8,775	140'	39.6	8,775	150'	39.6	8,775					
110'	30'	77.6	135,025	170'	35'	79.7	107,225	220'	40'	78.9	73,975	260'	45'	79.5	62,425	300'	50'	79.5	62,425
	35'	74.9	107,925		40'	77.8	88,525		45'	77.4	63,600		50'	77.1	47,750		60'	77.1	47,750
	40'	72.2	89,375		45'	76.0	74,950		50'	74.4	48,925		60'	74.6	37,875		70'	74.6	37,875
	45'	69.4	75,925		50'	74.2	64,675		60'	71.4	39,025		70'	72.1	30,750		80'	72.1	30,750
	50'	66.6	65,700		60'	70.4	50,100		70'	68.4	31,900		80'	69.6	25,375		90'	69.6	25,375
	60'	60.7	51,250		70'	66.5	40,275		80'	65.2	26,525		90'	67.0	21,175		100'	67.0	21,175
	70'	54.5	41,500		80'	62.5	33,200		90'	62.0	22,325		100'	64.4	17,775		110'	64.4	17,775
	80'	47.8	34,475		90'	58.4	27,875		100'	55.3	16,200		110'	61.7	15,000		120'	61.7	15,000
	90'	40.2	29,175		100'	54.1	23,700		110'	51.7	13,875		120'	58.9	12,675		130'	58.9	12,675
	100'	31.1	25,050		110'	49.5	20,375		120'	48.0	11,925		130'	56.1	10,700		140'	56.1	10,700
110'	18.4	21,725	120'	44.6	17,625	130'	39.2	8,775	140'	39.2	8,775	150'	39.2	8,775					
			130'	39.2	15,325	140'	33.0	13,375	150'	33.0	13,375	160'	33.0	13,375					
			140'	33.0	13,375	150'	25.6	11,725	160'	25.6	11,725	170'	25.6	11,725					
			150'	25.6	11,725	160'	15.2	10,275	170'	15.2	10,275	180'	15.2	10,275					
			160'	15.2	10,275	170'	15.2	10,275	180'	15.2	10,275	190'	15.2	10,275					
			170'	15.2	10,275	180'	15.2	10,275	190'	15.2	10,275	200'	15.2	10,275					
			180'	15.2	10,275	190'	15.2	10,275	200'	15.2	10,275	210'	15.2	10,275					
			190'	15.2	10,275	200'	15.2	10,275	210'	15.2	10,275	220'	15.2	10,275					
			200'	15.2	10,275	210'	15.2	10,275	220'	15.2	10,275	230'	15.2	10,275					
			210'	15.2	10,275	220'	15.2	10,275	230'	15.2	10,275	240'	15.2	10,275					
			220'	15.2	10,275	230'	15.2	10,275	240'	15.2	10,275	250'	15.2	10,275					
			230'	15.2	10,275	240'	15.2	10,275	250'	15.2	10,275	260'	15.2	10,275					
			240'	15.2	10,275	250'	15.2	10,275	260'	15.2	10,275	270'	15.2	10,275					
			250'	15.2	10,275	260'	15.2	10,275	270'	15.2	10,275	280'	15.2	10,275					
			260'	15.2	10,275	270'	15.2	10,275	280'	15.2	10,275	290'	15.2	10,275					
			270'	15.2	10,275	280'	15.2	10,275	290'	15.2	10,275	300'	15.2	10,275					
			280'	15.2	10,275	290'	15.2	10,275	300'	15.2	10,275	310'	15.2	10,275					
			290'	15.2	10,275	300'	15.2	10,275	310'	15.2	10,275	320'	15.2	10,275					
			300'	15.2	10,275	310'	15.2	10,275	320'	15.2	10,275	330'	15.2	10,275					
			310'	15.2	10,275	320'	15.2	10,275	330'	15.2	10,275	340'	15.2	10,275					
			320'	15.2	10,275	330'	15.2	10,275	340'	15.2	10,275	350'	15.2	10,275					
			330'	15.2	10,275	340'	15.2	10,275	350'	15.2	10,275	360'	15.2	10,275					
			340'	15.2	10,275	350'	15.2	10,275	360'	15.2	10,275	370'	15.2	10,275					
			350'	15.2	10,275	360'	15.2	10,275	370'	15.2	10,275	380'	15.2	10,275					
			360'	15.2	10,275	370'	15.2	10,275	380'	15.2	10,275								



CRANE ATTACHMENT

A-2	Includes: 60' pin connected tubular boom (75" x 85") with hammerhead point with six (6) lower main sheaves and two (2) top guide sheaves plus two (2) guide sheaves at base of point section; mast assembly with fourteen (14) part boom hoist reeving and pendants for basic boom; telescopic boomstop with air shutoff; boom angle indicator; 24" L.H. and R.H. smooth laggings (1"); foot accelerator; swing snubber and swing brakes; ropes; 100,000# two piece counterweight.	120,275#
-----	--	----------

When machine is equipped as a Crane, the following parts included above are installed in the Rotator and can be deducted from the above weight to obtain correct reduction for removing the front.

1. 24" L.H. Smooth Laggings (1")	760#
2. 24" R.H. Smooth Laggings (1")	830#
3. Boom Stop with Air Cutoff	1,380#
4. Accelerator, Swing Snubber Controls and Wire Ropes	2,615#
5. Total Rotator Crane Parts—Less Cwt.	5,585#
6. Counterweight	100,000#

BOOM AND SUSPENSION

1. Base Section	4,870#
2. Point Section with Sheaves	5,610#
3. Mast	3,780#
4. Pendants for Basic Boom	430#
Total of Above four (4) items	14,690#

OPTIONAL CRANE ACCESSORIES—ADD

1. Extensions (with pendants)—60' pin connected boom (75" x 85") x Section	
A. 10'	1,460#
B. 20'	2,315#
C. 40'	4,010#

2. Jib — Tubular — pin connected	
A. Jib Base	400#
B. Jib Point and Point Shaft	580#
C. 10' Extension with Pendants	420#
D. 20' Extension with Pendants	690#
E. Strut	600#
F. Basic Wire Ropes and Pendants	305#





CRAWLER TRUCK

TRUCK BASE: The truck base is of all welded construction with axles designed to bolt to the side frames. The swing gear, and the anti-friction swing circle are integral with the truck base.

SIDE FRAME ASSEMBLY: The side frames are of welded construction using high alloy steel for great strength and durability. The side frames may be easily removed, with treads and drive chain in place, to facilitate machine transport.

VERTICAL PROPEL SHAFT: Transmits propel power from rotating assembly to horizontal propel shaft in truck base. It is mounted in pressure lubricated bronze bushings.

HORIZONTAL PROPEL SHAFT: Three piece shaft transmits power from vertical propel shaft to drive sprockets in side frames. Bevel gears run in sealed oil bath.

STEERING AND TRUCK LOCK: Two large diameter, wide face brakes serve as crawler locks and safety propel brakes. Brakes are spring-set and air-released and each is at all times connected to its respective crawler. Air operated gear type

jaw clutches engage for propelling. Air engages jaw clutches and releases brakes simultaneously. Either clutch can be dis-engaged, setting brake for steering. Any accidental loss of air automatically sets brakes to lock crawlers.

INDEPENDENT PROPEL: Additional air operated clutches and shafting provided for simultaneous, independent hoist, swing, and propel functions.

ANTI-FRICTION BEARING SWING CIRCLE: Large anti-friction, single row, sealed bearing. It is welded to the truck base and bolts to the rotating base.

TREAD ROLLERS: Hardened rims, with sealed, bronze bushing type bearings.

CRAWLER TREADS: 32" and 42" wide treads available. They are made of heat-treated alloy steel to provide superior wearing quality. Hardened steel pins are used to connect treads. Tread belts are driven by heavy duty roller chains (one per side): The chains are integral with side frame assemblies.

ROTATING BASE: Welded fabrication with integral machinery frames, depressed center section for horizontal gear train, and a built-in fuel tank having a 256 gallon capacity.

POWER PLANT: See Power Plant Data Table.

SHAFTING: All shafting is of high strength, heat treated, alloy steel. Involute splines are used extensively.

BEARINGS: All horizontal operating machinery on the rotating assembly is mounted on anti-friction bearings. The single exception is the boom hoist drum shaft which is mounted on bronze journal bearings.

HOIST DRUM SHAFT: Shaft is supported by self-aligning roller bearings. Cable drums, clutch and brake housings are mounted on antifriction bearings. Cable laggings, of various sizes, are demountable.

BOOM HOIST CLUTCH SHAFT: Driven by heavy duty roller chain from reversing clutch shaft, and equipped with spring set air released holding brake. A ratchet and pawl are provided to give positive holding and added safety. Power boom lowering is accomplished through the planetary reduction unit on this shaft which provides a smooth, positive, precision, controlled operation.

BOOM HOIST DRUM SHAFT: Two boom hoist drums are mounted on this shaft which is gear driven from the boom hoist clutch shaft.

REVERSING CLUTCH SHAFT UNIT: Sub-assemblies of horizontal and vertical shafts in an oil tight case. Driven by power take-off chain.

VERTICAL SWING SHAFT: Mounted between the vertical propel and vertical reversing shaft, mounted on pressure lubricated bronze bushings. Integral spur pinion at lower end of shaft engages internal teeth of the ring gear.

CONTROLS: All controls are compressed air and mounted in the operator's cab.

HOIST BRAKES: External contracting, friction band type; air-set by treadle valves. Spring-set safety feature locks brakes when air pressure is shut off by valves in operator's cab.

POSITIVE SWING LOCK: This mechanism is air-released and spring-set; it engages gear teeth in the ring gear.

SWING SNUBBER: Air operated band on left hand clutch of horizontal reversing clutch shaft provides a smooth, sensitive snubbing action.

LIGHTING EQUIPMENT: 2 KW generator and corresponding wiring available in either A.C. or D.C.

ROTATING ASSEMBLY GROUP

BACK HITCH GANTRY: Pinned to rear of rotating unit and has a low profile for traveling. Gantry must always be in lowest position, with upper 3" diameter gantry pins in place, when handling a boom or boom and load. Refer to operator's manual for counterweight handling attachment operating instructions.

CAB: All steel construction and equipped with environmental operator's cab lined with sound barrier and deadening material which cuts noise level by an estimated 50 percent. Cab can be heated or air-conditioned. Controls are grouped for maximum operator convenience, comfort, and efficiency. Side and front windows slide up and down for ventilation. Numerous hatches and doors are provided for access to machinery and power plant. Hoist drums are not covered.

BOOM SUSPENSION: A 14-part boom hoist wire rope suspension is used with all lengths of boom. See mid-point suspension data. Booms 140' long and less may be handled horizontally, without live load, with the mast pinned to the boom base, to provide a low travel height. With longer booms, normal pendant suspension must be used.

BOOM STOP: Telescopic type with automatic air shut-off of boom hoist.

POWER LOAD LOWERING: Chain driven and geared to the main hoist drum it provides a smooth, precision lowering operation.

THIRD DRUM: One piece lagging mounted independently on front of machine. Chain driven and operated by air controlled clutch and brake.

COUNTERWEIGHT: Two (2) piece cast iron counterweight totaling 100,000 lbs. suspended on brackets and positively held at rear of rotating unit.

COUNTERWEIGHT HANDLING DEVICE: Capable of installing or removing the counterweights and actuated by two (2) hydraulic cylinders mounted in the rear gantry legs.

LUBRICATION: Horizontal gear train, boom hoist chain, bevel swing gears, truck gears and power take-off chain operate in oil filled cases. In the case of gear train and bevel swing gears, the oil is circulated and applied to the gears by a rotary type oil pump; the bottom of the truck gear case and rotating base is provided with both a test and drain plug. Propel chains, and control mechanism are hand lubricated; all other points including crawler adjusting screws are pressure lubricated by hand guns.

**CLUTCH AND BRAKE DATA**

Function	CLUTCHES				BRAKES			
	Type	Width	Diameter	Area	Type	Width	Diameter	Area
Hoist	Band	5 1/2"	40"	587 In ²	Band	6"	46"	713 In ²
Swing	2 Shoe	5 1/2"	32"	424 In ²	Band	3 1/2"	33 1/2"	299 In ²
Power Load Lowering	Band	4 1/2"	24"	294 In ²				
Boom Hoist	Band	5 1/2"	30"	445 In ²	Band	4"	32"	302 In ²
Steering Brakes					Band	5"	27"	424 In ²
Independent Propel	Band	5 1/2"	32"	488 In ²				
Intermediate Propel	Band	5 1/2"	32"	488 In ²				
Third Drum	Band	6"	23"	383 In ²	Band	3 1/2"	24 3/4"	253 In ²

BOOM DATA

Boom Description	Tubular
Type Service	Crane
Type Boom Point	Hammerhead
Quantity Point Sheaves	6
Diameter Point Sheaves	19" P.D.
Basic Boom Length	60'

Type Connections	Pin
Maximum Length	250'
Extensions	10', 20' & 40'
Cross Section	75" x 85"
Type Chords	Tubular
Chord Material P.S.I. Yield	100,000 PSI

Time required to raise or lower a 60' basic boom from 20° above horizontal to 70° above horizontal — with planetary boom hoist and 14 part boom hoist reeving.	To Raise	To Lower
	59 Sec.	118 Sec.

NOTE: Times above vary slightly with different boom lengths.

MIDPOINT SUSPENSIONRequired On Booms
200' through 250' Long**POWER PLANT DATA**

Make	Model	Fuel	Cyl.	Bore and Stroke	Gross Rated H.P.	Mech. Drive H.P. @ Governed R.P.M.	Torque Conv. H.P. @ Governed R.P.M.
Cumm. w/T. C.	NT-855-P-335	Diesel	6	5 1/2" x 6"	335 @ 2300	—	300 @ 2100

Fuel Tank Capacity — 256 Gallons

WORKING WEIGHTS
(APPROXIMATE IN POUNDS)

Weight based upon a machine equipped with a Cummins power plant and torque converter, 25' truck with 42" treads, 100,000 lbs. of counterweight, and a 60' basic boom.	
Crane	278,635 Lbs.

PERFORMANCE DATA

Swing Speed	3.2 R.P.M.
Gradability	30%
Travel Speed:	
Standard Propel	1.02 M.P.H.
Independent Propel	1.31 M.P.H.

In accordance with our established policy of constantly improving our products, we reserve the right to change or modify our products or our product specifications at any time without notice.

CLARK

Lima Division

LIMA, OHIO 45802

Manufactured and Sold in Conformance with U.S. Department of Commerce Commercial Standard CS90-58.

DISTRIBUTED BY