




COMANSA

LINDEN 2100


21 LC 210


39,670 lbs.

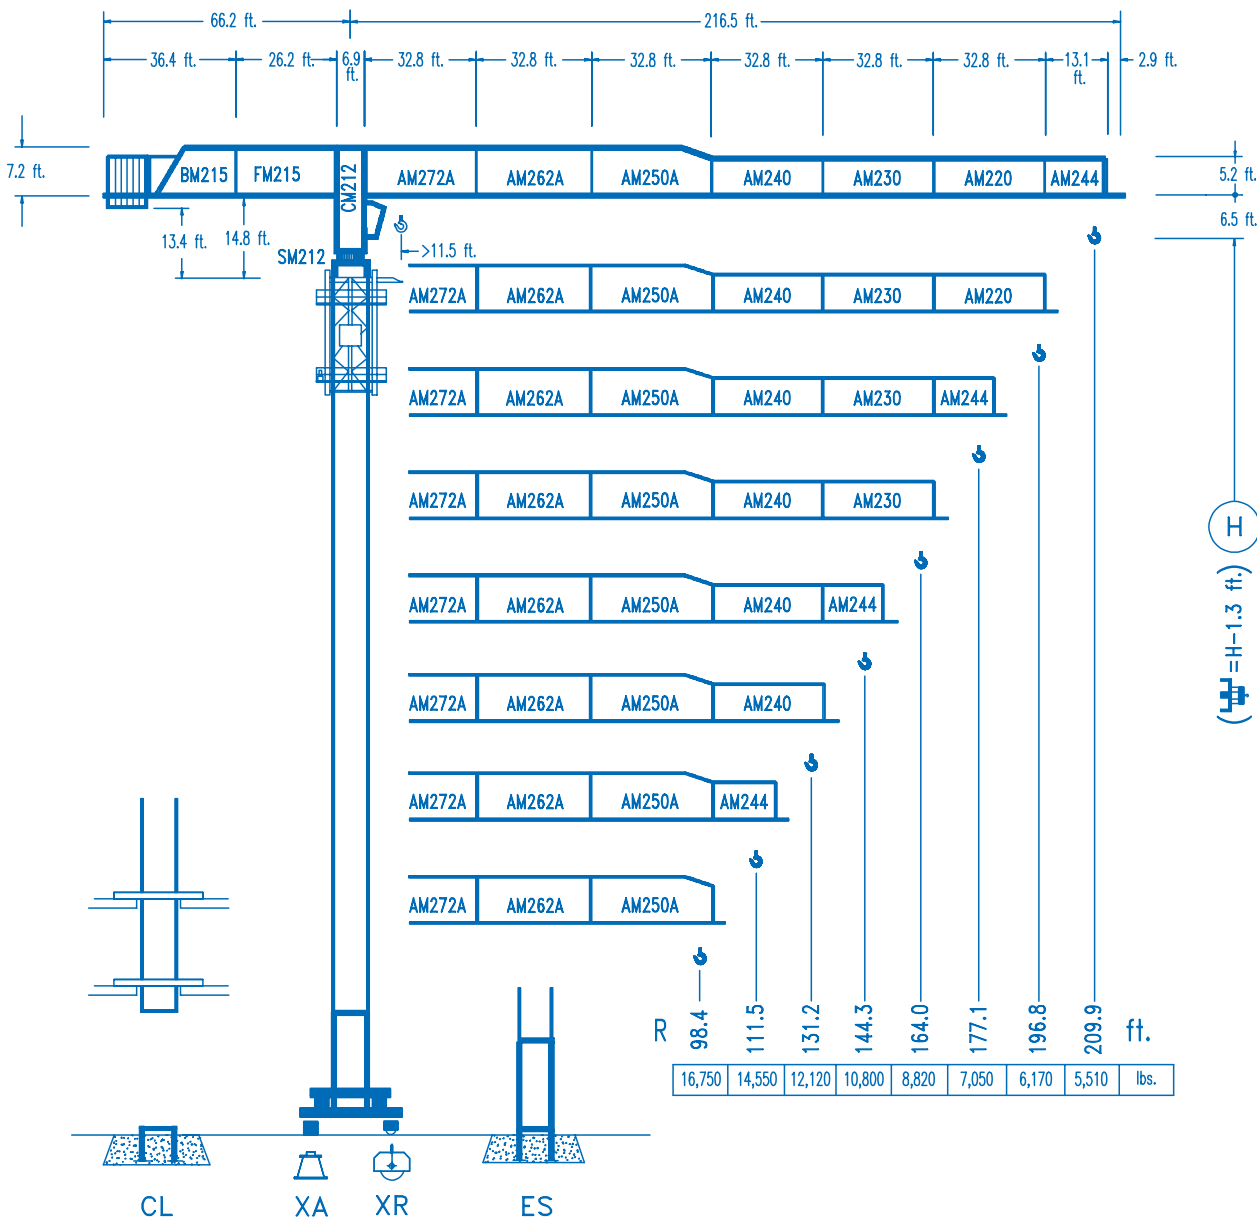

CE
DIN 15018 H1 B3

R													
209.9	38.4	49.2	68.9	69.2	82.0	98.4	111.5	131.2	144.3	164.0	177.1	196.8	209.9 ft.
	39,670	29,650	19,840	19,840	16,440	13,380	11,610	9,640	8,640	7,430	6,780	5,960	5,510 lbs.
196.8	39.0	49.2	70.5	71.2	82.0	98.4	111.5	131.2	144.3	164.0	177.1	196.8 ft.	
	39,670	30,330	19,840	19,840	16,950	13,810	11,990	9,960	8,910	7,680	7,010	6,170	lbs.
177.1	39.0	49.2	70.2	71.5	82.0	98.4	111.5	131.2	144.3	164.0	177.1 ft.		
	39,670	30,220	19,840	19,840	17,050	13,900	12,070	10,020	8,970	7,720	7,050	lbs.	
164.0	43.0	49.2	65.6	77.4	80.0	98.4	111.5	131.2	144.3	164.0 ft.			
	39,670	33,790	24,110	19,840	19,840	15,740	13,670	11,380	10,210	8,820	lbs.		
144.3	44.6	49.2	65.6	80.4	84.0	98.4	111.5	131.2	144.3 ft.				
	39,670	35,250	25,190	19,840	19,840	16,610	14,450	12,030	10,800	lbs.			
131.2	44.6	49.2	65.6	80.4	84.3	98.4	111.5	131.2 ft.					
	39,670	35,270	25,210	19,840	19,840	16,730	14,540	12,120	lbs.				
111.5	43.9	49.2	65.6	79.7	84.3	98.4	111.5 ft.						
	39,670	34,910	24,940	19,840	19,840	16,720	14,550	lbs.					
98.4	43.9	49.2	65.6	79.0	84.6	98.4 ft.							
	39,670	34,700	24,780	19,840	19,840	16,750	lbs.						



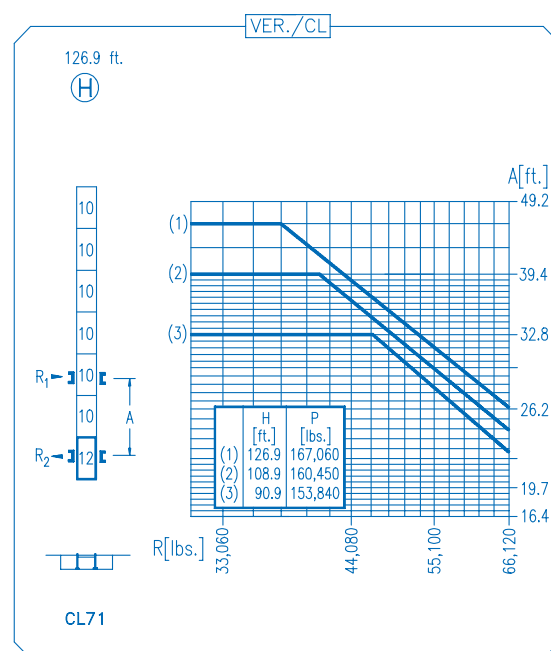




R. máx.	En servicio En operation En service In Betrieb	3XR52 198,580 lbs. 5XR72 210,920 lbs.
----------------	---	--

R. máx.	Fuera de servicio	3XR52 208,060 lbs.
	Out of service Hors service Ausser Betrieb	5XR72 295,340 lbs.

		
CFU-7.5		
10 hp.		
0		308 ft./min

	
TRA-7.5	
2 x 55 ft.lbs.	
0	↻ 78 ft./min

TRA-7.5VC	
2 x 55 ft. lbs.	
0	78 ft./min
5XR72	

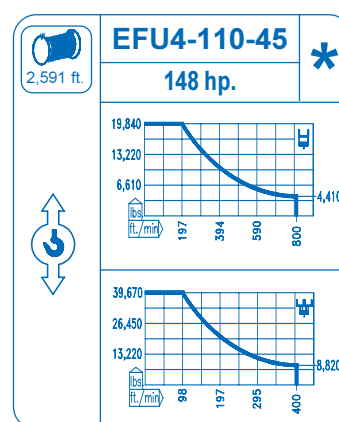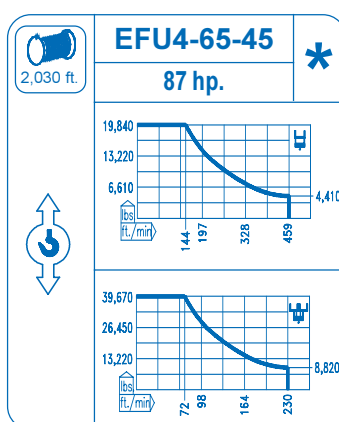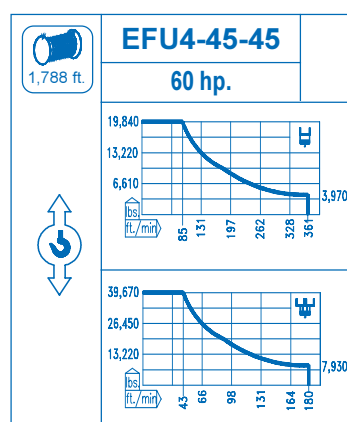

Tensión de alimentación Operating voltage Tension de service Betriebsspannung	480 V 3 ph 60 Hz
--	---

Optional Optional En option Kaufoption	
---	---



Construcciones Metálicas COMANSA S. A.

Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN

DS.0406.26	12/05	21	LC 210	39,670 lbs