




LINDEN

COMANSA

LC 2100

21 LC 400

26,450 lbs.

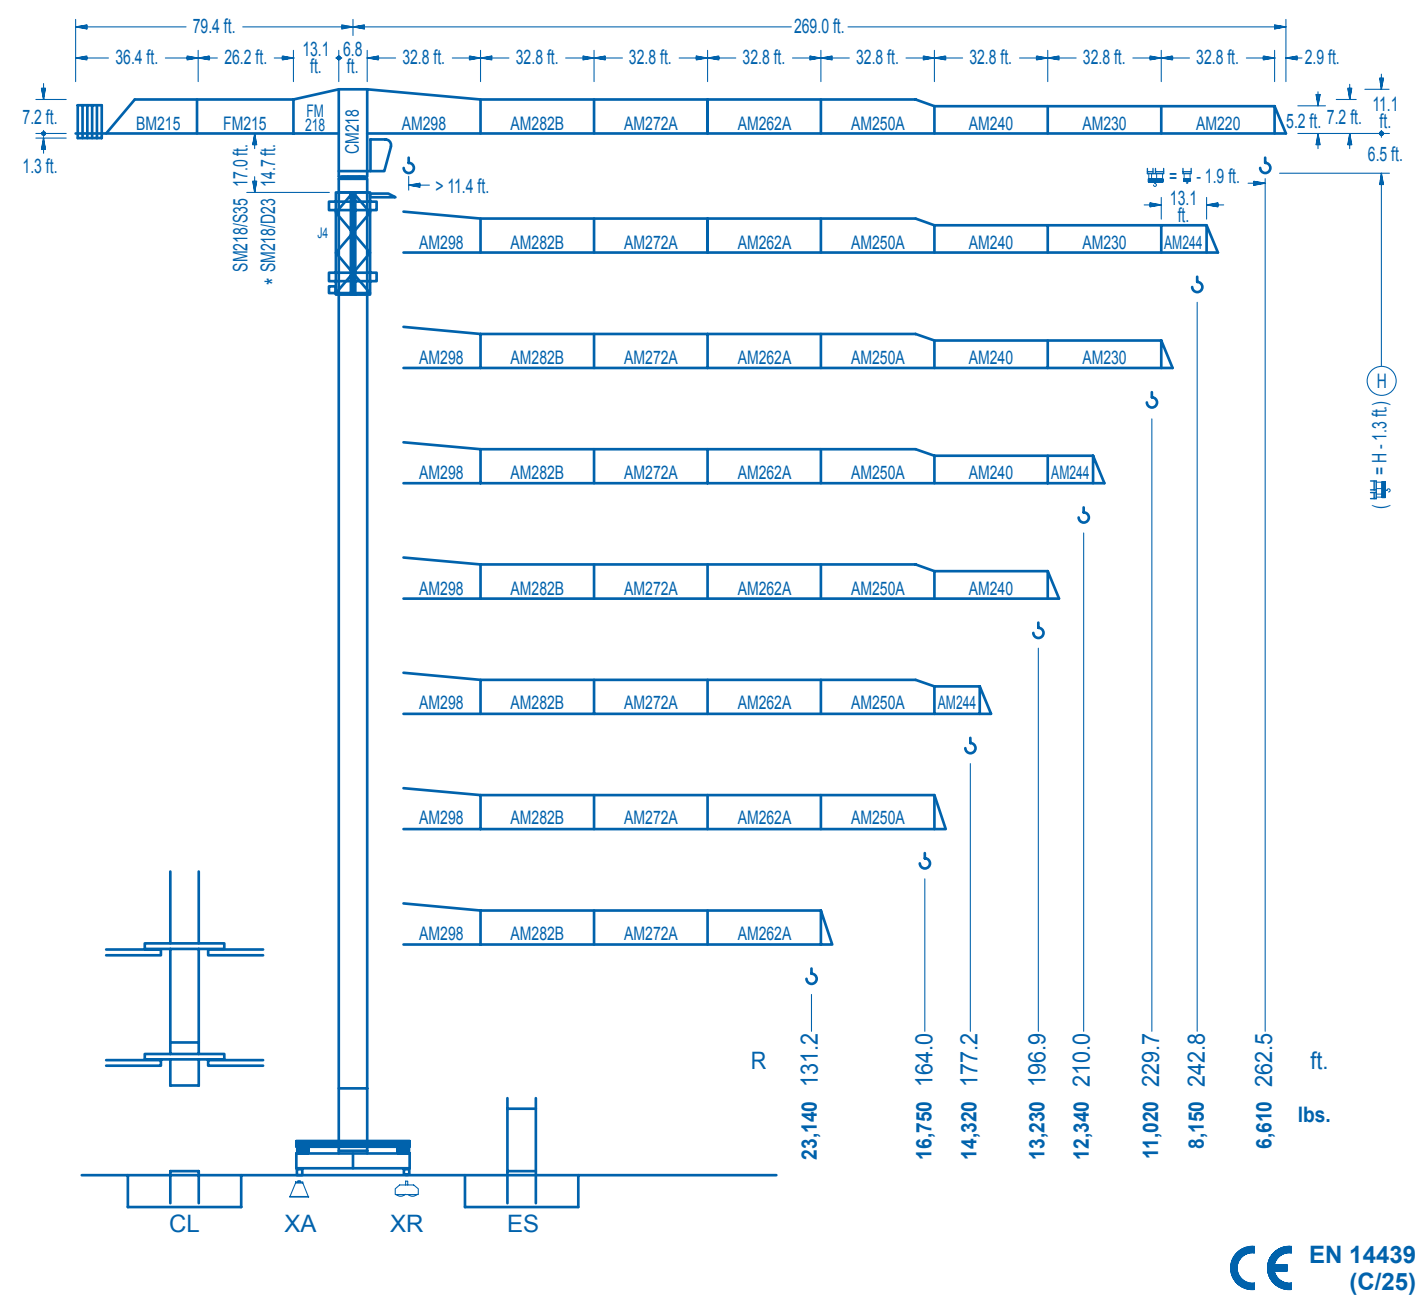

R (ft.)														
262.5	77.4	82.0	98.4	111.5	121.4	137.8	144.0	164.0	177.2	196.9	210.0	229.7	242.8	262.5 ft.
	26,450	24,720	19,940	17,160	15,480	13,230	13,230	11,430	10,470	9,280	8,600	7,740	7,260	6,610 lbs.
242.8		84.3	98.4	111.5	121.4	131.2	150.3	158.8	177.2	196.9	210.0	229.7	242.8	ft.
		26,450	22,040	19,000	17,170	15,610	13,230	13,230	11,700	10,380	9,640	8,690	8,150	lbs.
229.7			101.7	111.5	121.4	131.2	144.4	164.0	181.8	195.2	210.0	229.7	ft.	
			26,450	23,730	21,500	19,620	17,510	15,010	13,230	13,230	12,190	11,020	lbs.	
210.0			102.0	111.5	121.4	131.2	144.4	164.0	182.7	197.5	210.0	ft.		
			26,450	23,880	21,640	19,750	17,630	15,110	13,230	13,230	12,340	lbs.		
196.9			105.6	111.5	121.4	131.2	144.4	164.0	189.0	196.9	ft.			
			26,450	24,830	22,510	20,560	18,380	15,770	13,230	13,230	lbs.			
177.2			104.0	111.5	121.4	131.2	144.4	164.0	177.2	ft.				
			26,450	24,430	22,150	20,220	18,070	15,500	14,320	lbs.				
164.0			109.6	111.5	121.4	131.2	144.4	164.0	ft.					
			26,450	25,900	23,500	21,470	19,200	16,750	lbs.					
131.2				114.8	121.4	131.2	ft.							
				26,450	24,840	23,140	lbs.							

