




COMANSA

LINDEN 500


5 LC 4010

4t

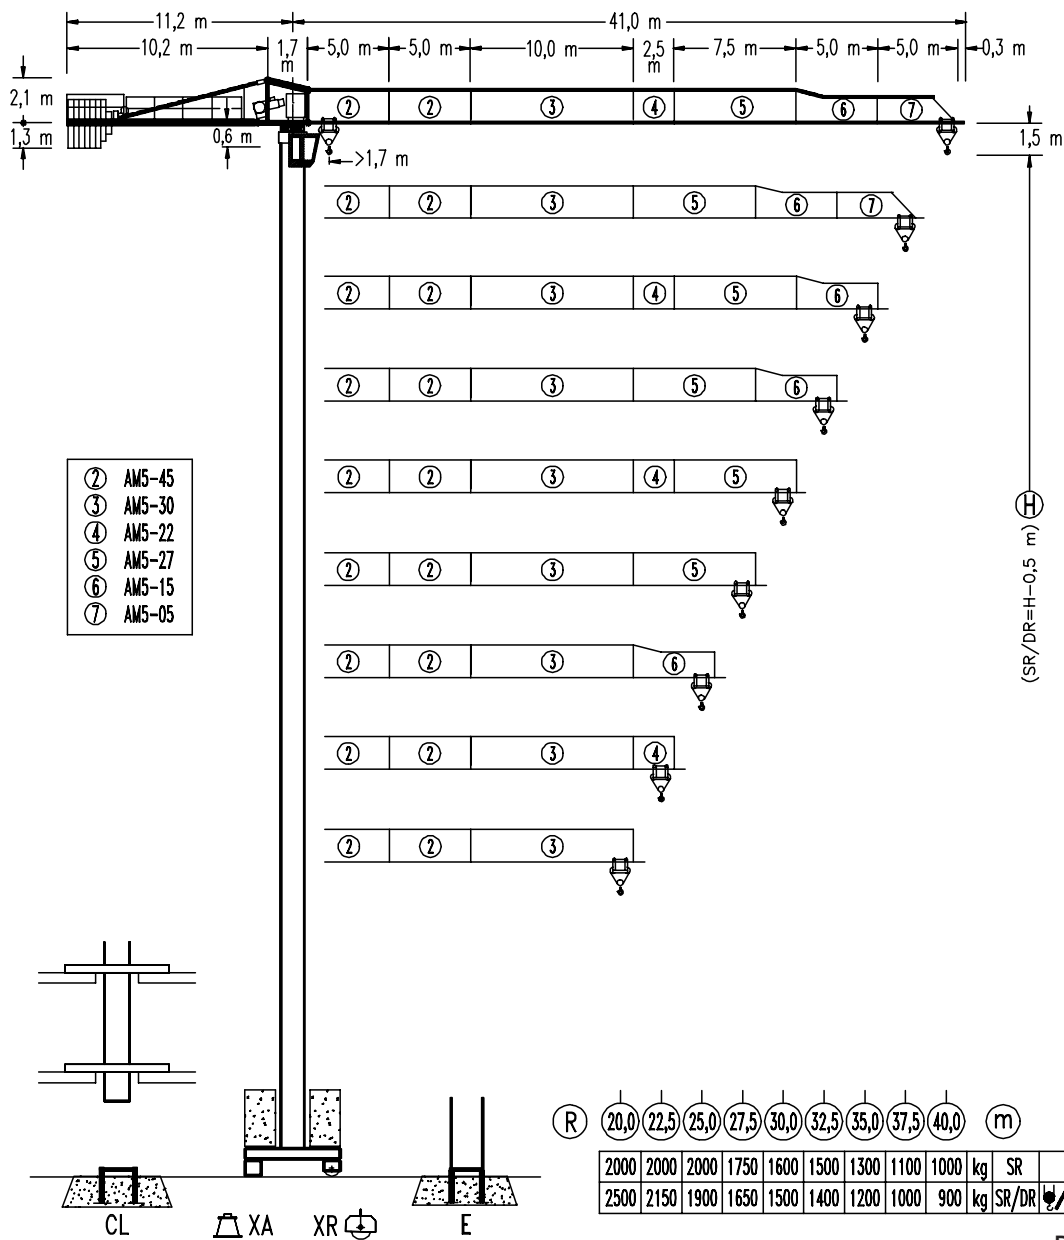

CE
DIN 15018 H1 B3

(R)		R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	mkg
40,0	SR	22,3 m	2000	2000	1980	1750	1570	1420	1290	1180	1080	1000	
	SR/DR	12,0 m	4000	2200	1910	1680	1490	1330	1200	1080	990	900	
37,5	SR	22,6 m	2000	2000	2000	1780	1590	1440	1310	1200	1100		
	SR/DR	12,1 m	4000	2230	1930	1700	1510	1350	1210	1100	1000		
35,0	SR	24,2 m	2000	2000	2000	1930	1730	1560	1420	1300			
	SR/DR	12,9 m	4000	2410	2090	1840	1640	1470	1320	1200			
32,5	SR	25,3 m	2000	2000	2000	2000	1820	1650	1500				
	SR/DR	13,5 m	4000	2540	2210	1940	1730	1550	1400				
30,0	SR	24,7 m	2000	2000	2000	1970	1770	1600					
	SR/DR	13,2 m	4000	2460	2140	1880	1670	1500					
27,5	SR	24,5 m	2000	2000	2000	1950	1750						
	SR/DR	13,0 m	4000	2430	2110	1860	1650						
25,0	SR	25,0 m	2000	2000	2000	2000							
	SR/DR	13,3 m	4000	2480	2160	1900							
22,5	SR	22,5 m	2000	2000	2000								
	SR/DR	13,2 m	4000	2470	2150								
20,0	SR	20,0 m	2000	2000									
	SR/DR	13,3 m	4000	2500									

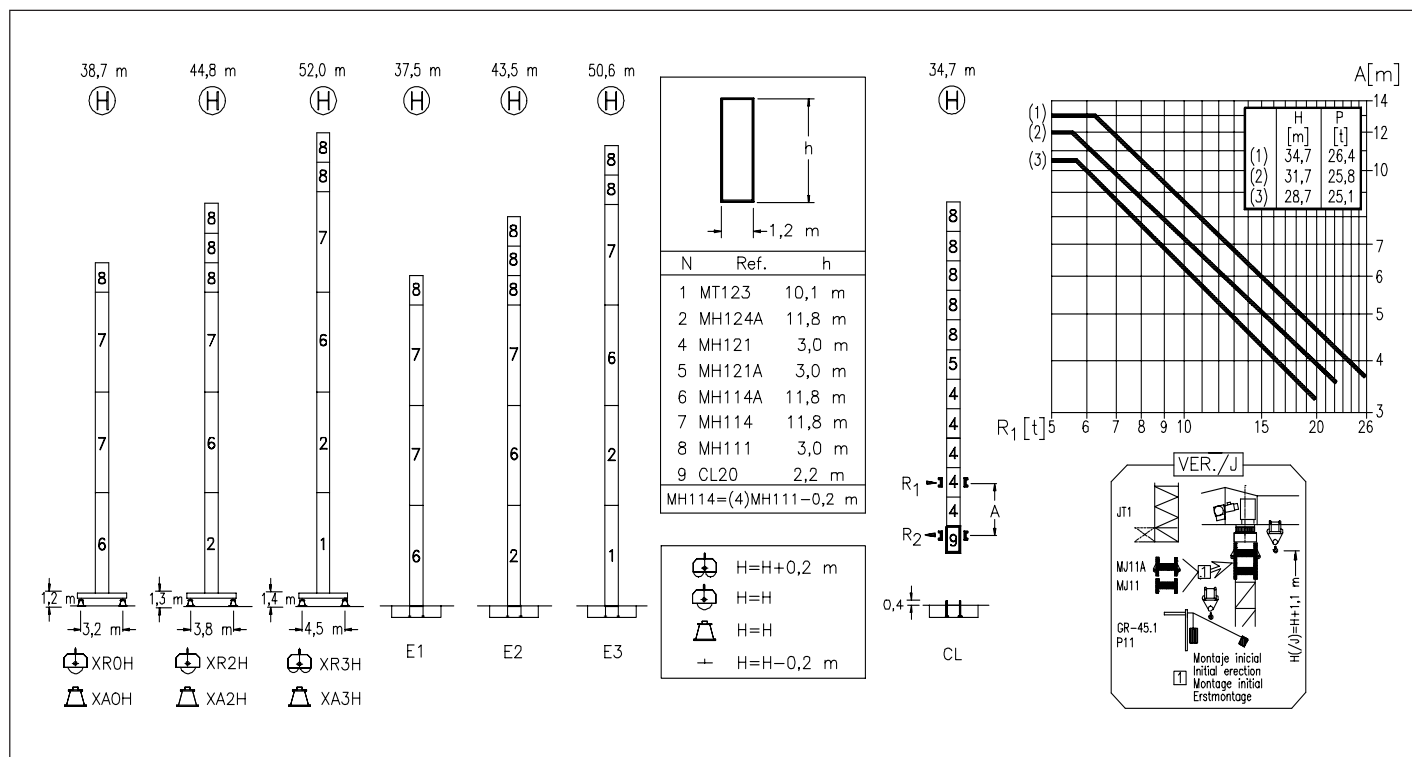

					
CS2-1.9	CFU-2.2	GR-6.5	TS2-3.0	TS2-4.5	TS2-5.5
1,9 kW	2,2 kW	65 Nm	2x30 Nm	2x45 Nm	2x55 Nm
16 m/min 48 m/min	0  80 m/min	0  0,8 rpm	0  20 m/min		
			XR0H	XR2H	XR3H

 250 m						
ES3-13-10						
13,2 kW						
SR	m/min	I	II			
	kg	7,5	30			
DR	m/min	I	II			
	kg	4000	2400			

250 mm

11 kW

SR

0.5 1 1.5 2

0 10 20 30 40 50 60 70 74

$\frac{\text{m}^3}{\text{min}}$

Tensión de alimentación	400 V
Operating voltage	3 ph
Tension de service	50 Hz
Betriebsspannung	

Optional Optional En option Kaufoption	
---	---

R. máx.	En servicio	XR0H	40,4 t
	In operation	XR2H	41,7 t
	En service	XR3H	44,8 t
	In Betrieb		

R. máx.	Fuera de servicio	XR0H	57,9 t
	Out of service	XR2H	65,5 t
	Hors service	XR3H	74,1 t
	Ausser Betrieb		