




COMANSA

LINDEN 500

5 LC 4510

4 t

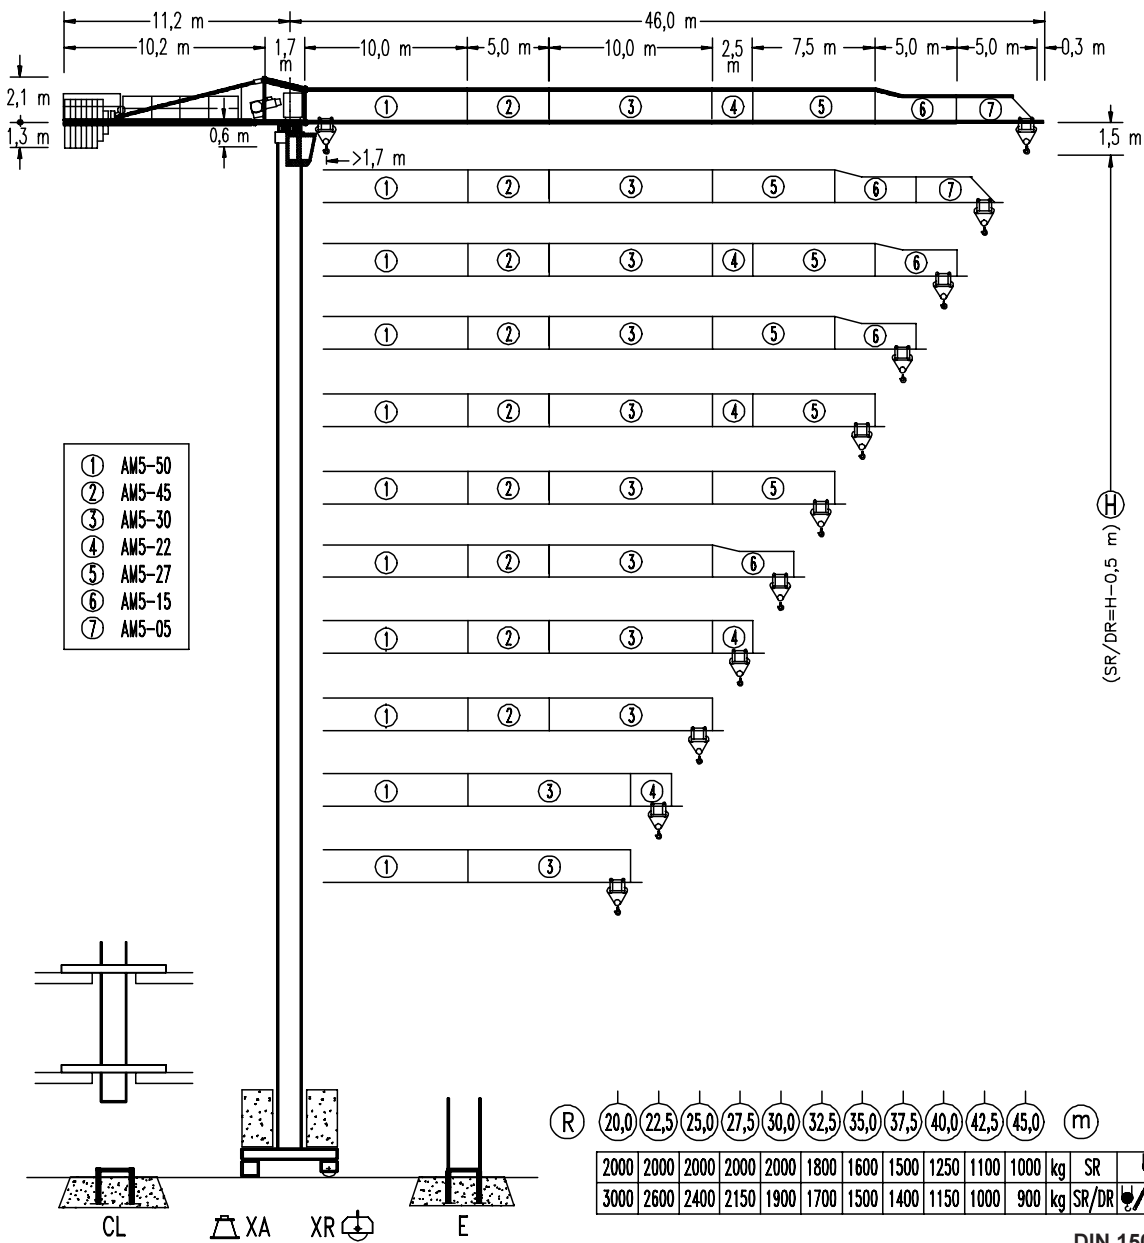

(R)		R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	m
(45,0)	SR	25,1 m	2000	2000	2000	2000	1800	1620	1480	1360	1250	1150	1070	1000	kg
	SR/DR	13,5 m	4000	2530	2200	1930	1720	1540	1390	1270	1160	1060	980	900	
(42,5)	SR	25,5 m	2000	2000	2000	2000	1840	1660	1520	1390	1280	1180	1100		
	SR/DR	13,7 m	4000	2580	2240	1980	1760	1580	1430	1300	1180	1090	1000		
(40,0)	SR	26,7 m	2000	2000	2000	2000	1940	1750	1600	1460	1350	1250			
	SR/DR	14,3 m	4000	2710	2360	2080	1850	1660	1510	1370	1250	1150			
(37,5)	SR	29,2 m	2000	2000	2000	2000	2000	1940	1770	1620	1500				
	SR/DR	15,5 m	4000	2990	2610	2300	2060	1850	1680	1530	1400				
(35,0)	SR	28,8 m	2000	2000	2000	2000	2000	1910	1740	1600					
	SR/DR	15,3 m	4000	2940	2570	2260	2020	1820	1650	1500					
(32,5)	SR	29,6 m	2000	2000	2000	2000	2000	1970	1800						
	SR/DR	15,7 m	4000	3030	2640	2330	2080	1880	1700						
(30,0)	SR	30,0 m	2000	2000	2000	2000	2000								
	SR/DR	15,9 m	4000	3070	2680	2360	2110	1900							
(27,5)	SR	27,5 m	2000	2000	2000	2000									
	SR/DR	16,1 m	4000	3120	2730	2410	2150								
(25,0)	SR	25,0 m	2000	2000	2000										
	SR/DR	16,1 m	4000	3110	2720										

2000	2000	20,0 m	SR	(20,0)
3000	4000	15,6 m	SR/DR	
2000	2000	22,5 m	SR	(22,5)
2600	2980	15,5 m	SR/DR	
22,5	20,0	Cmax	R(Cmax)	(R)

