




COMANSA


LINDEN 500

5 LC 5010

5t

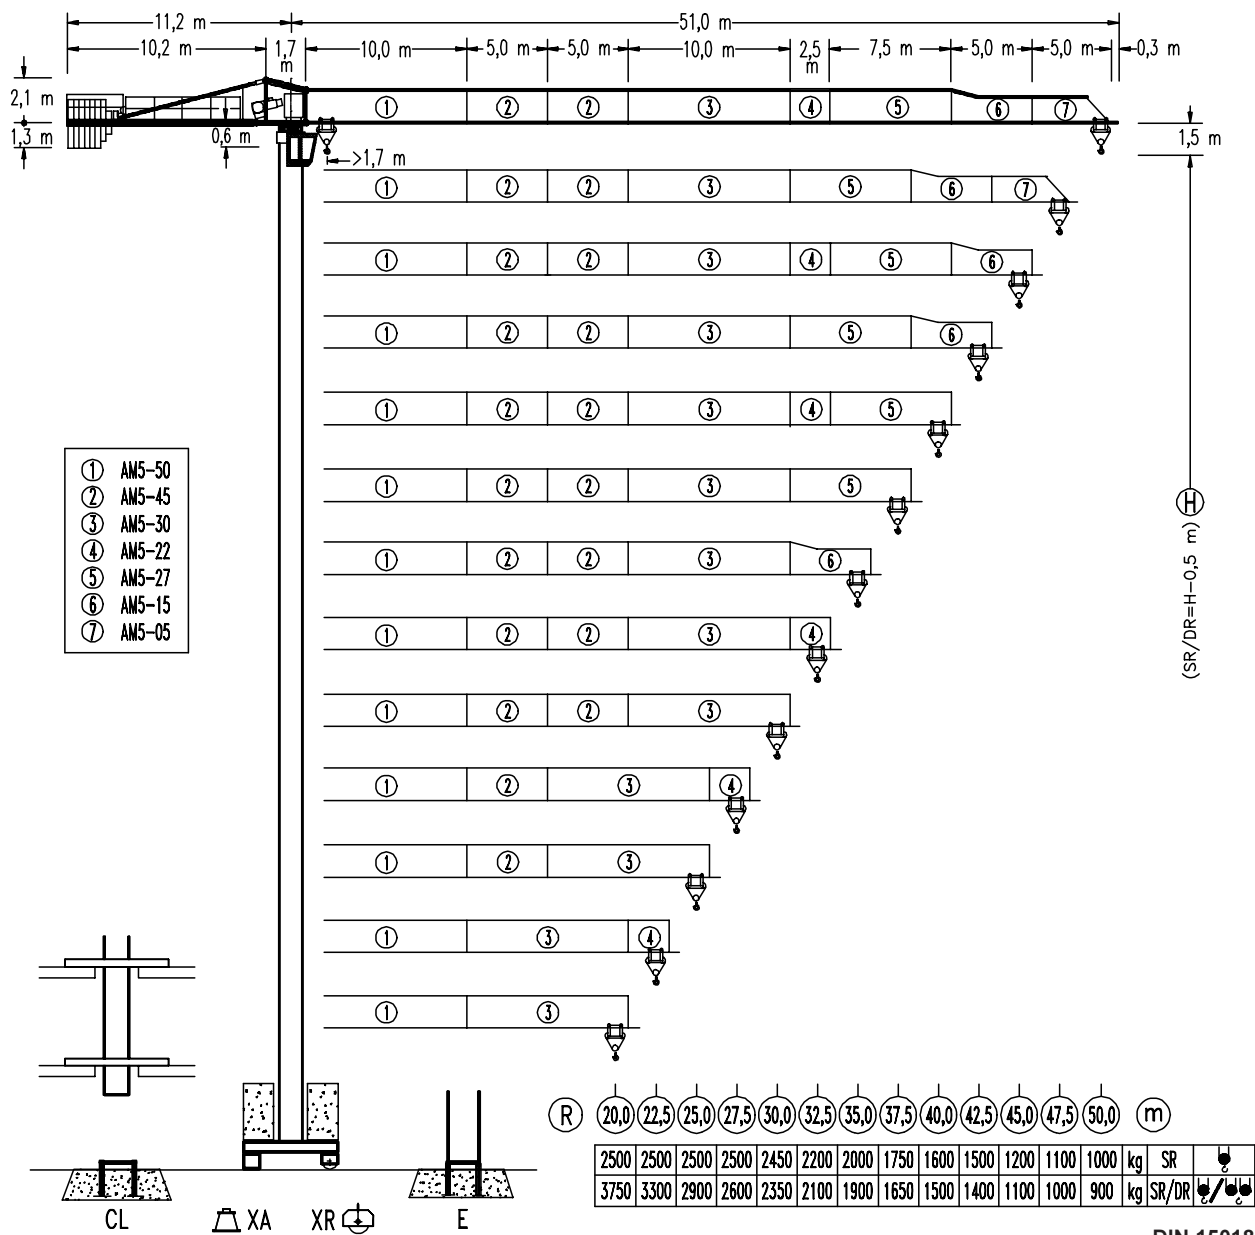

(R)		R(Cmax)	Cmax	20,0	22,5	25,0	27,5	30,0	32,5	35,0	37,5	40,0	42,5	45,0	47,5	50,0	m kg		
50,0	SR	22,8 m	2500	2500	2500	2250	2020	1830	1670	1530	1410	1310	1220	1140	1070	1000			
	SR/DR	12,2 m	5000	2850	2480	2190	1950	1760	1590	1450	1330	1220	1120	1040	970	900			
47,5	SR	23,4 m	2500	2500	2500	2320	2090	1890	1720	1580	1460	1350	1260	1170	1100				
	SR/DR	12,5 m	5000	2930	2550	2250	2010	1810	1640	1490	1370	1260	1160	1080	1000				
45,0	SR	23,8 m	2500	2500	2500	2370	2130	1930	1760	1610	1490	1380	1280	1200					
	SR/DR	12,7 m	5000	2980	2600	2300	2050	1840	1670	1520	1400	1280	1190	1100					
42,5	SR	27,1 m	2500	2500	2500	2500	2460	2230	2040	1880	1730	1610	1500						
	SR/DR	14,4 m	5000	3450	3010	2660	2380	2150	1950	1780	1640	1510	1400						
40,0	SR	27,0 m	2500	2500	2500	2500	2450	2220	2030	1860	1720	1600							
	SR/DR	14,3 m	5000	3420	2990	2640	2370	2130	1940	1770	1630	1500							
37,5	SR	27,3 m	2500	2500	2500	2500	2480	2250	2060	1890	1750			2500	2500	20,0 m	SR	20,0	
	SR/DR	14,5 m	5000	3470	3030	2680	2400	2160	1970	1800	1650			3750	5000	15,5 m	SR/DR	22,5	
35,0	SR	28,7 m	2500	2500	2500	2500	2500	2380	2170	2000				2500	2500	2500	22,5 m	SR	22,5
	SR/DR	15,1 m	5000	3650	3190	2830	2530	2280	2080	1900				3300	3770	5000	15,6 m	SR/DR	25,0
32,5	SR	29,0 m	2500	2500	2500	2500	2500	2410	2200					2500	2500	2500	25,0 m	SR	25,0
	SR/DR	15,3 m	5000	3690	3230	2860	2560	2310	2100					2900	3270	3740	5000	15,5 m	SR/DR
30,0	SR	29,5 m	2500	2500	2500	2500	2500	2450						2500	2500	2500	27,5 m	SR	27,5
	SR/DR	15,5 m	5000	3750	3280	2910	2600	2350						2600	2900	3280	3750	15,5 m	SR/DR

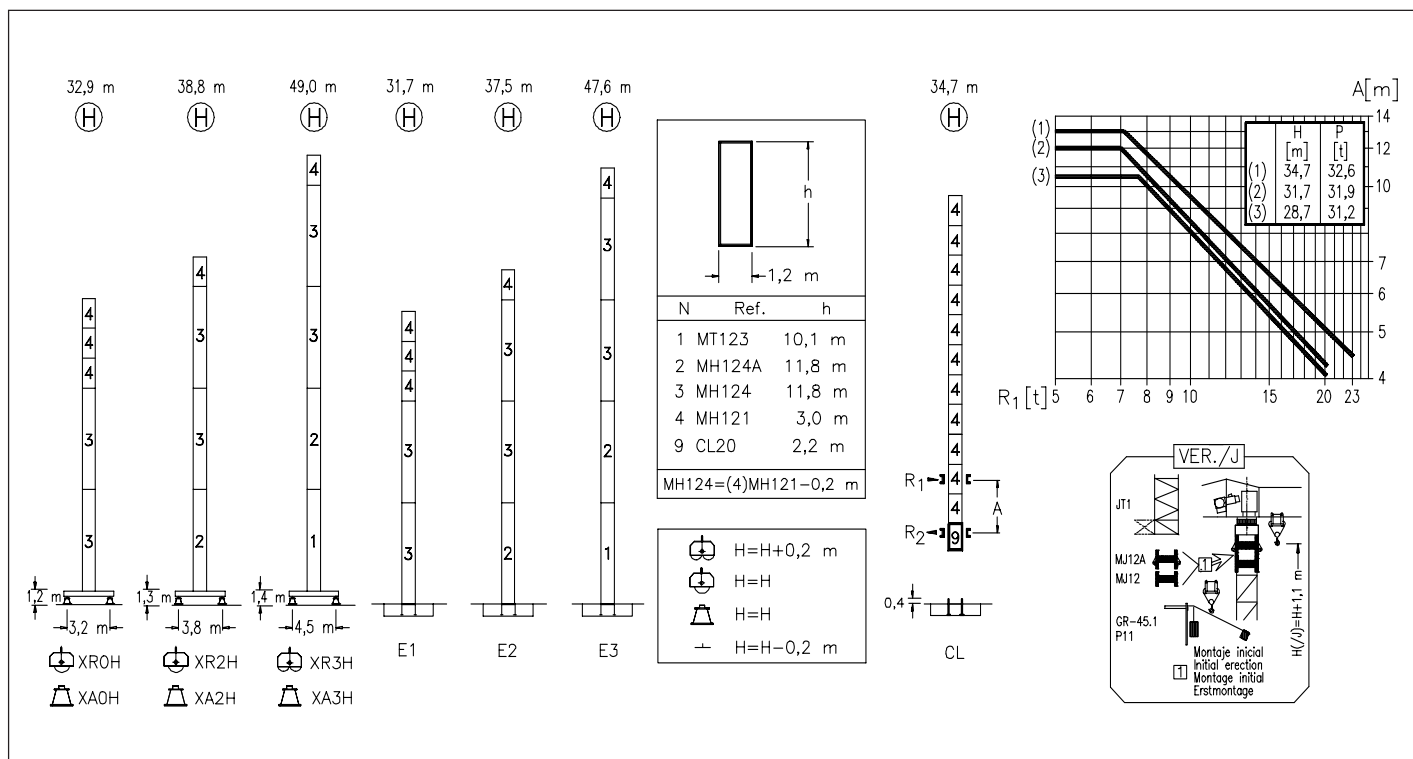


CS2-1.9
1,9 kW
16 m/min 48 m/min

Technical drawing of a circular saw blade. The blade is represented by a circle with a double-headed horizontal arrow passing through its center. Inside the circle, there is a curved arrow pointing clockwise, indicating rotation. Above the blade, there is a 6-pointed star symbol. Below the blade, the text "CFU-2.2" is written. Below that, "2,2 kW" is written. At the bottom, "0" is written on the left and "80 m/min" is written on the right, with a small curved arrow pointing clockwise between them.


GR-9.0
90 Nm
0 ϕ 0,8 rpm

		
TS2-3.0	TS2-4.5	TS2-5.5
2x30 Nm	2x45 Nm	2x55 Nm
0  20 m/min		
XR0H	XR2H	XR3H

				
		ES3-18-12		
		18 kW		
		I	II	III
SR	m/min	8	32	64
	kg	2500	2500	1300
DR	m/min	4	16	32
	kg	5000	5000	2600

EFU 2018-12

18 kW

250 mm

90°

SR

Pressure (bar)	Flow Rate (m³/min)
40	2.5
76	1.0

DR

Pressure (bar)	Flow Rate (m³/min)
20	5.0
38	2.2

Tensión de alimentación	400 V
Operating voltage	3 ph
Tension de service	50 Hz
Betriebsspannung	

Optional Optional En option Kaufoption	
---	---

R. máx.	En servicio	XR0H 44,6 t
	In operation	XR2H 42,6 t
	En service	XR3H 49,2 t
	In Betrieb	

R. máx.	Fuera de servicio	XR0H 47,7 t
	Out of service	XR2H 56,4 t
	Hors service	XR3H 76,8 t
	Ausser Betrieb	