




COMANSA

HT

HT-30

4 t

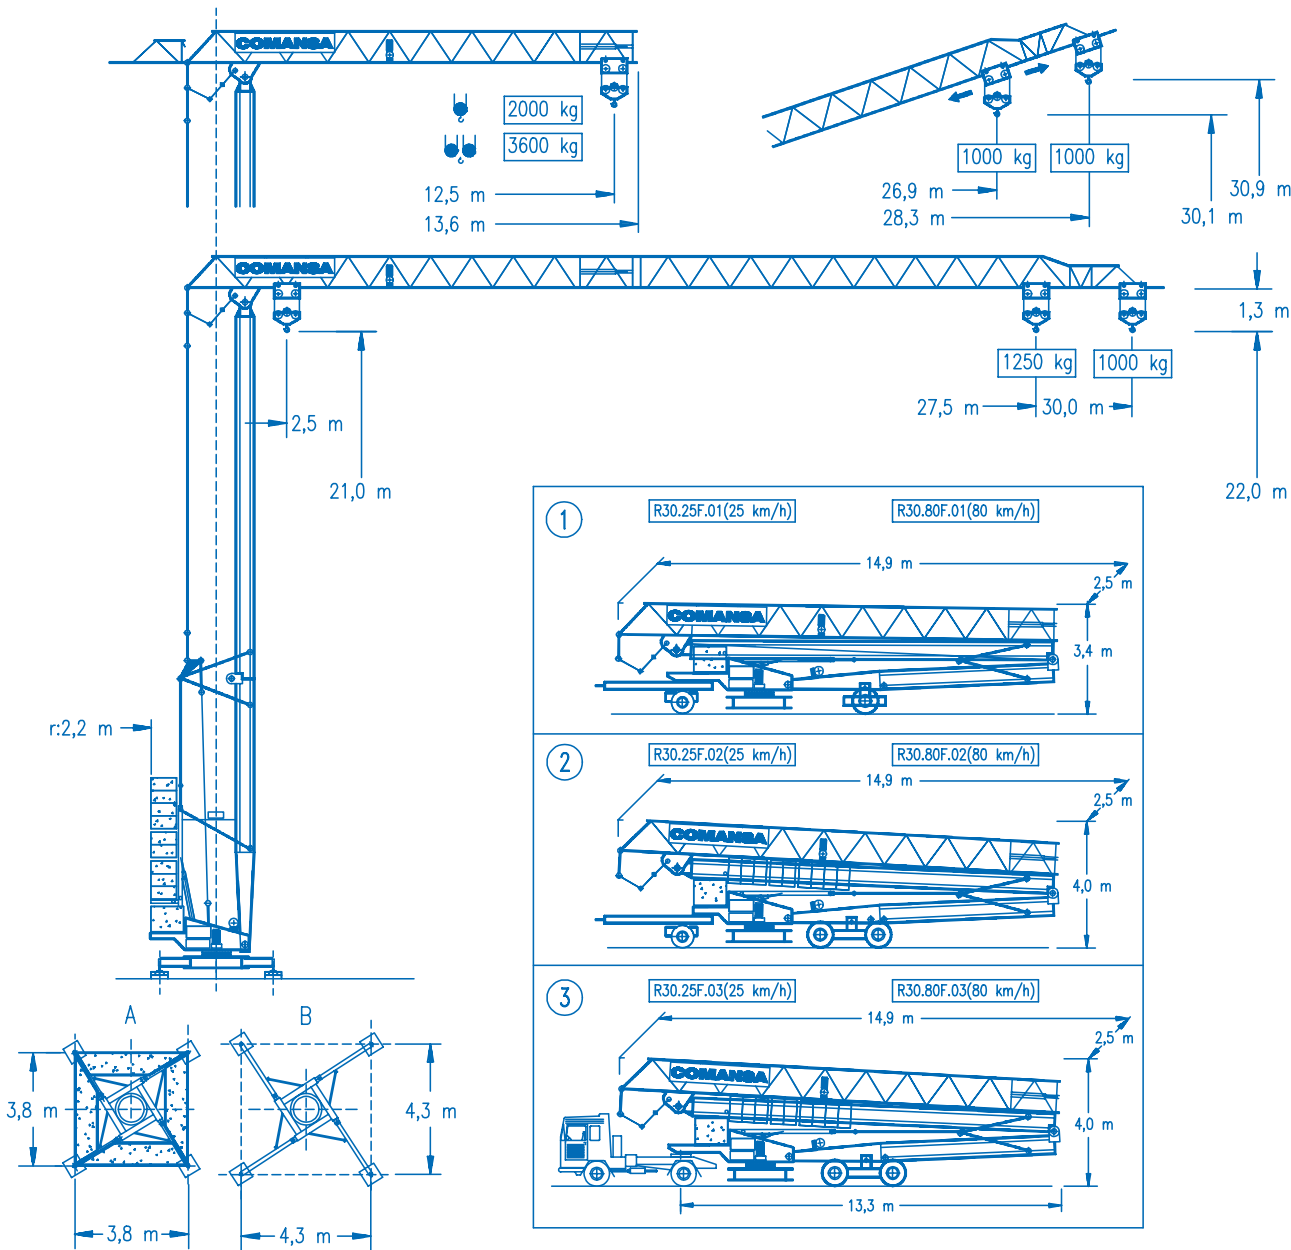

CE
DIN 15018 H1 B3

													
30 m	9,0 4000	10 3550	12 2880	14 2415	16,5 2000	18 1815	20 1605	22 1440	24 1300	26 1185	28 1085	30 1000	m kg
27,5 m	9,9 4000	10 3965	12 3220	14 2705	16 2325	18,2 2000	20 1805	22 1615	24 1465	26 1335	27,5 1250	m kg	





Reacción por esquina en servicio
Max. corner pressure in operation
Reaction max. par angle en service
Max. Ecklast in Betrieb

VER. A 22000 kg
VER. B 20000 kg

Peso de la construcción
Dead weight
Poids de la construction
Konstruktionsgewicht

14000 kg

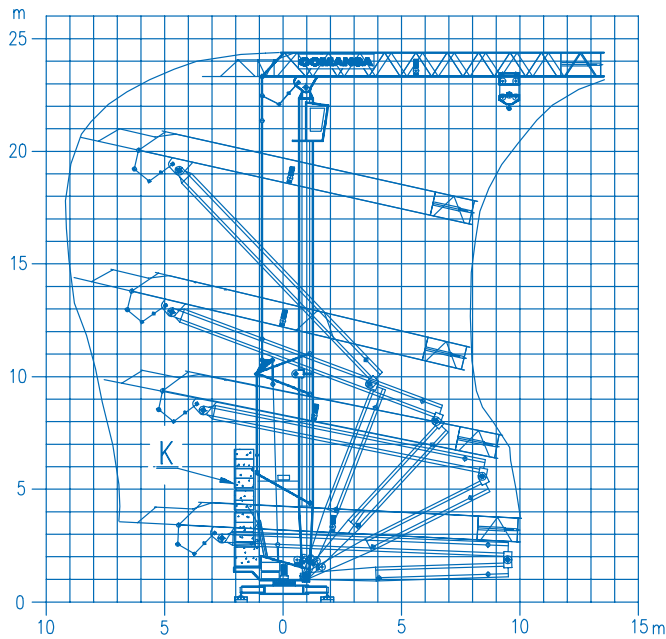

		
VER.	A	B
K (kg)	14500	14500
M (kg)	5000	-



CS2-3.0

3 kW

20 - 40 m/min



GR-3.0

30 Nm

0 0,7 rpm



ES3-7.5-10

7,5 kW

		I	II	III
	m/min	7	20	40
	kg	2000	2000	1000
	m/min	3,5	10	20
	kg	4000	4000	2000

Tensión de alimentación
Operating voltage
Tension de service
Betriebsspannung

400 V
3 ph
50 Hz

Opcional
Optional
En option
Kaufoption



COMANSA

Construcciones Metálicas COMANSA S. A.

Tel.: (34) 948 335 020
Fax: (34) 948 330 810
e-mail: info@comansa.com
www.comansa.com

Polígono Urbizkain
E-31620 HUARTE-PAMPLONA.- SPAIN

DS.0346.03

09/05

HT-30 4 t