




COMANSA

LC-5211


11,020 lbs.

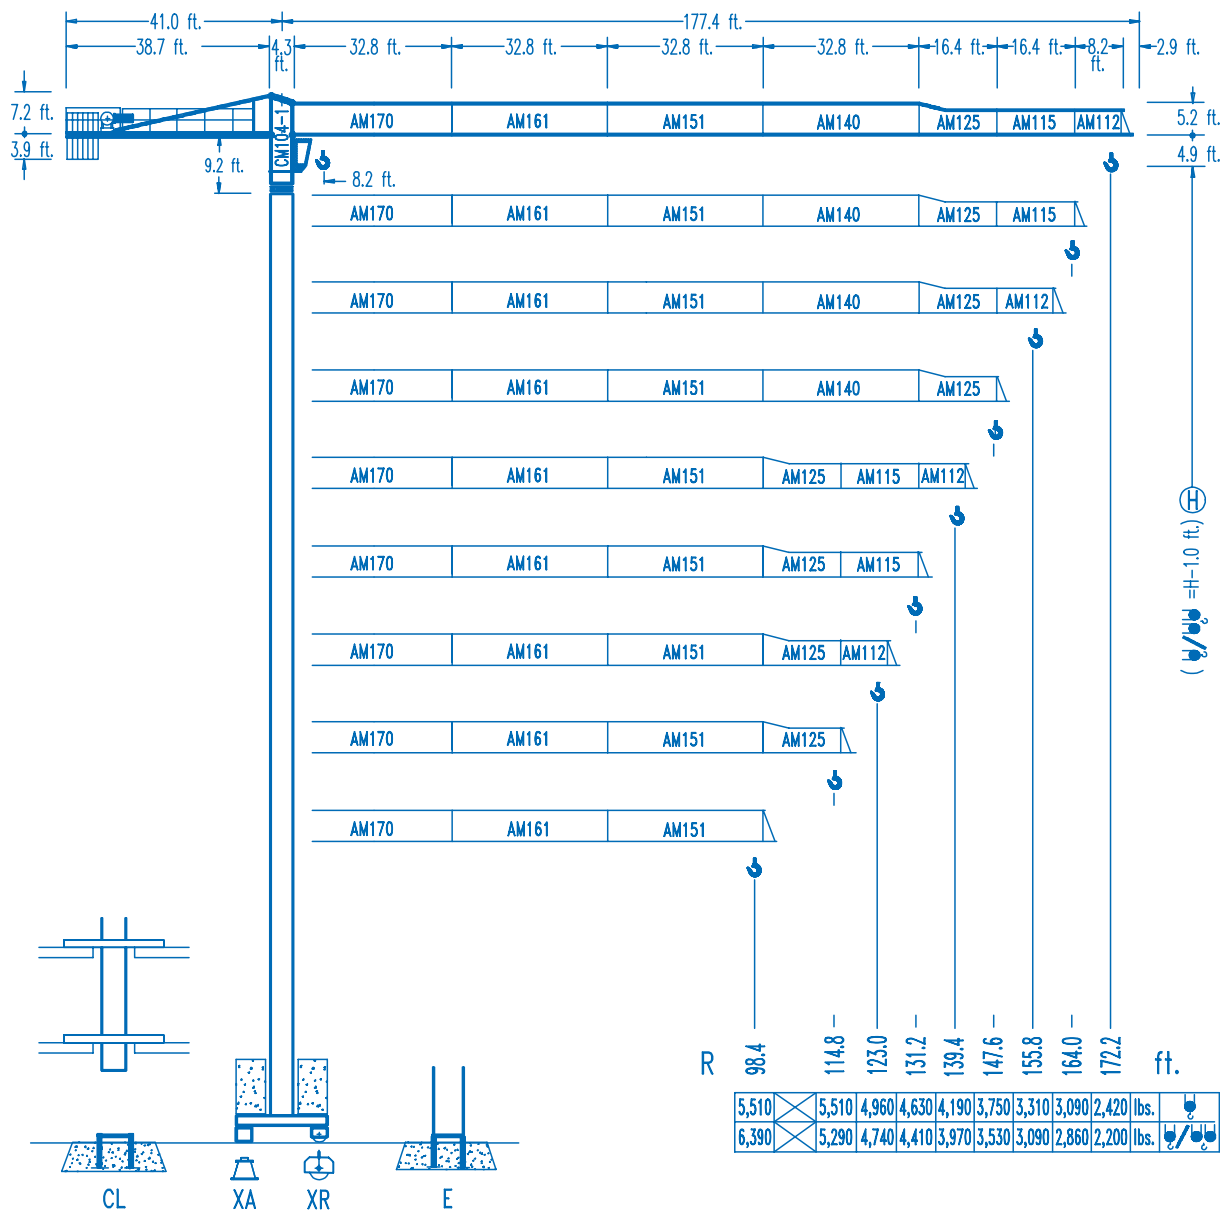



5,510	5,510	4,960	4,630	4,190	3,750	3,310	3,090	2,420	lbs.
6,390	5,290	4,740	4,410	3,970	3,530	3,090	2,860	2,200	lbs.

CE
DIN 15018 H1 B3

R	R(Cmax)	Cmax	65.6	82.0	98.4	114.8	123.0	131.2	139.4	147.6	155.8	164.0	172.2	ft.
172.2	87.9 ft. 46.6 ft.	5,510 11,020	5,510 7,450	5,510 5,730	4,830 4,580	4,010 3,790	3,700 3,480	3,420 3,200	3,170 2,950	2,950 2,730	2,750 2,530	2,580 2,360	2,420 2,200	
164.0	101.0 ft. 53.5 ft.	5,510 11,020	5,510 8,730	5,510 6,740	5,510 5,540	4,740 4,520	4,360 4,140	4,060 3,830	3,770 3,550	3,500 3,280	3,280 3,060	3,090 2,860		
155.8	101.4 ft. 53.5 ft.	5,510 11,020	5,510 8,770	5,510 6,790	5,510 5,470	4,760 4,540	4,390 4,170	4,080 3,860	3,790 3,570	3,530 3,310	3,310 3,090			
147.6	106.3 ft. 56.1 ft.	5,510 11,020	5,510 9,260	5,510 7,160	5,510 5,800	5,050 4,830	4,650 4,430	4,320 4,100	4,010 3,790	3,750 3,530				
139.4	110.2 ft. 58.4 ft.	5,510 11,020	5,510 9,650	5,510 7,470	5,510 6,040	5,240 5,020	4,850 4,630	4,500 4,280	4,190 3,970					
131.2	112.8 ft. 59.7 ft.	5,510 11,020	5,510 9,920	5,510 7,690	5,510 6,210	5,400 5,180	4,980 4,760	4,630 4,410						
123.0	112.2 ft. 59.4 ft.	5,510 11,020	5,510 9,850	5,510 7,650	5,510 6,170	5,380 5,160	4,960 4,740							
114.8	114.8 ft. 60.7 ft.	5,510 11,020	5,510 10,090	5,510 7,850	5,510 6,350	5,510 5,290								
98.4	98.4 ft. 61.0 ft.	5,510 11,020	5,510 10,160	5,510 7,890	5,510 6,390									

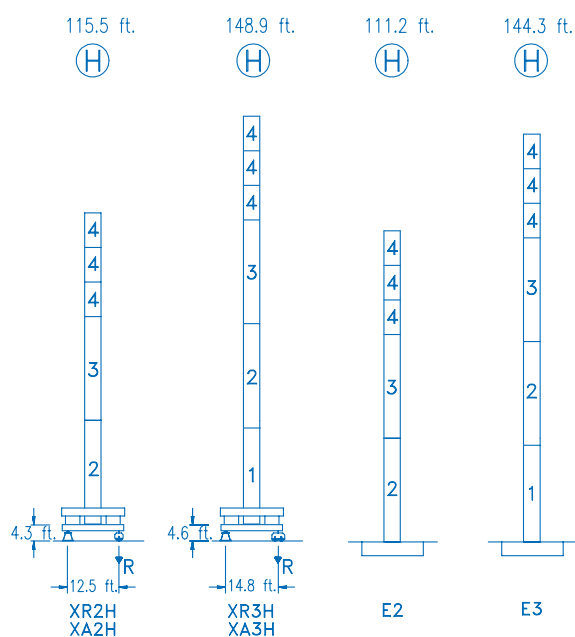

	$H = H + 0.6 \text{ ft.}$
	$H = H$
	$H = H$
	$H = H - 0.6 \text{ ft.}$

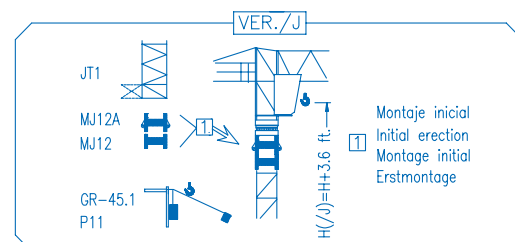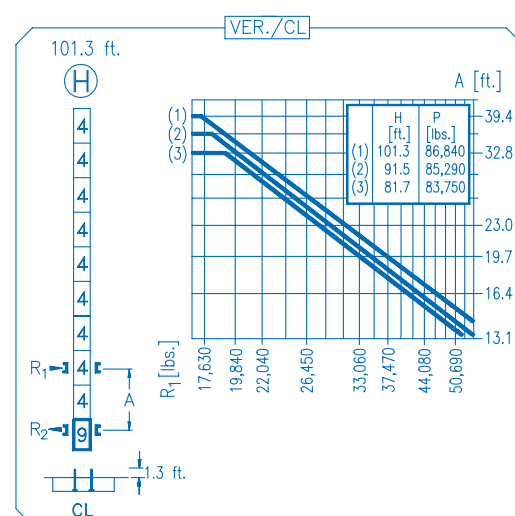

R. máx.	En servicio En operation En service In Betrieb	XR2H 96,650 lbs. XR3H 144,620 lbs.
----------------	---	--

R. máx.	Fuera de servicio	XR2H 89,730 lbs.
	Out of service Hors service Ausser Betrieb	XR3H 101,630 lbs.

A blue icon consisting of a circle with a hand pointing down inside it. This circle is flanked by two horizontal arrows pointing outwards to the left and right, all enclosed within a larger rectangular frame.

A top-down view of the CFU-2.2 unit. It features a central circular fan with a blue arrow pointing upwards. Above the fan is a power button with a blue arrow pointing right. To the right of the fan is a blue star symbol. The unit is white with a black border.

	
TS2-4.5	TS2-5.5
2x33 ft.lbs.	2x40 ft.lbs.
0 ➡ 78 ft./min	
XR2H	XR3H

							
ES3-18-12							
29 hp.							
		I	II	III			
	ft./min	32	126	252			
	lbs.	5,510	5,510	2,860			
	ft./min	16	63	126			
	lbs.	11,020	11,020	5,730			

EFU2-10-12

820 ft.

24 hp.

Flow rate (GPM) vs. Head (ft.)

Flow rate (GPM)	Head (ft.)
0	1,120
25	1,050
50	950
75	820
100	680
125	450

Tensión de alimentación	480 V
Operating voltage	3 ph
Tension de service	60 Hz
Betriebsspannung	

Optional	
Optional	
En option	
Kaufoption	*