




COMANSA

NT-40100

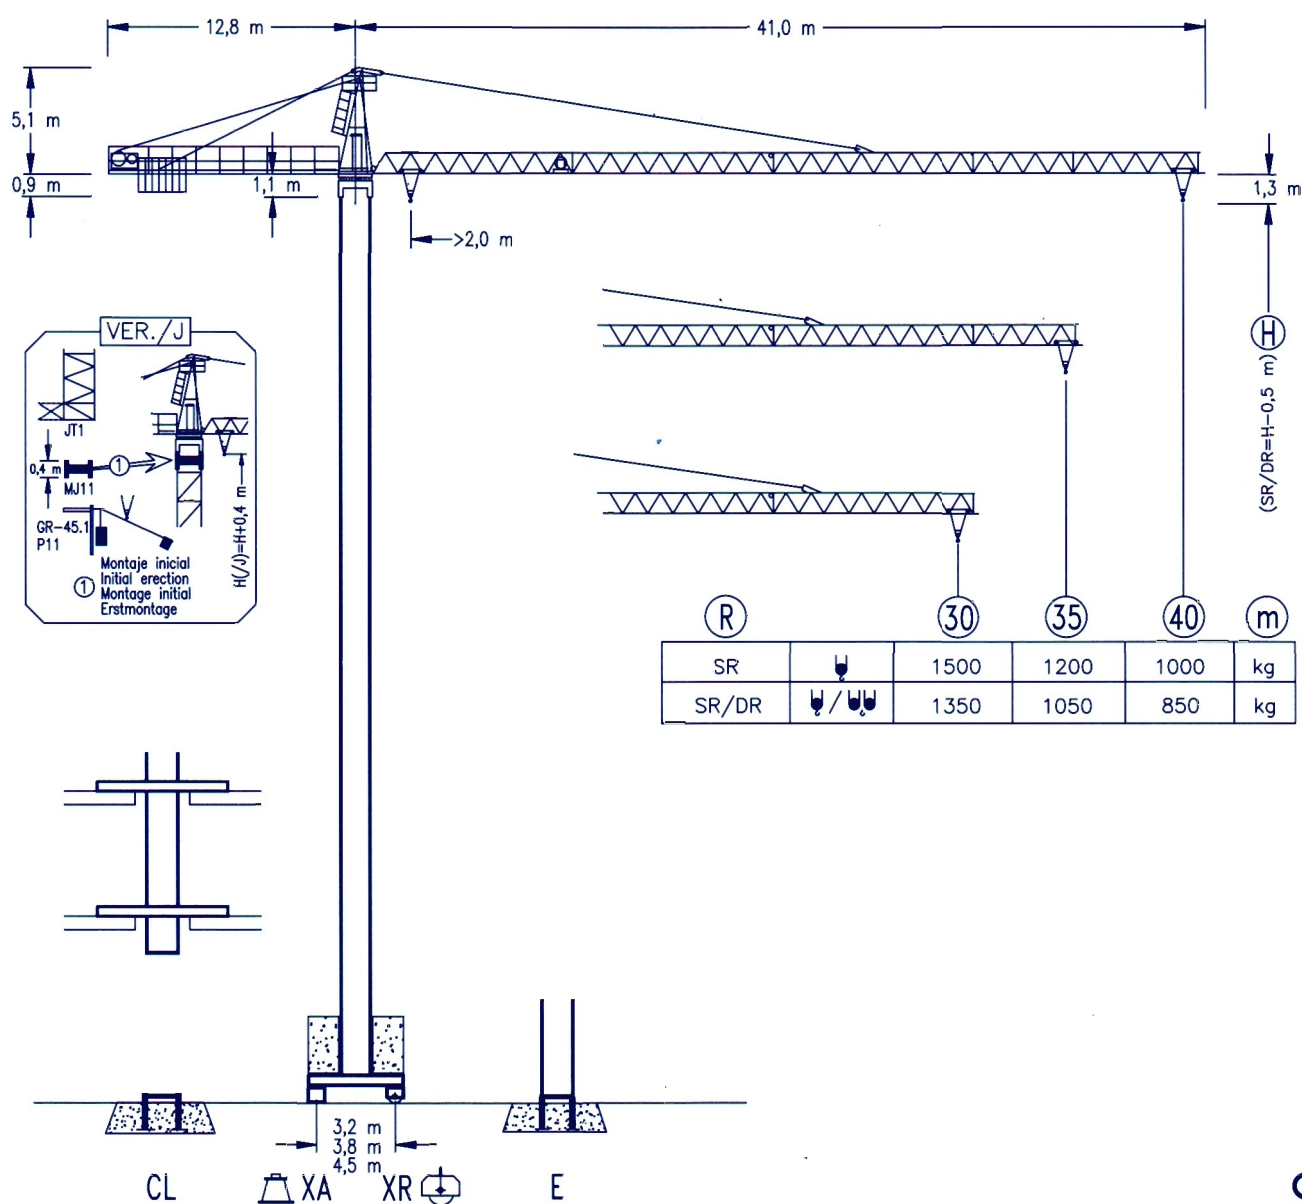

CE
DIN 15018 H1 B3

(R)		R _(Cmax)	C _{max}	12	15	18	20	25	30	35	40	
(40)	SR	22,3 m	2000	2000	2000	2000	2000	1760	1365	1180	1000	
	SR/DR	11,6 m	4000	3865	2760	2250	2110	1525	1210	990	850	
(35)	SR	22,7 m	2000	2000	2000	2000	2000	1710	1445	1200		
	SR/DR	11,8 m	4000	3585	3030	2440	2150	1635	1290	1050		
(30)	SR	23,4 m	2000	2000	2000	2000	2000	1855	1500			
	SR/DR	12,2 m	4000	4000	3150	2540	2240	1705	1350			

