



# COMBiLiFT

## C4000E

*Customised Handling Solution*



New Display Including Wheel Position



Deep Suspension Seat



***three machines in one***

*Counterbalance Forklift > Aisle Truck > Side Loader*

Patent Pending : GB1302811.3

**[www.COMBiLiFT.com](http://www.COMBiLiFT.com)**



# SPECiFiCATIONS

## MODEL C4000E

Available 3,000 kg to 5,000 kg





| REF | DESCRIPTION                             | C4000 E                |
|-----|-----------------------------------------|------------------------|
| 1a  | Max. Lift Height                        | 4040mm                 |
| 1b  | Freelift Height                         | 0mm                    |
| 2   | Height Mast Closed                      | 2855mm                 |
| 3   | Max. (Mast raised)                      | 4870mm                 |
| 4   | Overall Length                          | 2300mm                 |
| 5   | Mast Travel                             | 1300mm                 |
| 6   | Ground Clearance Under Mast             | 150mm                  |
| 7   | Ground Clearance to Centre of Wheelbase | 180mm                  |
| 8   | Height Over Cab (Without work - lights) | 2380mm                 |
| 9   | Width                                   | 2270mm                 |
| 10  | Outside Spread of Fork Arms             | 1350mm                 |
| 11  | Track Front                             | 2020mm                 |
| 12  | Frame Opening                           | 1400mm                 |
| 13  | Load Centre Distance                    | 600mm                  |
| 14  | Overhang Front                          | 220mm                  |
| 15  | Wheelbase                               | 1895mm                 |
| 16  | Overhang Back                           | 135mm                  |
| 17  | Length From Face of Fork                | 1100mm                 |
| 18  | Approach Angle                          | 45°                    |
| 19  | Ramp Angle                              | 17°                    |
| 20  | Departure Angle                         | 45°                    |
| 21  | Forward Tilt                            | 3°                     |
| 22  | Backward Tilt                           | 5°                     |
| 23  | Minimum Outside Radius                  | 1785mm                 |
| 24  | Platform Height                         | 470mm                  |
| 25  | Platform Length                         | 1200mm                 |
| A   | Capacity                                | 4000kg                 |
| B   | Unladen Weight                          | 6650kg                 |
| C   | Maximum Ground Speed                    | 10km/h                 |
| D   | Gradability                             | 10%                    |
| E   | Battery Capacity ( V / Ah)              | 80V / 625 Ah           |
| F   | Fork Section                            | 50mm x 150mm x 1200mm  |
| G   | 405/220-305 Front Tyres (Solid Rubber)  | OD 405mm / Width 220mm |
| H   | 27 x 10-12 Rear Tyre                    | OD 680mm / Width 255mm |
| I   | Standard Colour                         | Green & Grey           |
| J   | AC Electric Traction Motor x 2          | 80v / 5kW              |
| K   | AC Electric Pump Motor                  | 80V / 19kW             |

**FEATURES INCLUDE:**

- Rubber Mounted Cabin
- AC Motor Technology
- Multi-Direction Operation
- Load Sensing Steering
- Curtis AC Software
- 4 Way Lever Positioning of Wheels
- 2 Wheel Drive

Distributed by:

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.

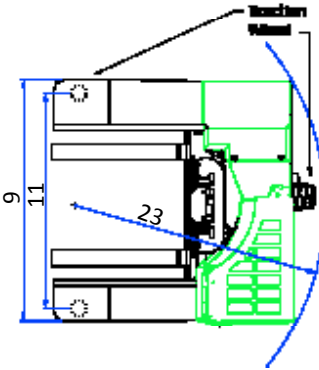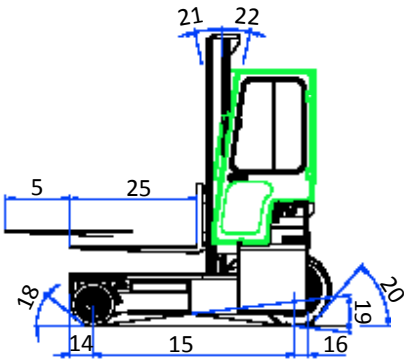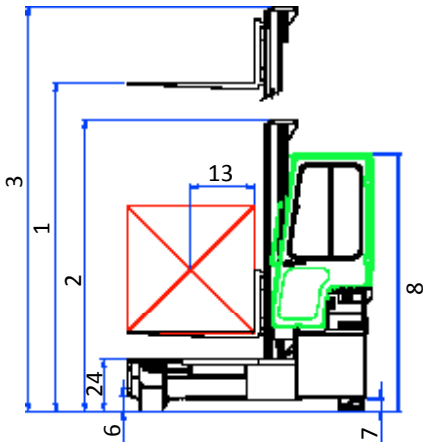

**COMBiLiFT**

Co. Monaghan  
Ireland

T: +353 47 80500

F: +353 47 80501

E: [info@combilift.com](mailto:info@combilift.com)

**[www.COMBiLiFT.com](http://www.COMBiLiFT.com)**