



COMBILIFT

Customized Handling Solutions

C5000 - C6000

making short work of long loads









three machines in one


- counterbalance forklift - sideloader - aisle truck

www.COMBiLiFT.COM



SPECIFICATIONS

Models C5000 - C6000

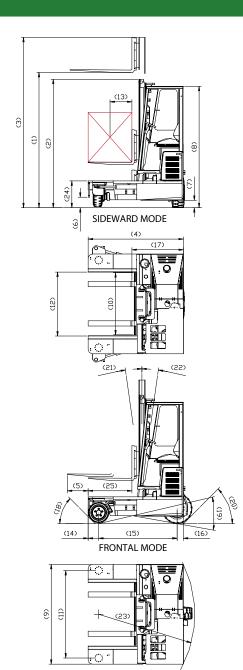

COMBILIFT Ltd

Co.Monaghan Ireland

Tel: 011 353 47 80500 Fax: 011 353 47 80501

COMBILIFT USA

303 Concord Street, Greensboro North Carolina 27406

Toll Free: 1-877 COMBI 56 Tel: 336-378-8884

Fax: 336-378-8842 info@combilift.com

REF	DESCRIPTION	C5000	C6000
la	Max. Lift Height	159"	
Ιb	Free Lift Height	0"	
2	Height Mast Closed	104"	
3	Max.(Mast raised)	188"	
4	Overall Length	75"	89"
5	Mast Travel	33½"	47½"
6	Ground Clearance Under Mast	6"	
7	Ground Clearance to Centre of Wheelbase	5"	
8	Height Over Cab	92"	
9	Width	76"	
10	Outside Spread of Fork Arms	47"	
П	Track Front	68"	
12	Frame Opening	48"	
	Load Centre Distance	18"	24"
14	Overhang Front	8	3"
15	Wheel Base	60"	74"
16	Overhang Back	7	7"
17	Length From Face of Fork	43½"	
18	Approach Angle	45°	
19	Ramp Angle	17°	
20	Departure Angle	45°	
21	Forward Tilt	2°	
22	Backward Tilt	4	l°
23	Minimum Outside Radius	60"	64"
24	Platform Height	19 ½"	
25	Platform Length	31½"	45¼"
Α	Capacity	5000 lbs	6000 lbs
В	Unladen Weight	10,350 lbs	10,800 lbs
С	Maximum Ground Speed	9 mph	
D	Gradibility	10%	
Е	VW Engine (Water Cooled)	65 HP	
F	Electric's	12 Volt	
G	Fork Section 1¾ x 6 x	31½"	45 ¼"
Н	16 x 7 – 10.5 Front Tyre (Solid Rubber)	OD 16"/Width 7"	
I	23 x 10 - 12 Rear Tyre (Super Elastic)	OD 23" / Width 10"	
J	Standard Colour	Green & Grey	
K	Suspension Seat	KAB Model 211	

FEATURES INCLUDE:

Multi - Direction Operation · Load Sensing Steering 3 Wheel Hydrostatic Drive • 4 Way lever Positioning of Wheels



Distributed By

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.