




- Gru a torre a braccio impennabile
- Luffing Jib Tower Crane • Grue à tour à flèche relevable
- Turmdrehkran mit Steilstellung-Ausleger
- Grua torre de pluma abatible

CTL 630-32

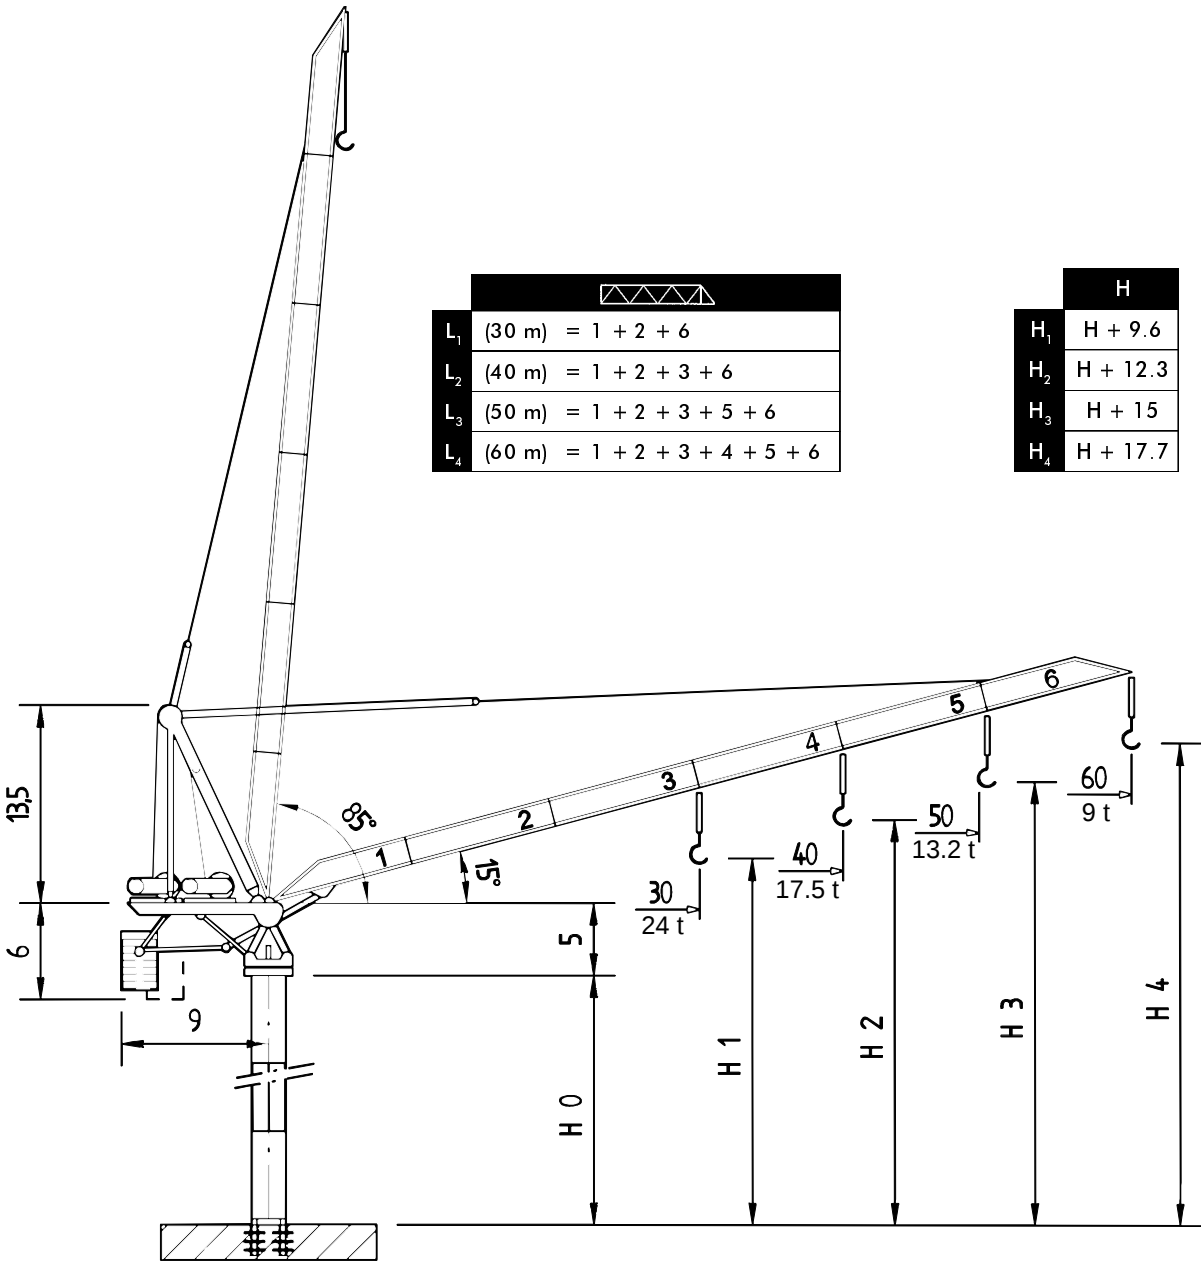

CE FEM 1.001 A3
(A2)

simple, available and cost effective™





COMEDIL CTL 630-32

Diagramma di portata
Load Diagram

I
GB

Curbes de charges
Lastkurven

F
D

Curvas de cargas

E

CTL 630-32														
			m	20	22	25	27	30	35	40	45	50	55	60
16 t	-	35	m	t	16,00	16,00	16,00	16,00	16,00	13,90	12,27	10,96	9,89	9,00
16 t	-	41,9	m	t	16,00	16,00	16,00	16,00	16,00	16,00	14,82	13,20		
32 t	-	21,8	m	t	32,00	31,78	27,80	25,64	22,93	19,46	16,85	14,82	13,20	
16 t	-	40	m	t	16,00	16,00	16,00	16,00	16,00	16,00				
32 t	-	22,6	m	t	32,00	32,00	28,84	26,60	23,80	20,20	17,50			
16 t	-	30	m	t	16,00	16,00	16,00	16,00	16,00					
32 t	-	22,8	m	t	32,00	32,00	29,08	26,82	24,00					

Altre installazioni
Other configurations


I
GB

Autres implantations
Aufstellmöglichkeiten

F
D

Otras implantaciones

E

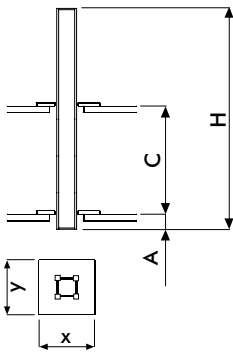


i

Gru climbing
Bottom climbing crane
Télescage sur dalles
Kletterkrane im Gebäude
Telescopage grua trepadora

I
GB
F
D
E

HD 23 26.6			
[m]			
C _{min}	12	18	24
H _{max}	30	42	48
A _{min}	2		
x	3		
y	2.47		

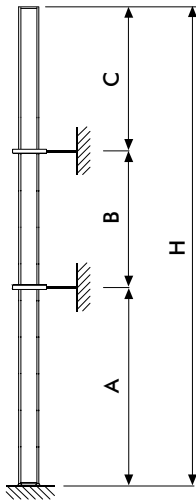

i

Gru ancorata
Crane tied to the structure
Grue ancrée
Geankerter Kran
Grua anclada

I
GB
F
D
E

HD 23 R1	
[m]	
A _{min/max}	30/42
B _{min/max}	24/30
C _{max}	24
H _{max}	i



COMEDIL CTL 630-32

Torre
Mast

I
GB



Mât
Turm

F
D

Mástil

E

HD 23

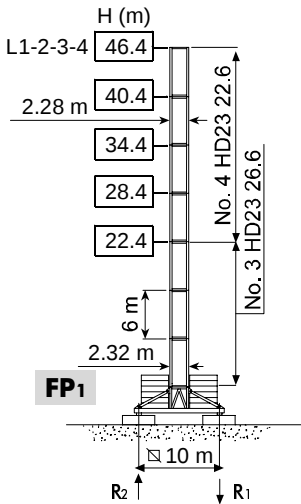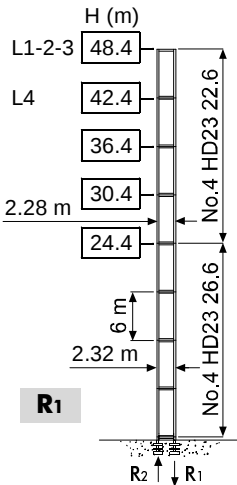

H

Altezza massima
sotto gancio

I

Max. under hook
height

GB

Hauteur maxi. sous crochet

F

Höchste Hackenhöhe

D

Maxima altura bajo gancho

E



COMEDIL CTL 630-32

Meccanismi Mechanisms	I GB	Mécanismes Antriebe	F D	Mecanismos E
--------------------------	---------	------------------------	--------	-----------------

	SR WB 102 160/5	400 - 460 V / 50 - 60 Hz	CE 87/405

* Gru senza traslazione / Crane without travelling equipment / Grue sans translation / Krane ohne Schienenfahren / Grúa sin traslación

			m/min	f	kW	
	SR WB 102 160/5		0 ⇄ 32	16	102	450 m
			0 ⇄ 50	10		
			0 ⇄ 80	6		
			0 ⇄ 125	3.5		
			0 ⇄ 16	32		
			0 ⇄ 25	20		
			0 ⇄ 40	12		
			0 ⇄ 63	7		

	LWL 11000	2.8 min	110 kW
	SCC 2 2 132 L	0 ⇄ 0.65 r.p.m.	2 × 14 kW

	Sollevamento	I	Hoisting	GB	Levage	F	Heben	D	Elevación	E
	Traslazione carrello		Trolleying		Distribution		Katzfahren		Distribución	
	Rotazione		Slewing		Orientation		Schwenken		Orientación	
	Traslazione		Travelling		Translation		Schienenfahren		Traslación	
	Direttiva sul livello acustico		Directive on noise level		Directive sur le niveau acoustique		Richtlinie für den Schall-Leistungspegel		Directiva sobre el nivel acustico	
	Consultateci		Consult us		Nous consulter		Auf Anfrage		Consultarnos	
	Potenza totale richiesta		Power requirements		Puissance totale nécessaire		Geforderte Stromstärke		Potencia necesaria	
	Alimentazione		Power supply		Alimentation		Stromversorgung		Alimentación	



Gru Comedil s.r.l.
Via S. Egidio 42/A
33074 Fontanafredda (PN) - Italy
Tel. (+39) 0434 567 311 - Telefax (+39) 0434 998631
Internet e-mail: info@comedil.com
Internet home page: <http://www.comedil.com>



AGENTE / DEALER / HÄNDLER / DISTRIBUTEUR / AGENTE

Dibujos y datos sin compromiso
Modifications réservées sans préavis
Données techniques seulement indicatives
Modifications vorbehalten ohne weitere Mitteilung
Angaben und Beschreibung unverbindlich
Änderungen vorbehalten ohne weitere notice
Specifications and data not binding
Subject to modification without notice
Dati illustrativi non impegnativi
Con riserva di modifica senza preavviso