




WALLBOARD CRANES

30000 WB SERIES

50000 WB SERIES

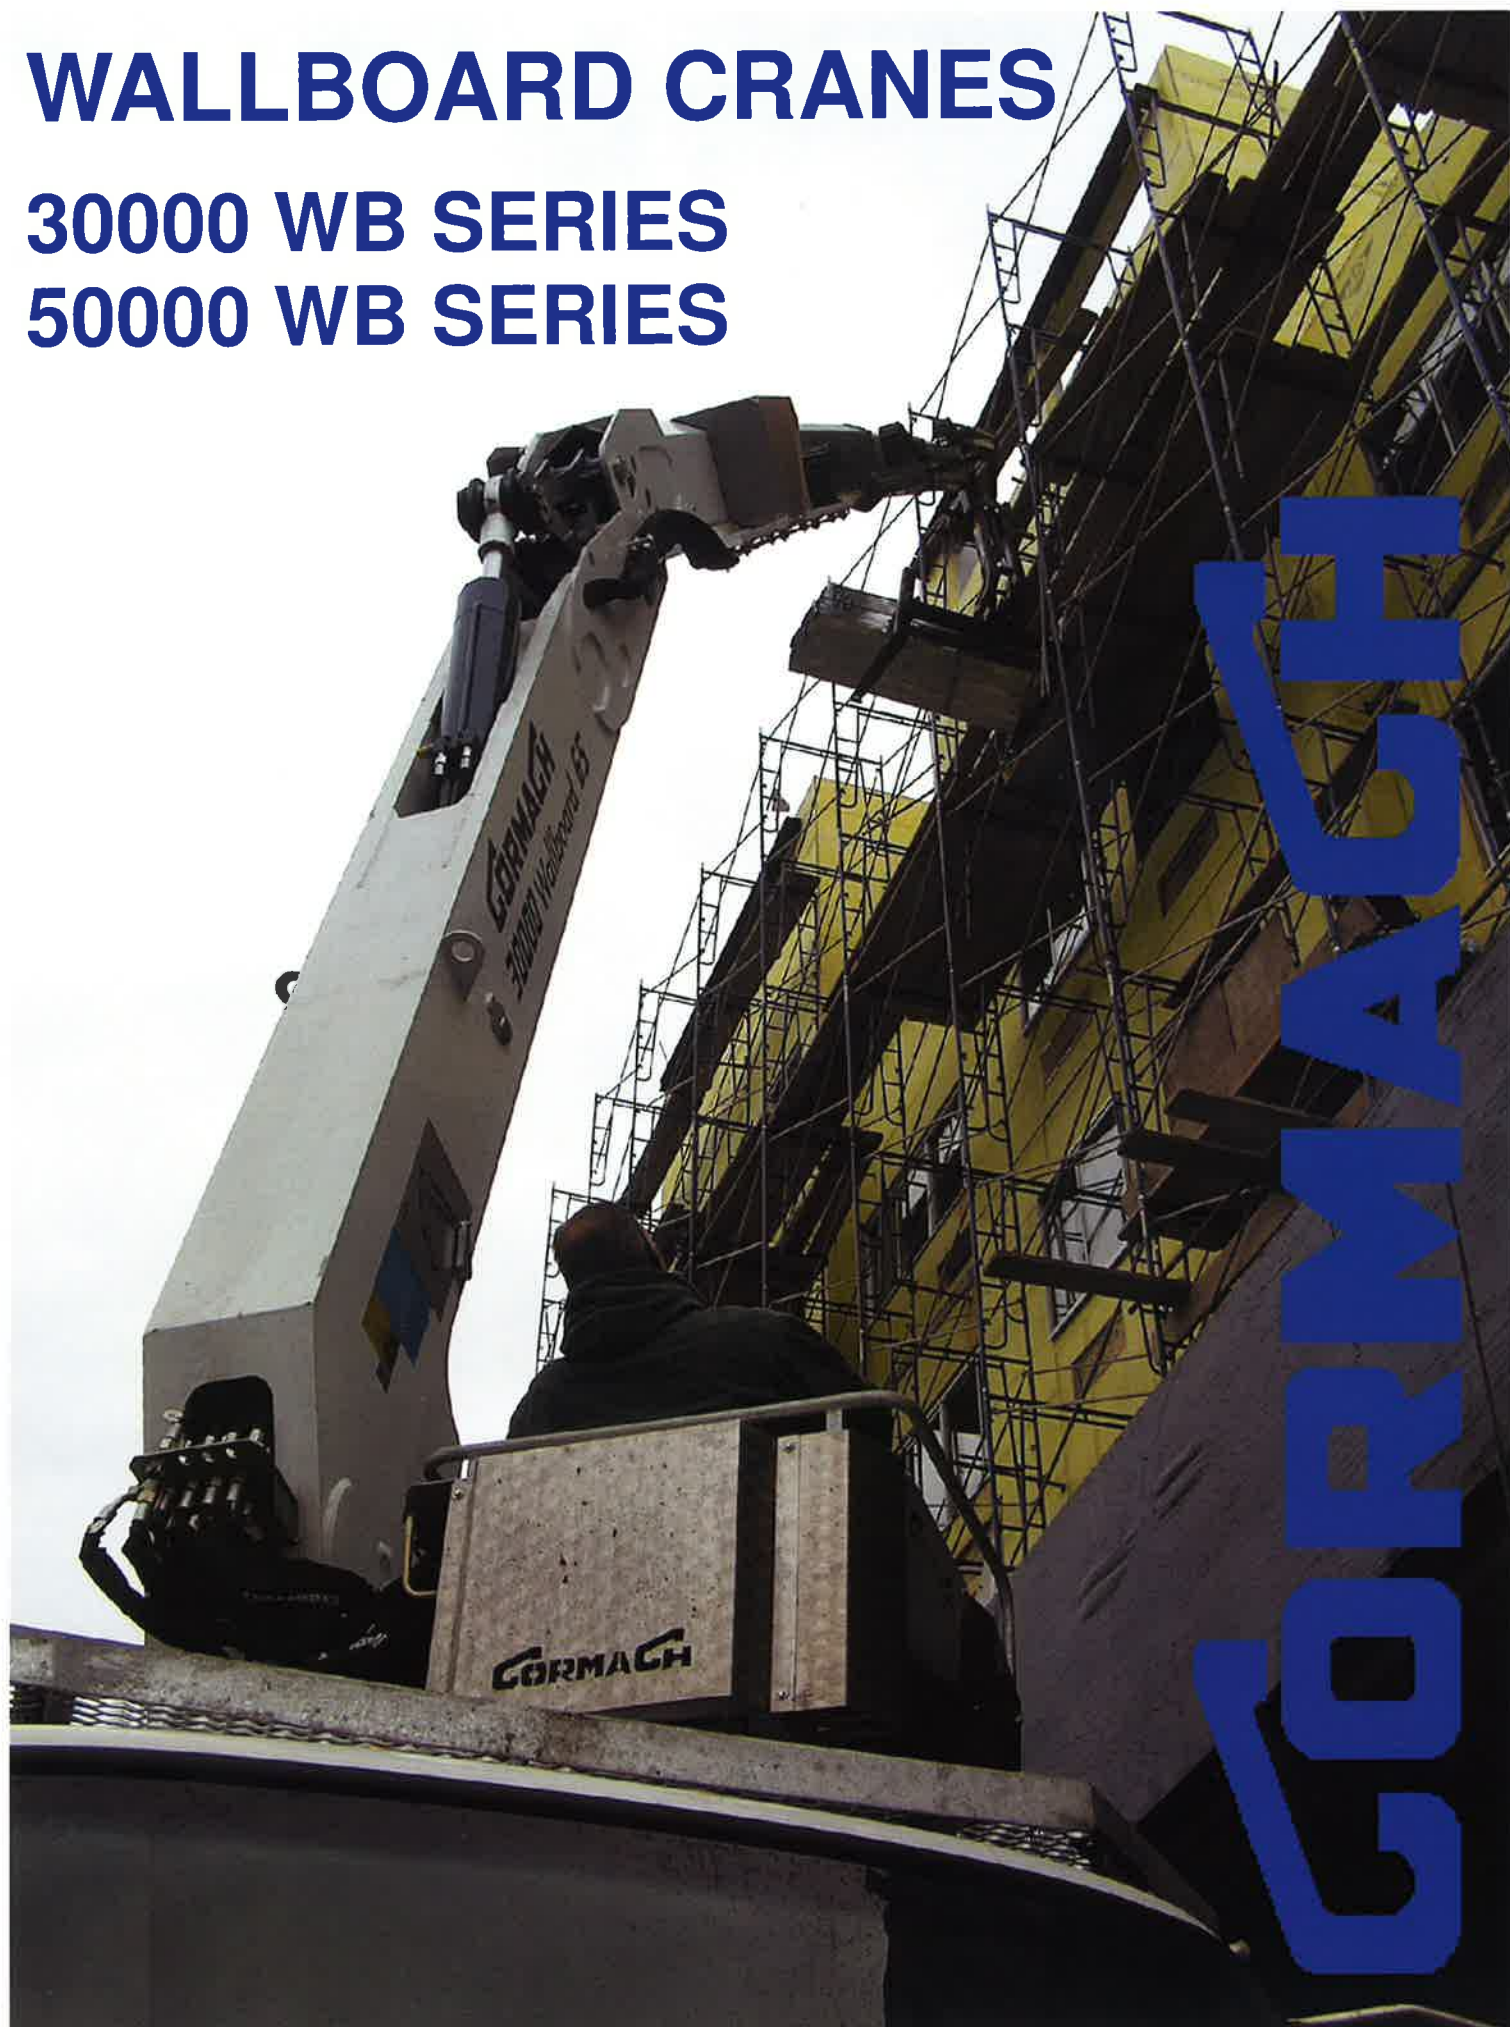



In 1988 Cormach first pioneered drywall deliveries into high-rises with the introduction of the 30000 WB series, capable of reaching heights over 85 feet. Seven years later a smaller wallboard boom was manufactured and put into production to compete in the residential and smaller commercial job market. After six years this crane was redesigned and an updated boom evolved. With three years in the field a new redesigned work horse evolved into the present 30000 WB series booms on the market today. For over twenty years Cormach has evolved their wallboard product line into a faster, smoother operating, more efficient and service friendly boom. These modifications have made Cormach the North American front runner in drywall and building material delivery booms.

Cormach has now taken the high-lift wallboard boom to the next level with the 50000 WB series. We are proud to offer the next generation of high lift wallboard booms. Using the technical knowledge of both the drywall industry of North America and other European markets, Cormach has developed the tallest, strongest and shortest stowed boom on the market today.

Only Cormach uses the rotation bearing and turret system on their complete product line that other manufacturers only use on their larger knuckle booms. The twin column turret design dissipates the lifting stresses and shock loads evenly into the 42" diameter ring gear and bearing surface. This eliminates unavoidable points of concentrated stresses at the upper bushings associated with other crane manufacturers designs.



Cormach cranes have
This is not possible with
offered by other crane



The simplistic design of
tenance inspections and
wear is measurable. A
minimum dismantling of
the rotation gear box,
need to be touched. The
parts the entire turret and
bearing.



The control station of
the operator into a recu
mation system and co
operator.

Radio Remote Control
valves give the Cormach
when operated.

Increased productivity-

- The extension cylinder system which increases heat generation accomplished by the cylinder and reduces the need for a hydraulic system.



All Cormach

See C

Specifications

CORMACH 50000 WB Series Booms

With three inner boom sections and either two, three or greater capacities. The inner boom can reach to over 72' before the extending the outer boom. This higher range will allow you boom can be activated on a zero degree horizontal plane allowing a trailer to feed the boom drywall constantly throughout the job.

Even with the greater heights and longer extensions even the 95' boom will collapse for transportation to allow for a 24'6" boom over 78" under the inner boom and even at it's lowest point under the knuckle for the outer boom there is almost 75". Nothing



continuous rotation as a standard. With a rack and pinion rotation system manufacturers.

The column aids in safety and maintains all stressed parts are visible and all components can be extracted without other components. Six bolts drop the gear and motor—no other parts. One ring of bolts—all accessible—and boom structure from the rotation.

Offers extreme comfort by positioning the operator in a comfortable position. The complete information controls are within easy access of the operator.

Ready, fully proportional Danfoss hydraulic crane the smooth fluid like motion.


Booms incorporate a regenerative system that increases the speed by almost 50% and reduces the heat in the hydraulic system. This is achieved by the oil being taken from the rod end of the cylinder and returning it to the base end of the cylinder through the pump and entire hydraulic system.

- Cormach wallboard cranes hydraulic system operate at 4120 psi on the 30000 WB series and 4650 psi on the 50000 WB series, use a stainless steel 66 gallon oil reservoir along with a variable displacement, load sensing pump that supplies hydraulic fluid on demand (26 gpm maximum). This too reduces the amount of heat that is generated in the hydraulic system. It further allows the crane to operate faster as any or all functions can be operated simultaneously.

An electro-hydraulic type load limiting device controls the lifted load of the crane. It only cuts off the movements that increase the moment in the different positions. A red light and audible buzzer inform the operator when the crane is in overload.

Technical Data:

Model	30000 WB	50000 WB
Series	45 – 55 – 65	80 – 87 – 95
Lifting Moment	258,000 – 279,000 ft/lbs	464,600 ft/lbs
Horizontal Reach	45'3" – 54'11" – 65'10"	80'4" – 87'7" – 95'2"
Vertical Reach	56' – 67' – 77'	92' – 98' – 106'
Rotation	Continuous	Continuous
Outrigger Span	25'	25' and 19' auxiliary
Crane Frame Space	41"	41"
Crane Weight in lbs	9,920 – 10,580 – 11,160	13,450 – 13,800 – 14,130

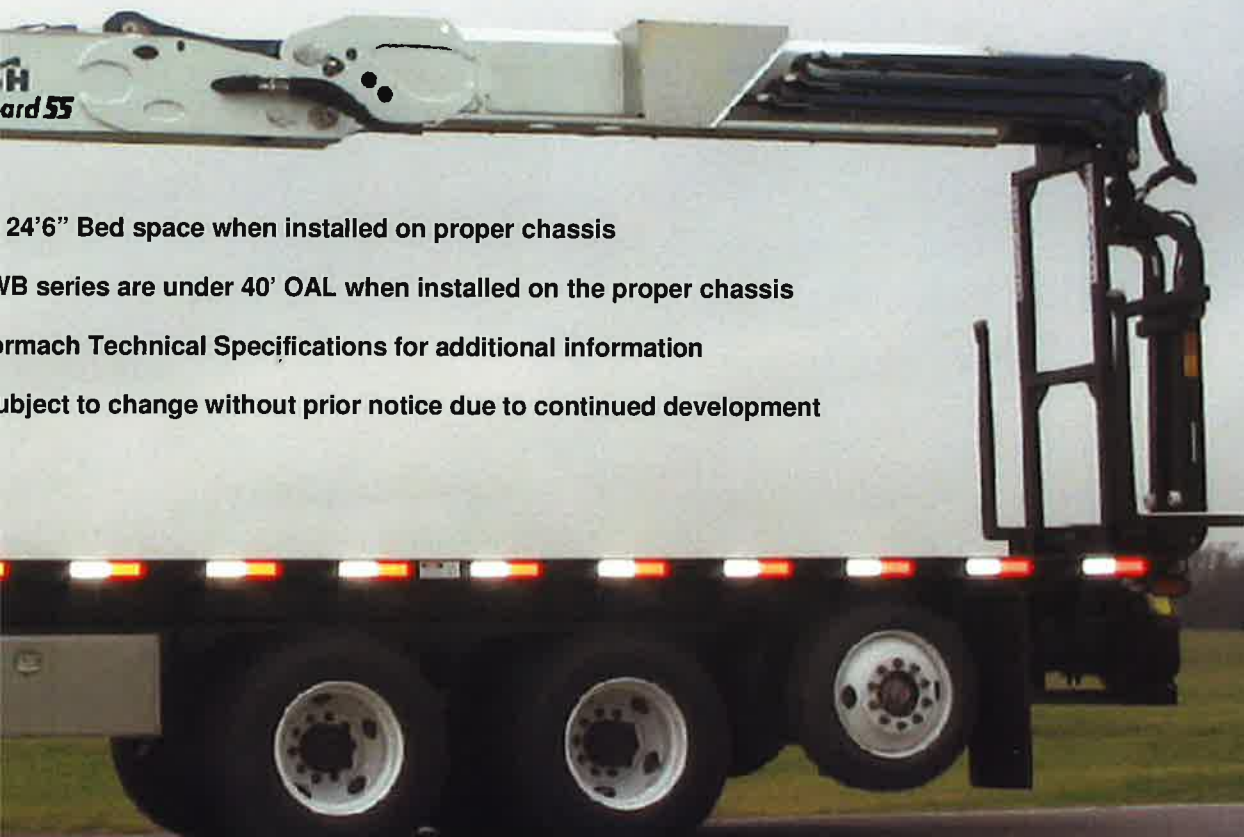

24'6" Bed space when installed on proper chassis

WB series are under 40' OAL when installed on the proper chassis

Cormach Technical Specifications for additional information


Subject to change without prior notice due to continued development

Four outer boom sections (depending on model) the boom is able to reach higher than any other boom on the market with no reach places other manufacturers' booms can't, permitting you to accomplish higher and more accurate picks. The inner boom can be retracted if necessary.


Keeping the overall length under 40' when installed on an acceptable chassis. The stowage under the boom for the load is not in the bed impedes the loading of materials and the full use of the bed can be utilized.




30000 WB45

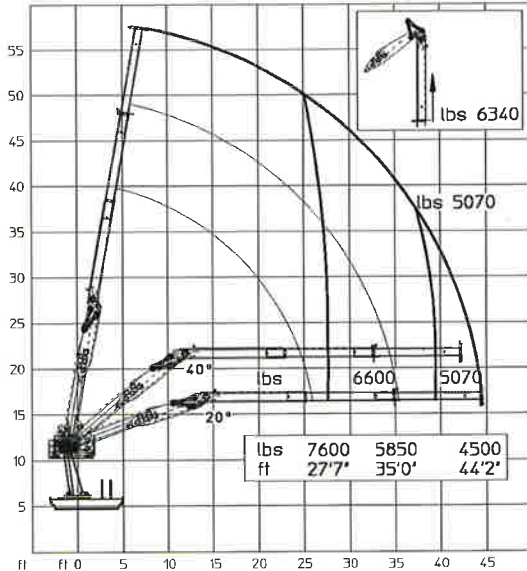


50000 WB80

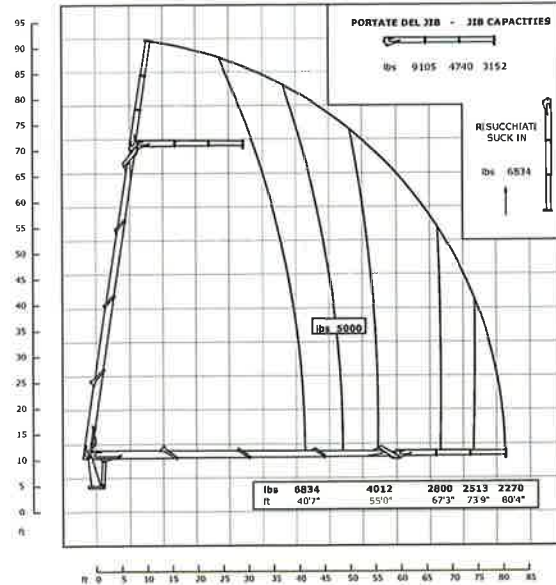


30000 WB55

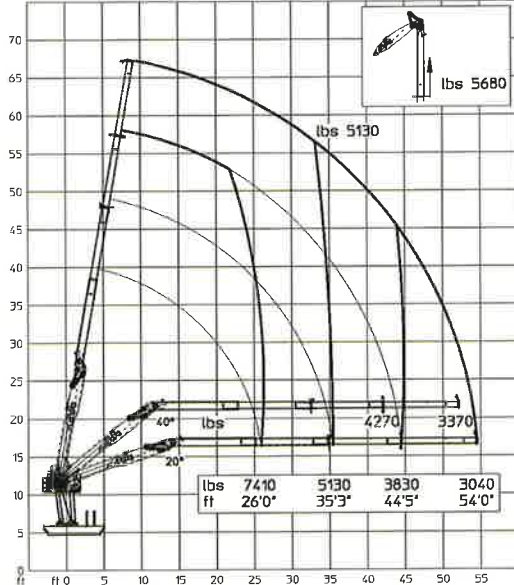

50000 WB87

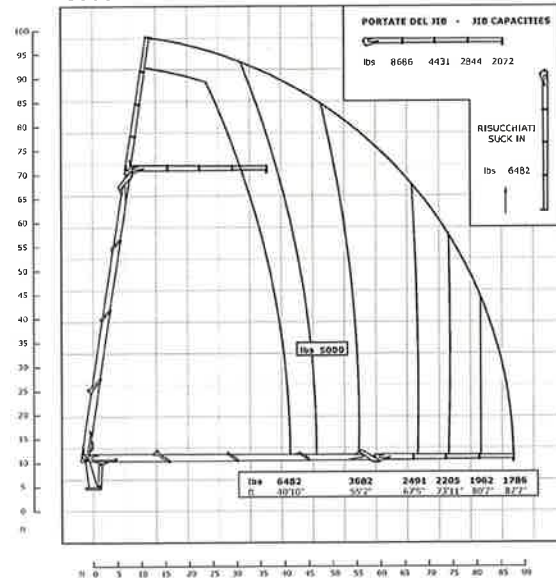

30000 WB65

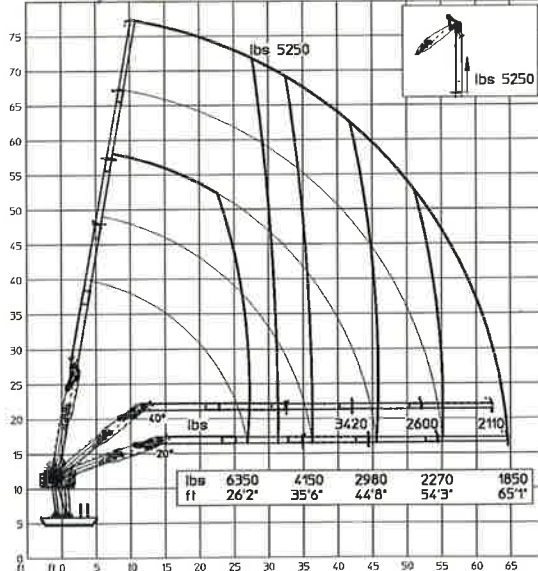

50000 WB95

