

**MANNESMANN
DEMAG**








Demag CC 2600

Ausleger-Kombinationen

Boom combinations

Combinaisons de flèche

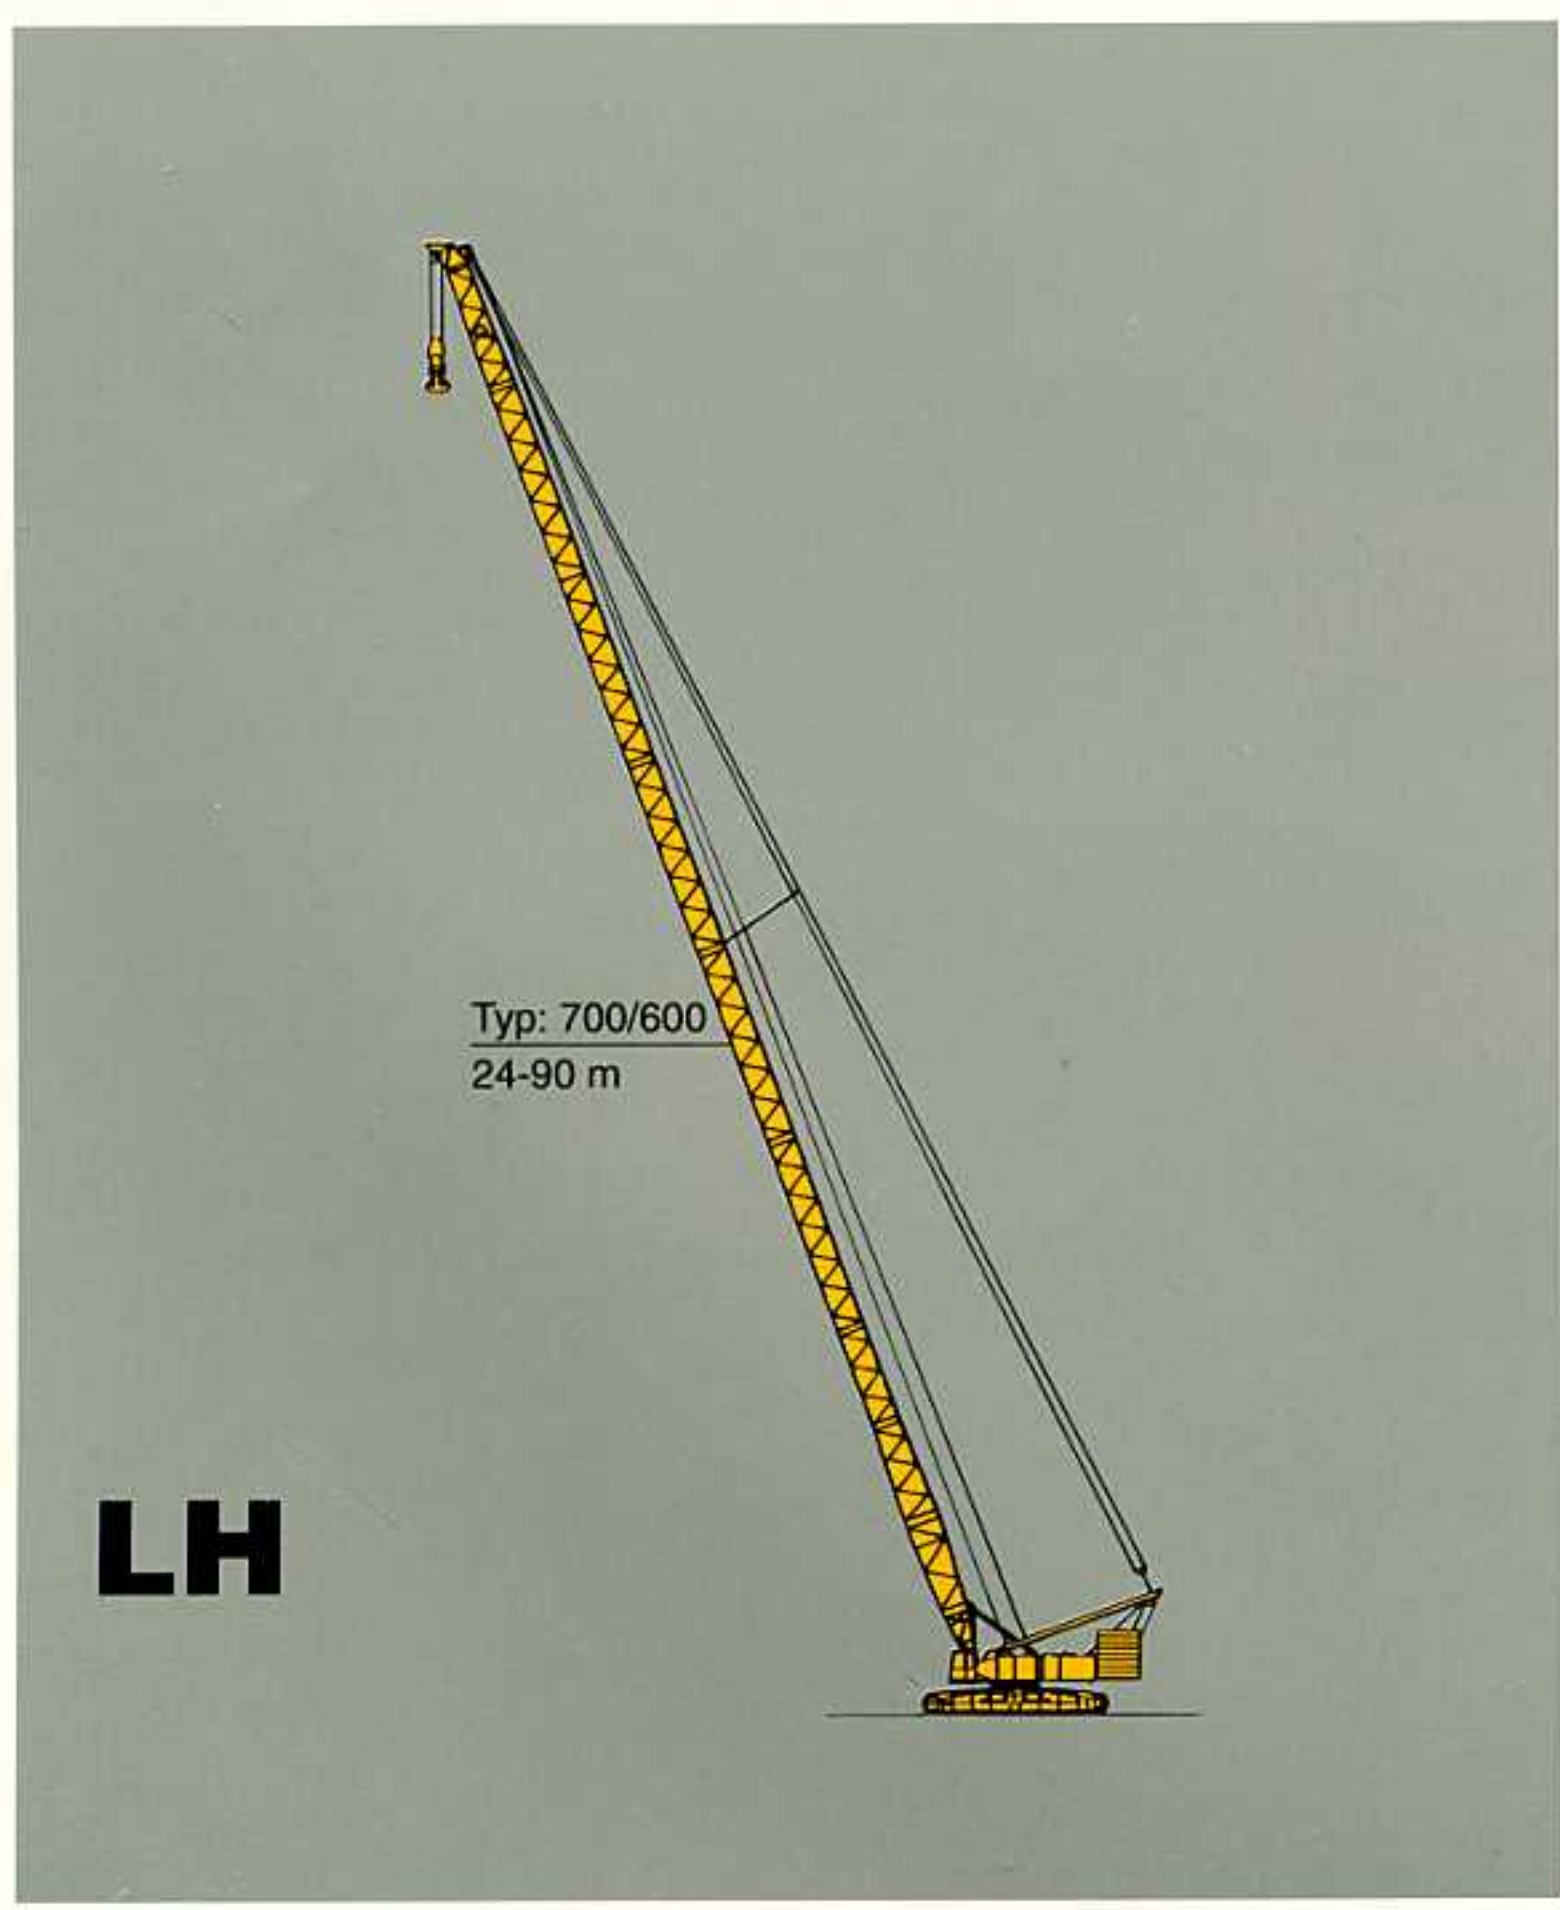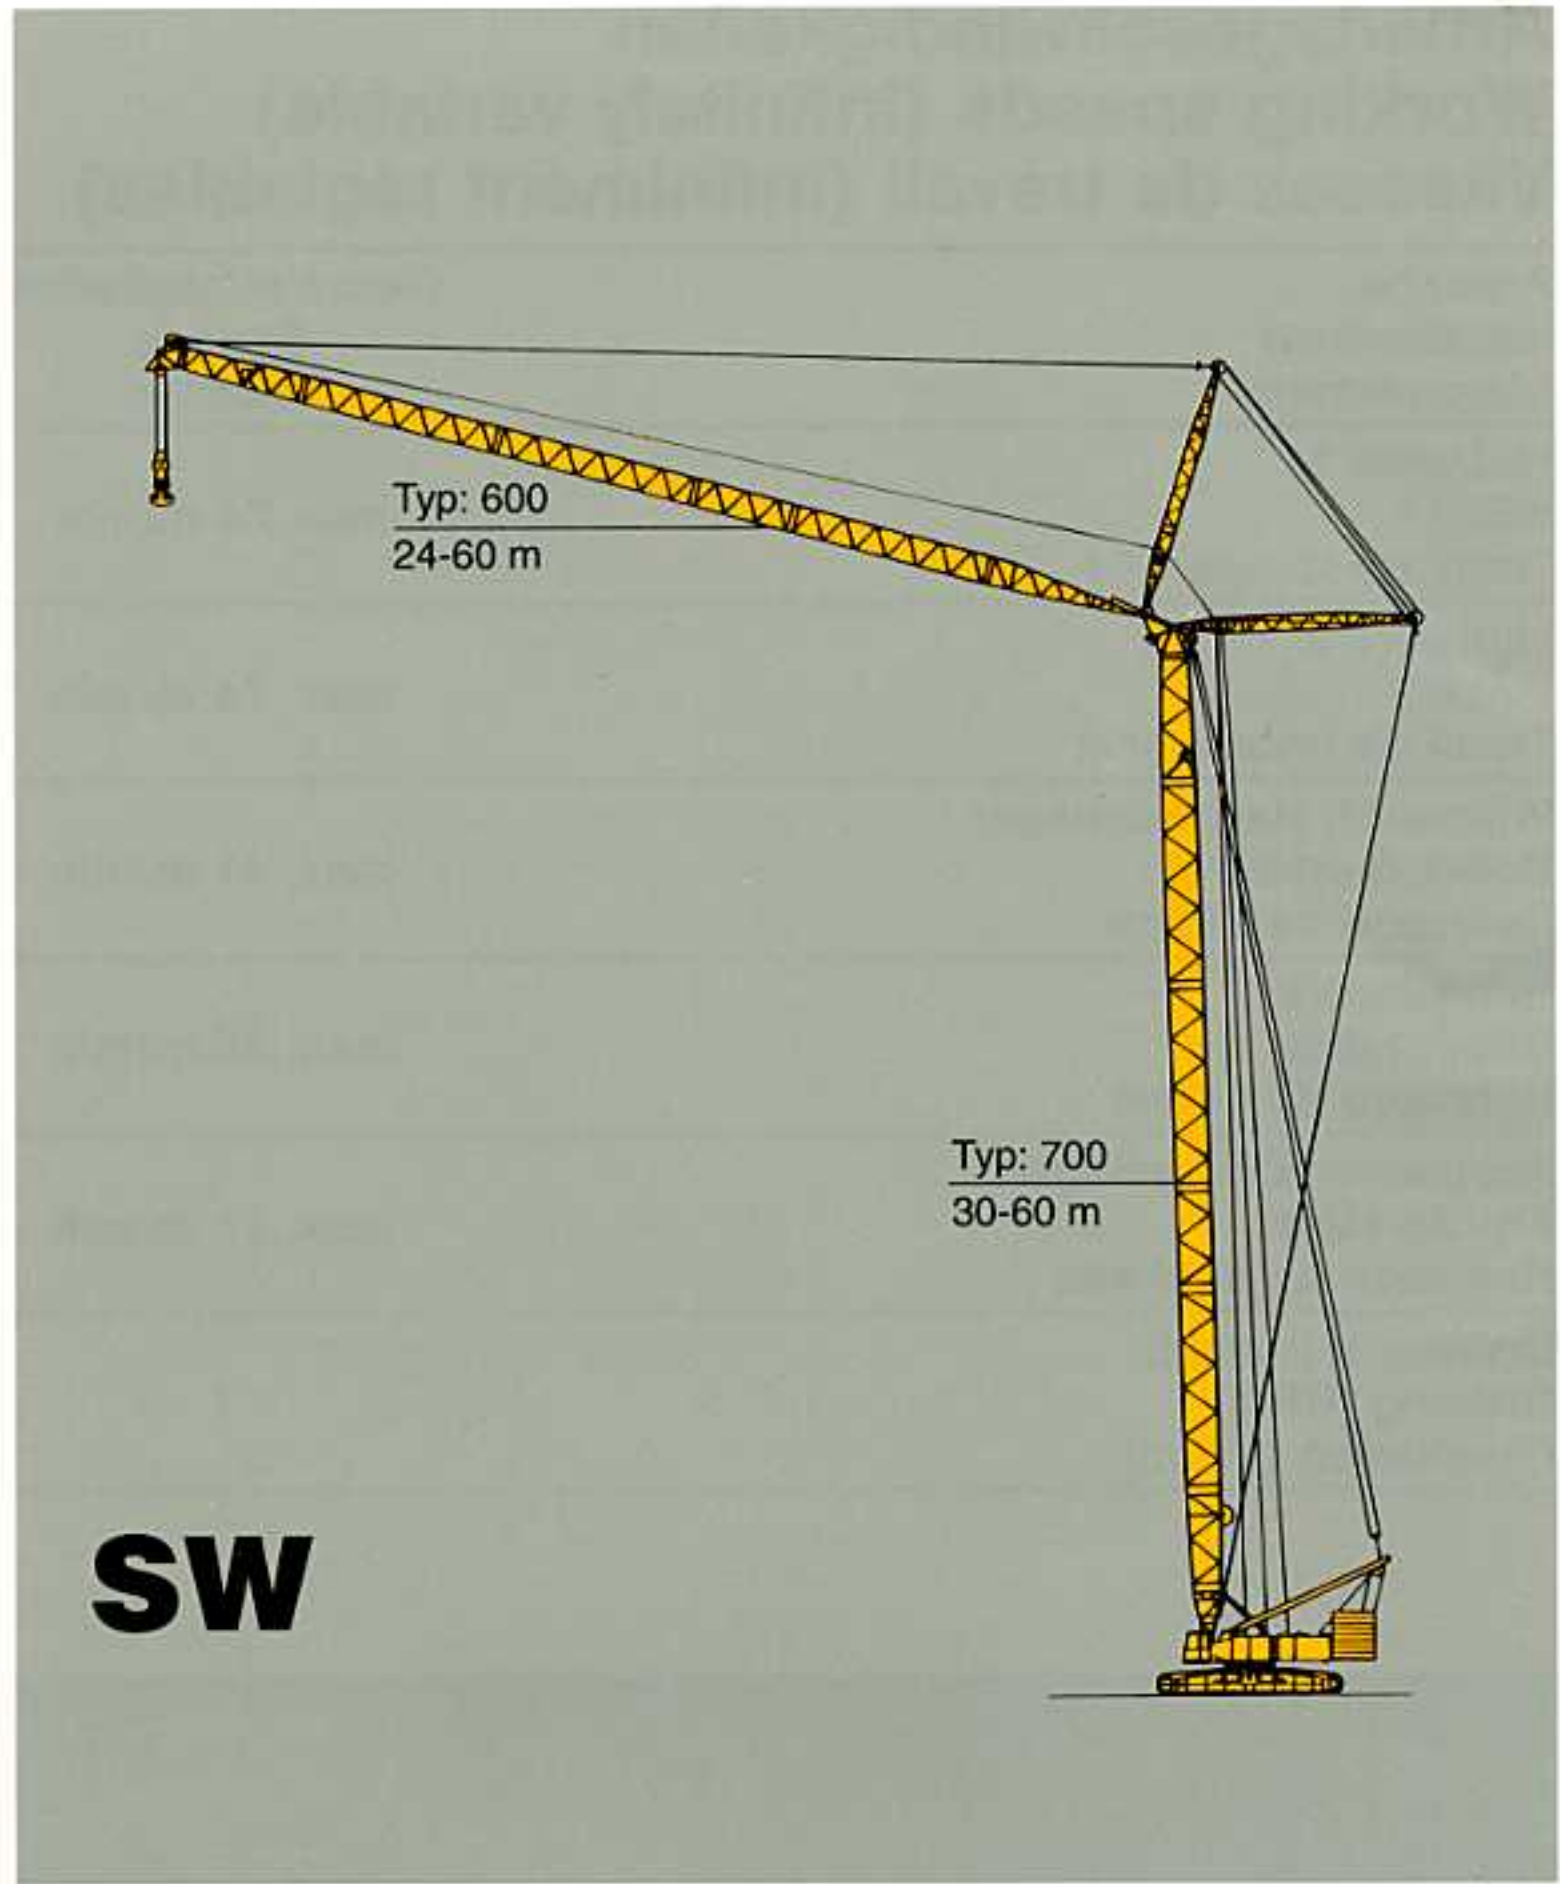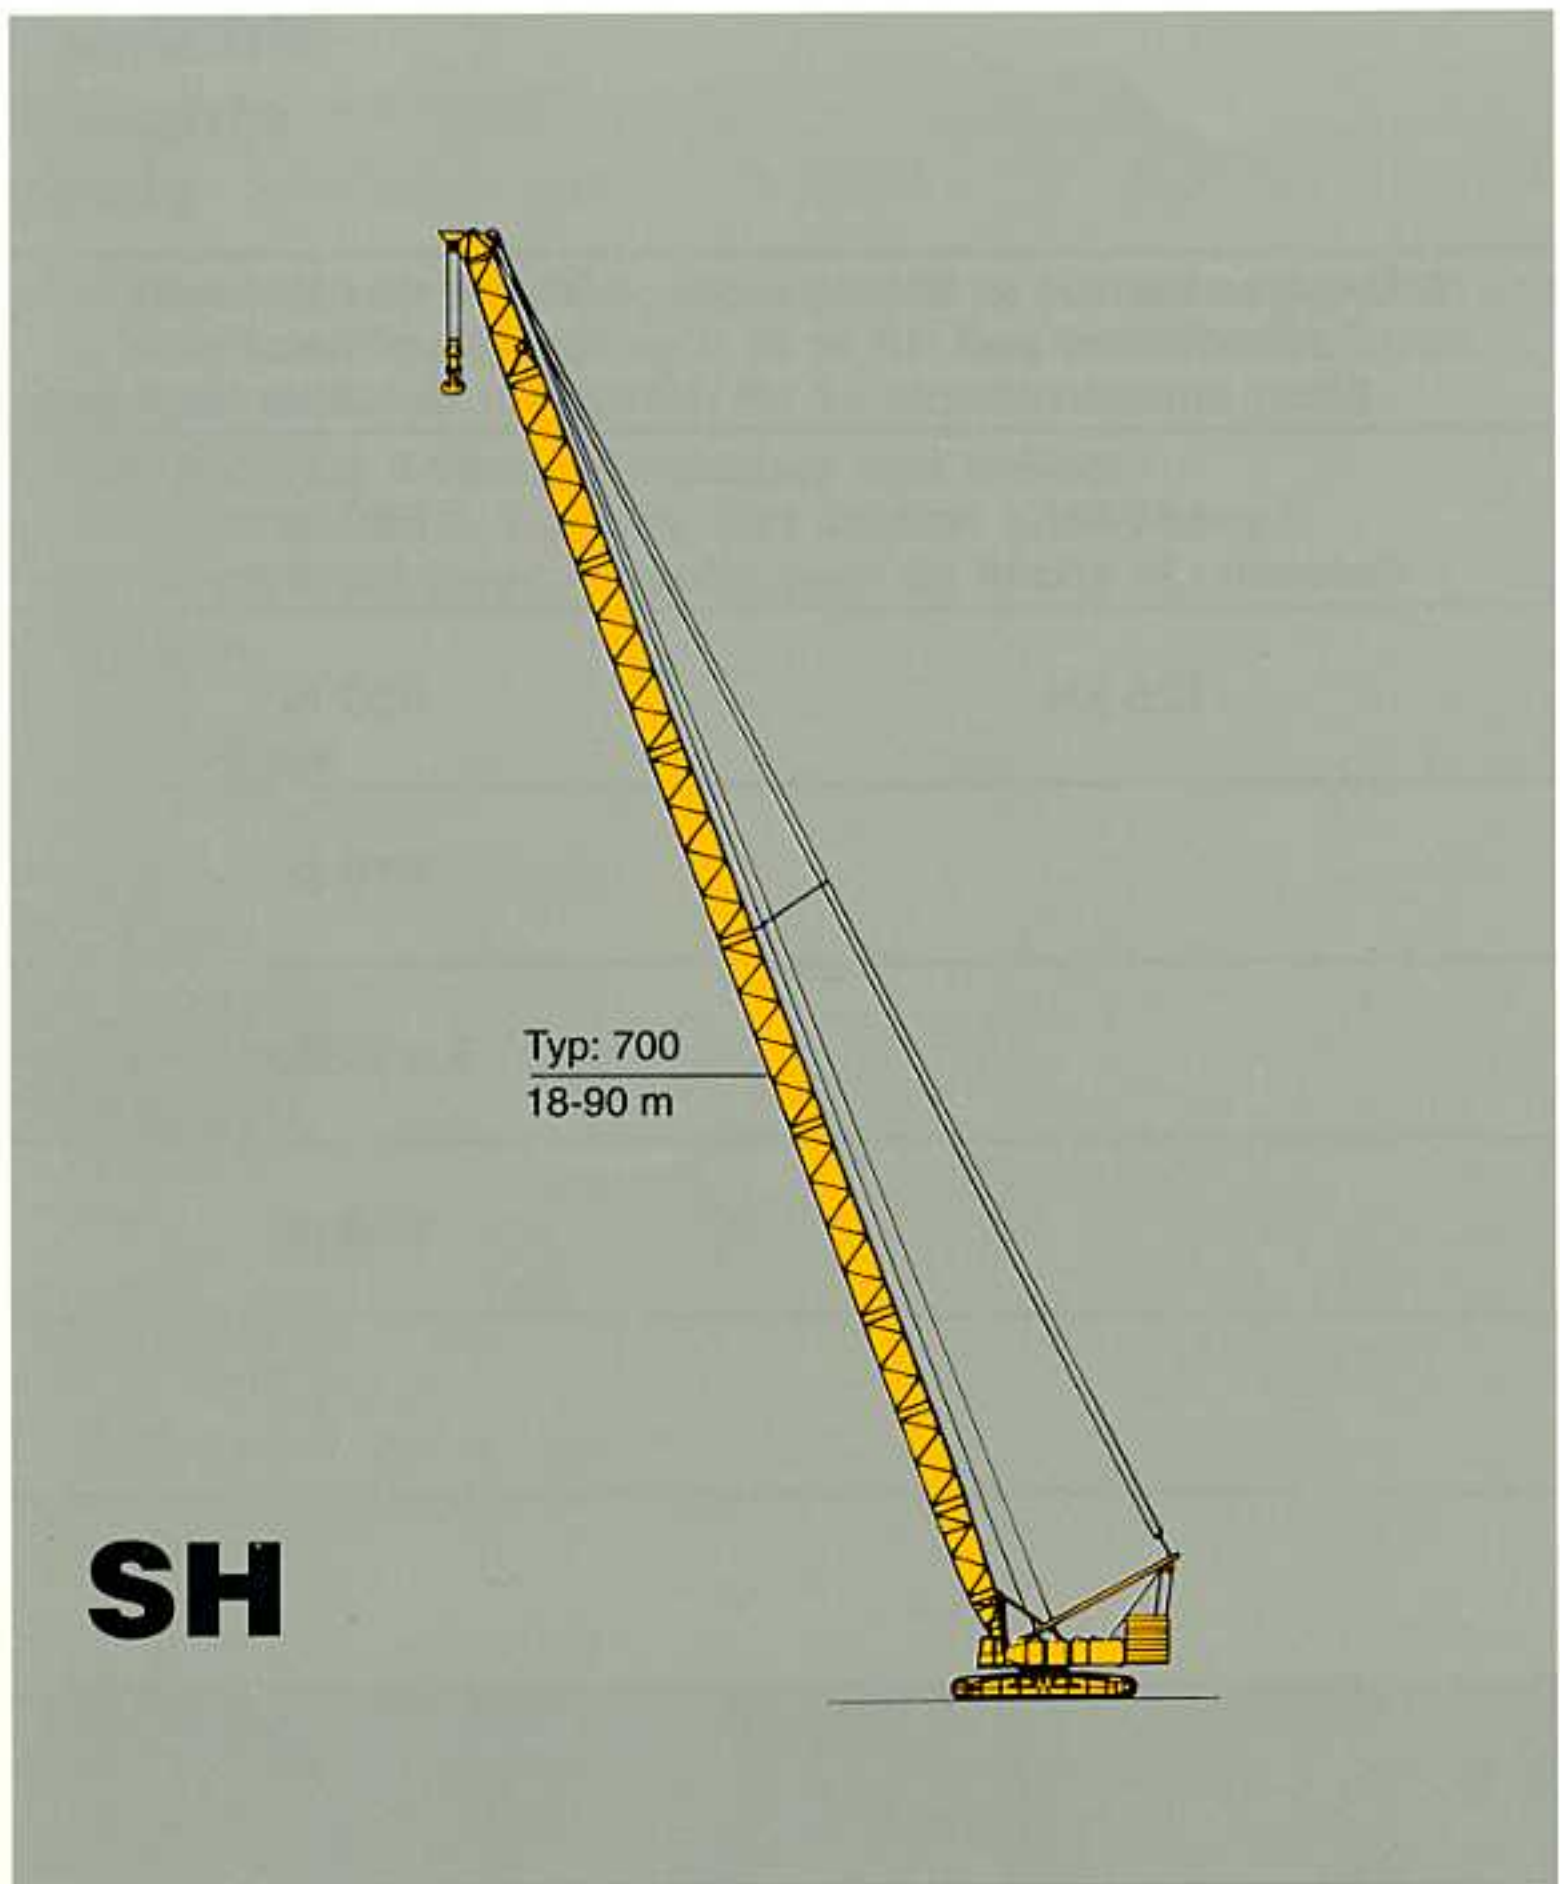

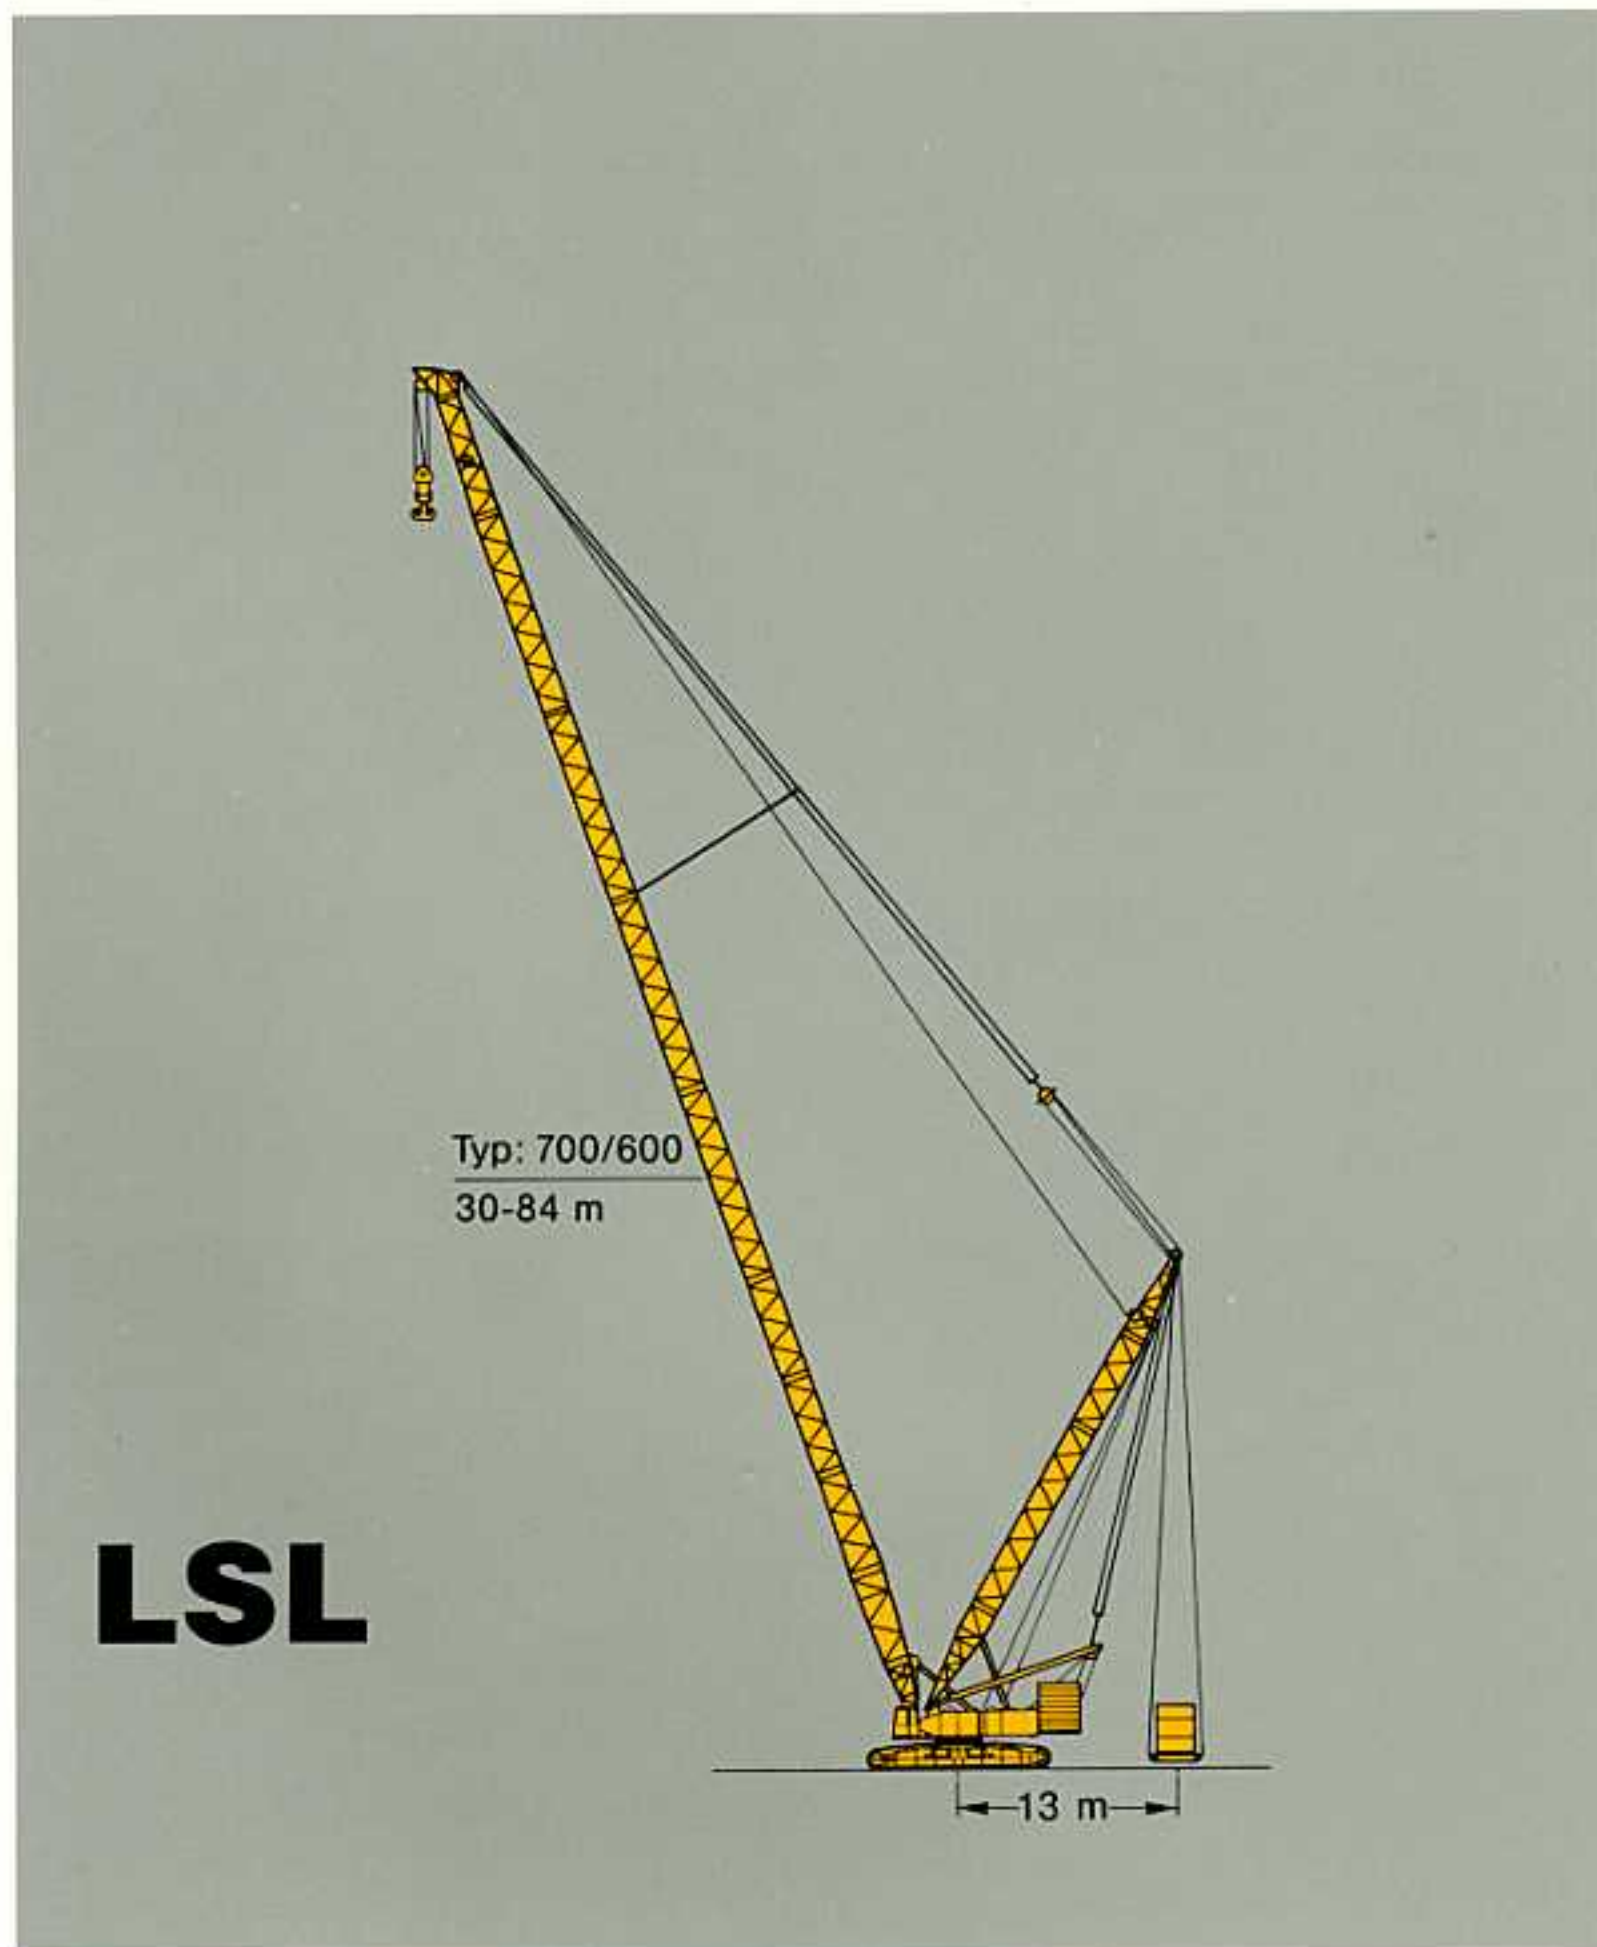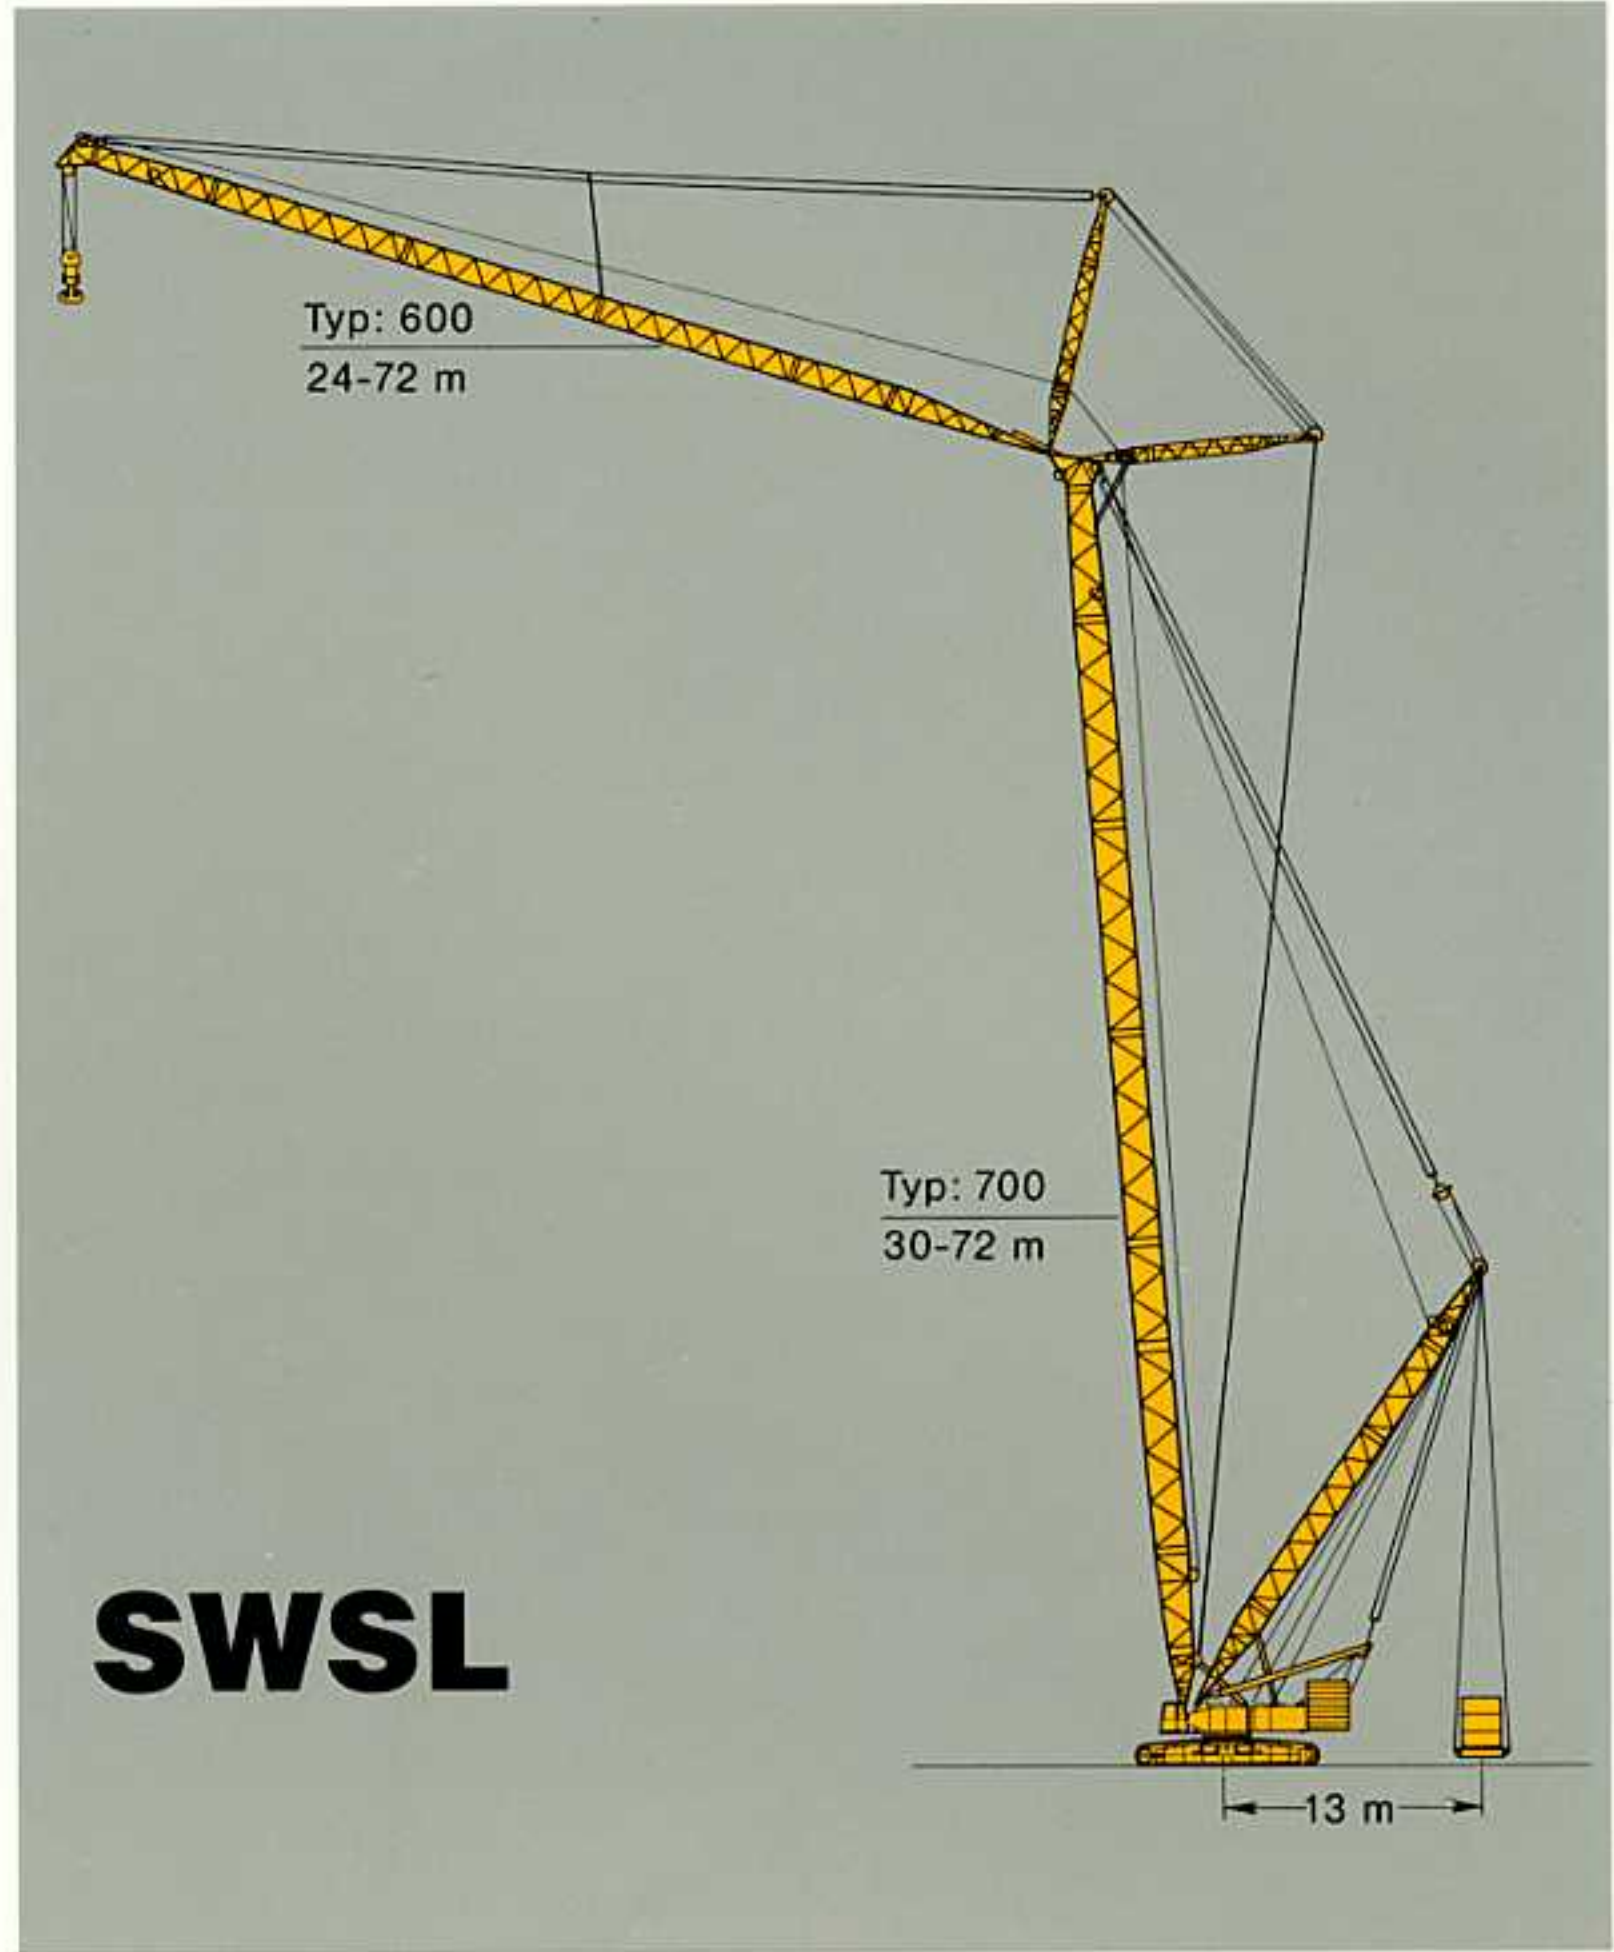

SSL


- * Doppelunterflasche erforderlich!
- * Double hook block required!
- * Exige crochet à deux moufles!

Tragfähigkeiten Hauptausleger mit Superlift

Lifting capacities main boom with Superlift

Capacités de levage flèche principale avec Superlift

SSL

 8 m  149 t SL-Radius 15 m		75% 360°					
Hauptausleger	Ausladung	Superlift-Gegengewicht · Superlift Counterweight · Contrepoids de Superlift					
Main Boom	Radius						
Flèche	Portée	0 t	50 t	100 t	150 t	200 t	250 t
m	m	t	t	t	t	t	t
54 m	9	305*	-	-	-	-	-
	10	251*	350*	-	-	-	-
	12	184*	270*	350*	-	-	-
	14	143	213*	282*	349*	-	-
	16	116	174	232*	290*	339*	-
	18	97	147	196*	246*	295*	328*
	20	83	126	169	213*	256*	295*
	22	71	110	148	187*	225*	264*
	24	62	97	132	166	201*	236*
	26	55	87	118	150	181*	213*
	28	49	78	107	136	165	193*
	30	44	71	97	124	151	177*
	34	36	59	82	105	128	151
	38	30	50	70	91	111	132
	42	25	43	61	80	98	116
60 m	46	21	38	54	71	87	104
	9	304*	-	-	-	-	-
	10	250*	310*	-	-	-	-
	12	183*	269*	310*	-	-	-
	14	142	211*	281*	310*	-	-
	16	115	173*	231*	288*	310*	-
	18	96	145	195*	244*	294*	310*
	20	81	125	168*	211*	255*	293*
	22	70	109	147	186*	224*	263*
	24	61	96	130	165*	200*	234*
	26	54	85	117	148	180*	211*
	28	48	77	106	134	163*	192*
	30	43	69	96	123	149	176*
	34	34	58	81	104	127	150
	38	28	49	69	89	110	130
66 m	42	23	42	60	78	96	115
	46	19	36	53	69	86	102
	50	16	32	47	62	77	92
	54	13	28	42	56	69	83
	10	250*	285*	-	-	-	-
	12	182*	269*	285*	-	-	-
	14	141	211*	280*	-	-	-
	16	114	172*	230	285*	-	-
	18	95	145*	194*	243*	285*	-
	20	81	124	167*	210*	254*	285*
	22	69	108	146*	185*	223*	262*
	24	60	95	130	164*	199*	234*
	26	53	84	116	147*	179*	210*
	28	47	76	105	133	162*	191*
	30	42	68	95	122	148*	175*
72 m	34	33	57	80	103	126	149*
	38	27	48	68	88	109	129
	42	22	41	59	77	95	113
	46	17	35	51	68	84	101
	50	14	30	45	60	75	90
	54	11	26	40	54	68	82
	58	-	23	36	49	62	75
	10	249*	-	-	-	-	-
	12	181*	263*	-	-	-	-
	14	141*	210*	263*	-	-	-
	16	113	171*	229*	263*	-	-
	18	94	144*	193*	243*	263*	-
	20	80	123	166*	210*	253*	-
	22	68	107	145*	184*	222*	261*
	24	59	94	129	163*	198*	233*
	26	52	83	115	146*	178*	209*
	28	46	75	104	132*	161*	190*
	30	41	67	94	121	147*	174*
	34	32	55	79	102	125	148*
	38	26	46	67	87	108	128
	42	20	39	58	76	94	112
	46	16	34	50	67	83	100
	50	13	29	44	59	74	89
	54	10	25	39	53	67	81
	58	-	21	35	48	60	73
	62	-	18	31	43	55	67

* Doppelunterflasche erforderlich!

* Double hook block required!

* Exige crochet à deux moufles!

Arbeitsbereiche Hauptausleger mit Superlift

Working ranges main boom with Superlift

Portées de flèche principale avec Superlift

SSL
LSL

