



DEMAG

TC 2000

Lattice Boom Crane






MANNESMANN
DEMAG

Construction Machinery



Basic Machine

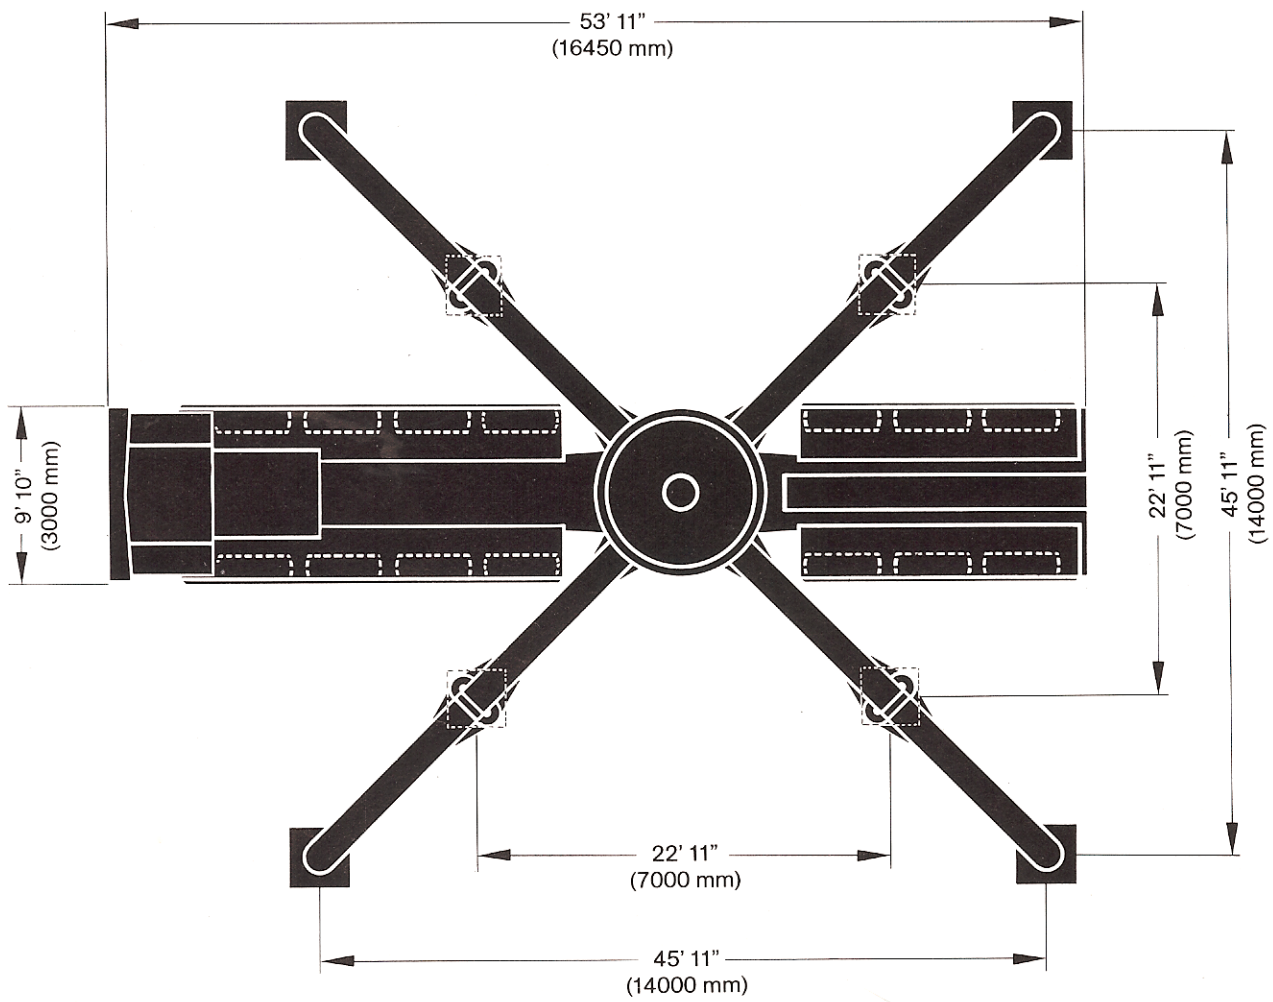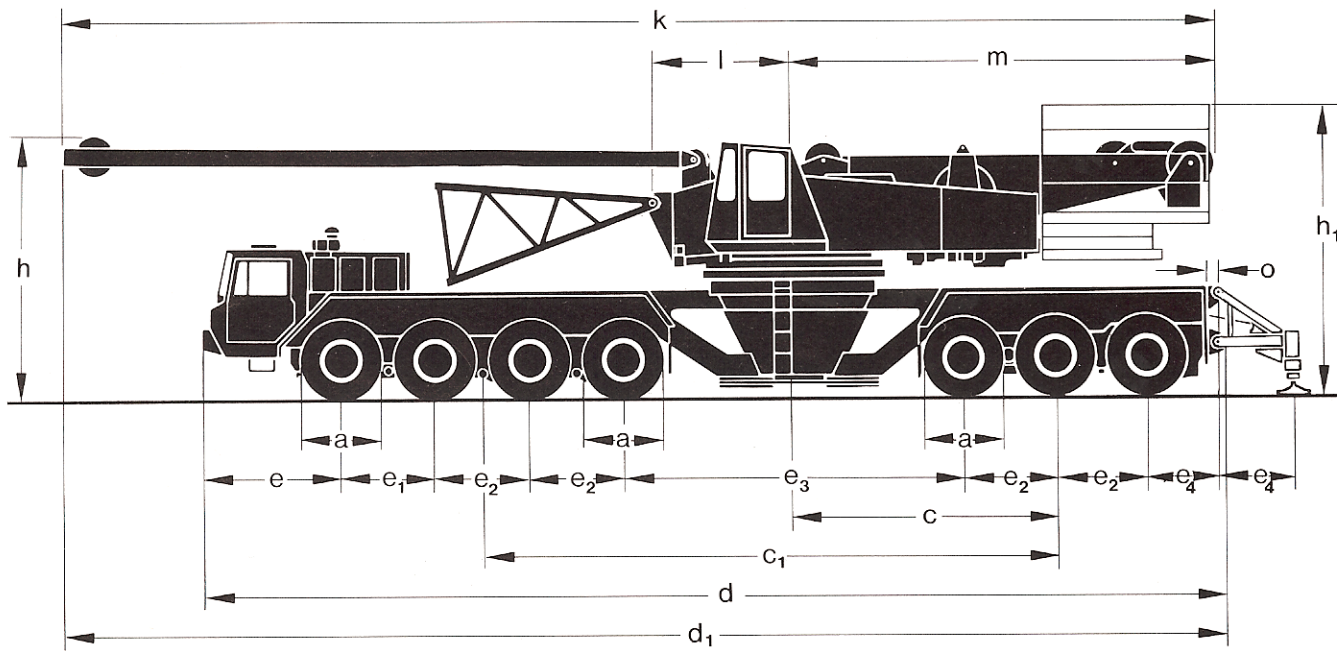


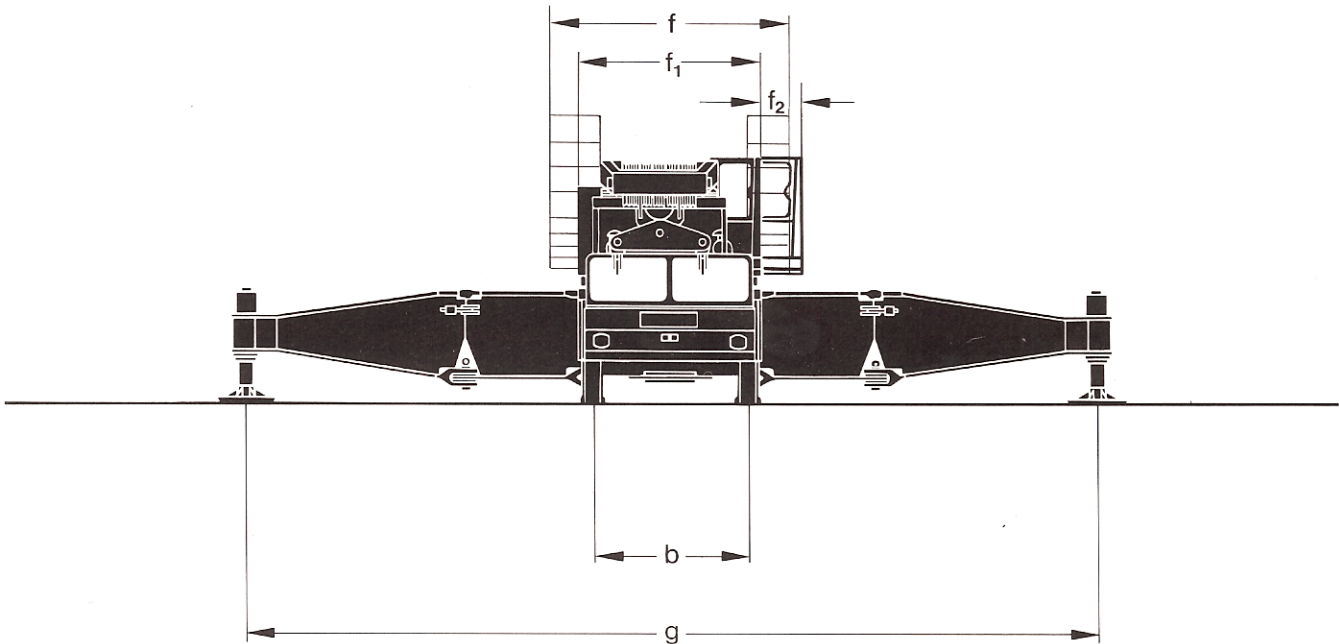

a	14.00 - 24, PR 22	d	54' 9" (16710 mm)	e ₄	3' (1150 mm)	h ₁	15' (4575 mm)
b	8' 5" (2503 mm)	d ₁	62' 2" (18950 mm)	f	15' 9" (4790 mm)	k	61' 4" (18700 mm)
c	13' 9" (4200 mm)	e	8' (2450 mm)	f ₁	9' 10" (3000 mm)	l	7' 2" (2200 mm)
c ₁	30' " (9150 mm)	e ₁	5' 3" (1600 mm)	f ₂	2' 4" (700 mm)	m	22' (6710 mm)
		e ₂	4' 11" (1500 mm)	g	45' 11" (14000 mm)	o	6' (150 mm)
		e ₃	17' 8" (5400 mm)	h	12' 11" (3950 mm)		

Truck Carrier

Engine	KHD-BF 12 L 413 F
System	12 cyl.-4 strokes
Output (DIN 70020) at 2100 RPM	353 kW (480 HP)
Cooling	air
Fuel-Tank Capacity	113 gal. (430 liters)
Transmission	* 8-Speed Synchronesh Torque-Converter Main Transmission plus Transfer Case and Differential with Lock-Out Control
Carrier	14 x 8
Driving Axles	1st, 2nd, 5th, 6th
Steering Axles	1st, 2nd, 3rd, 5th, 6th, 7th
Suspension	
Front	1st and 2nd Axles: Leaf springs; 3rd and 4 th = Hydraulic Suspension
Rear	1st and 2nd Axles = Walking Beams, 3rd = Hydraulic Suspension
Outriggers	4 articulated dismountable outrigger beams with hydraulic jack legs



Axle Loads

	1st front	2nd front	3rd front	4th front	1st rear	2nd rear	3rd rear	Total
	tons	tons	tons	tons	tons	tons	tons	tons
Crane in travel order, with basic boom and mast gantry, without outriggers	10.5*	10.5	13.2	13.2	13.2	13.2	13.2	87.0

Change of Road Weight

Deduct for: 2nd Hoist Drum with Cable	-0.31	-0.31	0	0	-1.69	-1.69	0	-4.00
Deduct for: Jib-Boom Luffing Drum with Cable	-0.33	-0.33	0	0	-0.91	-0.91	0	-2.48
Deduct for: Main Hoist and Boom Hoist Cable	-0.65	-0.65	0	0	-1.98	-1.98	0	-5.26
Deduct for: 2nd Hoist Cable	-0.20	-0.20	0	0	-1.07	-1.07	0	-2.54
Deduct for: Jib-Boom Luffing Cable	-0.15	-0.15	0	0	-0.42	-0.42	0	-1.14
 Deduct for: Basic Boom plus Mast Gantry	-3.10	-3.10	0	0	+0.23	+0.23	0	-5.74

Carrier Weight

	10.5	10.5	0*	0	10.4	10.4	0	41.8
--	------	------	----	---	------	------	---	------

* When adjusting the load on each of the 3rd, and 4th front axle and the 3rd rear axle to a certain value "X", the load on each of the 1st and 2nd front axle will be reduced by "X" multiplied by 1.28 t, and on each of the 1st and 2nd rear axle by "X" multiplied by 2.03 t.

Carrier Performance

Travel Speeds	0 ... 38.4 mph (0 ... 61.9 km/h)
Gradeability	max. 30.7%



Superstructure

Engine	KHD-F 10 L 413 F
Output at 2300 RPM	196 kW (267 HP)
Transmission	Axial-Piston Hydraulic Pumps
Drum Drive	Axial-Piston Hydraulic Motor and Planetary Drive
Swing Drive	Axial-Piston Hydraulic Motor and Planetary Drive
Control	Hydraulic

Working Speeds

	Infinitely variable
Main Hoist	max. 295 ft./min. (max. 90 m/min.)
Aux. Hoist	max. 387 ft./min. (max. 118 m/min.)
Aux. Boom Hoist	max. 141 ft./min. (max. 43 m/min.)
Main Boom Hoist	max. 118 ft./min. (max. 36 m/min.)
Swing	1.1 RPM

Cables


Main Hoist: Rope Pull, Single Line	(75%) 27.557 lbs. (12500 kg) (85%) 31.300 lbs. (14200 kg)	Aux. Hoist: Rope Pull, Single Line	(75%) 20.282 lbs. (9200 kg)
Lenght of Cable	2789 ft. (850 m)	Length of Cable	2460 ft. (750 m)
Dia. of Cable	1 ⁷ / ₆₄ " (28 mm)	Dia. of Cable	1 ¹ / ₃₂ " (26 mm)

Boom


	Main Boom	Max. Allowable Lifting Load	Main Boom + Jib Boom
Heavy-Duty Hammer Head	39–59 ft. (12–18 m)	440 tons (400 t)	–
Universal Head	39–295 ft. (12–90 m)	350 tons (300 t)	276 + 236 ft. (84 + 72 m)




TC 2000

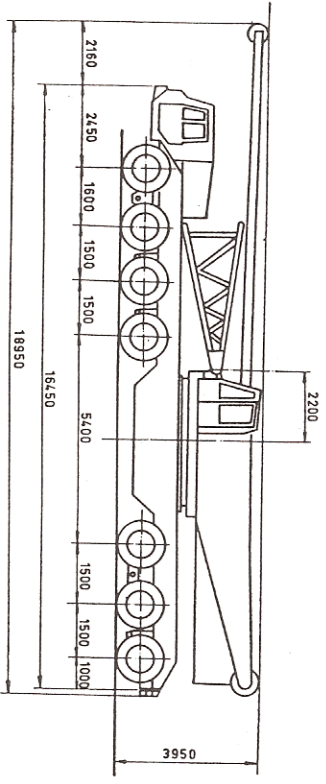


TC 2000

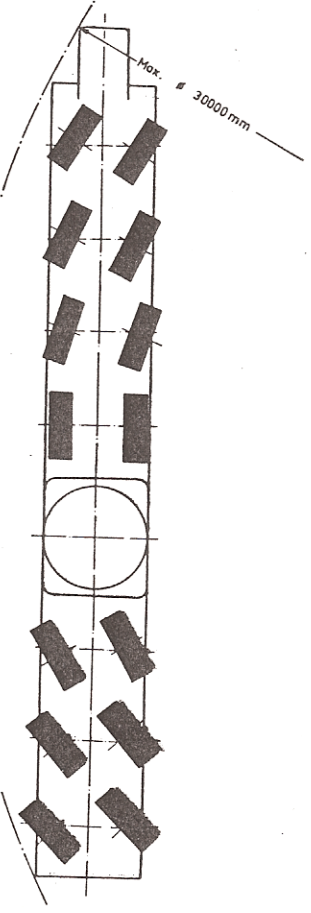


TC 2000

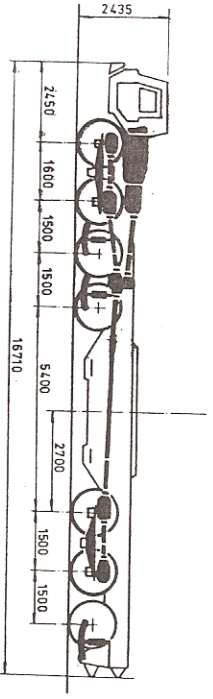

TC 2000

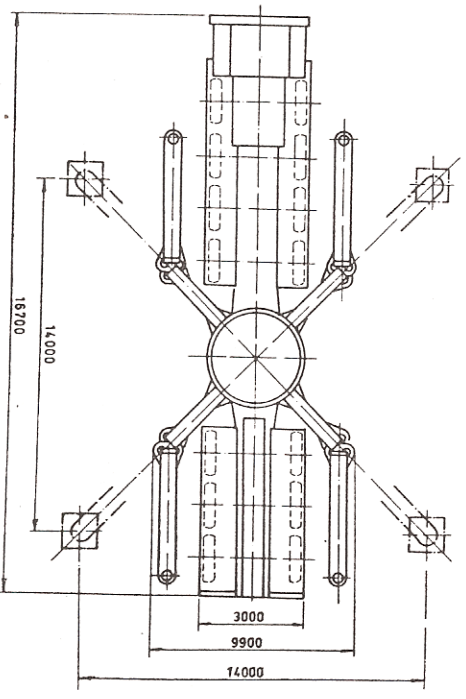

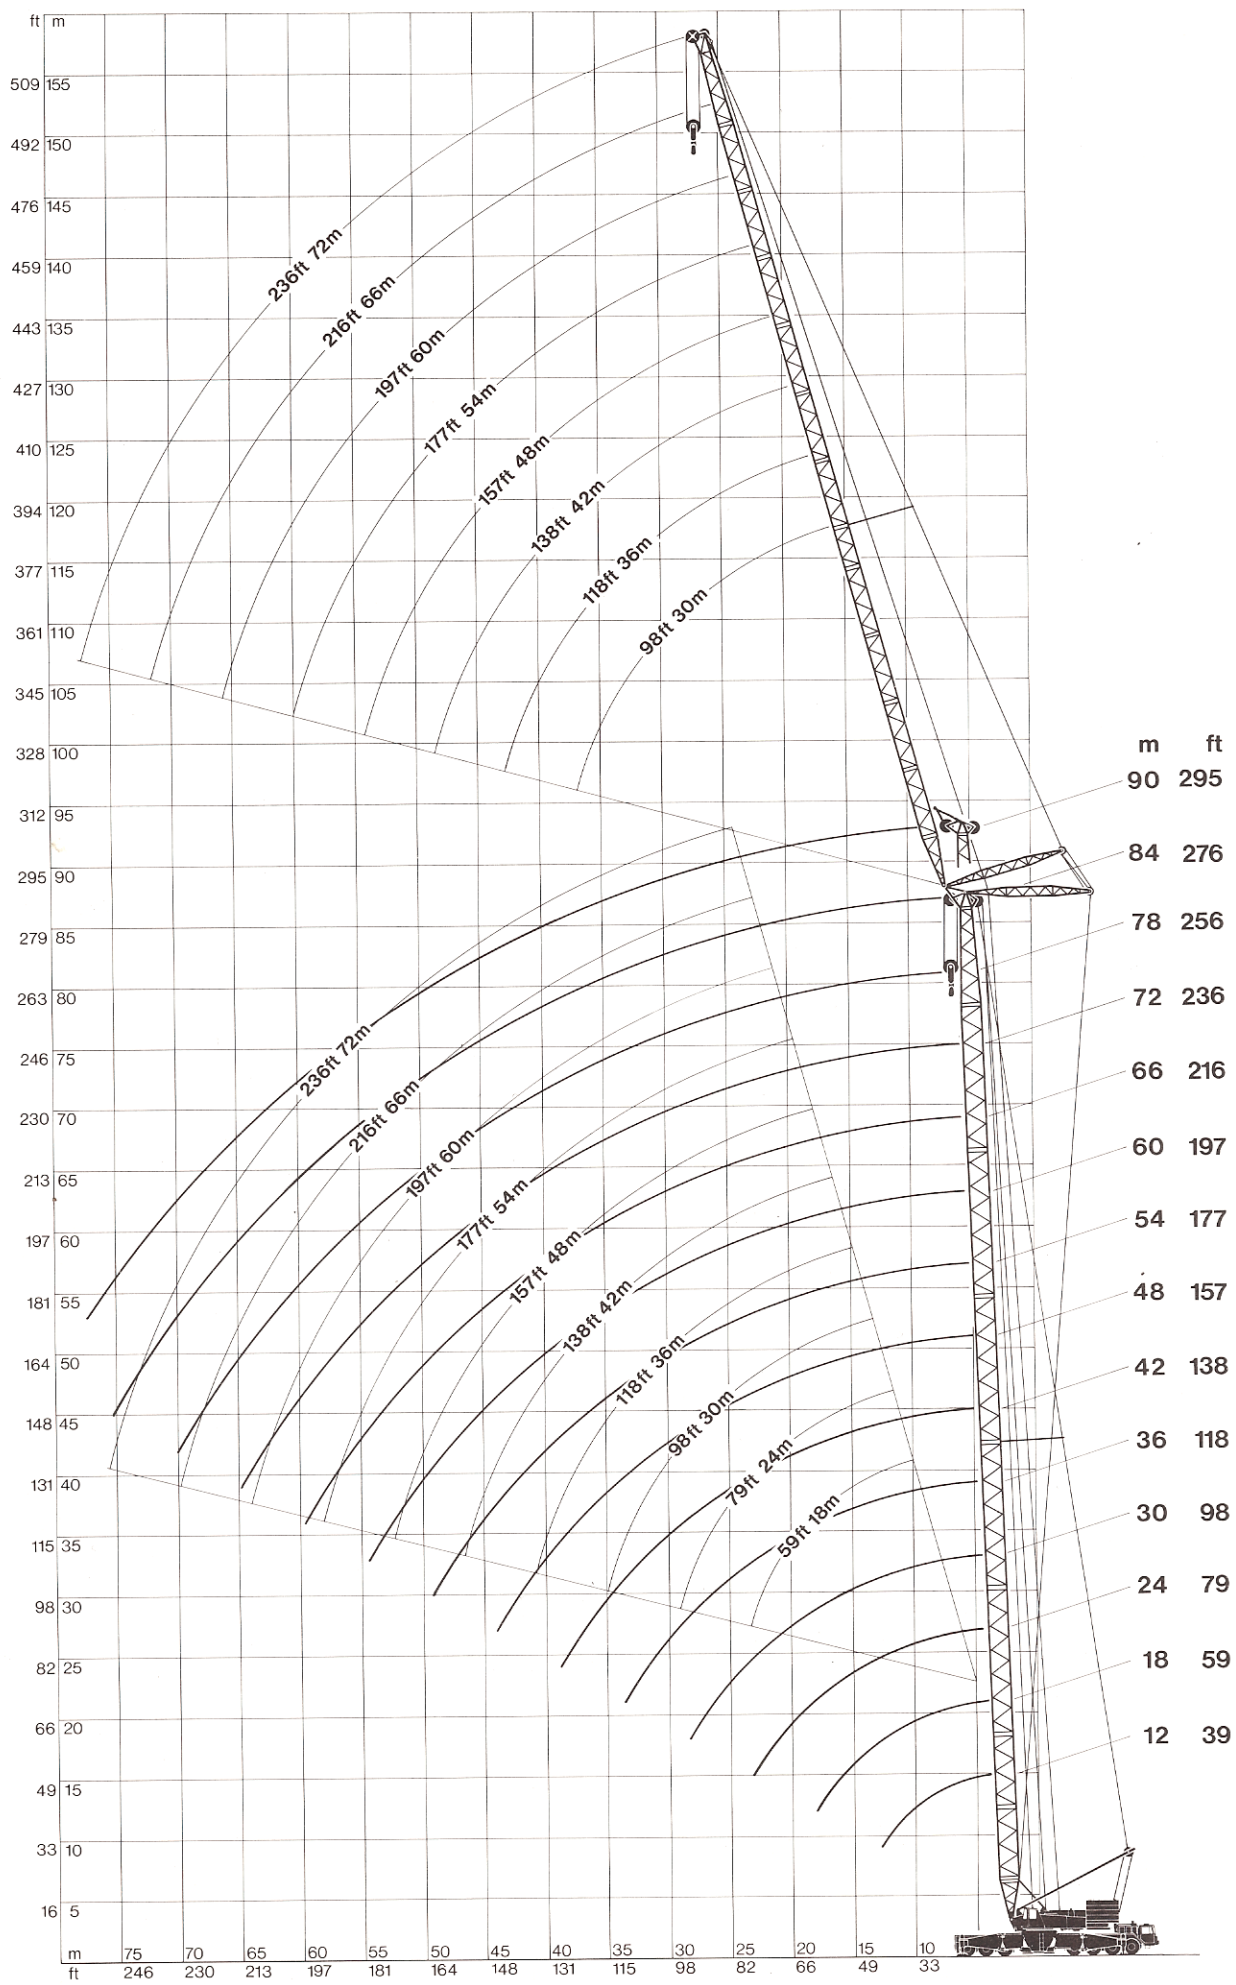



TC 2000

132 tons Counterweight

112 tons Counterweight

Radius	Length of Main Boom													
	39 ft	59 ft	79 ft	98 ft	118 ft	138 ft	157 ft	177 ft	197 ft	216 ft	236 ft	256 ft	276 ft	295 ft
ft	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons
18	350	350	-	-	-	-	-	-	-	-	-	-	-	-
20	346	345	-	-	-	-	-	-	-	-	-	-	-	-
23	315	314	310	310	292	-	-	-	-	-	-	-	-	-
26	281	280	279	278	270	253	-	-	-	-	-	-	-	-
30	251	250	248	247	245	236	222	196	-	-	-	-	-	-
33	226	225	224	223	220	219	211	188	163	135	112	-	-	-
39	189	188	187	185	183	182	180	170	152	126	104	90	76	62
46	-	-	159	157	156	155	154	153	141	118	97	83	70	56
53	-	-	138	136	135	134	133	132	132	111	91	78	64	51
59	-	-	122	120	118	117	116	115	115	104	85	72	60	47
66	-	-	108	106	105	104	103	102	101	96	80	68	56	43
72	-	-	97	95	94	93	92	91	90	89	75	63	52	40
79	-	-	-	87	86	85	84	82	81	80	71	59	48	37
85	-	-	-	79	78	77	76	74	73	72	67	56	45	35
92	-	-	-	73	72	71	70	68	67	66	63	52	42	32
98	-	-	-	-	67	64	63	62	61	60	59	49	39	31
112	-	-	-	-	-	54	53	52	51	50	50	42	34	28
125	-	-	-	-	-	47	46	45	44	43	43	38	30	24
138	-	-	-	-	-	-	39	38	37	36	36	32	27	21
151	-	-	-	-	-	-	-	34	33	32	31	28	24	19
164	-	-	-	-	-	-	-	-	29	28	27	25	21	17
177	-	-	-	-	-	-	-	-	25	24	23	21	19	15
190	-	-	-	-	-	-	-	-	-	22	21	19	17	13
203	-	-	-	-	-	-	-	-	-	-	18	16	14	11
216	-	-	-	-	-	-	-	-	-	-	-	14	12	9
229	-	-	-	-	-	-	-	-	-	-	-	12	11	8



TC 2000

46' by 46' Outriggers
360 degrees 85%

72 tons Counterweight

Lifting Capacities on Main Boom

23' by 23' Outriggers
360 degrees 85%

112 tons Counterweight

[illegible]

Crane Service
Division

TC 2000

Lifting Capacities on Main Boom

23' by 23' Outriggers
360 degrees 85%

72 tons Counterweight

Radius ft	Length of Main Boom													
	39 ft	59 ft	79 ft	98 ft	118 ft	138 ft	157 ft	177 ft	197 ft	216 ft	236 ft	256 ft	276 ft	295 ft
16	250	-	-	-	-	-	-	-	-	-	-	-	-	-
20	235	235	-	-	-	-	-	-	-	-	-	-	-	-
23	216	216	216	216	-	-	-	-	-	-	-	-	-	-
26	172	170	169	168	167	-	-	-	-	-	-	-	-	-
30	139	138	137	136	135	134	-	-	-	-	-	-	-	-
33	118	116	115	114	113	112	112	111	110	-	-	-	-	-
39	89	88	87	85	84	84	83	82	81	-	-	-	-	-
46	-	70	69	68	67	66	65	64	63	-	-	-	-	-
53	-	58	57	56	55	54	53	52	51	-	-	-	-	-
59	-	50	48	47	46	45	44	43	42	-	-	-	-	-
66	-	-	42	40	39	38	37	36	36	-	-	-	-	-
72	-	-	37	35	34	33	32	31	31	-	-	-	-	-
79	-	-	-	31	30	29	28	27	26	-	-	-	-	-
85	-	-	-	28	27	26	25	24	23	-	-	-	-	-
92	-	-	-	25	24	23	22	21	20	-	-	-	-	-
98	-	-	-	-	21	20	19	18	17	-	-	-	-	-
112	-	-	-	-	-	17	16	15	13	-	-	-	-	-
125	-	-	-	-	-	14	13	11	10	-	-	-	-	-
138	-	-	-	-	-	-	10	9	8	-	-	-	-	-
151	-	-	-	-	-	-	-	-	6	-	-	-	-	-
164	-	-	-	-	-	-	-	-	-	-	-	-	-	-
177	-	-	-	-	-	-	-	-	-	-	-	-	-	-
190	-	-	-	-	-	-	-	-	-	-	-	-	-	-
203	-	-	-	-	-	-	-	-	-	-	-	-	-	-
216	-	-	-	-	-	-	-	-	-	-	-	-	-	-
229	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Crane-Capacity Notes

Capacities do not exceed 85%/75% of tipping load

Max. wind pressure: 15 kg/m² △ 15,5 m/sec (85%)25 kg/m² △ 20 m/sec (75%)Crane operation up to a wind force of 5^o Beaufort scale
(5 kg/m² △ 9 m/sec) permissible.The weights of all load-handling devices are
considered part of the load, and suitable allowance
for them should be made.The 75% crane ratings furthermore comply with
DIN 15019,2 (test load = 1.25x lifting load + 0.1 x dead
weight of boom reduced to the boom point)All capacities above the parting line are based upon
structural strength. The capacities below the parting line
are based on stability.

* With Heavy-Duty Hammer Head



Lifting Capacities on Luffing Jib Boom, with Outriggers, 360°
75 %

Main Boom	Radius	Length of Jib Boom									
		59 ft	79 ft	98 ft	118 ft	138 ft	157 ft	177 ft	197 ft	216 ft	236 ft
	ft	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons
177 ft (54 m)	39	—	78.7	—	—	—	—	—	—	—	—
	46	—	77.6	63.8	—	—	—	—	—	—	—
	53	—	75.9	63.4	53.9	—	—	—	—	—	—
	59	—	71.5	62.7	53.5	45.1	38.2	—	—	—	—
	66	—	67.9	61.2	52.7	44.9	37.7	—	—	—	—
	72	—	64.1	59.6	51.7	44.4	37.3	31.6	25.5	—	—
	79	—	60.5	57.5	50.6	44.1	37.0	31.2	25.5	20.6	—
	85	—	57.0	54.8	49.5	43.6	36.6	31.1	25.5	20.6	16.0
	92	—	—	51.4	48.4	42.7	36.3	30.8	25.5	20.6	16.0
	98	—	—	48.2	47.3	41.7	35.9	30.6	25.3	20.6	16.0
	112	—	—	—	40.9	38.9	34.4	29.8	24.9	20.4	16.0
	125	—	—	—	34.8	34.3	32.5	28.8	24.1	19.8	16.0
	138	—	—	—	—	29.7	29.7	27.5	23.3	18.9	16.0
	151	—	—	—	—	—	26.1	24.9	22.4	17.8	15.7
	164	—	—	—	—	—	23.4	22.2	21.0	16.7	15.4
197 ft (60 m)	177	—	—	—	—	—	—	20.0	18.7	15.6	14.3
	190	—	—	—	—	—	—	—	17.3	14.7	13.2
	203	—	—	—	—	—	—	—	—	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.0	11.2
	230	—	—	—	—	—	—	—	—	—	10.5
	46	—	—	58.3	—	—	—	—	—	—	—
	53	—	—	57.0	49.0	—	—	—	—	—	—
	59	—	—	55.8	47.9	39.6	—	—	—	—	—
	66	—	—	54.8	46.8	35.8	—	—	—	—	—
	72	—	—	53.8	45.7	39.1	34.1	28.8	—	—	—
	79	—	—	52.7	44.6	38.6	33.7	28.6	23.9	—	—
	85	—	—	51.4	43.8	38.2	33.3	28.3	23.5	19.6	—
	92	—	—	49.8	43.0	37.7	33.1	28.1	23.3	19.6	14.9
	98	—	—	48.2	42.1	37.3	32.7	27.8	23.1	19.6	14.9
	112	—	—	—	39.6	36.0	31.8	27.3	22.8	19.6	14.9
	125	—	—	—	34.8	34.1	30.6	26.6	22.4	19.4	14.9
216 ft (66 m)	138	—	—	—	—	29.7	28.6	25.7	22.1	18.9	14.9
	151	—	—	—	—	—	26.1	24.6	21.5	17.8	14.9
	164	—	—	—	—	—	23.4	22.2	20.7	16.7	14.6
	177	—	—	—	—	—	—	20.0	18.7	15.6	14.3
	190	—	—	—	—	—	—	—	17.3	14.7	13.2
	203	—	—	—	—	—	—	—	15.4	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.0	11.2
	230	—	—	—	—	—	—	—	—	—	10.5
	46	—	—	51.2	—	—	—	—	—	—	—
	53	—	—	50.3	42.4	—	—	—	—	—	—
	59	—	—	48.8	41.9	36.3	—	—	—	—	—
	66	—	—	47.2	41.1	36.1	—	—	—	—	—
	72	—	—	45.7	40.4	35.8	30.8	—	—	—	—
	79	—	—	44.3	39.4	35.2	30.6	25.3	—	—	—
	85	—	—	42.8	37.4	34.5	30.3	25.3	20.9	—	—
	92	—	—	41.1	37.0	33.8	29.9	25.2	20.9	17.1	—
	98	—	—	39.6	35.8	33.0	29.5	25.0	20.8	17.1	13.2
	112	—	—	36.9	33.6	31.2	29.0	24.8	20.7	17.1	13.2
236 ft (72 m)	125	—	—	—	31.1	29.0	27.8	24.1	20.5	17.1	13.2
	138	—	—	—	—	27.0	26.5	23.3	20.0	16.9	13.2
	151	—	—	—	—	—	25.2	21.5	19.6	16.7	13.1
	164	—	—	—	—	—	23.8	21.5	18.8	16.5	12.9
	177	—	—	—	—	—	22.2	20.4	18.0	16.1	12.7
	190	—	—	—	—	—	—	19.1	17.2	15.5	12.3
	203	—	—	—	—	—	—	—	16.2	14.7	11.9
	217	—	—	—	—	—	—	—	15.2	13.9	11.4
	230	—	—	—	—	—	—	—	—	12.8	11.0
	46	—	—	42.9	—	—	—	—	—	—	—
	53	—	—	42.5	37.4	—	—	—	—	—	—
	59	—	—	41.9	37.3	31.9	—	—	—	—	—
	66	—	—	41.3	37.0	31.4	26.8	—	—	—	—
	72	—	—	40.7	36.5	30.8	26.5	22.2	—	—	—
	79	—	—	40.0	35.9	30.3	26.3	22.1	19.5	—	—
	85	—	—	39.4	35.2	29.7	26.1	22.0	19.5	15.4	—
	92	—	—	38.7	34.5	29.2	25.9	22.0	19.4	15.4	12.1
	98	—	—	38.1	33.6	28.6	25.6	22.0	19.3	15.4	12.1
	112	—	—	36.6	32.5	28.1	25.2	21.8	18.9	15.4	12.1
256 ft (78 m)	125	—	—	—	31.0	27.5	24.8	21.3	18.6	15.3	12.1
	138	—	—	—	—	27.0	24.3	20.9	18.2	15.2	12.1
	151	—	—	—	—	—	23.9	20.2	17.7	15.1	12.1
	164	—	—	—	—	—	23.4	20.2	17.3	14.9	12.0
	177	—	—	—	—	—	—	19.0	16.8	14.4	11.9
	190	—	—	—	—	—	—	—	15.7	14.0	11.7
	203	—	—	—	—	—	—	—	14.7	13.8	11.4
	217	—	—	—	—	—	—	—	—	12.8	11.0
	230	—	—	—	—	—	—	—	—	—	10.5
	53	—	—	36.9	31.9	—	—	—	—	—	—
	59	—	—	36.4	31.7	27.0	—	—	—	—	—
	66	—	—	35.9	31.2	26.7	23.1	—	—	—	—
	72	—	—	35.4	30.9	26.4	23.0	19.5	—	—	—
	79	—	—	34.9	30.3	26.2	22.9	19.5	16.9	—	—
	85	—	—	34.0	29.8	25.7	22.8	19.4	16.8	13.8	—
	92	—	—	33.2	29.2	25.3	22.6	19.3	16.7	13.8	11.0
	98	—	—	32.0	28.2	24.8	22.3	19.2	16.7	13.8	11.0
	112	—	—	30.8	27.0	24.0	21.8	18.7	16.5	13.8	11.0
276 ft (84 m)	125	—	—	—	25.6	23.1	21.1	18.3	16.2	13.8	11.0
	138	—	—	—	—	22.1	20.4	17.7	16.0	13.6	11.0
	151	—	—	—	—	—	19.5	17.1	15.5	13.5	10.9
	164	—	—	—	—	—	18.6	16.3	15.1	13.3	10.8
	177	—	—	—	—	—	—	15.5	14.5	13.0	10.6
	190	—	—	—	—	—	—	—	14.1	12.5	10.2
	203	—	—	—	—	—	—	—	13.6	11.9	9.9
	217	—	—	—	—	—	—	—	—	11.2	9.5
	230	—	—	—	—	—	—	—	—	—	9.0
	53	—	—	30.3	25.9	—	—	—	—	—	—
	59	—	—	30.0	25.6	22.6	—	—	—	—	—
	66	—	—	29.8	25.1	22.4	19.3	—	—	—	—
	72	—	—	29.6	25.2	22.3	19.3	16.6	—	—	—
	79	—	—	29.2	25.0	22.1	19.1	16.5	14.0	—	—
	85	—	—	28.6	24.6	21.8	19.1	16.4	14.0	11.4	—
	92	—	—	28.1	24.2	21.5	19.0	16.4	14.0	11.4	8.8
	98	—	—	27.4	23.8	21.2	18.9	16.3	14.0	11.4	8.8
	112	—	—	25.9	22.7	20.4	18.6	16.1	14.0	11.4	8.8
	125	—	—	—	21.5	19.3	17.8	15.6	13.9	11.4	8.8
	138	—	—	—	—	18.2	17.1	15.1	13.6	11.3	8.8
	151	—	—	—	—	17.1	16.2	14.4	13.2	11.3	8.8
	164	—	—	—	—	—	14.2	13.6	12.7	11.2	8.7
	177	—	—	—	—	—	—	13.1	12.1	10.9	8.7
	190	—	—	—	—	—	—	—	11.4	10.3	8.6
	203	—	—	—	—	—	—	—	10.9	9.8	8.5
	217	—	—	—	—	—	—	—	—	9.1	8.3
	230	—	—	—	—	—	—	—	—	—	7.9




Lifting Capacities on Luffing Jib Boom, with Outriggers, 360°
75 %

Main Boom	Radius	Length of Jib Boom									
		59 ft	79 ft	98 ft	118 ft	138 ft	157 ft	177 ft	197 ft	216 ft	236 ft
	ft	tons	tons	tons	tons	tons	tons	tons	tons	tons	tons
59 ft (18 m)	39	130	122	—	—	—	—	—	—	—	—
	46	123	114	102	84.2	—	—	—	—	—	—
	53	103	104	96.8	82.5	69.3	—	—	—	—	—
	59	84.7	90.8	90.8	80.3	67.8	55.0	—	—	—	—
	66	74.3	79.2	72.6	77.8	66.0	53.9	40.8	—	—	—
	72	—	69.3	64.0	73.7	63.8	52.8	39.6	32.2	—	—
	79	—	61.1	56.7	66.3	61.6	51.7	38.8	31.5	28.1	—
	85	—	54.0	50.1	59.4	58.3	50.6	38.1	30.8	27.1	23.1
	92	—	—	44.7	52.8	52.3	48.4	37.2	29.9	26.0	23.1
	98	—	—	—	46.8	48.4	46.2	36.3	29.2	25.1	22.9
	112	—	—	—	37.6	39.8	42.0	34.1	27.5	23.3	21.6
	125	—	—	—	—	33.9	35.2	31.5	25.6	21.6	20.1
	138	—	—	—	—	29.4	29.7	27.7	23.7	19.9	18.6
	151	—	—	—	—	—	25.3	24.4	21.5	18.6	17.1
	164	—	—	—	—	—	—	21.7	19.4	17.2	15.5
79 ft (24 m)	177	—	—	—	—	—	—	19.8	17.6	16.0	14.3
	190	—	—	—	—	—	—	—	16.2	14.9	13.2
	203	—	—	—	—	—	—	—	—	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.2	11.2
	230	—	—	—	—	—	—	—	—	—	10.5
	39	130	121	—	—	—	—	—	—	—	—
	46	125	115	100	—	—	—	—	—	—	—
	53	107	106	96.3	80.3	66.0	—	—	—	—	—
	59	90.8	94.1	91.9	79.4	65.5	52.8	—	—	—	—
	66	77.9	81.6	83.3	77.3	64.6	51.9	41.9	—	—	—
	72	—	71.0	72.8	74.3	63.6	51.5	40.7	33.6	—	—
	79	—	62.2	64.9	67.1	62.2	50.8	39.9	32.8	28.1	—
	85	—	55.0	57.4	60.2	59.4	49.7	39.2	32.1	27.1	22.0
	92	—	—	52.4	54.1	55.0	48.4	38.3	31.2	26.0	22.0
	98	—	—	46.3	48.4	49.0	47.3	37.4	30.5	25.1	21.9
98 ft (30 m)	112	—	—	—	39.6	41.4	41.8	35.2	28.8	23.3	21.5
	125	—	—	—	—	34.4	35.4	32.6	27.0	21.6	20.1
	138	—	—	—	—	29.2	30.3	28.8	25.0	19.9	18.6
	151	—	—	—	—	—	25.9	25.9	22.8	18.6	17.1
	164	—	—	—	—	—	21.7	20.7	20.7	17.2	15.5
	177	—	—	—	—	—	19.8	18.9	18.9	16.0	14.3
	190	—	—	—	—	—	—	17.5	17.5	14.9	13.2
	203	—	—	—	—	—	—	—	—	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.2	11.2
	230	—	—	—	—	—	—	—	—	—	10.5
	39	130	121	—	—	—	—	—	—	—	—
	46	126	115	94.8	—	—	—	—	—	—	—
	53	110	106	92.6	77.0	63.8	—	—	—	—	—
	59	94.6	94.6	89.9	75.9	63.3	51.7	—	—	—	—
	66	81.4	82.5	85.3	74.8	62.5	51.0	41.3	—	—	—
118 ft (36 m)	72	—	72.1	76.5	72.6	61.6	50.6	40.3	33.6	—	—
	79	—	63.3	67.1	66.8	60.7	50.1	39.6	33.0	26.4	—
	85	—	56.1	59.4	60.2	59.0	49.5	38.8	31.9	26.4	20.9
	92	—	—	52.8	55.0	55.0	48.4	38.2	30.8	25.5	20.9
	98	—	—	49.5	49.5	49.5	46.2	37.4	29.7	24.2	20.9
	112	—	—	—	42.4	42.4	41.8	35.2	27.7	22.6	20.9
	125	—	—	—	—	35.9	35.8	32.5	26.1	20.9	20.0
	138	—	—	—	—	30.8	30.3	28.8	24.5	19.4	18.6
	151	—	—	—	—	25.9	25.9	22.6	22.6	18.0	17.1
	164	—	—	—	—	—	22.8	21.0	21.0	16.9	15.5
	177	—	—	—	—	—	20.0	18.7	18.7	15.8	14.3
	190	—	—	—	—	—	—	17.3	17.3	14.9	13.2
	203	—	—	—	—	—	—	—	—	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.1	11.2
	230	—	—	—	—	—	—	—	—	—	10.5
	39	121	107	89.7	—	—	—	—	—	—	—
138 ft (42 m)	46	112	104	87.5	71.9	58.3	—	—	—	—	—
	53	94.6	96.8	85.3	70.6	58.3	47.3	—	—	—	—
	59	81.2	83.7	82.5	69.6	56.3	47.1	38.5	—	—	—
	66	—	72.9	74.8	68.2	57.5	46.5	38.5	32.6	—	—
	72	—	64.1	67.1	66.0	56.7	53.7	38.5	31.7	24.2	—
	79	—	56.7	60.0	62.7	55.6	45.2	38.2	30.8	24.2	19.8
	85	—	—	53.4	56.1	53.9	44.3	37.4	29.7	24.2	19.8
	92	—	—	49.5	50.6	51.2	43.2	36.5	28.8	23.8	19.8
	98	—	—	—	42.1	42.1	40.4	34.4	27.3	22.1	19.8
	112	—	—	—	34.5	35.4	36.0	32.1	25.9	20.5	19.6
	125	—	—	—	—	30.1	30.3	28.8	24.4	19.1	18.6
	138	—	—	—	—	—	25.1	25.9	22.6	17.9	17.1
	151	—	—	—	—	—	—	22.8	21.0	16.7	15.5
	164	—	—	—	—	—	—	20.0	18.7	15.6	14.3
	177	—	—	—	—	—	—	—	17.3	14.7	13.2
157 ft (48 m)	190	—	—	—	—	—	—	—	—	13.9	12.2
	203	—	—	—	—	—	—	—	—	13.1	11.2
	217	—	—	—	—	—	—	—	—	—	10.5
	230	—	—	—	—	—	—	—	—	—	—
	39	—	101	—	—	—	—	—	—	—	—
	46	—	99.3	81.8	—	—	—	—	—	—	—
	53	—	97.7	80.0	67.1	—	—	—	—	—	—
	59	—	91.3	78.1	66.0	53.9	45.1	—	—	—	—
	66	—	82.1	75.9	64.9	53.6	44.7	36.5	—	—	—
	72	—	73.3	73.0	63.6	53.0	44.0	35.9	29.7	—	—
	79	—	65.3	68.8	62.0	52.0	43.6	35.3	29.6	23.7	—
	85	—	58.1	60.0	59.8	51.0	42.9	34.7	28.9	23.7	18.5
	92	—	—	53.4	56.1	49.5	42.1	34.1	28.3	23.5	18.5
	98	—	—	49.5	49.5	47.3	41.3	33.7	27.7	23.1	18.5
	112	—	—	—	42.1	41.9	38.9	32.5	26.7	22.0	18.5
	125	—	—	—	35.0	35.3	35.2	30.9	25.7	20.5	18.3
	138	—	—	—	—	30.8	30.8	28.8	24.6	19.1	17.9
	151	—	—	—	—	30.0	26.1	25.9	22.6	17.9	17.1
	164	—	—	—	—	—	23.4	22.8	21.0	16.7	15.5
	177	—	—	—	—	—	—	20.0	18.7	15.6	14.3
	190	—	—	—	—	—	—	—	17.3	14.7	13.2
	203	—	—	—	—	—	—	—	—	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.1	11.2
	230	—	—	—	—	—	—	—	—	—	10.5
	39	—	89.1	—	—	—	—	—	—	—	—
177 ft (54 m)	46	—	87.5	73.7	—	—	—	—	—	—	—
	53	—	85.5	71.9	60.1	—	—	—	—	—	—
	59	—	83.1	69.3	58.5	47.9	40.7	—	—	—	—
	66	—	80.1	67.1	57.0	47.4	40.4	34.1	—	—	—
	72	—	73.3	64.9	55.4	46.6	40.1	33.9	28.6	—	—
	79	—	65.3	62.4	53.7	46.0	39.8	33.7	28.3	21.6	—
	85	—	58.9	58.9	51.9	45.0	39.4	33.4	27.9	21.6	17.2
	92	—	—	53.4	50.1	44.0	38.8	33.2	27.6	21.6	17.2
	98	—	—	49.3	47.9	42.9	38.2	33.0	27.3	21.6	17.2
	112	—	—	—	41.8	39.6	36.3	32.1	26.6	21.3	17.2
	125	—	—	—	34.9	34.3	33.7	30.8	25.7	20.0	17.1
	138	—	—	—	—	29.7	29.7	28.8	24.6	19.1	16.7
	151	—	—	—	—	—	26.1	25.9	22.6	17.9	16.2
	164	—	—	—	—	—	23.4	22.8	21.0	16.7	15.5
	177	—	—	—	—	—	—	20.0	18.7	15.6	14.3
	190	—	—	—	—	—	—	—	17.3	14.7	13.2
	203	—	—	—	—	—	—	—	—	13.9	12.2
	217	—	—	—	—	—	—	—	—	13.1	11.2
	230	—	—	—	—	—	—	—	—	—	10.5



Hook Blocks



Number of Sheaves	Capacity	Weight	"B"
16	440 tons (400 t)	12.257 lbs. (5560 kg)	11 ft. (3.50 m)
13	330 tons (300 t)	9.094 lbs. (4125 kg)	10 ft. (3.20 m)
6	120 tons (110 t)	4.938 lbs. (2240 kg)	8 ft. (2.50 m)
1	35 tons (32 t)	2.557 lbs. (1160 kg)	6 ft. (2.00 m)



**ROCKY MOUNTAIN CRANE
SERVICE, INC.**
135 CRANE LANE
SALIDA, CO 81201



Subject to change without notice

Printed in West-Germany

Mannesmann Demag Corporation
Construction Machinery Division
468 Country Club Drive
Bensenville, Illinois 60106

D 830 013 01/82 KA 1Te