



LIBERATOR 2001R • 2000R

6500 ft-lbs Crane Rating



Better by design

ETI is committed to designing and manufacturing the best electric hydraulic crane value in the industry. Our cranes are innovatively designed to perform to a higher standard of durability and reliability, and to provide the maximum duty cycle possible in an electric crane. We've backed that commitment with our limited lifetime structural warranty and factory direct technical support. You can be assured that your new Liberator crane will provide many years of dependable service.

ETI
A **PALFINGER** Company



Distributed by:

Equipment Technology LLC
341 NW 122nd
Oklahoma City, OK 73114
Toll-Free: 1-888-748-3841
Fax: 1-405-755-6829
www.eti1.com

L 2001R • 2000R
11.11




LIBERATOR 2000R 2001R

Liberator 2000R and 2001R cranes come complete with 25' power cable, a crane ground cable, a 225 amp fuse, a 4' frame grounding cable, 16' remote control pendant, mounting bolts and owner's manual.

600 amp CCA battery and 100 amp alternator recommended. Stifflegs recommended for most installations.

Maximum lifting capabilities

2000 lbs	2' - 4"
2000 lbs	2' - 10"
1857 lbs	3' - 6"
1625 lbs	4' - 0"
1500 lbs	4' - 4"
1259 lbs	5' - 2"
1181 lbs	5' - 6"
1040 lbs	6' - 3"
1000 lbs	6' - 6"

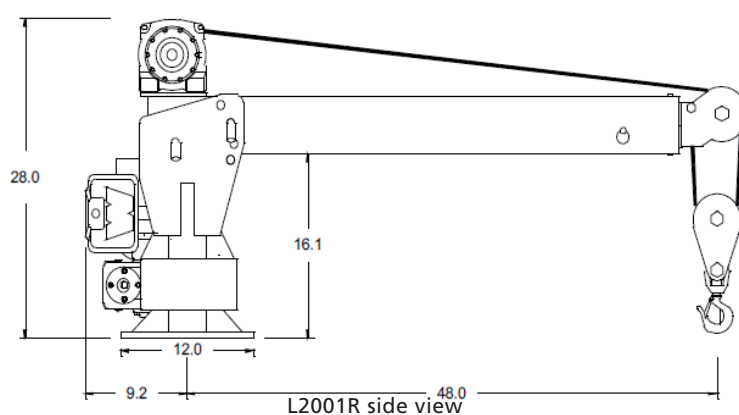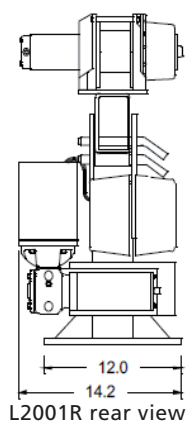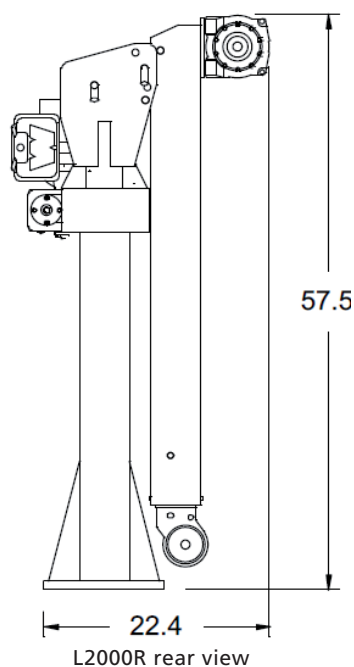

Features

- Boom extends manually 4' to 6' - 6"
- Boom locks in (4) positions for lifting: 0°, 15°, 35° and 55°
- Boom folds down when not in use on 2000R models
- Smooth, 12 volt planetary hoist with low maintenance gearbox, high reliability and efficient operation.
- Hoist drum and rope sheaves meet ANSI standards*
- Wire rope (28' x 3/16"), hoist line speed of 30 feet per minute
- Industrial grade motor contactors
- Load block with safety latch and swivel for loads over 1,200 lbs.
- All steel worm gear rotation drive is mounted on steel slewing ring crane bearing and provides power rotation.
- Powder coat finish for high gloss and durability
- 16' non-metallic remote control pendant controls hoisting and rotation.
- Polymer wire rope pulleys are permanently lubricated to extend life and reduce wire rope wear.
- Crane base plate is 12" x 11-3/4"
- Mounting bolts provided (4) Grade 8 (3/4" diameter)
- Shipping Weights:
 - 2000R 405lbs
 - 2001R 345lbs.