




110E




Standard

Optional


1S




2S



3S

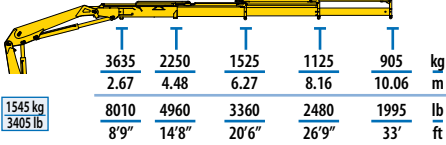

4S

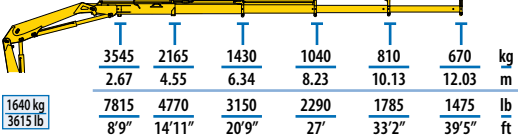


MODEL							
	txm	(°)	mm	mm	mm	mm	t
1S	10,73	400	2220	2455	805	4540 5500	12
2S	10,33	400	2220	2455	805	4540 5500	12
3S	10,09	400	2220	2455	805	4540 5500	12
4S	9,86	400	2220	2455	805	4540 5500	12



MODEL							
	lb*ft	(°)	in	in	in	in	lb
1S	77640	400	87	97	32	179 217	26500
2S	74740	400	87	97	32	179 217	26500
3S	73000	400	87	97	32	179 217	26500
4S	71340	400	87	97	32	179 217	26500





5S

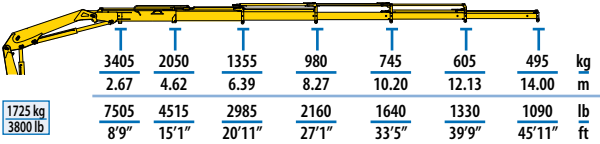



2S+JIB 2S

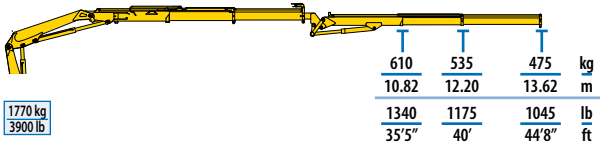



3S+JIB 2S

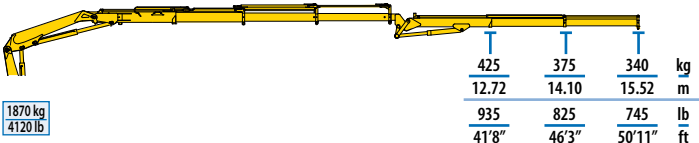

4S+JIB 2S

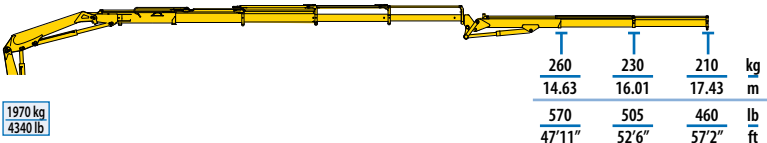

4S+JIB 3S

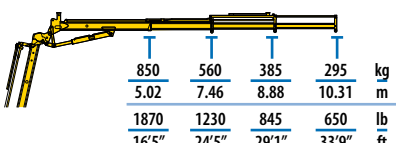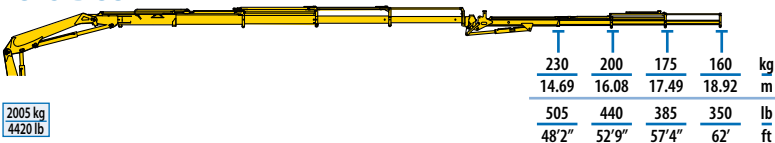

MODEL							
	txm	(°)	mm	mm	mm	mm	t
5S	9,48	400	2220	2455	890	4540 5500	12
2S+JIB 2S	10,33	400	2220	2455	875	4540 5500	12
3S+JIB 2S	10,09	400	2220	2455	875	4540 5500	12
4S+JIB 2S	9,86	400	2220	2455	875	4540 5500	12
4S+JIB 3S	9,86	400	2220	2455	875	4540 5500	12

MODEL							
	lb*ft	(°)	in	in	in	in	lb
5S	68590	400	87	97	35	179 217	26500
2S+JIB 2S	74740	400	87	97	34	179 217	26500
3S+JIB 2S	73000	400	87	97	34	179 217	26500
4S+JIB 2S	71340	400	87	97	34	179 217	26500
4S+JIB 3S	71340	400	87	97	34	179 217	26500