





130.00 LSV



Standard



Optional



2S

	4025	2665	1810	1365	kg
	2.75	4.35	6.25	8.17	m
1580 kg 3480 lb	8870	5875	3990	3005	lb
	9'	14'3"	20'6"	26'9"	ft

3S

	3905	2540	1695	1250	995	kg
	2.75	4.42	6.32	8.25	10.25	m
1710 kg 3765 lb	8605	5595	3735	2765	2190	lb
	9'	14'6"	20'8"	27'	33'7"	ft

4S

	3765	2415	1585	1150	885	730	kg
	2.75	4.49	6.39	8.32	10.32	12.37	m
1835 kg 4045 lb	8300	5320	3490	2535	1950	1605	lb
	9'	14'8"	20'11"	27'3"	33'10"	40'7"	ft

5S



	3655	2320	1490	1050	780	620	515	kg
	2.75	4.55	6.45	8.37	10.37	12.43	14.60	m
1950 kg 4295 lb	8055	5110	3280	2310	1715	1365	1135	lb
	9'	14'11"	21'1"	27'5"	34'	40'9"	47'10"	ft

MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	11,58	400	2275	2495	780	4555 5955	13
3S	11,23	400	2275	2495	780	4555 5955	13
4S	10,84	400	2275	2495	780	4555 5955	13
5S	10,43	400	2275	2505	900	4555 5955	13



MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	83790	400	90	98	31	179 234	28700
3S	81250	400	90	98	31	179 234	28700
4S	78430	400	90	98	31	179 234	28700
5S	75470	400	90	99	35	179 234	28700





2S+JIB 2S

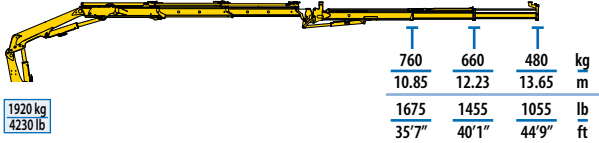


3S+JIB 2S

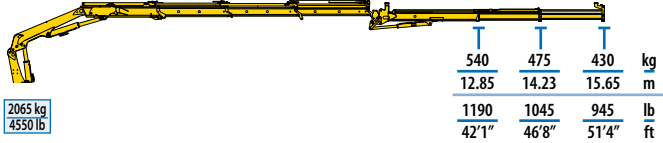

3S+JIB 3S

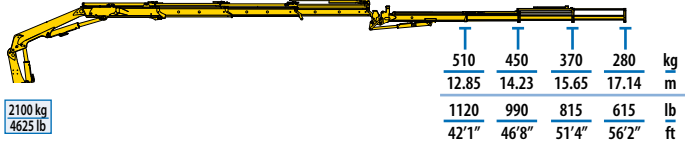

4S+JIB 2S



130.00 LSV

MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S+JIB 2S	11,58	400	2275	2500	875	4555 5955	13
3S+JIB 2S	11,23	400	2275	2500	875	4555 5955	13
3S+JIB 3S	11,23	400	2275	2500	875	4555 5955	13
4S+JIB 2S	10,84	400	2275	2500	875	4555 5955	13

MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S+JIB 2S	83790	400	90	98	34	179 234	28700
3S+JIB 2S	81250	400	90	98	34	179 234	28700
3S+JIB 3S	81250	400	90	98	34	179 234	28700
4S+JIB 2S	78430	400	90	98	34	179 234	28700