




155.00 LSV




EFFER
155.00 LSV


Standard




Optional




2S

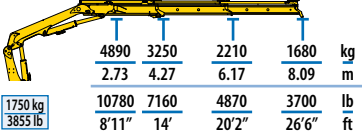


3S

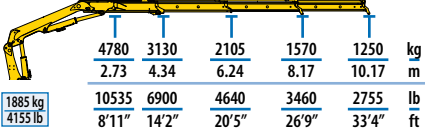

4S

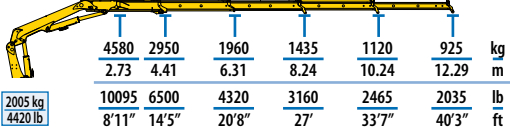

5S


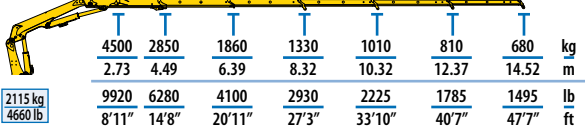


MODEL							
	txm	(°)	mm	mm	mm	mm	t
2S	13,86	400	2295	2495	810	5960	15
3S	13,58	400	2295	2495	810	5960	15
4S	13,02	400	2295	2495	810	5960	15
5S	12,79	400	2295	2505	920	5960	15



MODEL							
	lb*ft	(°)	in	in	in	in	lb
2S	100280	400	90	98	32	235	33100
3S	98260	400	90	98	32	235	33100
4S	94210	400	90	98	32	235	33100
5S	92540	400	90	99	36	235	33100





3S+JIB 2S

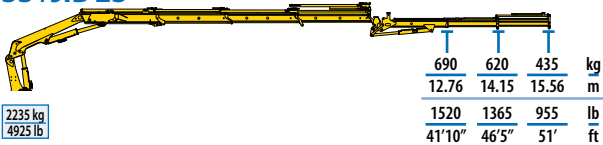

3S+JIB 3S

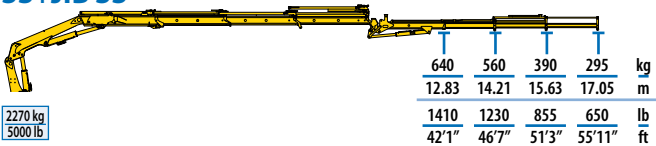

4S+JIB 2S

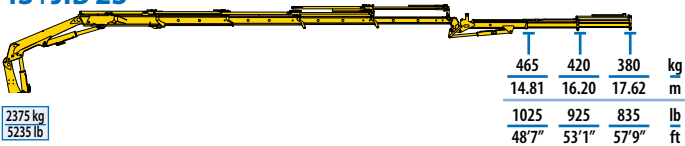

155.00 LSV

MODEL							
	txm	(°)	mm	mm	mm	mm	t
3S+JIB 2S	13,58	400	2295	2505	910	5960	15
3S+JIB 3S	13,58	400	2295	2505	910	5960	15
4S+JIB 2S	13,02	400	2295	2505	910	5960	15

MODEL							
	lb*ft	(°)	in	in	in	in	lb
3S+JIB 2S	98260	400	90	99	36	235	33100
3S+JIB 3S	98260	400	90	99	36	235	33100
4S+JIB 2S	94210	400	90	99	36	235	33100