




42




Standard

Optional


1S




2S



3S

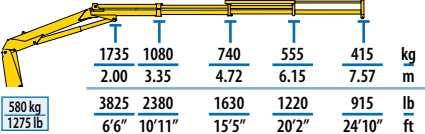

4S

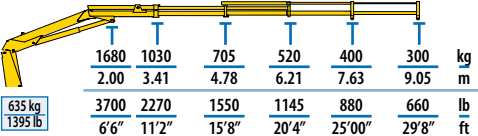

| MODEL |      |     |      |      |     |              |       |
|-------|------|-----|------|------|-----|--------------|-------|
|       | txm  | (°) | mm   | mm   | mm  | mm           | t     |
| 1S    | 3,86 | 380 | 1700 | 1965 | 515 | 2886<br>4066 | 3,5-5 |
| 2S    | 3,73 | 380 | 1700 | 1965 | 515 | 2886<br>4066 | 3,5-5 |
| 3S    | 3,62 | 380 | 1700 | 2020 | 535 | 2886<br>4066 | 3,5-5 |
| 4S    | 3,51 | 380 | 1700 | 2070 | 535 | 2886<br>4066 | 3,5-5 |

| MODEL |       |     |    |    |    |            |               |
|-------|-------|-----|----|----|----|------------|---------------|
|       | lb*ft | (°) | in | in | in | in         | lb            |
| 1S    | 27930 | 380 | 67 | 77 | 20 | 114<br>160 | 7700<br>11000 |
| 2S    | 26990 | 380 | 67 | 77 | 20 | 114<br>160 | 7700<br>11000 |
| 3S    | 26190 | 380 | 67 | 80 | 21 | 114<br>160 | 7700<br>11000 |
| 4S    | 25400 | 380 | 67 | 82 | 21 | 114<br>160 | 7700<br>11000 |