




BoomTruck™

TRUCK-MOUNTED CRANE

MODEL 2600 SPECIFICATIONS

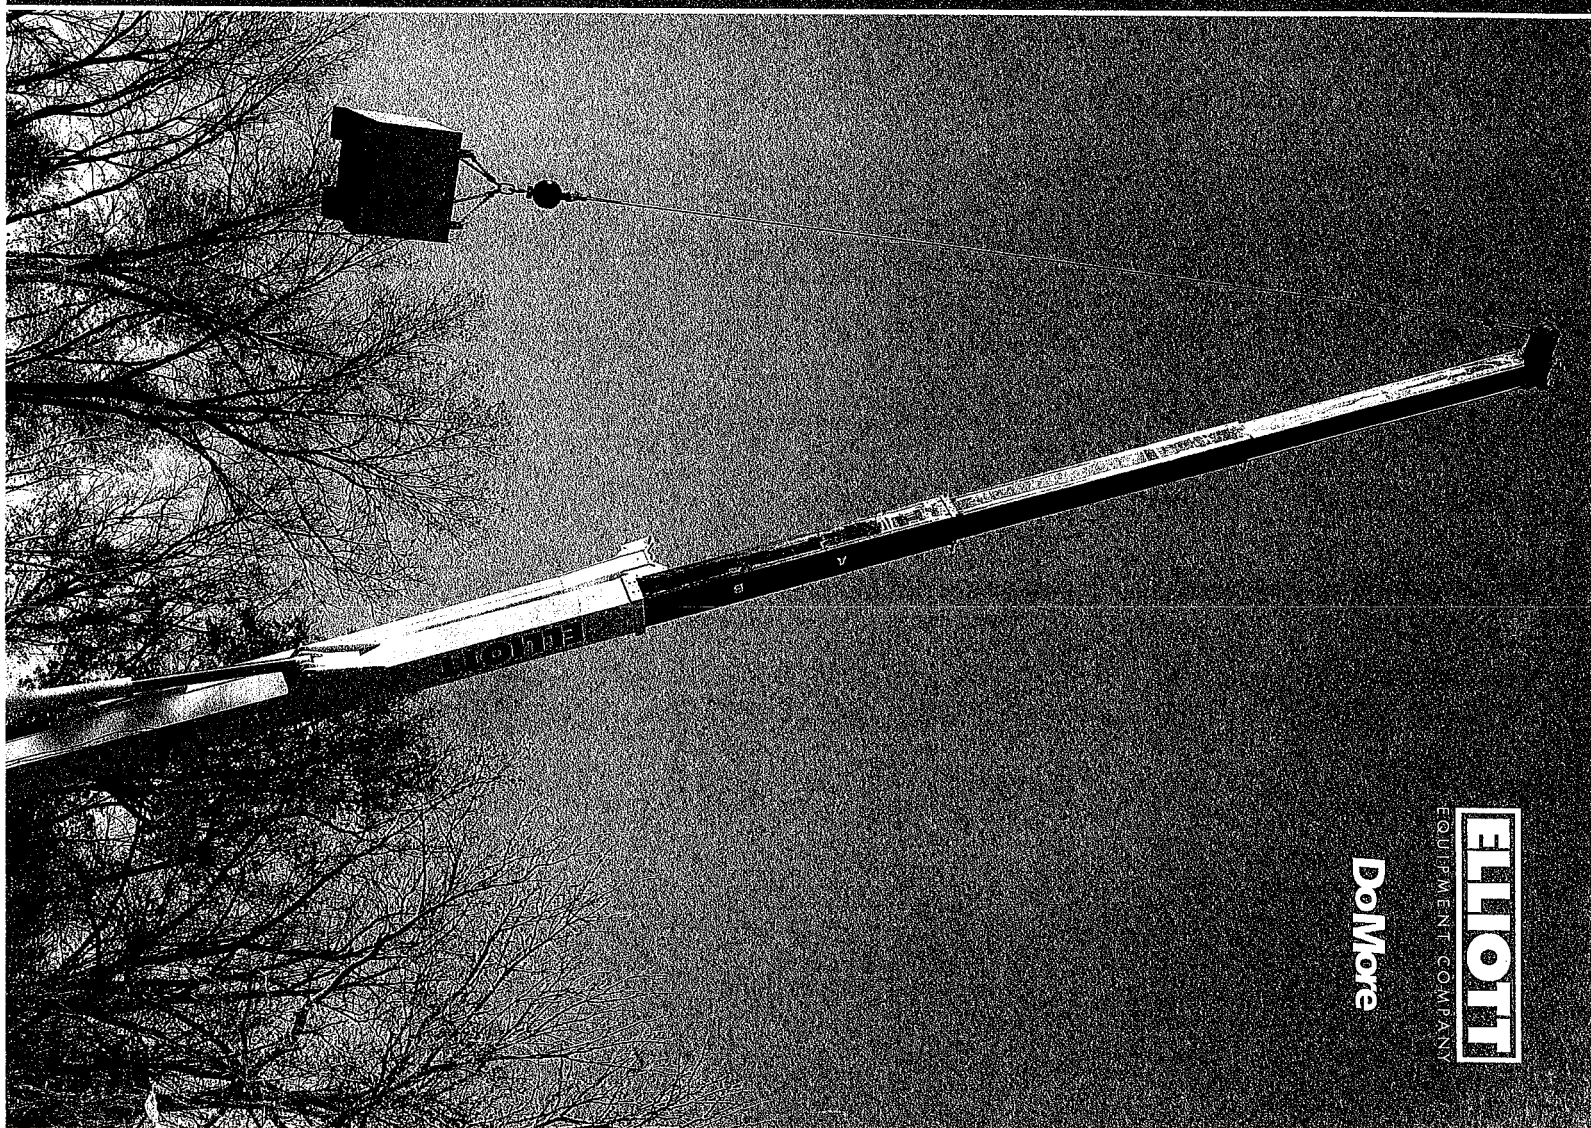


ELLIOTT
EQUIPMENT COMPANY

DoMore



Chassis Specifications


2695F

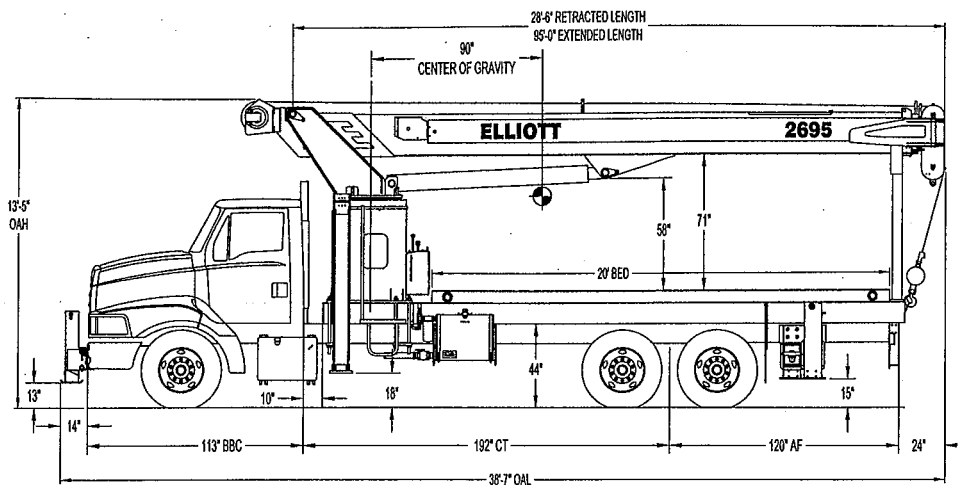

Wheelbase (WB)	256"	GVWRF	20,000 lbs.
Cab-To-Axle (CA/CT)	192"	GVWRR	40,000 lbs.
Afterframe (AF)	120"	Frame Section Modulus	15.9 @ 110,000
GVWR	60,000 lbs.	Approximate Payload	7,000 lbs.

Integral front frame extension required with front stabilizer.

26105F

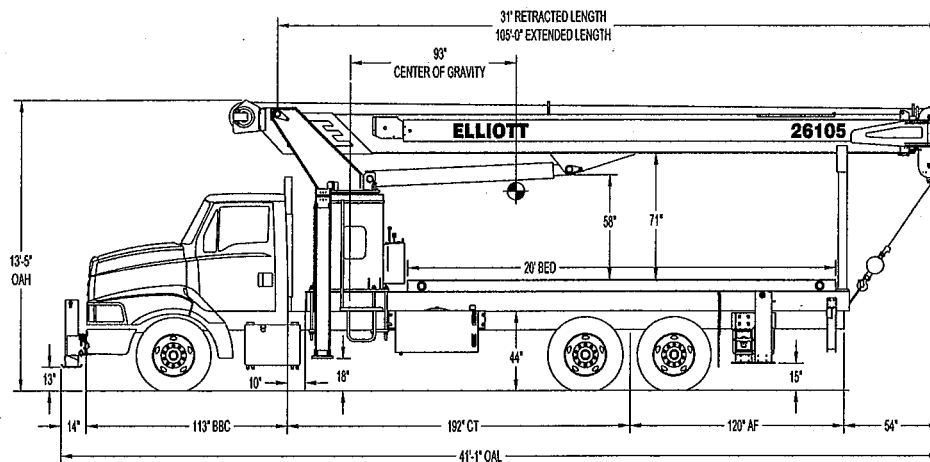

Wheelbase (WB)	256"	GVWRF	20,000 lbs.
Cab-To-Axle (CA/CT)	192"	GVWRR	40,000 lbs.
Afterframe (AF)	120"	Frame Section Modulus	15.9 @ 110,000
GVWR	60,000 lbs.	Approximate Payload	6,000 lbs.

Integral front frame extension required with front stabilizer.



Model 2600. Any job. Anywhere.

The 26 ton boom truck is available as a front mounted crane with dual side control station. The available 95' and 105' boom lengths coupled with jib lengths to 45' enables tip heights of up to 162'. The winch provides line speeds up to 288 fpm and line pulls of 9,060 lbs. with our standard rotation resistant cable. A variety of user specified outrigger options can be configured including the patented Superlink for restricted workspace conditions.

STANDARD FEATURES

- LMI load moment indicator	- 372-degree non-continuous rotation
- Rear bumper underride protection	- Two-speed winch
- Internal boom hard wire anti-two block	- Horizontal boom test
- Rotation-resistant wire rope	- Proportional boom extension
- Backup alarm	- Cup holder at control console
- Variable speed foot throttle	- 12V power outlet at control console
- 1-year parts and labor and 5-year structural warranty	- One hard copy and one CD operator manual

OPTIONS

- Steel and wood beds	- Line blocks
- 1-piece and 2-piece jibs	- Steel gravity-leveled two-man basket
- Front stabilizer	- Radio remote controls
- Superlink "short jack" option for main outriggers	- Toolboxes
- Boom mounted hose reel	- Hydraulic oil cooler
- Hydraulic tool circuit	- Continuous rotation
- Vertical line block holder	- 24" steel bulkhead

Specifications

	2695F	26105F
PERFORMANCE		
Lifting Capacity	52,000 lbs.	52,000 lbs.
Crane Weight	24,920 lbs.	26,040 lbs.
Jib Lengths	26',45'	26',45'
Maximum Vertical Reach	152'	162'
Operator controls	Dualside standup	Dualside standup

WINCH		
Speed	2	2
Winch Type	Planetary	Planetary
Bare Drum Pull	12,800 lbs.	12,800 lbs.
Single Line Pull	9,060 lbs.	9,060 lbs.
Line Speed (4th layer)	181/288 fpm	181/288 fpm
Wire Rope Length	425'	425'
Wire Rope Size	9/16"	9/16"
Breaking Strength	45,400 lbs.	45,400 lbs.

	2695F	26105F
HYDRAULICS		
Pump Sections	3	3
Pump Type	Gear	Gear
Gallon per Minute	39/23/9	39/23/9
Reservoir	120 gallons	120 gallons

OPERATING SPEED		
Swing Rotation	42 sec.	42 sec.
Boom Up/Down	44/40	44/40
Boom Extend/Retract	90/90	110/110

OUTRIGGERS		
Front Type	"A" LINK	"A" LINK
Front Spread	20'-10"	20'-10"
Rear Type	OUT-DOWN	OUT-DOWN
Rear Spread	18'2"	18'2"
Front Bumper Stabilizer	Optional	Optional



BoomTruck™

TRUCK-MOUNTED CRANE

4427 South 76th Circle

Omaha, NE 68127-1806

Tele: 402-592-4500

Fax: 402-592-4553

E-mail: info@elliottequip.com

www.elliottequip.com

MODEL 26105 LOAD SPECIFICATIONS

MAIN BOOM LOAD RATINGS WITH FULLY EXTENDED OUTRIGGERS

LOAD RADIUS IN FEET	LOADED BOOM ANGLE	31-FT.	46-FT.	58-FT.	70-FT.	82-FT.	94-FT.	105-FT.
5	80	52,000						
6	78	44,000						
8	74	36,600	79.5	30,000				
10	70	31,000	77	27,000	80	20,000		
12	66	26,500	74.5	24,900	78	19,800		
14	61.5	20,500	72	21,800	76	17,700	79.5	18,500
16	57	18,500	69	19,500	74	16,000	77.5	16,000
18	52	15,900	66	15,800	72	14,400	76	14,800
20	47	14,300	63	12,800	69.5	11,500	74	13,400
25	30.5	10,300	55.5	11,000	64.5	9,500	69.5	10,900
30			47.5	9,300	58.5	7,950	65.5	9,000
35			37.5	8,500	52.5	6,700	60.5	7,500
40			23	6,300	45.5	5,600	55.5	6,300
45					37	4,000	50	5,300
50					26.5	3,850	44	4,600
55						37	3,800	48.5
60						28.5	2,700	43
65						15.5	2,150	37
70							30	2,150
75							20.5	1,800
80								30.5
85								23
90								
0		5,500	0	2,900	0	1,100	0	500
DEDUCTIONS FOR STOWED JIB (lbs)		850		600		450		400
		550		350		250		200
								350
								300
								250
								150
								150

JIB LOAD RATINGS WITH FULLY EXTENDED OUTRIGGERS

26-ft FIXED LENGTH JIB			26'-45' TWO SECTION JIB			
			RETRACTED 26' JIB		EXTENDED 45' JIB	
LOAD RADIUS IN FEET	LOADED BOOM ANGLE	26-ft JIB	LOAD RADIUS IN FEET	LOADED BOOM ANGLE	26-ft JIB	45-ft JIB
30	78.5	4,400	30	78.5	4,150	
35	76.5	4,000	35	76	3,750	77
40	74	3,600	40	74	3,350	75.5
45	72	3,100	45	71.5	2,850	74
50	69.5	2,700	50	69	2,450	72
55	67	2,300	55	66.5	2,050	70
60	64.5	2,000	60	64	1,750	68
65	62	1,700	65	61.5	1,450	66
70	59	1,500	70	59	1,250	64
75	56.5	1,300	75	56	1,050	61.5
80	53.5	1,100	80	53.5	850	59.5
85	50.5	900	85	50.5	650	57
90	47.5	700	90			55
			95			52

NOTICE

- DO NOT DEADHEAD LINE BLOCK AGAINST BOOM TIP WHEN EXTENDING BOOM.
- KEEP AT LEAST 5 WRAPS OF LOADLINE ON THE WINCH DRUM AT ALL TIMES.
- USE ONLY 9/16" DIAMETER WIRE ROPE, AS SPECIFIED BELOW, WITH THE PROPER BREAKING STRENGTHS LISTED.
- ANTI-TWO-BLOCK SYSTEM MUST BE IN GOOD OPERATING CONDITION BEFORE OPERATING CRANE. SEE OPERATION & SAFETY MANUAL.

1-PART LINE



MAX PULL: 9,060 lbs

2-PART LINE



18,120 lbs

3-PART LINE



27,180 lbs

4-PART LINE



36,240 lbs

5-PART LINE



45,300 lbs

6-PART LINE



52,000 lbs

ELLIOTT EQUIPMENT CO. SUPPLIED
LOADLINE EQUIPMENT DEDUCTIONS:
DOWNHAUL WEIGHT180 lbs
ONE SHEAVE BLOCK.....375 lbs
TWO SHEAVE BLOCK.....640 lbs
THREE SHEAVE BLOCK.....870 lbs
AUXILIARY SHEAVE.....100 lbs

9/16" - SPIN RESISTANT 5:1 S.F.) 45,300-lbs.
BREAKING STRENGTH

CRANE MEETS ASME B30.5 REQUIREMENTS AT TIME OF MANUFACTURE

DO NOT PAINT OVER ANY LABELS 11/05/99 01/006





BoomTruck™

TRUCK MOUNTED CRANE

MODEL 26105 RANGE SPECIFICATIONS

RANGE DIAGRAM WITH FULL SPAN OUTRIGGERS

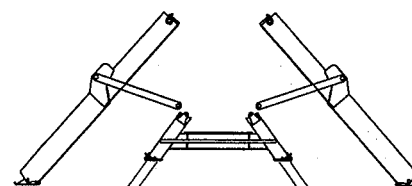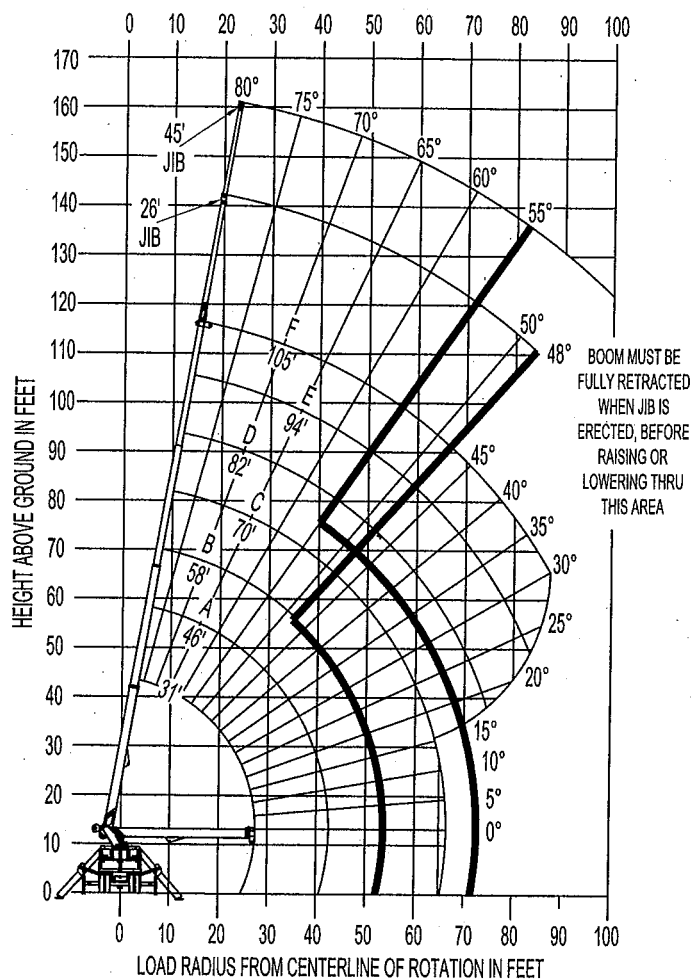


OUTRIGGERS AT FULL EXTENSION

NOTE:

1. OPERATE JIB BY RADIUS WHEN MAIN BOOM IS FULLY EXTENDED. INCREASE BOOM ANGLE IF NECESSARY TO MAINTAIN LOAD RADIUS.
2. WHEN BOOM IS RETRACTED, OPERATE JIB BY BOOM ANGLE. DO NOT EXCEED ANY RATED JIB CAPACITIES AT REDUCED BOOM LENGTHS.
3. CAPACITIES DO NOT EXCEED 85% STABILITY.
4. PERSONNEL HANDLING IS ALLOWED ONLY WITH FULL SPAN OUTRIGGERS.
5. LOAD RATINGS ABOVE BOLD LINE ARE STRUCTURALLY LIMITED.
6. BOOM LOAD RATINGS ARE BASED ON LOADED BOOM RADIUS.
7. LOADED BOOM ANGLES ARE GIVEN AS A REFERENCE ONLY.

AREA OF OPERATION

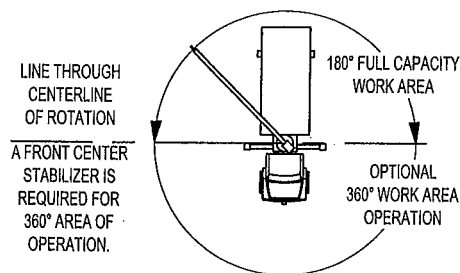

CRANE LISTS ASME B30.5 REQUIREMENTS AT TIME OF MANUFACTURE

DO NOT PAINT OVER ANY LABELS 1110578 01/06