


TECHNICAL SPECIFICATIONS **BOOMTRUCK****32105****BoomTruck™ 32105****GENERAL UNIT DESCRIPTION**

BoomTruck – When it comes to design and engineering, Elliott's BoomTruck is generations apart from the traditional crane—making it ideal for the exacting demands of today's job sites. With an industry-leading 18-ton capacity crane equipped with the 38' boom option, the BoomTruck delivers high performance with increased efficiency—from its high-speed outrigger set-up, boom extension and retraction to its high-pull winch. Plus our BoomTruck requires very little maintenance thanks to its layaway hoist, 10 percent fewer fittings than competitor models and the industry's best warranty. That gives you time to enjoy operator amenities like the built-in cup holders and 12-volt charger on the operator console.

Basic unit includes base assembly supporting front mounted rotating turret, hydraulically powered rotation mechanism, oil reservoir, oil, and dual operator console with levers linked to manual hydraulic control valve mounted to pedestal. Base mounted "A" frame link type outriggers hydraulically powered, individually controlled main outriggers. Under frame mounted outriggers for rear stabilization. High strength steel three section hydraulic and cable telescoping boom with one double acting 7" lift cylinder. Boom can be stowed over cab to increase payload & eliminate payload to boom interference on bed. Load Moment Indicator System with display and hydraulic function lockout for load capacities. Power take off and pump drive, pressure gauge, three-section gear pump and holding valves on all cylinders. Control console is equipped with Anti-2-Block system, engine start/stop, variable speed foot throttle, horn, winch burst of speed, and outrigger motion alarm. Additional equipment includes triangle reflector kit, backup alarm, and fire extinguisher. Paint BoomTruck white, outriggers red and bed and boxes black. Installed on chassis, tested and ready to operate. Unit certified to ANSI B30.5 for Mobile and Locomotive cranes.

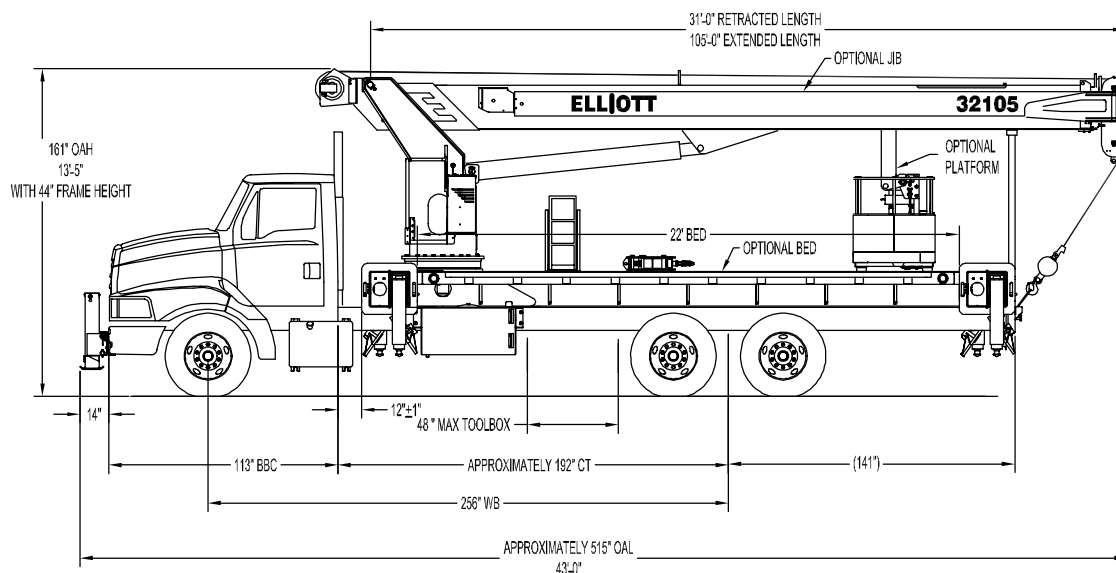

32105 TECHNICAL SPECIFICATIONS BOOMTRUCK



Technical Specifications

Crane Capacity: 64,000 pounds at five feet load radius.

Maximum Tip Height: 117' height (162' with optional 45' jib)

Control Console: Rotating turret single operator control station equipped with four single axis control levers for the main crane controls. Operator station includes LMI display, bubble level gauge, engine start/stop switch, signal horn button, variable speed throttle switch, lifting capacity chart, range diagram chart, boom angle indicator, system pressure gauge, 12V DC power source, and cup holder. Independent ground level electric operated outrigger controls.

Boom: Four-section fully proportional, high strength steel plated rectangular tube sections. A maximum boom tip height of 117 feet mounted on a truck. The boom nose contains one floating upper sheave and three lower sheaves. Assembly includes heavy-duty cylinder fittings, pivot pins, and replaceable wear pads.

Winch: Mounted at the base of the boom for a long fleet angle and flat level spooling of cable. Winch is driven by a planetary reducer and powered by a hydraulic motor. Burst-of-speed winch provides increased line speed. The winch brake is spring applied, pressure release design. Supplied with 425' of 9/16" diameter rotation resistant wire rope with a single line pull of 8,900 pounds, and a downhaul ball with swivel hook for single part line.

Load Moment Indicator System: LMI system senses hoist cylinder pressures, boom length and boom angle with hydraulic function lockout. The display console is equipped with an integrated bar graph showing crane utilization, boom angle or boom length, a mode select controls for main boom and jib operation, and an anti-two block with an audio/visual warning and shut-off functions to limit hook-boom point contact.

Outriggers: Two sets of out and down overframe outriggers with 20 foot span. Outriggers are configured for full span or mid span operation. Outriggers equipped with ball socket aluminum removable pads that stow on vertical outrigger legs.

Frame: Full length, all welded rigid 4-plate design sub-frame. Sub-frame allows for bolt-on addition 22' bed wings, with top plate of subbase serving as portion of the bed deck, to form a three-piece bed.

Turret: Turret is one-piece weldment. Turret rotated on large diameter ball bearing.

Rotation: Hydraulic motor drives turret through double reduction planetary swing drive for 372-degree non-continuous rotation. The swing drive system has a spring applied, pressure release brake.

Boom Extension: Incorporates a 2-stage hydraulic extension cylinder, attached to the largest boom section, with a proportional cable extension system driving the outermost sections.

Lift: One double acting full displacement, long stroke cylinder provides smooth and stable boom elevation. Holding valve prevents boom from lowering in event of hose failure.

Cylinders: All cylinders use microhoned cylinder tubing, chrome shafts, top grade packing and protective rod wipers. Cylinder-mounted holding valves provided on all load-holding cylinders.

Hoses: All high-pressure hose is wire braid reinforced with a minimum safety factor of 4 to 1.

Oil Tank Capacity: 120 gallon mounted to truck frame on roadside.

Hydraulic System: Equipped with cable-shift PTO, piston pump, SAE O-ring face seals on pressure lines, and a 10-micron return line filter. The control valve distributes all flow to hoist system, swing circuit, and other crane functions. System is closed center type.

Cab Equipment: PTO cable and switch with indicator light installed in truck cab. U/L approved 5:BC dry chemical fire extinguisher installed in truck cab.

Operator Manual: One copy of operation, maintenance, safety and parts manual provided with each unit.

Installation: Unit installed on customer's truck, painted, system and tank filled with oil, tested, inspected, certified and ready to operate.

Standard Paint: Paint BoomTruck white, outriggers red, and bed and boxes black.

Bumper: Bureau of Motor Carrier Safety rear bumper.

Weight: Approximately 27,000 lbs. with 22' steel floor bed, less truck.

Truck Chassis Requirements: Approximately 192" C.A., 18,000 lb. front axle, 34,000 lb. rear axle, and 54,000 lb. GVWR required. Trucks must have extended rear frame, increased cooling, heavy duty front and rear springs, 12V electrical system with high capacity alternator, cab clearance stop/tail/backup lights, and I.D. lamps. Additional equipment to consider: front tow hook, pintle hook, mud and snow tires for highway use. Recommended GVWR is minimum for BoomTruck with flatbed only. Contact factory when additional equipment is to be added.

Options

- 45' telescopic jib
- Radio remote control crane operation
- Radio operated remote for outrigger setup
- Open seated controls and cab (rear mount)
- Outrigger interlock system to allow working over one side of crane
- Hook block for 2/3-part line load
- Hook block for 4 part line load
- Rear mount
- Tool boxes
- Front jack for 360 degree crane operation
- Steel gravity level platform
- Continuous rotation
- Oil Cooler
- Miscellaneous Options: Contact factory for details



4427 South 76th Circle
 Omaha, NE 68127
 Phone: 402-592-4500
 Fax: 402-592-4553
 Email: info@elliottequip.com
www.elliottequip.com

TECHNICAL SPECIFICATIONS **BOOMTRUCK****32105**


Notes:

Notes:

PRELIMINARY MAIN BOOM LOAD RATINGS

LOAD RATINGS IN lb WITH OUTRIGGERS AND STABILIZERS EXTENDED											
LOAD RADIUS IN FEET	LOADED BOOM ANGLE 31-ft	LOADED BOOM ANGLE 46-ft	LOADED BOOM ANGLE 58-ft	LOADED BOOM ANGLE 70-ft	LOADED BOOM ANGLE 82-ft	LOADED BOOM ANGLE 94-ft	LOADED BOOM ANGLE 105-ft				
5	80	64,000									
6	78	48,000									
8	74.2	38,600	79.2	32,000							
10	70.3	32,000	76.6	28,000							
12	66.2	27,500	74	26,000	77.4	25,300					
14	62	24,000	71.3	24,000	75.4	23,700	78	21,700			
16	57.6	21,500	68.6	22,500	73.3	22,200	76.3	20,400	78.3	17,500	
18	52.9	19,000	65.8	21,000	71.1	20,600	74.5	19,000	76.9	18,600	78.6
20	47.8	17,000	62.9	19,000	68	19,100	72.8	17,800	75.4	15,500	77.3
22	42.3	15,000	60	17,000	66.8	17,600	71	16,500	74	14,500	76.1
25	32.2	12,300	55.3	14,000	63.5	15,300	68.4	14,800	71.7	13,000	74.2
30			46.9	11,000	58.1	12,300	64.2	12,800	68.3	11,800	71.2
35			37.8	9,000	51.8	9,900	59.4	10,500	64.4	10,000	67.9
40			24.3	6,300	44.9	8,700	54.4	8,700	60.3	8,200	64.5
45					36.9	7,500	49	7,300	56.1	7,200	61
50					26.7	6,000	43.1	6,200	51.7	6,100	57.4
55							36.3	5,100	46.9	5,200	53.6
60							28.1	4,100	41.7	4,450	49.6
65							18.1	3,600	36.9	3,800	45.4
70								30	3,000	40.7	2,800
75								18.9	2,300	35.6	2,000
80									29.7	1,000	39.2
85									22.3	600	34.5
90											29.1
95											22.4
0	10,000	0	6,200	0	4,100						
DEDUCTIONS FOR STOWED JIB (lb)	850	600	450	400	350	300	250				
	550	350	300	250	200	150	150				

PRELIMINARY RANGE DIAGRAM WITH FULL SPAN OUTRIGGERS

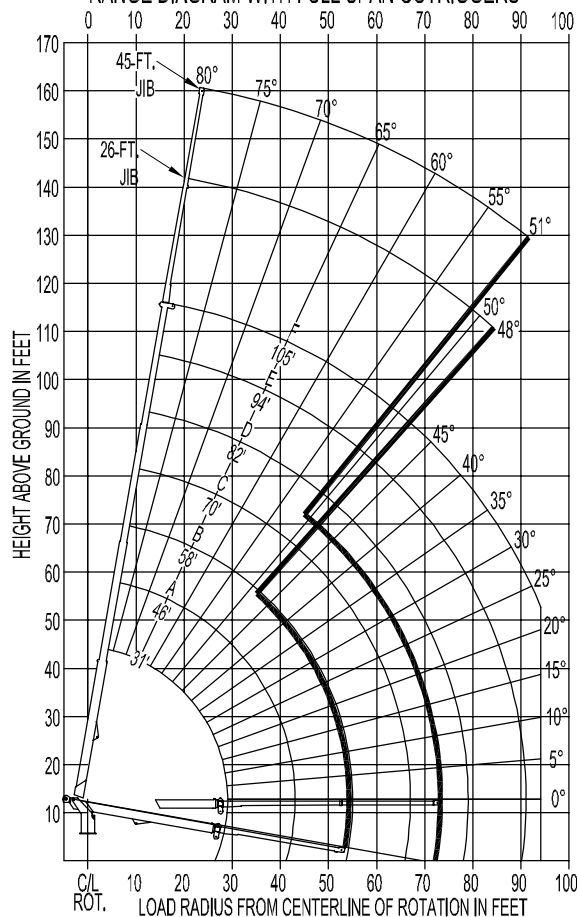

THIS AERIAL DEVICE IS NON-INSULATING. IT PROVIDES NO ELECTRICAL PROTECTION. CONTACT WITH OR INADEQUATE CLEARANCE TO AN ENERGIZED LINE OR APPARATUS IS AN ELECTROCUTION HAZARD.

Elliott Equipment Company reserves the right to change the specification of any unit at any time without prior notice. This brochure is only a statement of general specifications on the date of this publication. For more detailed info on specific HiReach trucks go to www.elliotequip.com