


622 RBI



○ MONOTRIPHASE ⚡ 230/400 V

GRU A MONTAGGIO RAPIDO
GRUE A MONTAGE RAPIDE
GRUA DE RAPIDO MONTAJE
GRUA DE MONTAGEM RAPIDA
QUICK SELFERECTING CRANE
HYDRAULISCHER SCHNELLMONTAGEKRAN

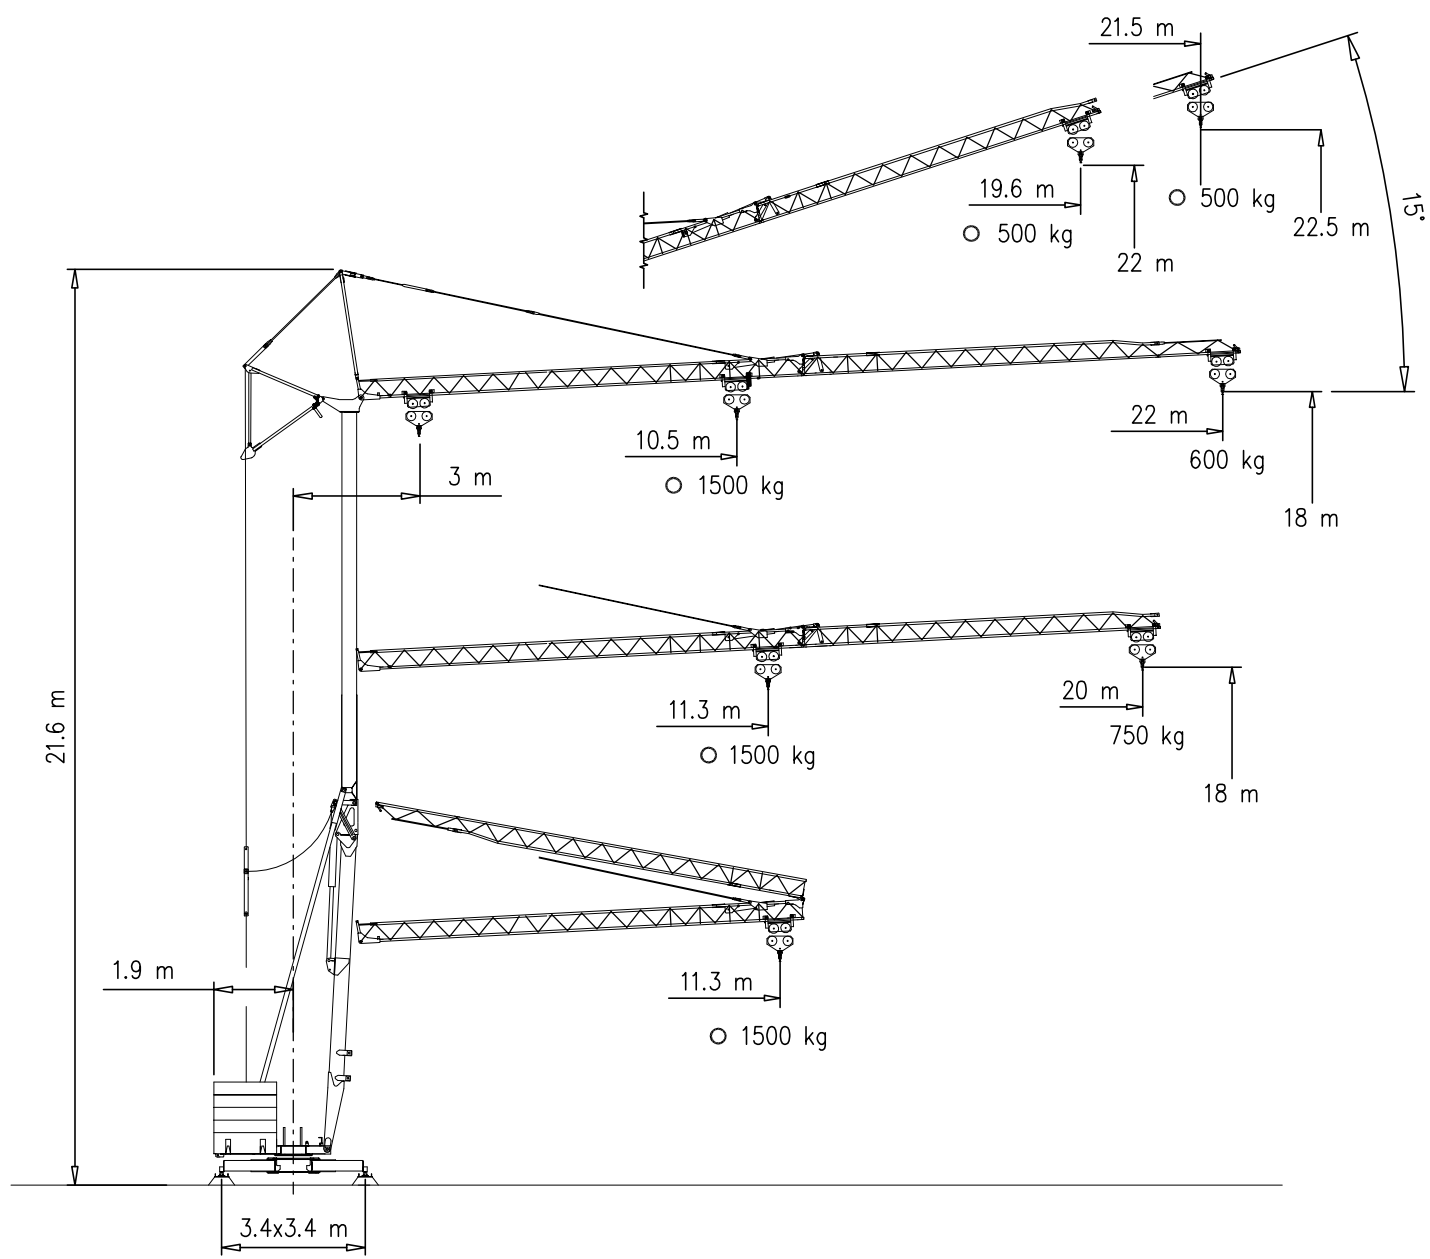






AFM Gru

622 RBI


Montaggio – Montage – Erection – Montage – Montaje – Montagem

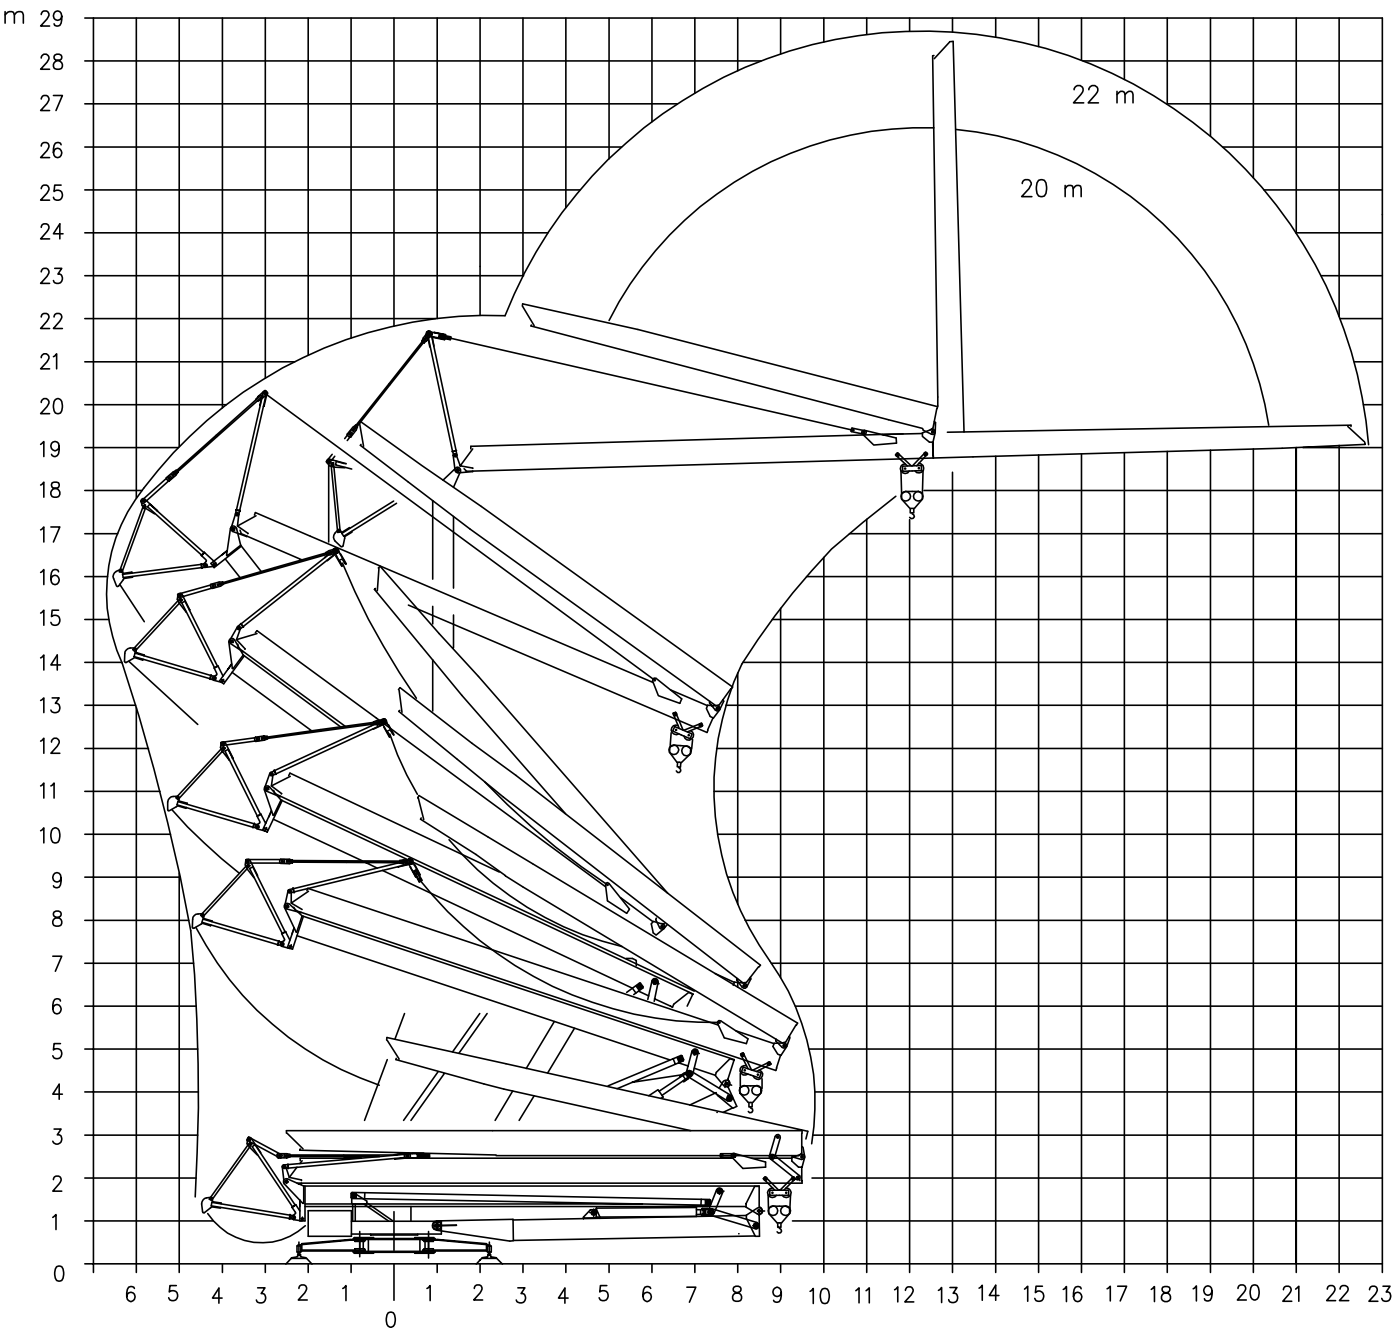

Trasporto – Transport – Transport – Transport – Transporte

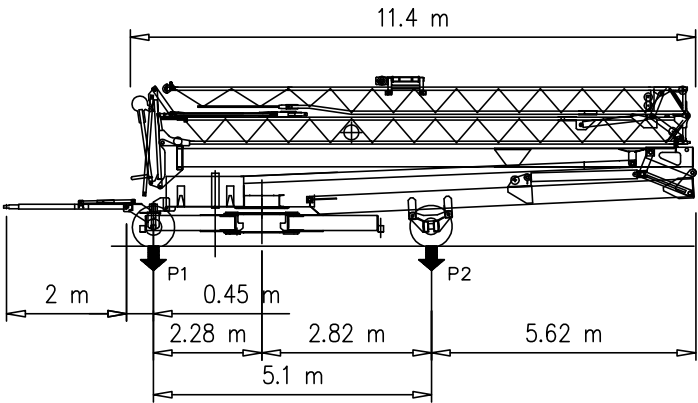

P1	kg	4100
P2	kg	7200
Ptot	kg	11300




622 RBI

Curve di carico – Courbes de charges – Load diagrams – LastKurven – Curvas de cargas


 Monotriphase	☒ 400 V	3	21.5	m kg						
	☒ 230/400V	500	500							
 Monotriphase	☒ 400 V	3	10.5	12	14	16	18	20	22	m kg
		1500	1500	1270	1050	890	770	670	600	
	☒ 230/400V	3	11.3	12	14	16	18	20	m kg	
		1500	1500	1400	1160	980	850	750		
 Monotriphase	☒ 400 V	3	11.3	m kg						
	☒ 230/400V	1500	1500							

Reazioni – Reactions – Réactions – Eckdrücke – Reacciones – Reações




R1 ● 10.5 t ■ 6.9 t
▲ 6.8 t ○ 10.6 t

● Reazioni in servizio	● Reactions in service	● Réactions en service
■ Reazioni fuori servizio	■ Reactions out of service	■ Réactions hors service
▲ Peso della gru senza assali	▲ Dead weight without transport axles	▲ Poids de construction sans essieux
○ Peso zavorra rotante	○ Ballast weight	○ Poids du lest
● Reaktionskräfte in betrieb	● Reacciones en servicio	● Em serviço
■ Reaktionskräfte außer betrieb	■ Reacciones fuera de servicio	■ Fora de serviço
▲ Konstruktionsgewicht ohne transportachse	▲ Peso de la grua sin tren de transporte	▲ Peso de grua sem carro de trasporte
○ Ballastgewicht	○ Peso de lastre	○ Peso de lastre rotativo



622 RBI

Meccanismi – Mechanisms – Mécanismes – Antriebe – Mecanismos – Montagem

V5,5.32 230 Volt Sollevamento Hoisting Levage Heben Elevaciòn Elevação							V5,5.32 4 kW (5.5 kW) 2–8 kVA 
	m/min	4	11	25			
	t	1.5	1.5	0.75			
							
		4	16	30			
			1.5	1.5			

V5,5.32 400 Volt Sollevamento Hoisting Levage Heben Elevaciòn Elevação		 					V5,5.32 4 kW (5.5 kW) 8 kVA 
	m/min	4	11	30			
	t	1.5	1.5	0.75			
		 					
		4	16	30			
		1.5	1.5	0.75			

Carrello Trolleying Distribution Katzfahren Distribuciòn Distribuição			1a	0 → 30	m/min	1.85 kW (2.5 Hp)
			1a			
			2a			
Rotazione Slewing Orientation Schwenken Orientaciòn Rotação			1a	0 → 0.8	giri/min tr/min rp/min	1.1 kW (1.5 Hp)
			2a			
			3a			

Rete elettrica – Réseau – Mains supply – Netzstrom – Red – Rede electrica	230/400V – 50 Hz
---	------------------

Potenza elettrica necessaria – Puissance électrique nécessaire Necessary electric power – Anschlusswert – Potencia electrica necesaria	1/3PH 2–8 kVA
---	---------------

 FMgru s.r.l. via Emilia 11–29010 Pontenure PC ITALY tel. 0523/510446 ric.aut. fax 0523/510365 www.fmgru.it e-mail: info@fmgru.com	DIN 15018 2000/14/CE	
--	-------------------------	--



Documento commerciale non contrattuale
Per tutte le informazioni tecniche riferirsi
alle corrispondenti istruzioni

Unverbindliches Vertriebsdokument.
Für technische Informationen, siehe die
entsprechenden Anweisungen.

This commercial document is not legally
binding. For any technical information, please
refer to the corresponding instructions.

Documento comercial no contractual
Para cualquier información técnica,
ver la noticia correspondiente.

Code: 15ICA37B20A0			
Ed.	Data	Rev	Data
1	05.06.03	1	17.03.10