



F660AXP



evolution
CONCEPT

english

italiano

français

deutsch

español

nederlands



c r a n e s w i t h o u t c o m p r o m i s e



CRANES WITHOUT COMPROMISE




FASSI


evolution
CONCEPT




F660AXP.22

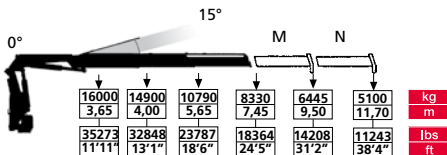


F660AXP.23

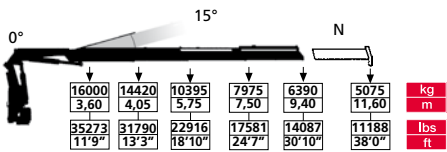


F660AXP.24

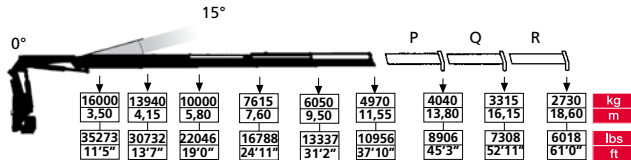


F660AXP.25

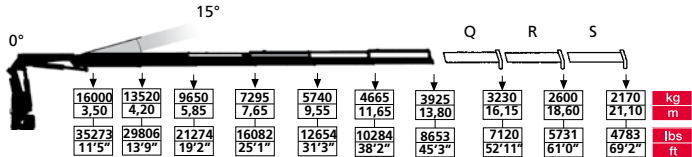


F660AXP.26

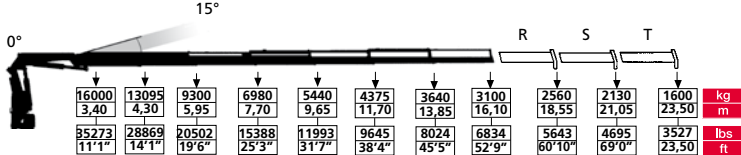

F660AXP.27

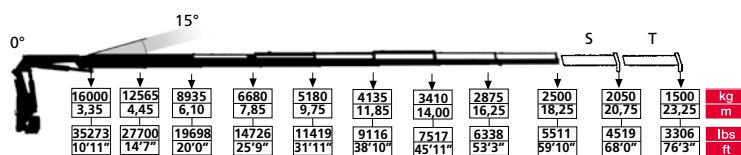

F660AXP.28

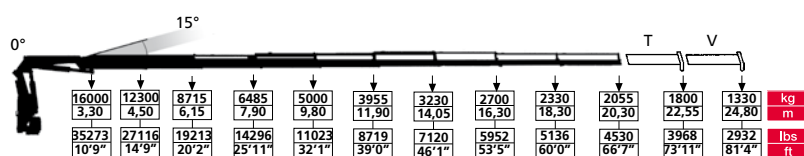


															
	tm	lbs.ft	m	ft	°	kNm	lbs.ft	Mpa	psi	l/min	gal/min	l	gal	kg	lbs
F660AXP.22	62,5	452062	7,45	24'5"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	5100	11243
F660AXP.23	60,5	437596	9,40	30'10"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	5435	11982
F660AXP.24	58,0	419514	11,55	7'10"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	5765	12709
F660AXP.25	56,8	410834	13,80	45'3"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	6075	13392
F660AXP.26	56,3	407218	16,10	52'9"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	6365	14032
F660AXP.27	57,0	412281	18,25	59'10"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	6575	14495
F660AXP.28	55,3	399985	20,30	66'7"	360 CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	6755	14892


FASSI




F660AXP.25 L516

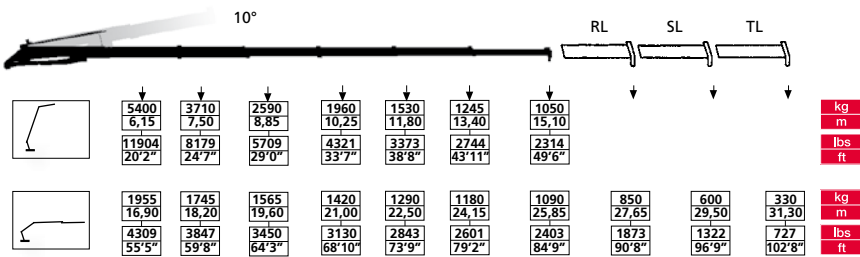


F660AXP.26 L426

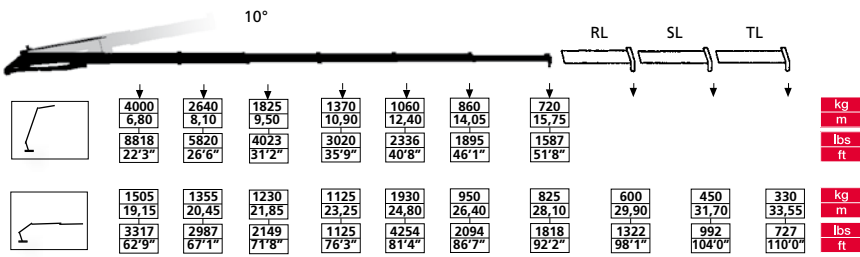


F660AXP.27 L426

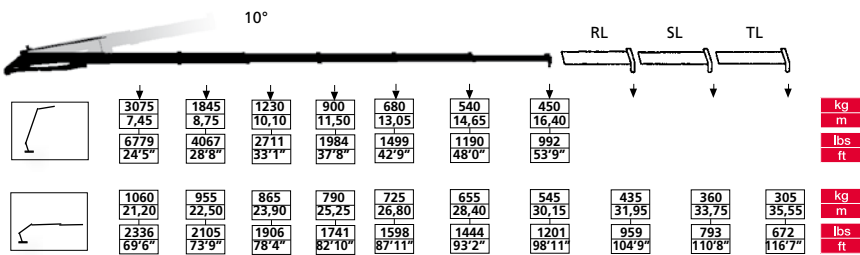

F660AXP.27 L214

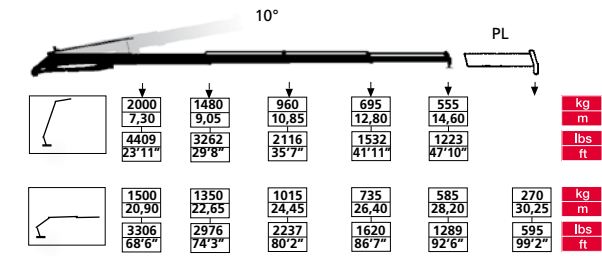



F660AXP.28 L214

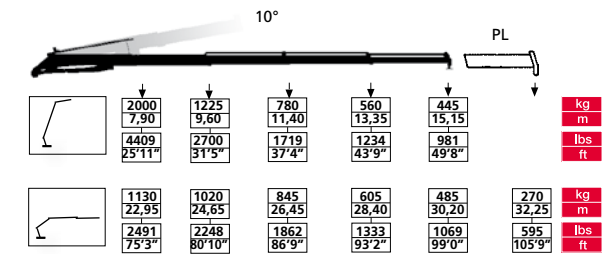



	tm	lbs.ft	m	ft	°	kNm	lbs.ft	Mpa	psi	l/min	gal/min	l	gal	kg	lbs
F660AXP.25 L516	56,8	410834	25,85	84'9"	360	CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	7580 16710
F660AXP.26 L426	56,3	407218	28,10	92'2"	360	CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	7685 16942
F660AXP.27 L426	57,0	412281	30,15	98'11"	360	CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	7910 17438
F660AXP.27 L214	57,0	412281	28,20	92'6"	360	CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	7360 16225
F660AXP.28 L214	55,3	399985	30,20	99'0"	360	CONTINUOS	45,0	33199	34,0	4930	70-80	18-21	250	66	7555 16655



F660AXP

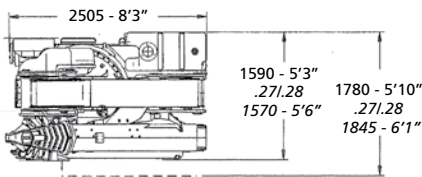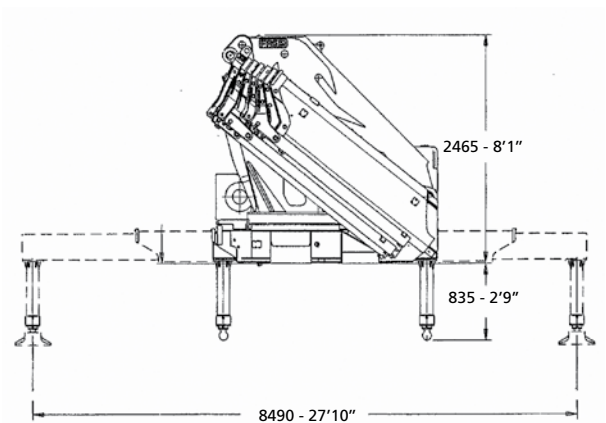

L SERIE

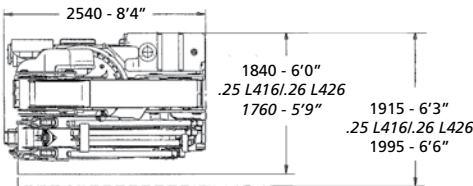

L214	650 kg /1432 lbs	L426	1200 kg /2645 lbs	L516	1400 kg /3086 lbs
PL	21 kg / 46 lbs	RL	36 kg / 79 lbs	RL	36 kg / 79 lbs
		SL	25 kg / 55 lbs	SL	25 kg / 55 lbs
		TL	15 kg / 33 lbs	TL	15 kg / 33 lbs

Dati e dimensioni sono forniti a titolo indicativo e non impegnativo - Toutes les données et descriptions sont fournies à titre indicatif, sans engagement - Unverbindliche Angaben, Konstruktionsänderungen vorbehalten
Data and descriptions are approximate and not binding - Datos y descripciones todos a título indicativo y no imperativo - Specificaties zijn niet bindend, wijzigingen derhalve voorbehouden



FASSI GRU S.p.A. - Via Roma, 110 - 24021 Albino (Bergamo) ITALY
Tel- +39 035 776400 - Fax +39 035 755020
<http://www.fassigroup.com> E-mail: fassigroup.com

