

Grove Manitowoc National Crane Potain



Grove GMK6350L

Preliminary Product Sales Guide





Grove Manitowoc National Crane Potain



Grove GMK6350L

Preliminary Quick Reference

Capacity: 300 t (350 USt)

Boom: 15,6 m - 80 m (51 ft - 263 ft) main boom

Max jib: 37 m (121 ft)


Max tip height: 120 m (393 ft)

FEATURES


- MEGAFORM™ boom with TWINLOCK™ pinning
- 12 m 21 m (39 ft 69 ft) hydraulic offset bi-fold swingaway and 2 x 8 m (26 ft) intermediate lattice insert
- 92,5 t (203,900 lb) counterweight with hydraulic removal
- MEGATRAK™ independent hydro-pneumatic suspension

Load chart



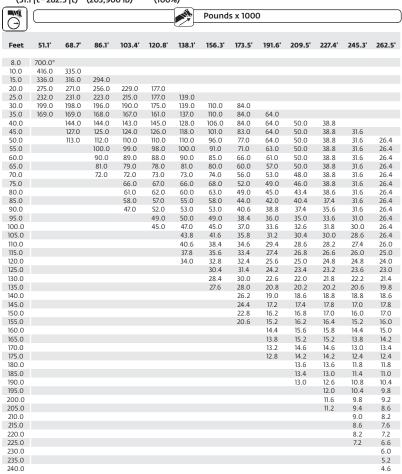


Main boom 15,6 m - 80 m (51 ft - 263 ft)

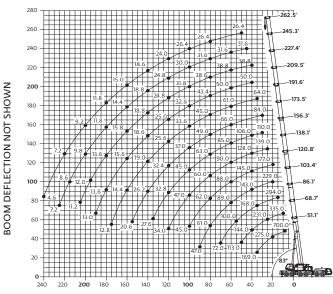

OPERATING RADIUS IN FEET FROM AXIS OF ROTATION

Dimensions

BOOM AND EXTENSION LENGTH IN FEET

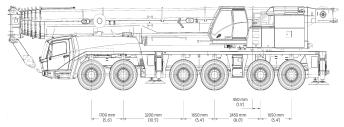

Basic Weights - kg (lb)	Axles 1 and 2		Axles 3 - 6		Total	
Mercedes power, 16.00R25 tires, 12x6x12 drive/steer, 2nd oil cooler, outrigger pads, driver and tanks filled	22 927	(50,545)	48 993	(108,011)	71 920	(158,556)
Additions:						
12x8x12 drive/steer	- 222	(-489)	612	(1349)	390	(860)
Spare wheel 14.00 R25 XGC steel rim with stowage	- 199	(-439)	464	(1023)	265	(584)
Spare wheel 16.00 R25 XGC steel rim with stowage		(-538)	569	(1254)	325	(717)
Spare wheel 20.5 R25 XGC steel rim with stowage	- 278	(-613)	645	(1422)	367	(809)
Brackets for hydraulic swingaway	100	(220)	0	(0)	100	(220)
Hose reel + parts for hydraulic swingaway	110	(243)	120	(265)	230	(507)
11 m - 18 m (36 ft - 59 ft) hydraulic swingaway	2525	(5567)	- 515	(-1135)	2010	(4431)
Auxiliary hoist	-2509	(-5,531)	5269	(11,616)	2760	(6085)
7000 kg (15,400 lb) base plate stowed on carrier	3662	(8073)	3338	(7359)	7000	(15,432)
9500 kg (20,900 lb) slab on top of base plate stowed on carrier	4970	(10,957)	4530	(9987)	9500	(20,944)
Substitutions:						
14.00R25 tires	- 240	(-529)	- 480	(-1058)	- 720	(-1587)
20.5R25 tires	168	(370)	336	(741)	504	(1111)
Removals:						
Boom assembly without lift cylinder	-17 034	(-37,554)	-10 499	(-23,146)	-27 533	(-60,700)
Front outriggers	-1655	(-3649)	- 890	(-1962)	-2545	(-5611)
Rear outriggers	1842	(4061)	-4675	(-10,307)	-2833	(-6246)
Front and rear outrigger floats	0	(0)	- 350	(-772)	- 350	(-772)



SUPERSTRUCTURE

Boom

15,6 m - 80 m (51 ft - 263 ft) 7-section, full power MEGAFORM[™] boom with TWIN-LOCK[™] Pinning.

Maximum tip height: 83 m (272 ft).

Boom nose

Nine nylatron sheaves, mounted on heavy duty tapered roller bearings with removable pin-type rope guards. Quick reeve boom nose. Removable auxiliary boom nose with removable pin type rope guard.

Boom elevation

Single lift cylinder with safety valve provides boom angle from -1.5° to +83°.

*Optional offsettable swingaway extension

12 m - 21 m (39 ft – 69 ft) bi-fold lattice swingaway extension, hydraulically offsettable and luffing under load, 5°-40°.

Maximum tip height: 104 m (341 ft)

*Lattice inserts

2 x 8 m (26 ft) insert for use with lattice swingaway extension to increase length to 37 m (121 ft). Maximum tip height: 120 m (393 ft)

Load moment and anti-two block system

Load moment and anti-two block system with audio/visual warning and control lever lockout provides electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block condition.

Cab

All aluminum constructed cab with acoustical lining, hydraulic tilted to 20°. Includes tinted safety glass, adjustable operator's seat, opening windows at side and rear, hinged windshield with wiper, sun visor and window shade. Other features include hot water heater/defroster, armrest integrated crane controls, ergonomically arranged instrumentation and radio/cd player.

Swing

3 planetary gear boxes with fixed displacement axial piston motors. Infinitely variable to 1.3 rpm. Free swing or hydrostatically engaged brake controlled by swing lever. Swing brake selected by foot operated switch.

Counterweight

92,5 t (203,900 lb) consisting of various sections with hydraulic installation/ removal system controlled from the superstructure cab.

Engine

Mercedes OM 926 LA six-cylinder Horsepower: 210 kW (286 bhp) at 2200 rpm

Torque: 1120 Nm (826 ft/lb) at 1400 rpm

Engine emissions: EPA/CARB/ EUROMOT (off road)

Fuel tank capacity

300 L (79 gal)

Electrical system

3 phase alternator: 28V/80A 2 batteries: 12V/170Ah

Hydraulic system

2 (two) separate circuits, 1 (one) axial piston variable displacement pump (load sensing) with electronic power limiting control for crane functions and 1 (one) double gear pump for slewing. Thermostatically controlled oil coolers keep oil at optimum operating temperature.

Hydraulic tank capacity: 1200 L (317 gal)

Hoist

Main and auxiliary hoist are powered by axial piston motor with planetary gear and brake. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

	Main	Auxiliary			
Rope length	350 m (1148 ft)	350 m (1148 ft)			
Rope diameter	22 mm	22 mm			
Line speed	127 m/min (417 fpm)	127 m/min (417 fpm)			
Line pull	93.5 kN (21,020 lb)	93.5 kN (21,020 lb)			

Hoist camera and light included.

CARRIER

Chassis

Box type, torsion resistant frame is fabricated from high strength steel.

Outrigger system

Four hydraulic two stage outrigger beams with vertical cylinders and outrigger pads, 700 mm (27.6 in) round. Outrigger can be set in 5 positions:

Full: 8,5 m (27.9 ft)
Partial: 7,4 m (24.3 ft)
Partial: 6,3 m (20.7 ft)
Partial: 5,0 m (16.4 ft)
Retracted: 2,7 m (9.0 ft)

Independent horizontal and vertical movement controlled from each side of carrier and the superstructure cab. Electronic crane level indicators. Hydraulic disconnect for all outrigger beams. Work light for each outrigger beam and outrigger pad load indicator with read out on both sides of carrier and in superstructure cabin.

Transmission

Allison automatic 4500 SP, 6 speeds forward, 1 reverse

2 speed transfer case

Drive/steer

12x6x12

Axles

1st axle line - drive/steer

2nd axle line - steer

3rd axle line – steer (connects for all wheel steer)

4th axle line – drive/steer (connects for all wheel steer)

5th axle line – drive/steer (permanent drive with 12x6, disconnects for highway with 12x8)

6th axle line – steer (optional drive)

Drive axles with planetary hub reduction and center mounted gearing. Standard inter-axle and cross axle differential locks.

Suspension

Grove exclusive MEGATRAK™ suspension. Independent hydropneumatic system acting on all wheels with hydraulic lockout. Suspension can be raised 170 mm (6.7 in) or lowered 126 mm (5.0 in), both longitudinally and transversely. Features an automatic leveling system for highway travel.

Tires

12 tires, 16.00R25 (Vehicle width – 3,0 m [9.8 ft])

Steering

Dual circuit, hydraulic power assisted steering system. Transfer case mounted, ground driven emergency steering pump. Axles 1, 2, 5 and 6 steer on highway. Separate steering (steer by wire) of the 3rd to 6th axles for all wheel and crab steering, controlled by an electronic rocker switch.

Engine

Mercedes OM 502 LA, eight-cylinder Horsepower: 405 kW (551 bhp) at 2100 rpm

Torque: 2600 Nm (1918 ft/lb) at 1300 rpm

Engine emissions: EPA /CARB/ EUROMOT (off road)

Fuel tank capacity

500 L (132 gal). Installed on superstructure.

Brakes

Service brakes: pneumatic dual circuit acting on all wheels.

Parking brake: pneumatically operated spring loaded brake acting on axle lines 2, 4, 5 and 6.

Air dryer.

Cab

Two-man, composite designed aluminum and fiber reinforced plastic construction with the following features: safety glass, driver seat with pneumatic suspension, engine-dependent hot water heater, power windows, heated rear view mirrors, complete instrumentation, driving controls, reversing camera system, air conditioning, radio/cd player, 12V plug and fire extinguisher.

Electrical system

24V system with three phase alternator, 28V/100A

2 batteries, 12V/170 Ah

Maximum speed

85 km/h (53 mph)

Gradeability (theoretical)

49% - 14.00 tires 43% - 16.00/20.5 tires

Miscellaneous standard equipment

Work lights; tool kit, fire extinguishers; auxiliary boom nose and wind speed indicator.



Grove Manitowoc National Crane Potain



GMK6350L

Grove Mobile Crane Product Line




GMK6350L: THE strongest 6 axle with 263 ft [80m] boom







Carrier specification overview

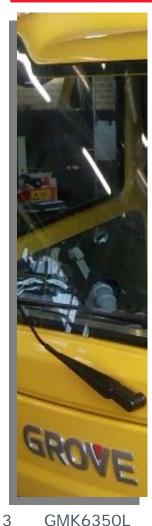

• Engine: Mercedes OM 502 LA, 8 cylinder

Tier 4i: 543 HP [405 kW] at 1.800 rpm

• Fuel capacity: 132 gal [500 l] (build in superstructure)

• Transmission: Allison 6-speed automatic transmission (4500SP)

Kessler 2speed transfer case (VG2600)

MEGATRAKTM +6.3''/-4.7'' [+160/-120 mm] • Suspension:

Outriggers: 27.9 ft [8.5 m], stroke 1.8 ft [0.55m], 5 positions

• Driver Cab: new designed two (three) man glass fiber -

aluminum cabin

• Steering: latest "Steer by wire" – technology on 5th and

6th axle

anıtowoc



Superstructure specification overview

262 ft [80 m] 7-section with Grove MEGAFORMTM boom • Boom:

• Engine: Mercedes OM 926 LA, 6 cylinder

282 HP [210 kW] at 1.200 – 1.600 rpm

Fuel capacity: 79 gal [300 I]

• Control: ECOS, EKS 5 full graphic display

• Cabin: New style full vision 20° tilt aluminum cab

Hoists: Drum style 22mm, line pull 23,380 lb [104 kN]

1083 ft [330 m] rope length (3 lines to ground on long boom)







Engine: Mercedes-Benz in carrier (OM502LA) and superstructure (OM926LA)

Latest engine technology including Tier 4i [stage Euromot IIIb]



Water-cooled diesel engine:

- > Turbocharged with intercooler
- ➤ High pressure fuel-injection system with unit injection pumps controlled by solenoid valves
 - Electronic engine management
- > OM 502 LA with 8 cylinder and 543 HP [405 kW]
- OM 926 LA with 6 cylinder and 282 HP [210 kW]
- ➤ Selective Catalytic Reduction reduces the NO_x by 80%






Transmission: Full automatic Allison 4500 SP with retarder*

"strong, reliable and

cost effective solution"

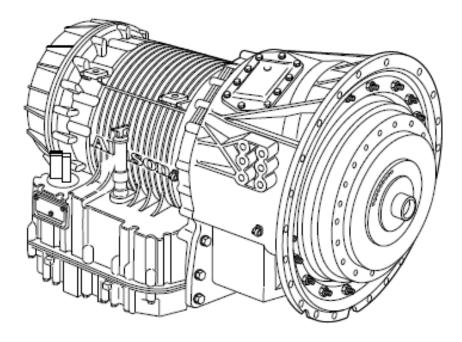

Allison automatics have been moving earth, in mines, construction sites, quarries, gravel pits for more than fifty years. They've proven to be durable and reliable in the most arduous duty cycles.

The technologically advanced electronic controls are programmed for the specific mobile crane situations and offer self diagnostic ability for easier maintenance.

Allison's integral retarder* is part of the transmission and provides enhanced vehicle braking on hills, and while slowing a vehicle with a heavy load.


6 GMK6350L

Grove Manitowoc National Crane Potain







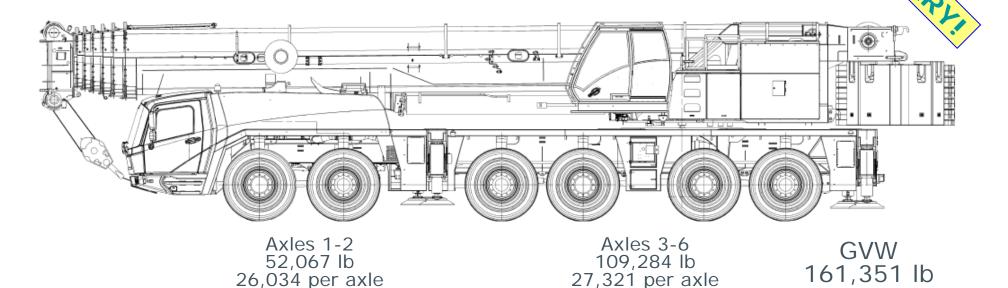

Unit configuration

51-262 ft boom / 12 X 8 X 12 (drive/steer) / retarder / main hoist with cable / 20.5" tires / additional oil cooler / outrigger pads stowed on unit / no counterweight / all outriggers / no ROB

→ Very similar GVW and weight distribution as GMK6350!


GMK 6350 in same configuration: GVW 160,988 lb (Front 51,673 lb / Rear 3-6 109,314 lb)





Product dimensions of carrier

Height: 13.1 ft [4 m] (16", 20.5" tires)

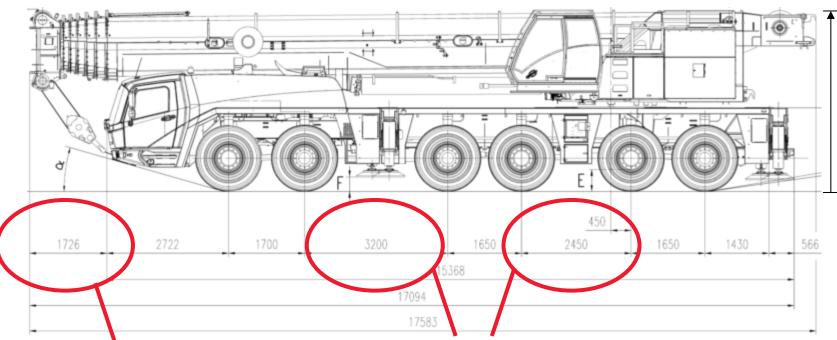


Very good overhang - under 6 ft [2 m].

The competition has bigger overhang: LTM1250-6.1 (> 6 ft [2 m]) LTM1350-6.1 (> 6 ft [2 m]) Ideal axle spread – more than 8 ft [2,45 m].






Product dimensions: Turning radius preliminary

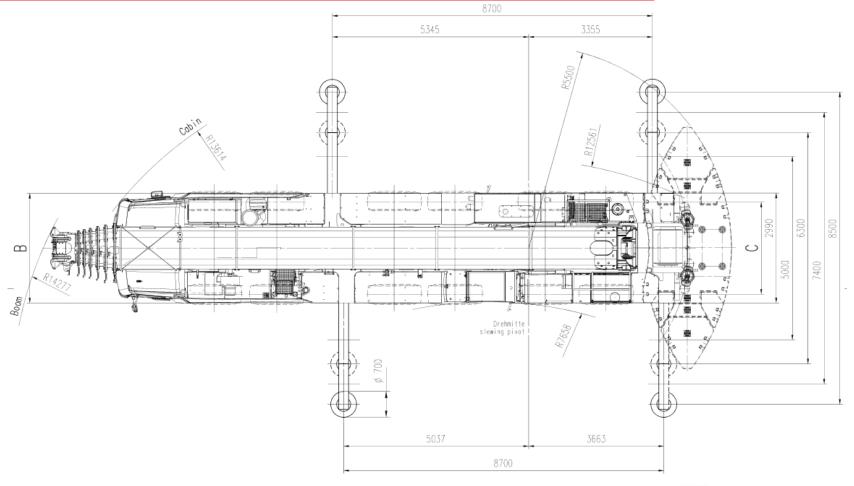



Product dimensions: Outrigger spread

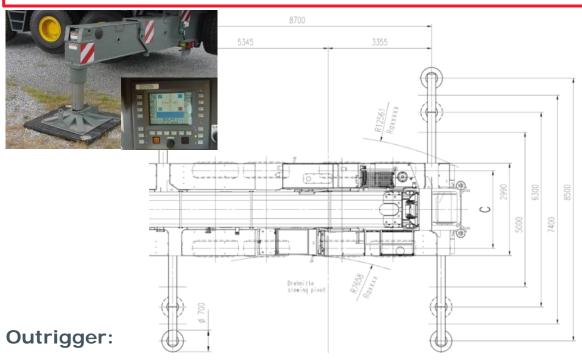

- Double box, 2 stage
- Electronic level indicators with automatic leveling system
- Carrier mounted controls and ECOS controlled from the superstructure
- Conveniently stowed outrigger floats

→ Standard outrigger pad load indicator

5 position outrigger span:

- Full 100% 27.9 ft [8.5 m]
- Partial 83% 24.3 ft [7.4 m]
- Partial 66% 20.7 ft [6.3 m]
- Partial 50% 16.4 ft [5.0 m]
- Retracted 0% 8.9 ft [2.7 m]

→ Ultimate flexibility:

Easy adaptation of the width to the required working area to maximize efficiency.

The competition has less flexibility: LTM1250-6.1 (3 outrigger positions) LTM1350-6.1 (4 outrigger positions) AC250-1 (4 outrigger positions) AC300/6 (4 outrigger positions)





Outrigger Controls / Handset

Emergency Stop

Emergency Crane Control (By-pass Cab)

Swingaway Rigging



Plugs in Both Sides of Carrier, Super Cab & Boom

NEW Chassis outrigger control boxes

Outrigger Controls



Standard Pressure Read-out

Suspension controls for improved rigging!


<u>Vanıtowoc</u>

Multi-Function Remote Control

Grove Manitowoc National Crane




Superstructure and counterweight

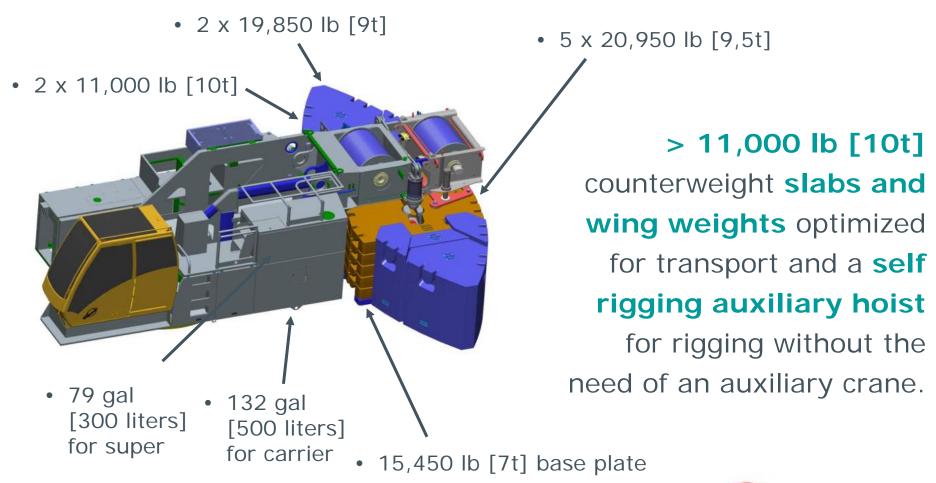





Boom technology: Grove patended MEGAFORM™

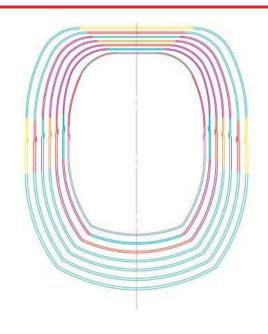



No Stiffeners on Base Section


→ Saves Weight without loss
of capacity
160KSI [1100 n/mm²] Steel

7 Section 51 ft – 262 ft [15,6 - 80 m] Boom (with MEGAFORMTM Shape Base Section)





Boom extensions

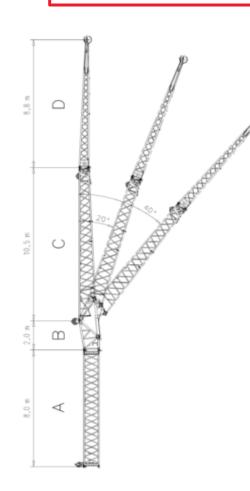

Optional Equipment


- Bi-fold swingaway, 39-69 ft [12-21 m] with hydraulic offset and luffing under load (5-40°), controlled from the crane cab.
- Lattice extensions, 2 x26 ft [8 m] for 95 ft [29 m] total boom extension in combination with 39-69 ft [12-21 m] swingaway. Maximum tip height 354 ft [107.7m].
- 7.5 ft [2.3 m] side stowed heavy duty jib [83,800 lb (38t) max capacity]. Offset 8 and 30°

Total length	Intermediate section boom extension make-up					
ft [m]	26.2 [8,0]	6.6 [2,0]	34.4 [10,5]	28.9 [8,8]		
39.4 [12,0]	-	1x	1x	-		
68.9 [21,0]	-	1x	1x	1x		
95.1 [29,0]	1x	1x	1x	1x		






Heavy Duty Jib



- Offsettable jib to 8° and 30°
- 2 sheaves
- max. capacity 83,700 lb [38 t]
- Stub jib can be stowed on side of main boom (left hand side); swingaway right hand side

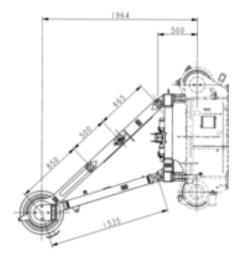

Strong loadcharts and high flexibility due to offset angle – this gives strength on short and long radius.







New carrier cabin for wide carrier frames

- Adaption of new look of drivers cabin from big AT cranes
- More driving comfort and better ergonomic instrumentation for driver
- Improving heating- and cooling system with air-condition as standard
- · Better visibility thru cabin width
- Better aerodynamic
- Noise reduction
- Increased quality
- Rust resistant glass-fibre and aluminum composite







New serial specification

Carrier

- Air condition in carrier cabin
- Outrigger pad load indicator with read out on superstructure and carrier
- CraneStar fleet management
- One additional strobe light
- Reversing camera system
- LMI status display (EN13000)
- Stereo radio/ CD Player
- Work lights for outrigger beams
- Suspension control in outrigger control boxes

Superstructure

- Hoist camera incl. light
- Second spotlight on superstructure cab
- Stereo radio/ CD player
- One additional strobe light







Crane Star

Cranes A fleet management tool with several customer benefits!



helps to **monitor cranes**, working sites, warehouses, or fleet productivity (% use, misuse,...)

gives knowledge to help making factbased decisions regarding on productivity; be more proactive in scheduling preventive maintenance, and make better decisions about equipments

increases security, which may lead to reduced insurance costs

allows to use data to prove the proper use of cranes to create an **higher resale value**





Lifting specification for various applications with long reach

Full counterweight 92.5t, max. outrigger base 8,70x8,50m

F	F4.4	00.4	400.0	450.0	404.0	007.4	0.45.0	000.5
Feet	51.1	86.1	120.8	156.3	191.6	227.4	245.3	262.5
0.0	700.0*							
8.0	700.0*							
10.0	416.0							
15.0	336.0	294.0						
20.0	275.0	256.0	177.0					
25.0	232.0	223.0	177.0					
30.0	199.0	196.0	175.0	110.0			/	
35.0	169.0	168.0	161.0	110.0	64.0			
40.0		144.0	145.0	106.0	64.0	38.8		
45.0		125.0	126.0	101.0	64.0	38.8	31.6	
50.0		112.0	110.0	96.0	64.0	38.8	31.0	26.4
55.0		100.0	98.0	91.0	63.0	38.8	31.6	26.4
60.0		90.0	88.0	85.0	61.0	38.8	31.6	26.4
65.0		81.0	78.0	80.0	57.0	38.8	31.6	26.4
70.0		72.0	73.0	74.0	53.0	38.8	31.6	26.4
75.0			67.0	68.0	49.0	38.8	31.6	26.4
80.0			62.0	63.0	45.0	38.6	31.6	26.4
85.0			57.0	58.0	42.0	37.4	31.6	26.4
90.0			52.0	53.0	38.8	35.6	31.6	26.4
95.0			49.0	49.0	36.0	33.6	31.0	26.4
100.0			45.0	45.0	33.6	31.8	30.0	26.4
105.0				41.6	31.2	30.0	28.6	26.4
110.0				38.4	29.4	28.2	27.4	26.0
115.0				35.6	27.4	26.6	26.0	25.0
120.0				32.8	25.6	24.8	24.8	24.0

Tower crane rigging.





Lifting of aircon or elevator equipment





Loadcharts: Tower crane rigging as the focus

MDT308

230 ft Jib = 31,500 lb; Slewing ring (pivot) = 21,800lb Max Height Under Hook = 213 ft

Competitors cranes:

• Liebherr: 250 EC-B 12 LITRONIC

• Wolffkran: 6531.12 • Terex: CTT231 12

MD265C

213 ft jib = **28,200 lb**; Slewing ring (pivot) = 11,700 lb Max Height Under Hook = **213 ft** Competitors cranes:

• Liebherr: 245 EC-H 12 LITRONIC

• Wolffkran: 6531.12 • Terex: CTT231 12

MR415

197 ft jib = 26,250 lb; Slewing ring (pivot) = **26,500 lb** Max Height Under Hook = **197 ft** Competitors cranes:

• Liebherr: 355 HC-L 12/24 LITRONIC

Wolffkran: 355BTerex: CTL400











GMK 5275 - Features

All-Wheel Steer

Steer By Wire

■ MEGATRAKTM Top Steered



■ MEGATRAKTM Independent Suspension









■ TWIN-LOCKTM



Hydraulic Luffing Jib



Tilting Superstructure Cab



New Carrier Cabin (wide)





EKS 5 / EKS 5 Light





Suspension technology: Grove patended MEGATRAK™

MEGATRAKTM is Grove's patented independent suspension and all- wheel steer System. Each wheel is able to remain on the ground at all times, so that stresses and weight are not continually transferred between axles.


RIGID AXLE




Traditional suspension systems may raise the body of the crane, but do not increase ground clearance.

MEGATRAK™ does, as the differential is attached to the base of the carrier, offering a ground clearance up to 600 mm.

MEGATRAKTM





Suspension can be raised or lowered (both front/back and side to side by +6.3"/-4.7" [+160/-120 mm]) directly from the carrier cab and automatically leveled for road travel.

MEGATRAK™ also allows the use of a deeper carrier cross section, which improves the overall torsion strength of the crane.





Suspension technology: Grove patended MEGATRAK™

However, **MEGATRAK**TM is not just about a comfortable and confident ride. The use of independent struts reduces the weight of the suspension system. These features make Grove all-terrains the strongest cranes available, with optimum lift characteristics.



- Reliable suspension system.
- Same suspension on almost all models.
- Driveline remains aligned all the time.
- Steering linkage is protected (positioned directly under the chassis).








GMK Features - MEGATRAKTM Top Steered


The latest design of MEGATRAKTM steering technology with top steered MEGATRAKTM cylinders allows a deeper cross-section of the frame for greater strength. This technology is used on GMK 5225, GMK 5275 and GMK 7550.

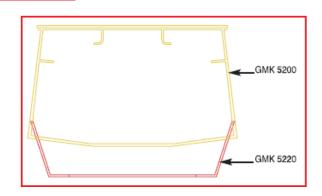


Megastruts with top steering


Megastruts with wishbones

steering rod





top steered

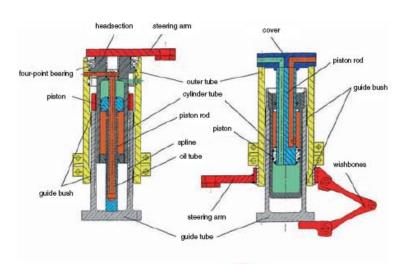







GMK Features - All-Wheel Steer General

An easy to use all-wheel system gives the best steering on or off highway, eliminating tire scrub and stressed on non steering axles.

Exceptional manoeuvrability allows even the largest fully rigged GMK to get as close to the lift as possible.






Other systems, where one or more "dead weight" hanging axles remain fixed – lead to higher axle loads, driveline maintenance problems, increased ground pressure and tire wall stress. All-wheel steer enables a fully laden crane to distribute weight evenly across all axles.





GMK Features - All-Wheel Steer Steer By Wire

The rear 2 axles are steered by wire. Up to 12.5 mph [20 km/h] the 2 rear axles are steering depending on the driving mode (crab steer and minimum turning radius) and the speed in optimised angle. For highway travelling the 4th axle is fixed straight and up to 37 mph [60 km/h] axle 5 is steering in an optimised angle depending on the front axles and the speed. The conventional mechanical steering is replaced by a hydraulic-electronic steering system.

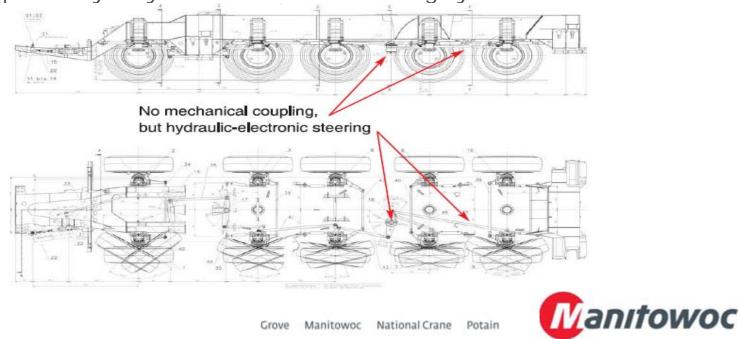



GMK Features - All-Wheel Steer Steer By Wire



ECOS controled:

Highway travel mode

Crab steer mode

Minimum turning radius mode

Manual mode

The Advantages:

- Precise steering.
- Higher driving comfort.
- Reduced tyre wear.
- Economy of space by loss of the longitudinal push rods.
- More space for higher chassis.
- Weight reduction in spite of higher form stability.
- Reduction of costs by loss of the mechanical lock.
- Reduce of tire abrasion due to electronic controlled steering up to 60 km/h.
- Very convenient way of steering.







GMK Features - ECOSSuperstructure

Electronic Crane Operating System

ECOS enables control of the entire crane's principle operations. Simple programming eases lift planning and a supply of essential information allows full concentration on the lift itself:

- Operating data on all crane functions.
- Constantly running data checks and data updates.
- Error code readouts.
- ECOS is run from three identical control boxes. Should unit malfunction, crane operation will revert to the functioning units.
- Although running separately ECOS also supplies any required information to the EKS Load Moment Indicator.



The Advantages:

- Telescoping mode automatic.
- Telescoping mode semi automatic.
- Operating data on power unit.
- Adjustment and readout of all operating speeds.
- Adjusts speeds automatically when jib extensions fitted.






GMK Features - ECOSSuperstructure

Control and Monitor:

- Telescope, Boom Lift, Swing and Hoist
- Efficient, precise control with user friendly diagnostics
- Constant exchange of information with EKS but works independently

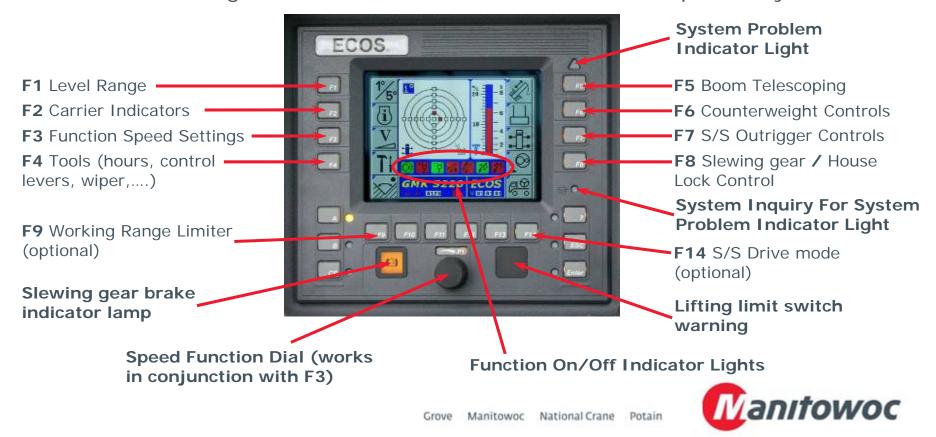



GMK Features - ECOSCarrier

Latest models feature ECOS also for the carrier functions. The ECOS screen is integrated in the carrier functions, diagnostics, warnings and error codes.






Carrier operations such as suspension and MEGATRAKTM controls, differentials and steering modes will be controlled via ECOS as well. The functions can be operated via the screen which replaces the switches usually installed in the middle console of the carrier cab.





GMK Features - ECOSCarrier

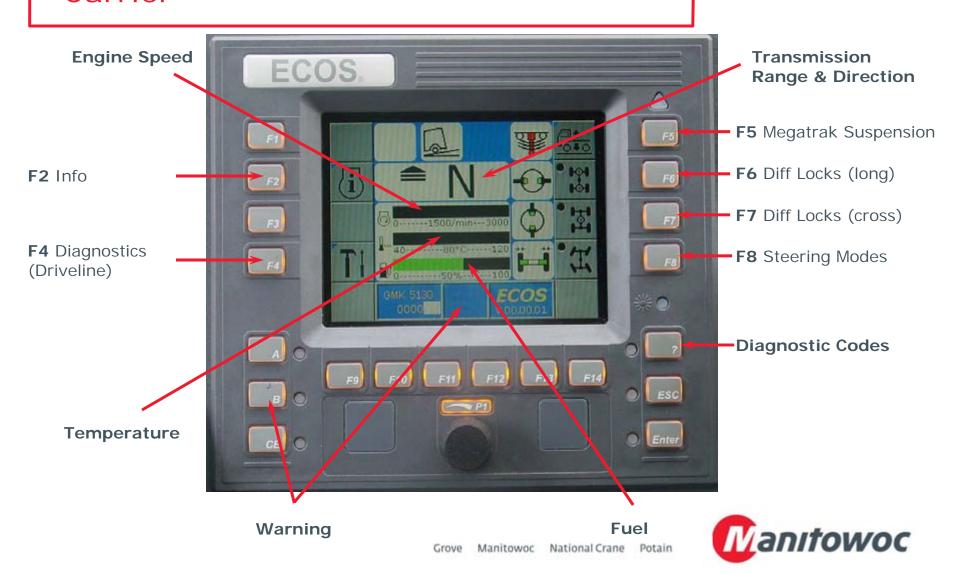



GMK Features - EKS 5Full Graphic Display

Monitoring the lifting condition of the crane at all times EKS works together with, but independently of the ECOS as a complete command and control system or separately as load moment indicator.



The EKS 5 features in addition to the Light version a full graphic display:

- Rear lightning.
- Graphic of boom telescoping %
- Shows loadcharts.
- Allows selection of loadchart sections.


Continually running fault analysis, the system advises service codes which can be transmitted to any Crane Care centre, world-wide, allowing fast accurate investigation and recommendation.






GMK Features - EKS 5Full Graphic Display

Main Screen

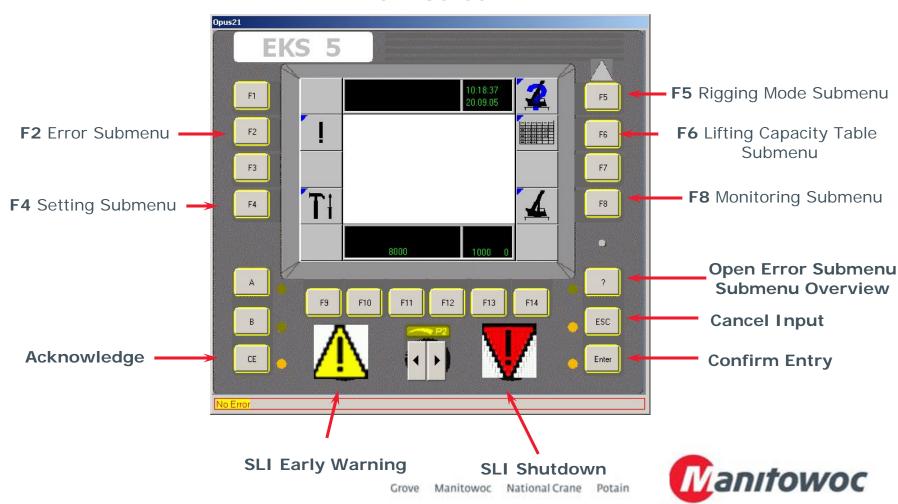




Rigging Screen

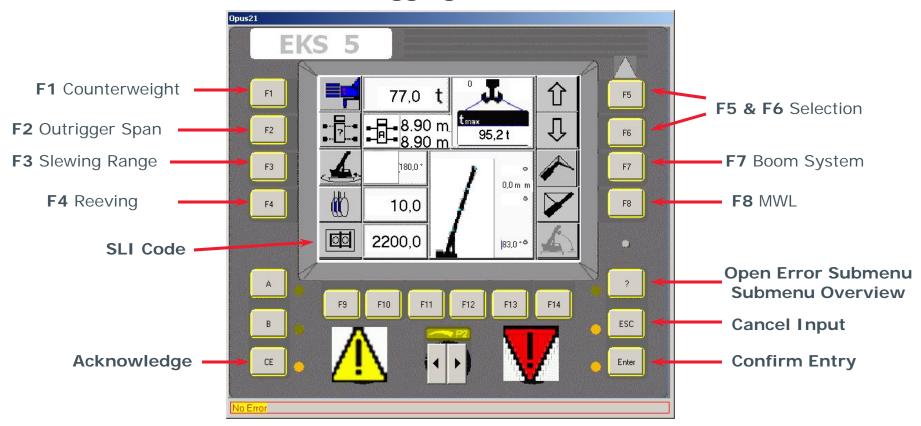






Working Screen

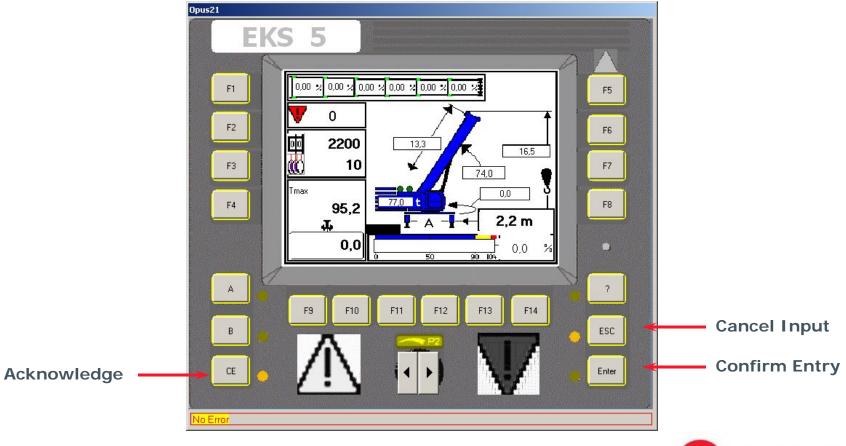

Wanıtowoc




Load Chart Screen

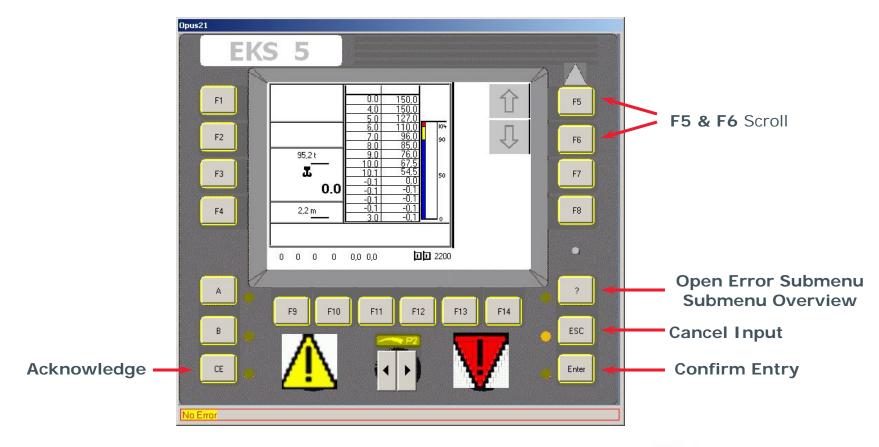





Error Screen

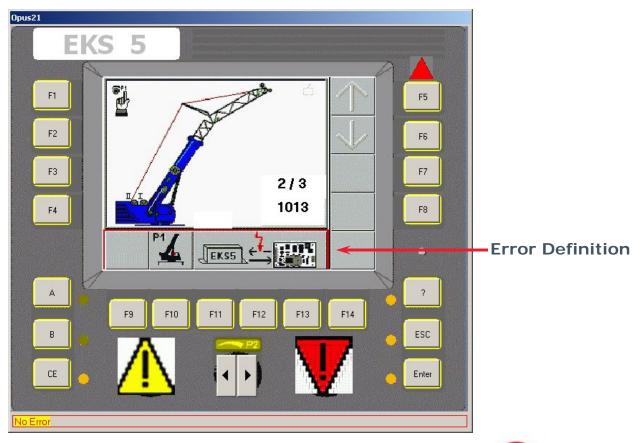





Boom technology: Grove patended TWIN-LOCKTM

TWIN-LOCKTM is a fully hydraulic system with electronic controls. It features a single telescopic cylinder that used two horizontally-mounted pins to move a boom section into the required position. The use of two pins increases security and their position in the side of the boom means they operate in the neutral zone. The use of a single telescope cylinder reduces weight used elsewhere to strengthen the crane, and increases lifting capacity.


















GMK Features – Hydraulic Jibs Hydraulic Luffing Jib

Grove hydraulic jibs can be offset to luff under load from 0° - 40°. The hydraulic luffing jib is controlled from the operator cab and can be used with any boom and jib configuration.

The Movement is continually monitored by the EKS system, for maximum safety.







These jibs can also be conveniently stowed alongside the boom for secure road travel.





GMK Features - CabsTilting Superstructure Cab

GROVE's 20° hydraulic tilting superstructure cab gives the operator an improved and more comfortable view of the lift.







Improved lift and operator performance – better views and increased comfort means lifts are completed quicker and accurately.

Increased view of the lift 0° - 20° tilt capability gives better views.





GMK Features - CabsTilting Superstructure Cab



- Aluminum construction
- Opening windshield and rear window
- Sunscreen and sun visor



- Electronic dual axis crane controls
- Hot water heater (on 2 engine cranes)
- Engine independent diesel air heater (on single engine cranes)
- Adjustable seat
- Ergonomically arranged instrumentation








GMK Features - Cabs Tilting Superstructure Cab



ECOS

EKS 5 Light

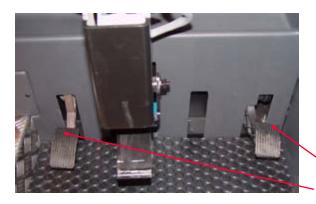



Left:

- Swing brake
- Auxiliary hoist
- Cab tilt



Right:

- Main hoist
- Telescope
- Lift
- Luffing Swingaway

Throttle pedal Swing brake pedal





GMK6350L - Positioning

GMK6350







GMK6350L - Positioning Overview



GMK6250-L



250 USt



236 ft



365 ft



GMK 6350L



6 350 USt



263 ft



367 ft



GMK6350



| **3**50 USt



🧀 197 ft



397 ft





GMK6350L - Positioning Load charts vs. GMK6250-L


GMK6350L vs. GMK6250-L

- 28.8% better chart and 27 ft longer boom compared to GMK6250L:
 - New design (high strength steel)
 - More counterweight





→ GMK6350L is a new generation of long boom 6 axle cranes

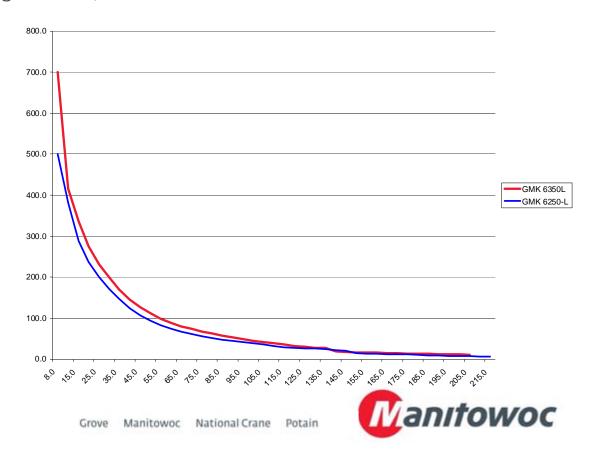



GMK6350L - Positioning

Load charts vs. GMK6350


GMK6350L vs. GMK6350

- 13.9% better chart for GMK 6350 with a 67 ft shorter boom:
 - New design (high strength steel)
 - Less counterweight





→ GMK6350L is close to the charts of the GMK6350 by offering a 25% longer boom

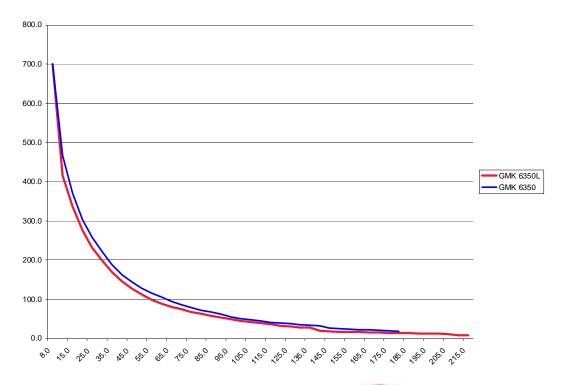

Grove Manitowoc National Crane Potain





GMK6350L - Positioning Summary

The GMK6350-L sets a new benchmark in the long boom 6 axle segment. Higher performance was achieved by following innovations and design changes:

- Top steered MEGATRAKTM & Steer by Wire: more capacity due to weight savings in carrier design
- New design with optimized and latest state-of-the-art Megaform boom shape
- Use of high strength 160KSI [1100 n/mm2] steel
- More counterweight











Grove Manitowoc National Crane Potain



GMK6350L


Grove Mobile Crane Options



Superstructure

BOO2T Boom / attachments

39 ft to 69 ft [12 m to 21 m] bi-fold swingaway, hydraulically offset from 5° to 40° including testing, calibration of LMI and load charts.

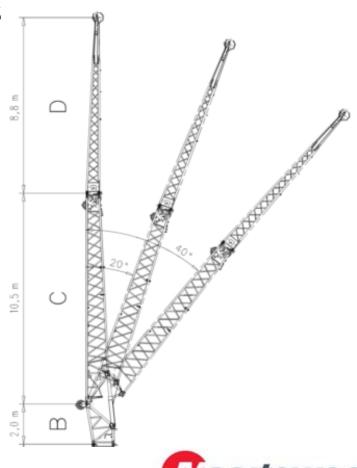


2



Superstructure

BOO3T Boom / attachments

95 ft [29 m] offsettable jib consisting of 69 ft [21 m] bi-fold swingaway and 1 x 26 ft [8 m] intermediate section. Bi-fold swingaway hydraulically offset from 5° to 40° including testing, calibration of LMI and loadcharts.

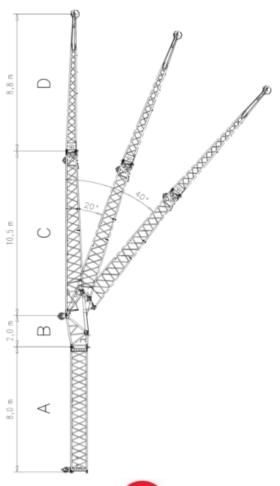





Superstructure

LOO4T Boom / attachments

2 worklights, mounted on top of boom base section (controlled from superstructure cab)

Halogen lamp, 70 Watt power ligths can be adjusted from operators cab (tilt 120°).







Superstructure

LOO5T Boom / attachments

Boom head mounted aircraft warning light (certified/permanent).

When the crane operates near airports a warning light on boom head is required:

LED technology (red light); no service required (> 50.000 hours life); small dimensions (4"x2.5" [103x64 mm]); very little power needed; controlled from operator cab and fully wired.







Superstructure

BOO6T Boom / attachments

7.5 ft [2.3 m] side stowed stub jib 83,000 lb [38 t] maximum capacity with 2 sheaves using 4 parts of line, offset 8° and 30° including testing, calibration of LMI and loadcharts.








GMK6350L STANDARD* equipment Superstructure

BOO7T Boom / attachments

Auxiliary boom nose.

Auxiliary boom nose is used with the wire rope from the auxiliary hoist.

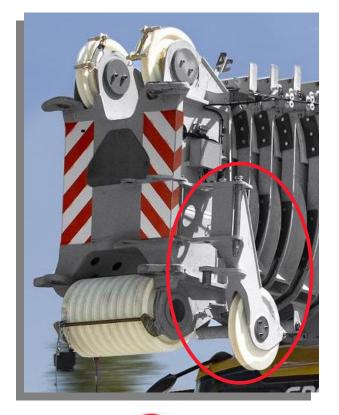

' GMK6350L

Grove Manitowoc National Crane Pota





Superstructure

BOOST Boom / attachments

Camera boom head.

- > auto focus function
- nitrogen-gas filled housing
- waterproofed
- > equipped with built-in night vision function

Video is wireless transmitted to a receiver and shown on an LCD display mounted in the superstructure cab.







GMK6350L STANDARD* equipment


Superstructure

TOO9T Boom / attachments

Trailing boom float kit.

This option consists of a kit that gives the possibility having the boom in floating position, rotating the superstructure 180° back and fixing the boom on a dolly. The slew drives and the elevating cylinder allow the boom to move while driving.

This option is especially for North American and Australian customers where lower axle loads need to be achieved.

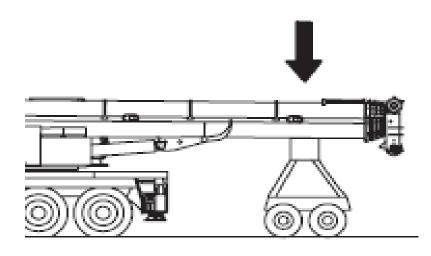

9 GMK6350L

Grove Manitowoc National Crane Potain






Superstructure

TO10T Boom / attachments

Trailing boom boost weight transfer kit - retracting force. (Includes boom float kit)

Pressure regulation through accumulator to increase boom weight on the dolly, relieve load on rear axles and increase load on front axles.

Required force need to be stated when ordered!

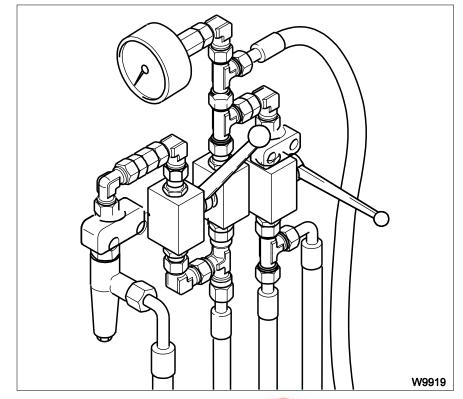





GMK6350L STANDARD* equipment

Superstructure

TO11T Boom / attachments

Boom removal kit.

This option allows to remove the main boom and to transport it with an auxiliary trailer; boom removal kit consists of: cylinder support (1), fixing belt (2), bottle jack for the elevating cylinder (3) and lifting slings for the boom (4).

Hydraulic disconnects, hydraulic boom pivot pins and a hydraulic pin to remove the elevating cylinder are provided on the boom.



11 GMK6350L

^{*} North American configuration




GMK6350L STANDARD* equipment

Superstructure

D012T Hoist / Hydraulic

Auxiliary hoist, self rigging with counterweight, axial piston motor with planetary gear and automatic multiple disc brake. Drum rotation indicator, 1148 ft [350 m] of 22mm wire rope. Including second upper boom head sheave, hoist camera and working light.

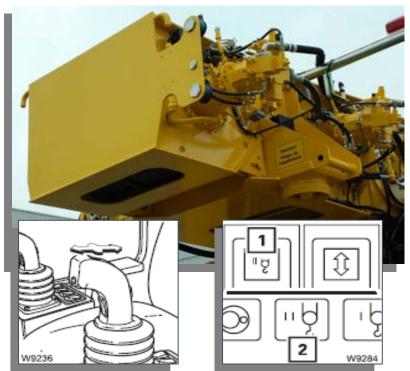

Zanıtowoc

When the auxiliary hoist is activated (switching on button 1), the indicator lamp (2) in the main menu of the crane control display lights green. It is possible to lift or lower the load using left joystick. There is a hoist drum synchro that will notice an impulse when the hoist drum rotates.

12 GMK6350L

Grove Manitowoc National Crane Potain

* North American configuration




GMK6350L STANDARD* equipment Superstructure

JO13T Hoist / Hydraulic

Additional oil cooler for hydraulic system.

On every GMK model a standard oil cooler is mounted on the superstructure, the second oil cooler is optional. The additional oil cooler provides better oil cooling and is suggested for hot weather countries or if the crane is equipped with an auxiliary hoist.

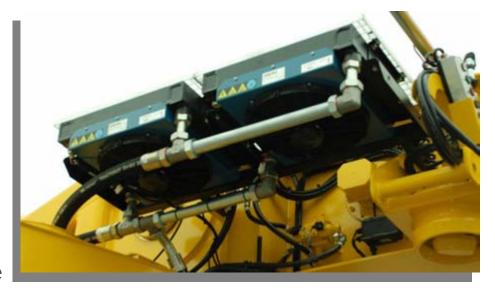



* North American configuration





Superstructure

Hook blocks (US)

ltem	Lifting Capacity	Sheaves	Weight	Parts of line	Possible load with crane
F74	200 ton	9	5,660	1-18/19*	378,360 / 399,380 lb*
F67	165 ton	7	3,851	1-15	315,300 lb
F21	125 ton	5	3,732	1-11	231,220 lb
F17	80 ton	3	2,127	1-7	147,140 lb
F98	35 ton	1	1398	1-3	63,060 lb
F64	Ball 19 ton	-	1,202	1	21,020 lb

^{*} requires additional boom nose sheave






Superstructure

CO2OT Cab Options

Engine independent diesel cab heater (air) with 24h timer

This cab heater is independent from carrier and superstructure engines and it is **diesel propelled**; can be used also to pre-heat superstructure engine. It is equipped with a standard 24 hour timer.



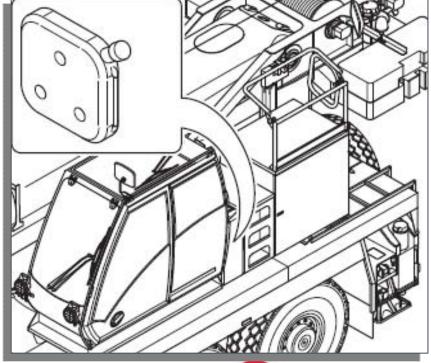





Superstructure

CO21T Cab Options

Air conditioning.

All components of the air conditioning system are located on the superstructure, beside the engine.








GMK6350L STANDARD* equipment

Superstructure

H022T Counterweight

Additional 83,800 lb [38 t] counterweight consisting of 2 x 19,840 lb [9 t] and 2 x 22,050 lb [10 t] removable wing weights.

Includes testing calibration and load charts.

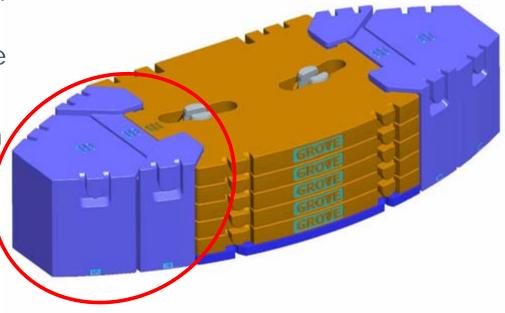

17 GMK6350L

* North American configuration






Carrier

E030T Powerplant / Accessories

Engine Shutdown Valves (for both engines)


This option consists of a valve on the exhaust manifold (both engines) that stops air intake when the engine rpm exceeds a certain limit (due to explosive gas intake). In this case a warning light flashes on ECOS display.

Engine shutdown valve is requested when crane should work in special workplaces (especially in chemical plants and refineries).

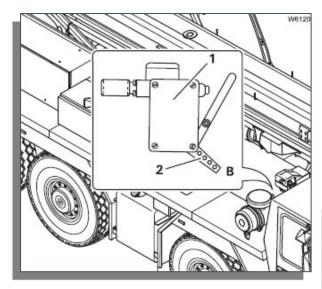

Lever 2 in position B is signalling that control device is on.

Lever 2 in position A, control device is off; lever 1 allows manual starting of control device.







GMK6350L STANDARD* equipment Carrier

G031T Tyres and Wheels

Twelve 16.00 R25 (445/95 R25) on / off highway radial tyres in lieu of standard.

Note:

Carrier width 9.8 ft [2975 mm] Crane hight 13.1 ft [4000 mm]



19 GMK6350L

Grove Manitowoc National Crane





GMK6350L Optional equipment Carrier

31T Tyres and Wheels

Twelve 14.00 R25 (385/95 R25) on / off highway radial tyres in lieu of US standard.

Note:

Carrier width 9.8 ft [2975 mm] Crane hight 13.0 ft [3950 mm]







Carrier

G032T Tyres and Wheels

Twelve 16.00 R25 (445/95 R25) on / off highway radial tyres on aluminum rims.

Note:

Carrier width 9.8 ft [2975 mm] Crane hight 13.1 ft [4000 mm]







Carrier

G033T Tyres and Wheels

Twelve 20.5R25 (525/80 R25) on / off highway radial tyres in lieu of standard.

Note:

Carrier width 10.1 ft [3070 mm] Crane hight 13.1 ft [4000 mm]







Carrier

G034T Tyres and Wheels

Twelve 20.5R25 (525/80 R25) on / off highway radial tyres on aluminum rims.



Note:

Carrier width 10.1 ft [3070 mm] Crane hight 13.1 ft [4000 mm]





Carrier

G035T Tyres and Wheels

14.00R25 (385/95 R25) spare wheel.







G036T Tyres and Wheels

16.00R25 (445/95 R25) spare wheel.







G037T Tyres and Wheels

16.00R25 (445/95 R25) spare wheel (aluminum).







Carrier

G038T Tyres and Wheels

20.5R25 (525/80 R25) spare wheel.







G039T Tyres and Wheels

20.5R25 (525/80 R25) spare wheel (aluminum).







GO40T Tyres and Wheels

Stowage for spare wheel. (Not in combination with K074T, K067T, P044T or P045T)

Note: spare wheel can not be mounted in combination with rear stowage box for rigging equipment, trailer hitch or removable rear outrigger box.



29



Carrier


KO41T Carrier Accessories

12 x 8 x 12 drive in lieu of standard.

Includes an additional driven axle (axle 6).

Crane standard drive: 12 x 6 x 12 (3 driven axles on axle 1, 4 and 5).

Driven axles

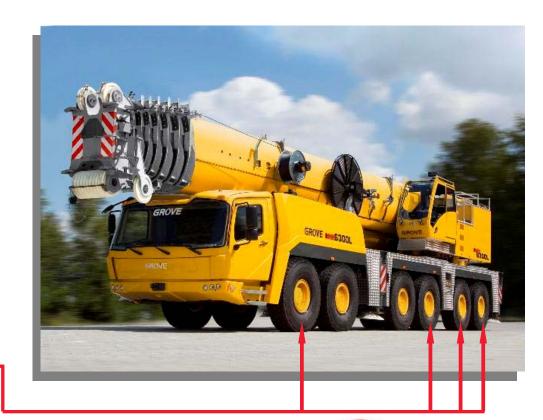





KO42T Carrier Accessories

Hydraulic retarder integrated in gear box.

The hydraulic retarder slows down the crane preserving the standard brake system. The efficiency is compareable to electric retarder (Telma), but in this case braking power is provided by viscous friction of the oil, that internally flows between rotor and fixed vanes. Can be activated with a hand lever that is located on right side of the dashboard.









KO43T Carrier Accessories

Outrigger length control.

Outrigger length is directly transmitted to ECOS/EKS.

No manual input necessary.

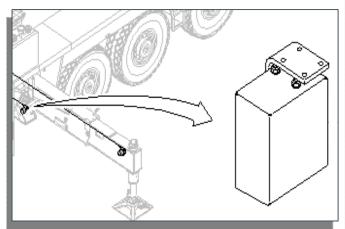

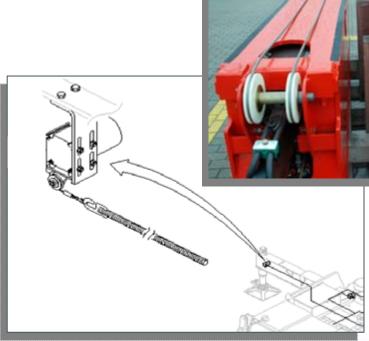






Carrier

PO44T Carrier Accessories

Trailer hitch including brakes and lights [50mm coupling 193 kN drawbar value].

Transmission of braking and lights signals is included (ABS, air, electrical and hydraulic).

50 mm coupling ⇒ 193 kN drawbar value

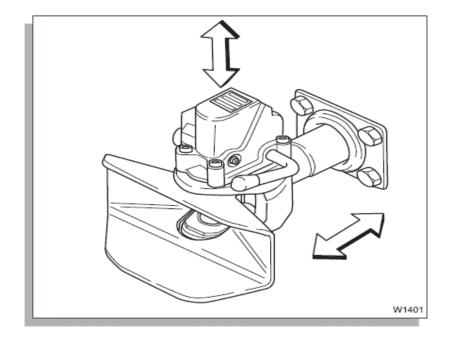





Carrier

P045T Carrier Accessories

Towing hitch, rear mounted [100 kN towing capacity].

This option consists of a towing hitch without brakes and electrical sockets.







GMK6350L STANDARD* equipment Carrier

KO46T Carrier Accessories

Hydraulic disconnect for all outrigger beams.

Hydraulic connections allow the disconnect of all hydraulic hoses that provide outrigger movements. Outrigger beams can be removed in order to reduce crane weight.





* North American configuration







GMK6350L STANDARD* equipment Carrier

Carrier Accessories **JO47T**

Additional oil cooler for carrier hydraulic system.

max. cooling power, useful in hot weather areas



Manitowoc National Crane

36 GMK6350L

* North American configuration



Carrier

MO48T Cab Accessories

Engine independent diesel cab heater (water) with 24h timer

The diesel cab heater (Webasto), mounted under carrier cab, is independent from carrier engine and it is diesel propelled by main fuel tank. Can be used also to preheat carrier engine and equipped with a 24 hour timer.









MO49T Cab Accessories

Hinged Bunk Bed mounted inside the carrier cab.

When not in use the bed can be closed and fixed to the cab's rear side.









Carrier

KO51T Cab Accessories

Additional spotlights on rear side of carrier for reversing.

- high light intensity
- unbreakable and waterproof lens
- resistant to heavy jolts







Carrier

NO60F Miscellaneous

Non-standard paint finish, two colours, same grade as standard.







Carrier

NO61F Miscellaneous

Non-standard paint finish, three colours, same grade as standard.







Carrier

NO64F Miscellaneous

Sign writing on basic boom section, turntable panelling and driver's cab.







Carrier

CO65T Miscellaneous

Wireless remote control for all crane functions (Hetronic).

Depending on crane equipment the following crane function can be controlled:

- engine start/stop
- constant engine speed
- main/auxiliary hoist
- slewing gear
- > telescopic mechanism
- lowering extensions



The crane can be operated within the range of the remote control without being on site





Carrier

S066T Miscellaneous


Datalogger on superstructure.

This software tool records up to 370 hours operation and specifically all following datas:

- Nominal and actual load
- Radius
- > Height
- Reeving
- > Rigging code

All recorded lifting datas are downloaded on memory card to PC (256 Mb)



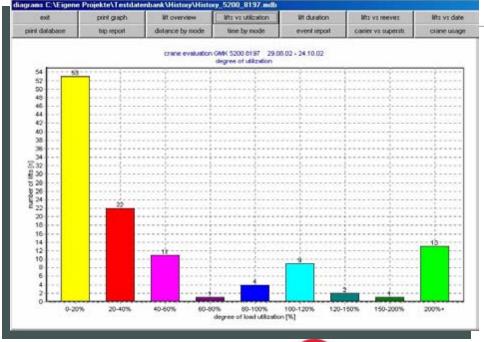



44



Carrier

KO67T Miscellaneous

Rear Mounted Stowage Box for Rigging Equipment (9 ft [2.75 m] wide)

(Not in combination with G040T).








Carrier

C068T Miscellaneous

NYC house lock (360° swing lock).

The houselock consists of a lockable, form-fitting locking unit, which is installed on two slewing gears between the slewing motor and the slewing gear transmission. As a result, the superstructure can be locked at any angle within the entire slewing range.

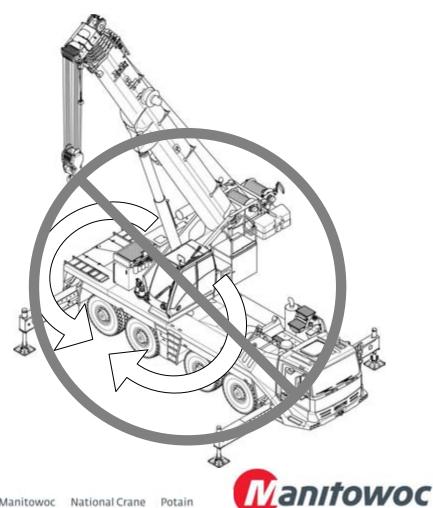

46




CO69T Miscellaneous

Emergency operation with transformer (BGR 159).

For an emergency operation connect the transformer(2) to the carrier hydraulic(1) and superstructure hydraulic(4). With the levers(3) it is possible to handle crane functions. The transformer ensures that the oil circuits stay separated.

This option is a European requirement for personal lifting.

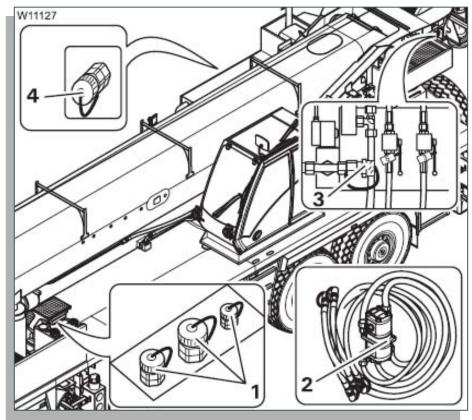





Carrier

CO70T Miscellaneous

Emergency operation without transformer (BGR 159).

hose connection on carrier







GMK6350L

Manitowoc National Crane



Carrier

R071T Miscellaneous

-30° package

This equipment is intended for special use (temperature around -30°C) and includes:

- ➤ Engine preheating system (via engine independing warm water heater)
- Battery preheating
- Cold weather batteries
- Arctic oil (viscosity 32 cSt)
- Flame start kit for both engines (air intake preheating)







Carrier

S072T Miscellaneous

External starting outlet (carrier and superstructure)

Bridges a discharged battery without disassembling any parts of the vehicle.







ROSOT Miscellaneous

Homologation kit - to comply with national regulation and registration codes.













Technical Description

GMK6350L

January 2010 / Revision A





Technical Description (provisional)

GROVE TELESCOPIC ALL-TERRAIN CRANE TYPE GMK6300L

Max. lifting capacity: 700,000 lb @ 8 ft over rear with special equipment.

ITEM NO.

A001T BASIC STANDARD UNIT

SUPERSTRUCTURE Connected to the carrier by a ball bearing slewing ring

and HSFG bolts. Continuous 360° rotation.

Turntable Torsion-resistant welded construction in high tensile close grain

steel plate.

Engine Make: Mercedes-Benz

Model: OM 926 LA

Type: 4-stroke Diesel direct fuel injection

Coolant: Water circulation cooling

Cylinders: 6 (R)

Rating: 210 kW (286 HP) at 2200 min ⁻¹ Torque: 1120 Nm (826 ft/lb) at 1400 min ⁻¹

Emission: EUROMOT 3 / EPA / CARB (non road)

Fuel tank: approx. 79 gal

Hydraulic system 1 axial piston pump with load sensing.

1 double gear pump for slewing gear.

Power limiting control via ECOS.

Oil coolers.

Tank capacity: 317 gal



Technical Description (provisional)

Control system **ECOS** electronic crane control. All crane movements infinitely

variable by electronic-hydraulic pilot control.

Through armrest-integrated crane control levers with automatic

reset to zero.

Main and aux.

hoist

Axial piston motor (variable displacement) with planetary

gear and automatic multiple disk brake.

Single line pull max.: 21,020 lb Single line speed max.: 417 fpm Drum diameter: 18 inch Rope diameter: 0.87 inch Rope length: 1148 ft

Drum rotation indicator.

Hoist cameras incl. light.

Derricking 1 cylinder.

Boom angle from -1,5° to +83°. Derricking time: approx. 95 sec.

Slewing gear 3 slewing gears, axial piston motors, planetary gear;

Dynamic brake:

hydrostatic, operated by control lever.

Parking brake:

1 automatic multiple disk brake. Hand-operated switch to

release slewing drive (to center boom).

Slewing speed infinitely variable approx. 0 - 1,3 min⁻¹ by means

of control lever.

The maximum slewing speed (1,3 min⁻¹) can be reduced to a min. speed by preselection, which allows very smooth slewing

motions.



Technical Description (provisional)

Telescopic boom

7 section welded structure made of high tensile close grain steel.

Boom length: 51 – 163 ft.

Boom head with 9 sheaves. Auxiliary boom nose. New boom shape **MEGAFORM** (incl. base section).

Hydraulic extension.

Telescopic time: 760 sec.

Telescoping load depends on hydraulic pressure, boom angle

and boom lubrication.

Telescopic system **TWIN-LOCK** consists of a single stage cylinder with integrated locking system. Manual and automatic

operation possible.

Trailing boom float kit and boom removal kit.

Operator's cab

New Style Full vision 20° tilt aluminium cab, mounted on lefthand side of turntable, safety glass windows, hinged front window with windshield wiper, tilting window in cab rear, sunvisor and window shade, dormer window pane with wiper, engine dependent hot water heater, fan and defroster nozzles. Adjustable, flexible seat with armrest and headrest, cab lighting, two spot lights, stereo radio/ CD player, fire extinguisher 6kg.

ECOS system including:

Engine data, speed adjustment, boom telescoping,

counterweight rigging, ourtrigger controls, warning systems.

Electric system

Three-phase generator: 28 V / 80 A 2 batteries: 12 V / 170 Ah

Instrument panel:

Base material consisting of recyclable hard foam material. Modular design, easy to fit owing to plug and socket

connections.

Safety installations Electronic safe load indicator EKS 5 with automatic cut-out and full graphic display for actual and admissible load, radius, telescoping and various working conditions, userfriendly,

illuminated display.

Hoist and lowering limit switches, pipe break safety valves, pressure relief valves, wind speed indicator. Working range

limiter.



Technical Description (provisional)

Counterweight 203,900 lb tonnes with standard unit.

Roadable with 0 tonnes.

Up to 36,400 lb technically roadable, restrictions applying.

Tailswing max. 18 ft.

Central lubrication for boom and lift cylinder heel pin, ball bearing slewing ring and

main hoist bearing.

Remote Control Cable connected remote control unit for swingaway erection,

control of outriggers and emergency control of crane functions.

Paint finish Grove standard livery.

CARRIER

Chassis Special 6-axle carrier, all-welded torsion-resistant large

cross section box-type in high tensile close grain steel plate.

Engine Make: Mercedes-Benz

Model: OM 502 LA

Type: 4-stroke Diesel direct fuel injection

Coolant: Water circulation cooling

Cylinders: 8 (90°-V)

Rating: 405 kW (551 HP) at 1800 min ⁻¹
Torque: 2600 Nm (1918 ft/lb) at 1300 min ⁻¹

Filter: Heavy-duty air cleaner

Emission: EUROMOT / EPA / CARB (non road)

Fuel tank: 132 gal (integrated in superstructure)

Transmission Allison automatic transmission 4500 SP

with 6 forward and 1 reverse gear. Transfer case Kessler VG 2600, 2 speed,

with interaxle differential lock.



Technical Description (provisional)

Axle lines Drive 12 x 6 x 12

> 1st axle line: drive + steer

2nd axle line: steer 3rd axle line: steer

4th axle line: drive + steer

5th axle line: drive + steer ("steer by wire")

6th axle line: steer ("steer by wire")

A driven axle line consists of 2 wheels with integrated planetary

hub reduction and a center-mounted differential gearing.

Transverse differential locks Integrated in all center-mounted differential gearings

including air shift cylinder.

Interaxle differential locks With 12 x 6 integrated in the transfer case and the

4th axle line.

With 12 x 8 (option) integrated in the transfer case, the

4th axle line and the 5th axle line in off-road gear.

Control from the cab.

Suspension **MEGATRAK**

Independent wheel Hydropneumatic suspension, level regulation and hydraulic suspension lock-out. Suspension range: +6.7/-5.0 inch.

Automatic suspension level control.

Increase of ground clearance up to 6.7 inch by raising carrier and reducing headroom clearance by lowering carrier down by

5.0 inch.

Combination possibilities for front, rear and side tilt.

Steering

ZF semi-integral dual-circuit hydraulic power-assisted steering, 2 steering cylinders per steered axle line. Automatic switch-in of a

stand-by steering pump in case of main pump failure.

Axles 1 and 2 are conventionally steered, axles 3 and 4 with speed depending steering (mechanically locked above 25 km/h), axles 5 and 6 are electronic-hydraulic steered ("steer by wire"). The steering modes "All-wheel steer", "crab steer" and "lowest radius" are available. "Crab steer" and "lowest radius" only for

jobsite travel.



Technical Description (provisional)

Automatic interval-controlled lubrication of the entire steering Central lubrication

system.

Tyres 12 x 445/95 R25 (16.00R25), single tyres.

Rims 25 - 11.00 / 1.7 for 16" tyres.

Brakes Service brake:

Pneumatic dual-circuit brake, acting on all wheels.

Drum brakes on all wheels (1st axle line with Duplex brake,

2nd to 6th axle line with Simplex brake).

Single chamber air dryer with integrated pressure regulator.

Permanent brake:

Exhaust brake with fixed throttle.

Parking brake:

Pneumatically operated spring-loaded brake acting on 2nd, 4th, 5th and 6th axle line.

Brake design in accordance with maximum loads, i.e. 26,500 lb

axle load.

Brake system complies with EC regulations.

Driver's cab Composite designed aluminium and fibre reinforced plastic, two-

> man-design, suspended, safety glass windows, laminated frontwindscreen, windshield wiper, electric windshield washer, defroster nozzles for the front windscreen, lockable doors with electric power window, driver's seat with pneumatic adjustment and integrated safety belt, lumbar support, passenger's seat, engine-dependent hot water heater, heated rear view mirrors, electrically adjustable, stereo radio / CD player and trip recorder, fire extinguisher 6kg mounted inside the cab, two rotating

beacons, air conditioning, reversing camera system.

Operating instrumentation and devices:

Suspension lock-out, suspension level control, drive connect and disconnect, differential locks, all-wheel steer by ECOS. Rear

fog light.



Technical Description (provisional)

Informations:

Steering pumps, generator, direction indicator, main beam, parking brake, hazard warning light, rear fog light.

Tachograph, odometerair pressure gauge for both brake circuits.

ECOS screen for:

fuel gauge, temperature gauge for the engine and transmission

circuit, engine coolant, suspension lock-out, air

filter, hydraulic filter, drive connect and disconnect, operating

hour meter, oil pressure gauge for engine.

Hydraulic system 2 axial piston variable displacement pumps for outriggers,

steering, and axle suspension.

1 gear pump for fan drive.

1 radial piston pump for emergency stand by steering.

Oil tank with micro oil filters.

Oil cooler.

Outriggers 4 double hydraulically telescoping beams, synchronized with

vertical cylinders and outrigger pads. Independent horizontal and vertical movement control on each side of the chassis. Worklight for each outrigger beam. Outrigger pad load indicator

with read out on carrier and superstructure.

Outrigger spread: length: 28.5 ft.

width: 27.9 ft fully extended.

Additional loadchart for: 24.3 / 20.7 / 16.4 / 9.8 ft.

Electronic crane level indicator. Removable rear outrigger box

and yydraulic disconnect for front outrigger beams.

Electric system Three-phase generator: 28 V / 100 A.

2 batteries: 12 V / 170 Ah.

Lights and signals 24 V, rear fog light, reversing light,

halogen spot light, 4 rotating beacons.

Instrument panel:

Base material consisting of recycable hard foam material. Modular design, easy to fit owing to plug and socket

connections.



Technical Description (provisional)

Towing hitch front mounted, 100 kN towing capacity.

Tools 1 set of tools.

Paint finish GROVE standard livery.

PERFORMANCE Travelling speeds: max. 53 mph

(with 14", 16" and 20.5" tyres)

Gradeability: 49 % (with 14" tyres)

43 % (with 16" and 20.5" tyres)

Turning radii: 46.8 ft at corner of main boom.

44.7 ft at corner of cab.

DIMENSIONS Basic unit in travelling position:

Length: 57.7 ft

50.4 ft (carrier)

Width: 9.8 ft (with 14" and 16" tyres)

10.1 ft (with 20.5" tyres)

Height: 13.0 ft (with 14" tyres)

13.1 ft (with 16" and 20.5" tyres) (without auxiliary

hoist)

+6.7 ft / -5.0 ft

WEIGHT ON-ROAD 158,800 lb



Technical Description (provisional)

OPTIONAL EQUIPMENT

SUPERSTRUCTURE

BOOM / ATTACHMENTS

B002T	39 ft to 69 ft bi-fold swingaway, hydraulically offset from 5° to 40°
	including testing, calibration of LMI and load charts.
B003T	95 ft offsettable jib consisting of 69 ft bi-fold swingaway and 1 x 26 ft
	intermediate section. Bi-fold swingaway hydraulically offset from 5° to
	40°. Including testing, calibration of LMI and loadcharts.
LOO4T	2 worklights, mounted on top of boom base section (controlled from
	superstructure cab).
L005T	Boom head mounted aircraft warning light (registered).
B006T	7.5 ft side stowed stub jib [83,000 lb tonnes max capacity] using 4 parts
	of line. Offset 8° and 30° including testing, calibration of LMI and
	loadcharts.
B007T	Auxilary boom nose.
B008T	Camera boom head.
T009T	Trailing boom float kit.
T010T	Trailing boom boost weight transfer kit - retracting force (including boom
	float kit). (Please indicate required force)
T011T	Boom removal kit.

HOISTS / HYDRAULIC

D012T	Auxiliary hoist, self rigging with counterweight, axial piston motor with planetary gear and automatic multiple disc brake. Drum rotation indicator,
	1148 ft of 0.87 inch wire rope. Including second upper head sheave on
	boom. Hoist camera and working light.
104 OT	

J013T Additional oil cooler for hydraulic system.

HOOKBLOCKS / HEADACHE BALL

F74	200 ton, 9 sheave quick-reeving hookblock with European dead end, weight: 5,300 lbs.
F67	165 ton, 7 sheave quick-reeving hookblock with European dead end, weight: 3,851 lbs.
F21	125 ton, 5 sheave quick-reeving hookblock with European dead end, weight: 3,732 lbs.
F17	80 ton 3 sheave quick-reeving hookblock with European dead end, weight 2,127 lbs.
F98	35 ton, 1 sheave quick-reeving hookblock with European dead end, weight: 1,398 lbs.
	19 ton, single line top-swiveling headache ball, weight: 1,202 lbs



Technical Description (provisional)

F64

CAB OPTIONS

CO20T Engine independent diesel cab heater which also serves as engine preheater

incl. 24h timer.

CO21T Air conditioning.

COUNTERWEIGHT

H022T Additional 83,776 lb counterweight consisting of 2 x 19,842 lb and 2 x 22,046

Ib removable wing weights. Includes testing calibration and load charts.

OPTIONAL EQUIPMENT

CARRIER

POWERPLANT / ACCESSORIES

E030T Engine Shutdown Valves (for both engines).

TYRES AND WHEELS

G031T Twelve 16.00 R25 (445/95 R25) on/off highway radial tyres in lieu of

standard

G032T Twelve 16.00 R25 (445/95 R25) on/off highway radial tyres on

aluminium rims, applicable on double coin tires only.

G033T Twelve 20.5R25 (525/80 R25) on/off highway radial tyres in lieu of

standard.

G034T Twelve 20.5R25 (525/80 R25) on/off highway radial tyres on

aluminium rims, applicable on double coin tires only.

Twelve 14.00R25 (385/95 R25) on / off highway radial tires in lieu

of standard.

G035T 14.00R25 (385/95 R25) spare wheel.

G036T 16.00R25 (445/95 R25) spare wheel.

G037T 16.00R25 (445/95 R25) spare wheel (aluminium).

G038T 20.5R25 (525/80 R25) spare wheel.

G039T 20.5R25 (525/80 R25) spare wheel (aluminium).

G040T Stowage for spare wheel. (Not in combination with K067T, P044T, P045T)

CARRIER ACCESSORIES

KO41T 12 x 8 x 12 drive in lieu of standard.

KO42T Hydraulic retarder integrated in gear box.

Outrigger length control.



Technical Description (provisional)

uding brakes and lights
193 kN D-Value, DC=193 kN, V=60 kN] heavy.
ar mounted [100 kN towing capacity].
nect for all outrigger beams.
oler for carrier hydraulic system.

CAB ACCESSORIES

M048T	Engine independent diesel cab heater which also serves as engine
	preheater incl. 24h timer.
MO49T	Hinged Bunk Bed mounted inside the carrier cab.
K051T	Additional spotlights on rear side of carrier for reversing.

MISCELLANEOUS

N060T	Non-standard paint finish, two colours, same grade as standard.						
N061T	Non-standard paint finish, three colours, same grade as standard.						
N064T	Sign writing on basic boom section, turntable panelling and driver's cab.						
C065T	Wireless remote control for all crane functions (Hetronic)						
S066T	Datalogger on superstructure						
K067T	Rear Mounted Stowage Box for Rigging Equipment (2.75m wide) (Not						
in combination with G040T).							
C068T	NY house lock (360° swing lock).						
C069T	Emergency operation with transformer (BGR 159).						
C070T	Emergency operation without transformer (BGR 159).						
R071T	-30° package incl. engine preheating system, battery preheating, cold						
	weather batteries, arctic oil and flame start kit for carrier engine.						
K072T	External starting outlet (carrier and superstructure).						
K074T	Removable Outrigger Box.						
R080T	Homologation kit - to comply with national regulation and registration						
	codes.						

- Subject to technical modifications -

This crane is designed for operation according to crane class A1 (as defined in ISO 4301-2). This is only a statement about design, but no warranty as defined in § 443 BGB (german civil code).



Grove Manitowoc National Crane Potain



GMK Features

Product Management July 2008





GMK Features Overview



- MEGATRAKTM Independent Suspension
- MEGAFORMTM





■ MEGATRAKTM Top Steered

■ TWIN-LOCKTM





All-Wheel Steer

Hydraulic Luffing Jib





Steer By Wire

Integrated Heavy Duty Jib





ECOS

Tilting Superstructure Cab





EKS 5 / EKS 5 Light

New Carrier Cab





GMK Features

Overview

GMK Features available	GMK 7450 GMK 7550	GMK 6300 GMK 6350	GMK 6220-L GMK 6250-L	GMK 5220 GMK 5275	GMK 5170 GMK 5225	GMK 5130-2 GMK 5165-2	GMK 5110-1 GMK 5135	GMK 5095 GMK 5115	GMK 4100L GMK 4115L	GMK 4100 GMK 4115	GMK 4080-1 GMK 4100B	GMK 3055	GMK 3050-1	GMK 2035E
MEGATRAK	•	•	•	•	•	•	•	•	•	•	•	•	•	
Top Steered MEGATRAK	•			•	•									
All-Wheel Steer	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Steer By Wire				•	•									
ECOS	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Carrier ECOS				•	•	•	•	•	•	•				
EKS 5 Light		•	•	•	•	•	•	•	•	•	•	•	•	•
EKS 5	•			•	•	•	•	•	•	•				
MEGAFORM	•	•	•	•	•	•	•	•	•	•	•	•	•	
TWIN-LOCK	•	•	•	•	•	•	•	•	•	•	•	•		
Hydraulic Luffing Jib			•	•	•	•	•	•	•	•	•	•	•	•
Integrated Heavy Duty Jib					•	•	•	•	•	•				
New Carrier Cab Design						•	•	•	•	•				
Titable Superstructure Cab	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Optional






MEGATRAKTM






GMK Features - MEGATRAKTM Independent Suspension

MEGATRAKTM is GROVE`s patented independent suspension and all- wheel steer System. Each wheel is able to remain on the ground at all times, so that stresses and weight are not continually transferred between axles.




Traditional suspension systems may raise the body of the crane, but do not increase ground clearance.



MEGATRAKTM does, as the differential is attached to the base of the carrier, offering a ground clearance up to 23.6" [600 mm]. Suspension can be raised 6.5" [170 mm] or lowered 5" [130 mm] (both front/back and side to side) directly from the carrier cab and automatically leveled for road travel. MEGATRAKTM also allows the use of a deeper carrier cross section, which improves the overall torsional strength of the crane.

MEGATRAKTM



RIGID AXLE







GMK Features - MEGATRAKTM Independent Suspension

However, MEGATRAKTM is not just about a comfortable and confident ride. The use of independent struts reduces the weight of the suspension system. These features make Grove all-terrains the strongest cranes available, with optimum lift characteristics.

Once you`ve experienced MEGATRAKTM you`ll really appreciate the difference.







Reduced maintenance:

- Reliable suspension system.
- Same suspension on almost all models.
- Driveline remains aligned all the time.
- Steering linkage is protected (positioned directly under the chassi).
- Constant tire contact for equal tire wear.








GMK Features - MEGATRAKTM Top Steered


The latest design of MEGATRAKTM steering technology with top steered MEGATRAKTM cylinders allows a deeper cross-section of the frame for greater strength. This technology is used on GMK 5225, GMK 5275 and GMK 7550.

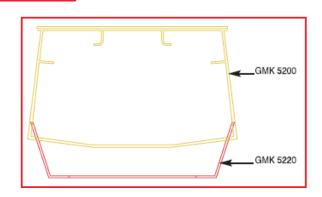


Megastruts with top steering

Megastruts with wishbones


steering rod







top steered

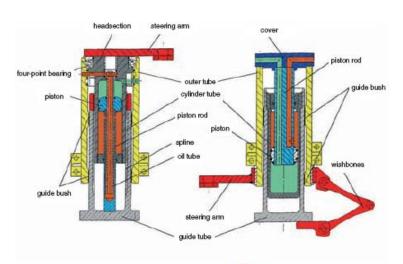





All-Wheel Steer





GMK Features - All-Wheel Steer General

An easy to use all-wheel system gives the best steering on or off highway, eliminating tire scrub and stressed on non steering axles.

Exceptional manoeuvrability allows even the largest fully rigged GMK to get as close to the lift as possible.






Other systems, where one or more "dead weight" hanging axles remain fixed – lead to higher axle loads, driveline maintenance problems, increased ground pressure and tire wall stress. All-wheel steer enables a fully laden crane to distribute weight evenly across all axles.






GMK Features - All-Wheel Steer Steer By Wire

The rear 2 axles are steered by wire. Up to 12.5 mph [20 km/h] the 2 rear axles are steering depending on the driving mode (crab steer and minimum turning radius) and the speed in optimised angle. For highway travelling the 4th axle is fixed straight and up to 37 mph [60 km/h] axle 5 is steering in an optimised angle depending on the front axles and the speed. The conventional mechanical steering is replaced by a hydraulic-electronic steering system.

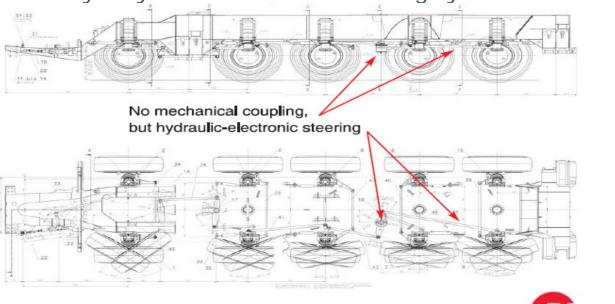



GMK Features - All-Wheel Steer Steer By Wire



ECOS controled:

- Highway travel mode
- Crab steer mode
- Minimum turning radius mode
- Manual mode

The Advantages:

- Precise steering.
- Higher driving comfort.
- Reduced tyre wear.
- Economy of space by loss of the longitudinal push rods.
- More space for higher chassis.
- Weight reduction in spite of higher form stability.
- Reduction of costs by loss of the mechanical lock.
- Reduce of tire abrasion due to electronic controlled steering up to 60 km/h.
- Very convenient way of steering.







ECOS





GMK Features - ECOSSuperstructure

Electronic Crane Operating System

ECOS enables control of the entire crane's principle operations. Simple programming eases lift planning and a supply of essential information allows full concentration on the lift itself:

- Operating data on all crane functions.
- Constantly running data checks and data updates.
- Error code readouts.
- ECOS is run from three identical control boxes. Should unit malfunction, crane operation will revert to the functioning units.
- Although running separately ECOS also supplies any required information to the EKS Load Moment Indicator.



The Advantages:

- Telescoping mode automatic.
- Telescoping mode semi automatic.
- Operating data on power unit.
- Adjustment and readout of all operating speeds.
- Adjusts speeds automatically when jib extensions fitted.






GMK Features - ECOSSuperstructure

Control and Monitor:

- Telescope, Boom Lift, Swing and Hoist
- Efficient, precise control with user friendly diagnostics
- Constant exchange of information with EKS but works independently

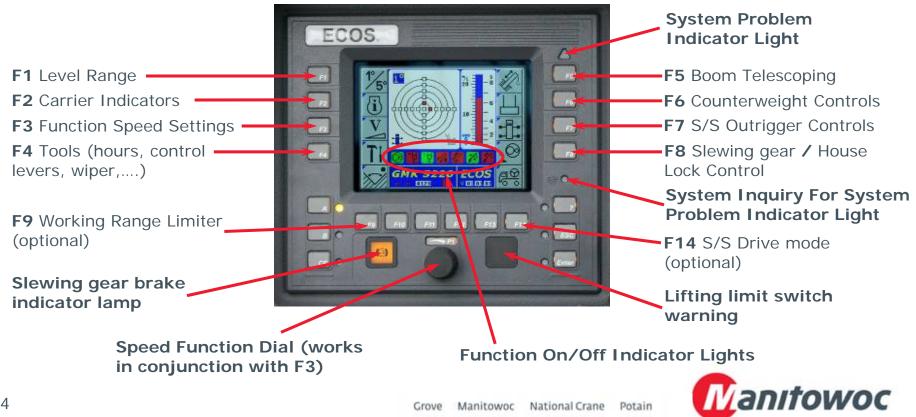



GMK Features - ECOSCarrier

Latest models feature ECOS also for the carrier functions. The ECOS screen is integrated in the carrier functions, diagnostics, warnings and error codes.






Carrier operations such as suspension and MEGATRAKTM controls, differentials and steering modes will be controlled via ECOS as well. The functions can be operated via the screen which replaces the switches usually installed in the middle console of the carrier cab.





GMK Features - ECOSCarrier

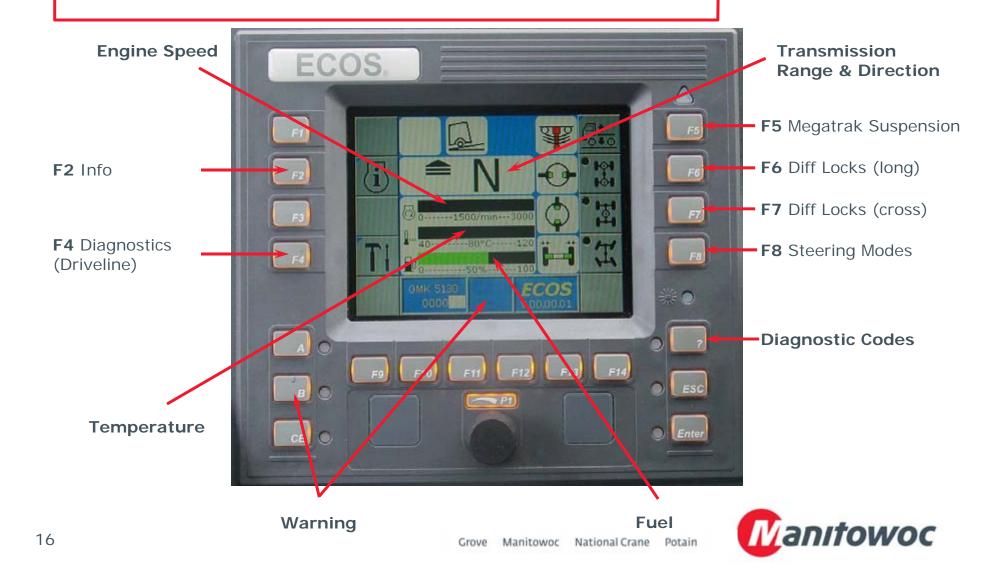



EKS 5 / EKS 5 Light





GMK Features - EKS 5 Light Semi Graphic Display

Monitoring the lifting condition of the crane at all times EKS works together with, but independently of the ECOS as a complete command and control system or separately as load moment indicator.



The EKS 5 light features a semi graphic display:


- Easy to use.
- Clear display.
- Ergonomic layout.

Continually running fault analysis, the system advises service codes which can be transmitted to any Crane Care centre, world-wide, allowing fast accurate investigation and recommendation.





GMK Features - EKS 5 Light Semi Graphic Display

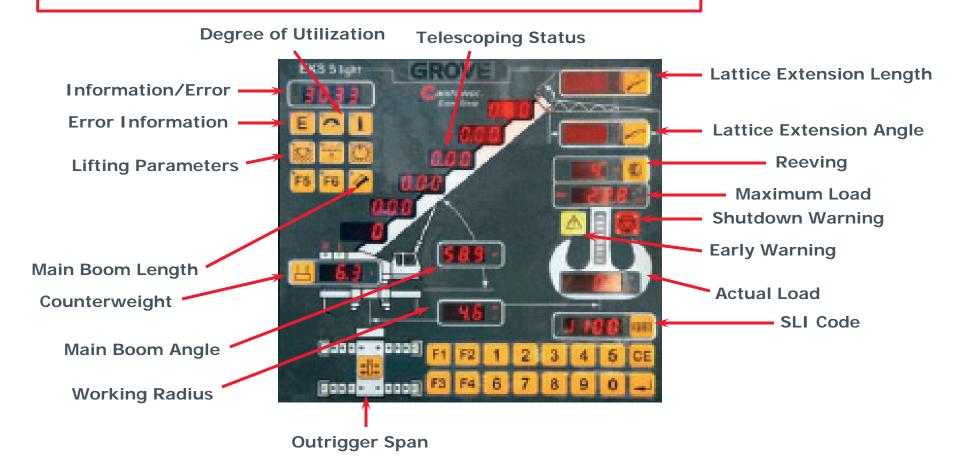





Monitoring the lifting condition of the crane at all times EKS works together with, but independently of the ECOS as a complete command and control system or separately as load moment indicator.



The EKS 5 features in addition to the Light version a full graphic display:


- Rear lightning.
- Graphic of boom telescoping %
- Shows loadcharts.
- Allows selection of loadchart sections.

Continually running fault analysis, the system advises service codes which can be transmitted to any Crane Care centre, world-wide, allowing fast accurate investigation and recommendation.






Main Screen

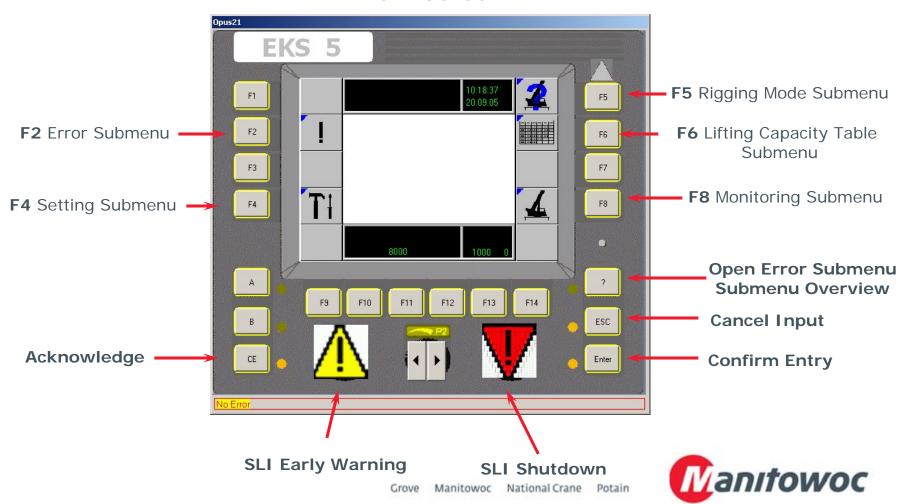




Rigging Screen

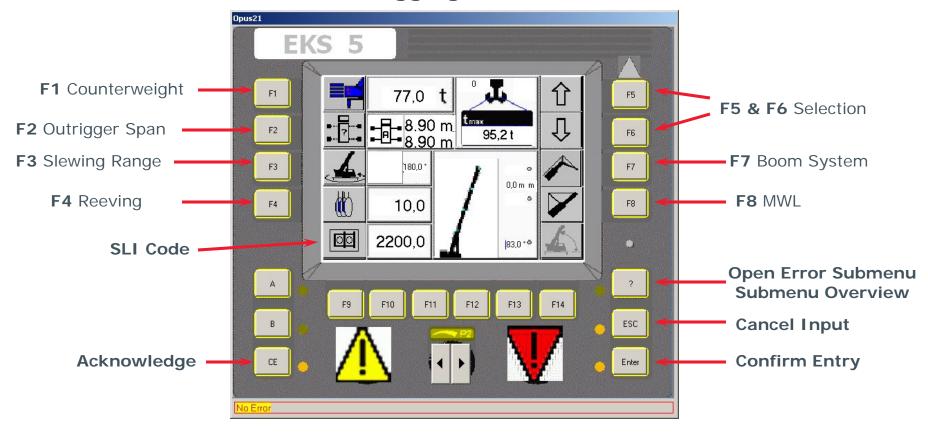






Working Screen

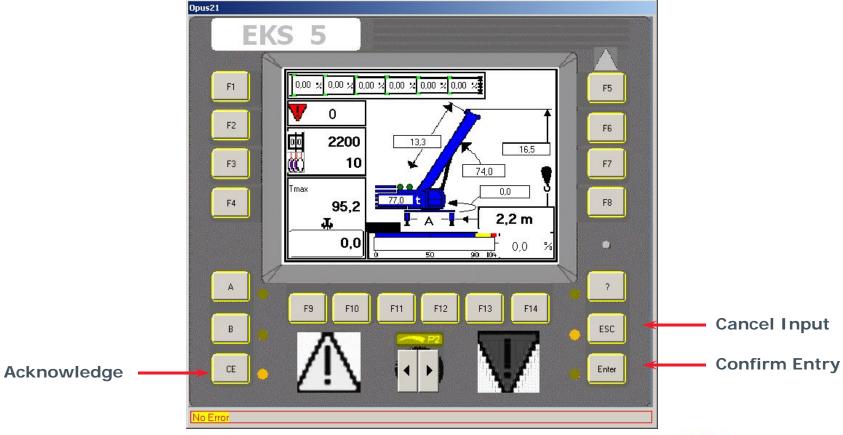






Load Chart Screen

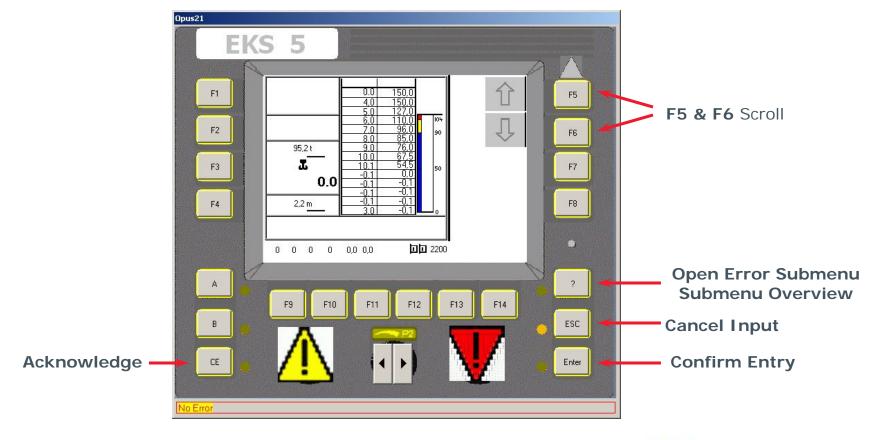





Error Screen

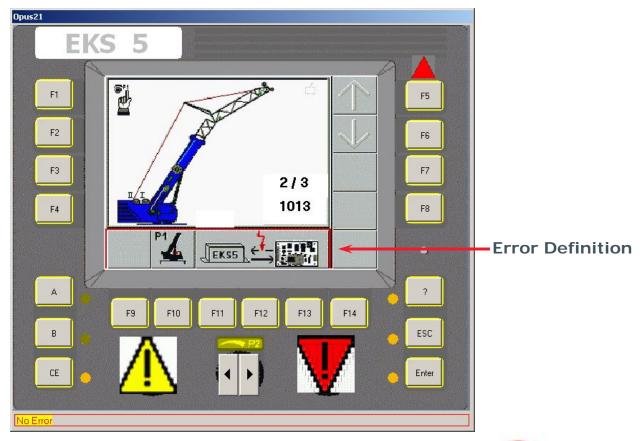





MEGAFORMTM






GMK Features - MEGAFORMTM Boom Design

The MEGAFORMTM boom design incorporates a "U" shaped cross-section, which provides a natural cradling position for boom sections. Large wear pads provide superior boom alignment when telescoping, and allow an excellent transition of weights between sections.







This leads to an intrinsically stronger system. In addition to less weight, a larger cross section area can be used, giving greater lifting capacity at all radii.





TWIN-LOCKTM





GMK Features - TWIN-LOCKTM Pinning System

TWIN-LOCKTM is a fully hydraulic system with electronic controls. It features a single telescopic cylinder that used two horizontally-mounted pins to move a boom section into the required position.








A single telescope cylinder reduces weight used elsewhere to strengthen the crane, and increases lifting capacity.

The use of two pins increases security and their position in the side of the boom means they operate in the neutral zone.









Hydraulic Jibs





GMK Features – Hydraulic Jibs Hydraulic Luffing Jib

Grove hydraulic jibs can be offset to luff under load from 0° - 40°. The hydraulic luffing jib is controlled from the operator cab and can be used with any boom and jib configuration.

The Movement is continually monitored by the EKS system, for maximum safety.







These jibs can also be conveniently stowed alongside the boom for secure road travel.





GMK Features – Hydraulic Jibs Integrated Heavy Duty Jib

The latest swingaway design features an integrated heavy duty jib including 3 sheaves for maximum capacities.

The heavy duty jib is hydraulic adjustable to 0°, 20° and 40°. The length is 10.8 ft [3.3 m] or 11.8 ft [3.6 m] depending on model.

Advantages:

- Saves weight: Combines bi-fold swingaway and heavy duty jib in one jib!
- More power: Higher lifting capacity on heavy duty jib due to 3 sheaves for up to 6 lines of rope!
- Increased radius when working under roof.
- Easy rigging and handling.
- Flexible to use due to hydraulic adjustment (0° -40°).
- Included in taxi configurations with swingaway.







Cabs





GMK Features - CabsTilting Superstructure Cab

GROVE's 20° hydraulic tilting superstructure cab gives the operator an improved and more comfortable view of the lift.







Improved lift and operator performance – better views and increased comfort means lifts are completed quicker and accurately.

Increased view of the lift 0° - 20° tilt capability gives better views.





GMK Features - CabsTilting Superstructure Cab



- Aluminum construction
- Opening windshield and rear window
- Sunscreen and sun visor



- Electronic dual axis crane controls
- Hot water heater (on 2 engine cranes)
- Engine independent diesel air heater (on single engine cranes)
- Adjustable seat
- Ergonomically arranged instrumentation








GMK Features - CabsTilting Superstructure Cab



ECOS

EKS 5 Light

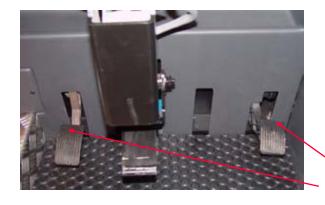

Left:

- Swing brake
- Auxiliary hoist
- Cab tilt



Right:

- Main hoist
- Telescope
- Lift
- Luffing Swingaway

Throttle pedal Swing brake pedal





GMK Features - CabsNew Carrier Cab

A new design, with maximum functionality and ergonomic excellence creating the best possible working environment.





The new cab combines functional performance, ergonomic excellence and safety.





GMK Features - CabsNew Carrier Cab



Convenience and ergonomic excellence:

- Better cab soundproofing thanks to the new plastic cladding.
- The panoramic windscreen gives excellent all-round visibility.
- Optimised cab access.
- Superior material processing quality.
- Headlamp installation optimised for easier bulb replacement.
- Air-conditioning and parking heating system come with a timer switch as standard.
- Air-suspension pivoting comfort seats, with shaping have been designed to provide best possible ergonomic benefits.







GMK Features - CabsNew Carrier Cab

Integrated ECOS display screen:

- Allows operation of suspension, differentials, separate steering, and level regulation beneath the unit.
- Displays oil and water temperature, fuel level, battery and engine speed.
- Provides fault warnings for easy fault detection and trouble-shooting.







Dashboard:

Dazzle-free instrument cluster offers reduced sun glare, and enables the most important data to read at a glance.

Drive and brake Tempomat control unit:

Acceleration and braking – two functions combined in one unit.









Grove Manitowoc National Crane Potain



Grove GMK6350L

Preliminary Product Guide



Features

- 15,6 m 80 m (51 ft 263 ft) seven-section full power MEGAFORM™ boom with TWIN-LOCK™ pinning
- 12 m 21 m (39 ft 69 ft) hydraulic offset bi-fold swingaway
- 1 x 8 m (26 ft) intermediate lattice insert
- 92,5 t (203,900 lb) counterweight with hydraulic removal system
- MEGATRAK™ independent hydro-pneumatic suspension



Features

Introducing the Grove GMK6350L

MEGATRAK™

The MEGATRAK™ suspension system is the best off road driveline available on the market today. The system's versatility and performance allows the GMK6350L to operate as a true all-terrain crane. The MEGATRAK™ independent suspension and all-wheel steer system allows wheels to remain on the ground at all times so stresses and weight are not continually transferred between axles. MEGATRAK™ provides true ground clearance where others just raise the chassis.

Other benefits of the MEGATRAK™ system are:

- A reliable suspension system
- Excellent job site maneuverability with all-wheel steering
- Commonality among almost all models
- A driveline that remains aligned at all times
- A steering linkage system that is protected against damage
- Constant tire contact for equal tire wear
- Reduced maintenance



TWIN-LOCK™

Boom pinning mechanism automatically pins the sections in position using two horizontal pins.







ECOS.

ECOS

Electronic Crane Operating System - ECOS enables control of the entire crane's principle operations. Simple programming eases lift planning and a supply of essential information allows full concentration on the lift itself.



EKS 5

The EKS 5 monitors the lifting conditions of the crane at all times and provides a full graphic display, rear lighting, graphic of boom telescoping percentage, and load charts.





Contents

Specifications	4
Dimensions	7
Weights	8
Counterweight	9
Working range (main boom)	10
Load charts (main boom)	11
Working range (hydraulically offsettable swingaway)	16
Load charts (hydraulically offsettable swingaway)	17
Working range (heavy duty jib)	18
Load charts (heavy duty jib)	19
Symbols glossary	20



Specifications

Superstructure



Boom

15,6 m - 80 m (51 ft - 263 ft) 7-section, full power MEGAFORM™ boom with TWIN-LOCK™ Pinning. Maximum tip height: 83 m (272 ft).



Boom nose

Nine nylatron sheaves, mounted on heavy duty tapered roller bearings with removable pin-type rope guards. Quick reeve boom nose. Removable auxiliary boom nose with removable pin type rope guard.



Boom elevation

Single lift cylinder with safety valve provides boom angle from -1.5° to $+83^{\circ}$.



*Hydraulic offsettable lattice extension

12 m - 21 m (39 ft – 69 ft) bi-fold lattice swingaway extension, hydraulically offsettable and luffing under load, 5°- 40°.

Maximum tip height: 104 m (341 ft)



*Lattice insert

 $1 \times 8 \text{ m}$ (26 ft) insert for use with lattice swingaway extension to increase length to 29 m (95 ft). Maximum tip height: 112 m (367 ft)



Load moment and anti-two block system

Load moment and anti-two block system with audio/ visual warning and control lever lockout provides electronic display of boom angle, length, radius, tip height, relative load moment, maximum permissible load, load indication and warning of impending two-block condition.



Cab

All aluminum constructed cab with acoustical lining, hydraulic tilted to 20°. Includes tinted safety glass, adjustable operator's seat, opening windows at side and rear, hinged windshield with wiper, sun visor and window shade. Other features include hot water heater/defroster, armrest integrated crane controls, ergonomically arranged instrumentation and radio/cd player.



Swing

3 planetary gear boxes with fixed displacement axial piston motors. Infinitely variable to 1.3 rpm. Free swing or hydrostatically engaged brake controlled by swing lever. Swing brake selected by foot operated switch.



Counterweight

92,5 t (203,900 lb) consisting of various sections with hydraulic installation/removal system controlled from the superstructure cab.



Engine

Mercedes OM 926 LA six-cylinder

Horsepower: 210 kW (286 bhp) at 2200 rpm Torque: 1120 Nm (826 ft/lb) at 1400 rpm

Engine emissions: EPA/CARB/EUROMOT (off road)



Fuel tank capacity

300 L (79 gal)



Electrical system

3 phase alternator: 28V/80A 2 batteries: 12V/170Ah



Hydraulic system

2 (two) separate circuits, 1 (one) axial piston variable displacement pump (load sensing) with electronic power limiting control for crane functions and 1 (one) double gear pump for slewing. Thermostatically controlled oil coolers keep oil at optimum operating temperature.

Hydraulic tank capacity: 1200 L (317 gal)



Specifications

Superstructure continued



Hoist

Main and auxiliary hoist are powered by axial piston motor with planetary gear and brake. "Thumb-thumper" hoist drum rotation indicator alerts operator of hoist movement.

di dili i otation nid	icator aicrts operator	of floist fllover
	Main	Auxiliary
Rope length:	350 m	350 m
	(1148 ft)	(1148 ft)
Rope diameter:	22 mm	22 mm
Line speed:	127 m/min	127 m/min
	(417 fpm)	(417 fpm)
Line pull:	93.5 kN	93.5 kN
Line pun.	73.7 KIN	73.7 KIN
	(21,020 lb)	(21,020 lb)
_		

Hoist camera and light included.

*Optional equipment

- Work lights, mounted on boom base section
- Boom mounted aircraft warning light
- Air conditioning
- ► Hook blocks/headache ball
- Engine independent diesel cab heater, with engine pre-heater. Includes 24 hour timer.
- Data logger
- ≥ 360° NYC swing lock
- 2,3 m (7.5 ft) side stowed heavy duty jib with 38 t (83,000 lb) maximum capacity using four parts of line, offset 8° and 30°
- Camera for boom head

Carrier



Chassis

Box type, torsion resistant frame is fabricated from high strength steel.



Outrigger system

Four hydraulic two stage outrigger beams with vertical cylinders and outrigger pads, 700 mm (27.6 in) round. Outrigger can be set in 5 positions:

Full: 8,5 m (27.9 ft)
Partial: 7,4 m (24.3 ft)
Partial: 6,3 m (20.7 ft)
Partial: 5,0 m (16.4 ft)
Retracted: 2,7 m (9.0 ft)

Independent horizontal and vertical movement controlled from each side of carrier and the superstructure cab. Electronic crane level indicators. Hydraulic disconnect for all outrigger beams. Work light for each outrigger beam and outrigger pad load indicator with read out on both sides of carrier and in superstructure cabin.

Transmission

Allison automatic 4500 SP, 6 speeds forward, 1 reverse 2 speed transfer case



Drive/steer

12x6x12



Axles

1st axle line - drive/steer

2nd axle line – steer

3rd axle line - steer (connects for all wheel steer)

4th axle line - drive/steer (connects for all wheel steer)

5th axle line – drive/steer (permanent drive with 12x6, disconnects for highway with 12x8)

6th axle line – steer (optional drive)

Drive axles with planetary hub reduction and center mounted gearing. Standard inter-axle and cross axle differential locks.

Grove GMK6350L *Denotes optional equipment 5



Specifications

Carrier continued



Suspension

Grove exclusive MEGATRAK™ suspension. Independent hydro-pneumatic system acting on all wheels with hydraulic lockout. Suspension can be raised 170 mm (6.7 in) or lowered 126 mm (5.0 in), both longitudinally and transversely. Features an automatic leveling system for highway travel.



Tires

12 tires, 16.00R25 (Vehicle width - 3,0 m [9.8 ft])



Steering

Dual circuit, hydraulic power assisted steering system. Transfer case mounted, ground driven emergency steering pump. Axles 1, 2, 5 and 6 steer on highway. Separate steering (steer by wire) of the 3rd to 6th axles for all wheel and crab steering, controlled by an electronic rocker switch.



Engine

Mercedes OM 502 LA, eight-cylinder Horsepower: $405~\mathrm{kW}$ (551 bhp) at 2100 rpm

Torque: 2600 Nm (1918 ft/lb) at 1300 rpm

Engine emissions: EPA /CARB/EUROMOT (off road)



Fuel tank capacity

500 L (132 gal). Installed on superstructure.



Brakes

Service brakes: pneumatic dual circuit acting on all wheels. Parking brake: pneumatically operated spring loaded brake acting on axle lines 2, 4, 5 and 6.

Air dryer.



Cab

Two-man, composite designed aluminum and fiber reinforced plastic construction with the following features: safety glass, driver seat with pneumatic suspension, engine-dependent hot water heater, power windows, heated rear view mirrors, complete instrumentation, driving controls, reversing camera system, air conditioning, radio/cd player, 12V plug and fire extinguisher.



Electrical system

24V system with three phase alternator, 28V/100A 2 batteries, 12V/170 Ah



Maximum speed

85 km/h (53 mph)



Gradeability (theoretical)

49% - 14.00 tires

43% - 16.00/20.5 tires

Miscellaneous standard equipment


Work lights; tool kit, fire extinguishers; auxiliary boom nose, and wind speed indicator.


*Optional equipment

- 14.00R25 tires (vehicle width. 3,0 m [9.8 ft])
- 20.5R25 tires (vehicle width. 3,1 m [10.2 ft])
- 12x8x12 drive/steer
- Transmission retarder
- Engine independent diesel cab heater, with engine pre-heater. Includes 24 hour timer.
- Spare tire and wheel with carry bracket
- Rear mounted stowage box
- Trailer hitch
- Outrigger length sensors



Dimensions

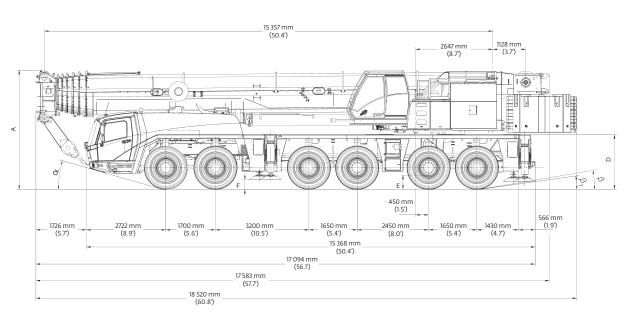

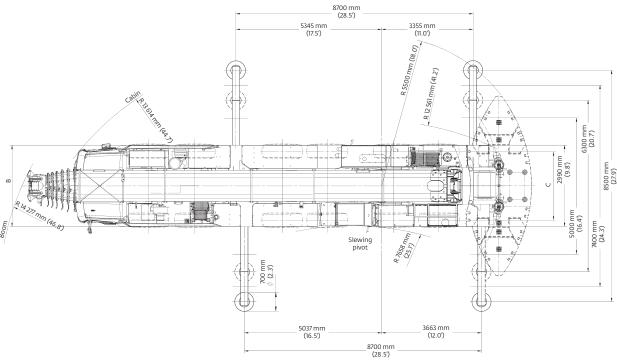

Tires	А	A *130 mm (0.4*)	В	С	D	E	F	α	β	β 1
14.00 R25	3950 mm (13.0')	3820 mm (12.5')	2970 mm (9.7')	2570 mm (8.4')	1822 mm (6.0')	400 mm (1.3')	297 mm (1.0')	14°	8°	6°
16.00 R25	4000 mm (13.1')	3870 mm (12.7')	2975 mm (9.8')	2510 mm (8.2')	1872 mm (6.1')	450 mm (1.5')	327 mm (1.1')	16°	10°	8°
20.5 R25	4000 mm (13.1')	3870 mm (12.7')	3070 mm (10.1')	2530 mm (8.3')	1872 mm (6.1')	450 mm (1.5')	327 mm (1.1')	16°	10°	8°


Ra = Radius all wheels steered *Lowered

7 Grove GMK6350L



Weights


Boom over front

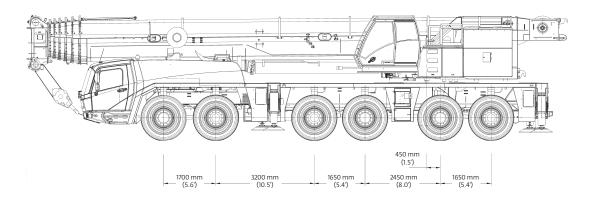


Basic Weights - kg (lb)	Axles	1 and 2	Axle	s 3 - 6	To	otal
Mercedes power, 16.00R25 tires, 12x6x12 drive/steer, 2nd oil cooler, outrigger pads, driver and tanks filled	22 927	(50,545)	48 993	(108,011)	71 920	(158,556)
Additions:						
12x8x12 drive/steer	- 222	(-489)	612	(1349)	390	(860)
Spare wheel 14.00 R25 XGC steel rim with stowage	- 199	(-439)	464	(1023)	265	(584)
Spare wheel 16.00 R25 XGC steel rim with stowage	- 244	(-538)	569	(1254)	325	(717)
Spare wheel 20.5 R25 XGC steel rim with stowage	- 278	(-613)	645	(1422)	367	(809)
Brackets for hydraulic swingaway	100	(220)	0	(0)	100	(220)
Hose reel + parts for hydraulic swingaway	110	(243)	120	(265)	230	(507)
11 m - 18 m (36 ft - 59 ft) hydraulic swingaway	2525	(5567)	- 515	(-1135)	2010	(4431)
Auxiliary hoist	-2509	(-5,531)	5269	(11,616)	2760	(6085)
7000 kg (15,400 lb) base plate stowed on carrier	3662	(8073)	3338	(7359)	7000	(15,432)
9500 kg (20,900 lb) slab on top of base plate stowed on carrier	4970	(10,957)	4530	(9987)	9500	(20,944)
Substitutions:						
14.00R25 tires	- 240	(-529)	- 480	(-1058)	- 720	(-1587)
20.5R25 tires	168	(370)	336	(741)	504	(1111)
Removals:						
Boom assembly without lift cylinder	-17 034	(-37,554)	-10 499	(-23,146)	-27 533	(-60,700)
Front outriggers	-1655	(-3649)	- 890	(-1962)	-2545	(-5611)
Rear outriggers	1842	(4061)	-4675	(-10,307)	-2833	(-6246)
Front and rear outrigger floats	0	(0)	- 350	(-772)	- 350	(-772)



Counterweight

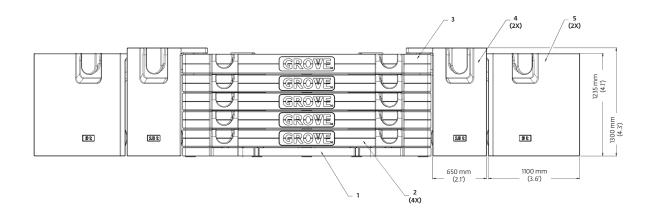

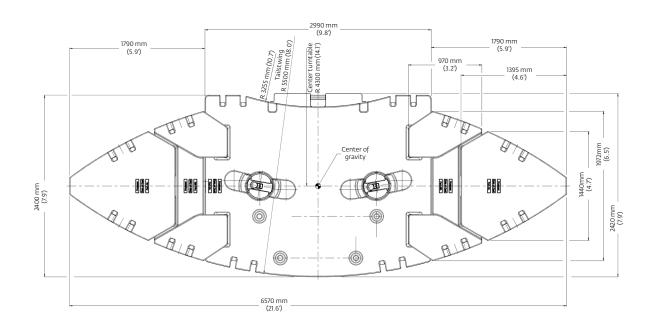


	1 7,0 t (15,430 lb)	2 9,5 t (20,940 lb)	3 9,5 t (20,940 lb)	4 10,0 t (22,050 lb)	5 9,0 t (19,840 lb)
7,0 t (15,400 lb)	Χ	-	-	-	-
16,5 t (36,400 lb)	Χ	Х	-	-	-
26,0 t (57,300 lb)	Χ	2 X	-	-	-
35,5 t (78,300 lb)	Χ	3 X	-	-	-
45,0 t (99,200 lb)	Χ	4 X	-	-	-
54,5 t (120,200 lb)	Χ	4 X	Х	-	-
74,5 t (164,200 lb)	Χ	4 X	Х	2 X	-
92,5 t (203,900 lb)	Χ	4 X	Х	2 X	2 X

Grove GMK6350L



Working range

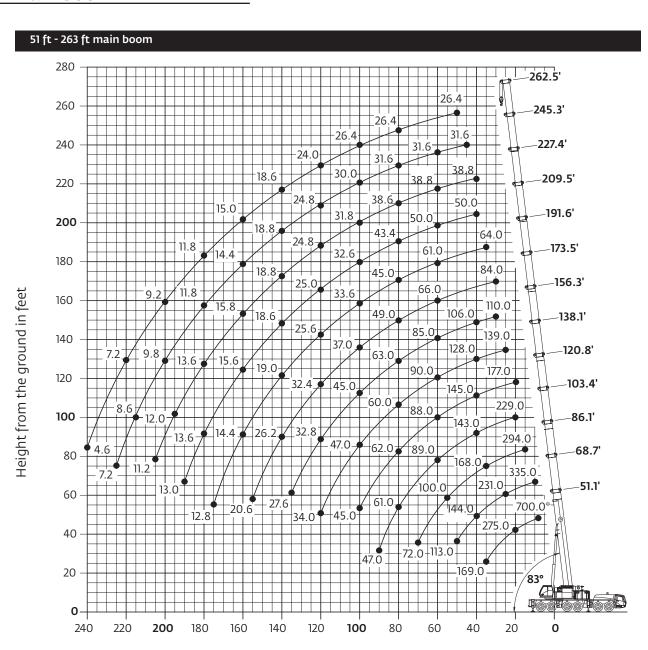

Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.





Load charts Main boom

15,6 m - 80 m 92 500 kg 26 ft 7 in spread 360° (51.1 ft - 262.5 ft) (203,900 lb) (100%)

							Pounds x 1	000					
<u>)</u>													
eet	51.1'	68.7'	86.1'	103.4'	120.8'	138.1'	156.3'	173.5'	191.6'	209.5'	227.4'	245.3'	262.5
8.0	700.0*												
0.0	416.0	335.0											
5.0	336.0	316.0	294.0										
0.0	275.0	271.0	256.0	229.0	177.0								
5.0	232.0	231.0	223.0	215.0	177.0	139.0							
0.0	199.0	198.0	196.0	190.0	175.0	139.0	110.0	84.0					
5.0	169.0	169.0	168.0	167.0	161.0	137.0	110.0	84.0	64.0				
0.0		144.0	144.0	143.0	145.0	128.0	106.0	84.0	64.0	50.0	38.8		
15.0		127.0	125.0	124.0	126.0	118.0	101.0	83.0	64.0	50.0	38.8	31.6	
0.0		113.0	112.0	110.0	110.0	110.0	96.0	77.0	64.0	50.0	38.8	31.6	26.4
5.0			100.0	99.0	98.0	100.0	91.0	71.0	63.0	50.0	38.8	31.6	26.
0.0			90.0	89.0	88.0	90.0	85.0	66.0	61.0	50.0	38.8	31.6	26.
5.0			81.0	79.0	78.0	81.0	80.0	60.0	57.0	50.0	38.8	31.6	26.
0.0			72.0	72.0	73.0	73.0	74.0	56.0	53.0	48.0	38.8	31.6	26.
5.0			72.0	66.0	67.0	66.0	68.0	52.0	49.0	46.0	38.8	31.6	26.
0.0				61.0	62.0	60.0	63.0	49.0	45.0	43.4	38.6	31.6	26.
5.0				58.0	57.0	55.0	58.0	44.0	42.0	40.4	37.4	31.6	26.
0.0				47.0	52.0	53.0	53.0	40.6	38.8	37.4	35.6	31.6	26.4
5.0				17.0	49.0	50.0	49.0	38.4	36.0	35.0	33.6	31.0	26.
0.0					45.0	47.0	45.0	37.0	33.6	32.6	31.8	30.0	26.
05.0					75.0	43.8	41.6	35.8	31.2	30.4	30.0	28.6	26.4
10.0						40.6	38.4	34.6	29.4	28.6	28.2	27.4	26.0
15.0						37.8	35.6	33.4	27.4	26.8	26.6	26.0	25.0
20.0						34.0	32.8	32.4	25.6	25.0	24.8	24.8	24.0
25.0						34.0	30.4	31.4	24.2	23.4	23.2	23.6	23.
30.0							28.4	30.0	22.6	22.0	21.8	22.2	21.4
35.0							27.6	28.0	20.8	20.2	20.2	20.6	19.
10.0							27.0	26.2	19.0	18.6	18.8	18.8	18.0
45.0								24.4	17.2	17.4	17.8	17.0	17.8
50.0								22.8	16.2	16.8	17.0	16.0	17.0
55.0								20.6	15.2	16.2	16.4	15.2	16.0
50.0								20.0	14.4	15.6	15.8	14.4	15.0
55.0									13.8	15.0	15.0	13.8	14.
70.0									13.2	14.6	14.6	13.0	13.4
75.0									12.8	14.0	14.0	12.4	12.4
30.0									12.0	13.6	13.6	11.8	11.8
35.0										13.4	13.0	11.4	11.0
90.0										13.4	12.6	10.8	10.4
95.0										13.0	12.0	10.8	9.8
0.00											11.6	9.8	9.2
05.0											11.0	9.8	8.6
15.0 10.0											11.2		8.2
15.0												9.0 8.6	7.6
20.0												8.5	7.0
25.0													
												7.2	6.6
30.0													6.0
35.0													5.2
0.0													4.

^{*} Over the rear with special equipment

Loads greater than 394,000 lb can only be lifted with special equipment.



Load charts


Main boom



[] [- Will	Pounds	x 1000						
						Tourids	X 1000						
	E2 21	50 T	06.11	102.41	120.01	***	150 21		202.61	200 5	227.41	245 21	262 51
Feet	51.1'	68.7'	86.1'	103.4'	120.8'	138.1'	156.3'	173.5'	191.6'	209.5'	227.4'	245.3'	262.5'
10.0	416.0	335.0											
15.0	331.0	316.0	294.0										
20.0	271.0	268.0	256.0	229.0	177.0								
25.0	228.0	225.0	223.0	215.0	177.0	139.0							
30.0	187.0	186.0	186.0	184.0	175.0	139.0	110.0	84.0					
35.0	157.0	157.0	156.0	155.0	156.0	137.0	110.0	84.0	64.0				
40.0		135.0	134.0	133.0	133.0	128.0	106.0	84.0	64.0	50.0	38.8	27.6	
45.0		117.0	117.0	117.0	114.0	116.0	101.0	83.0	64.0	50.0	38.8	31.6	26.4
50.0		101.0	103.0	101.0	100.0	102.0	96.0	77.0	64.0	50.0	38.8	31.6	26.4
55.0			90.0	90.0	91.0	90.0	90.0	71.0	63.0	50.0	38.8	31.6	26.4
60.0 65.0			80.0 72.0	80.0 75.0	82.0 74.0	80.0 72.0	82.0 74.0	66.0 60.0	61.0 57.0	50.0 50.0	38.8 38.8	31.6 31.6	26.4 26.4
70.0			65.0	67.0	66.0	66.0	67.0	56.0	53.0	48.0	38.8	31.6	26.4
75.0			05.0	61.0	60.0	61.0	60.0	52.0	49.0	46.0	38.8	31.6	26.4
80.0				55.0	54.0	56.0	54.0	49.0	45.0	43.4	38.6	31.6	26.4
85.0				49.0	50.0	51.0	49.0	44.0	42.0	40.4	37.4	31.6	26.4
90.0				45.0	47.0	47.0	44.0	41.0	38.8	37.4	35.6	31.6	26.4
95.0				75.0	43.8	42.6	40.0	38.6	36.0	35.0	33.6	31.0	26.4
100.0					40.0	38.6	36.2	37.0	33.6	32.6	31.8	30.0	26.4
105.0					10.0	35.4	33.0	35.2	30.8	30.4	30.0	28.6	26.4
110.0						32.6	32.0	32.4	28.0	28.0	28.2	27.4	26.0
115.0						30.0	31.0	30.0	25.4	25.6	26.4	26.0	25.0
120.0						28.0	29.6	27.6	23.0	23.4	24.4	24.8	24.0
125.0							27.6	25.4	20.8	21.6	22.6	23.2	23.0
130.0							25.6	23.4	19.0	20.4	21.0	21.4	21.4
135.0							23.8	21.6	17.6	19.0	19.8	19.6	19.8
140.0								20.0	16.6	18.0	18.6	18.0	18.6
145.0								18.4	16.0	17.4	17.8	16.6	17.6
150.0								17.0	15.4	16.8	17.0	15.8	16.2
155.0								15.8	14.8	16.2	16.4	15.2	14.8
160.0									14.2	15.6	15.6	14.4	13.6
165.0									13.8	14.8	14.8	13.8	12.4
170.0									13.2	13.8	13.8	12.8	11.4
175.0									12.8	12.8	12.8	12.0	10.4
180.0										12.2	11.8	10.8	9.4
185.0 190.0										11.8 11.2	10.8 10.0	10.0 9.0	8.4 7.6
190.0										11.2	9.2		6.8
200.0											8.6	8.4 7.6	5.8
200.0											8.2	6.8	5.0
203.0											0.2	6.2	4.4
210.0 215.0												5.4	3.6
220.0												4.8	3.0
225.0												4.2	




Load charts Main boom

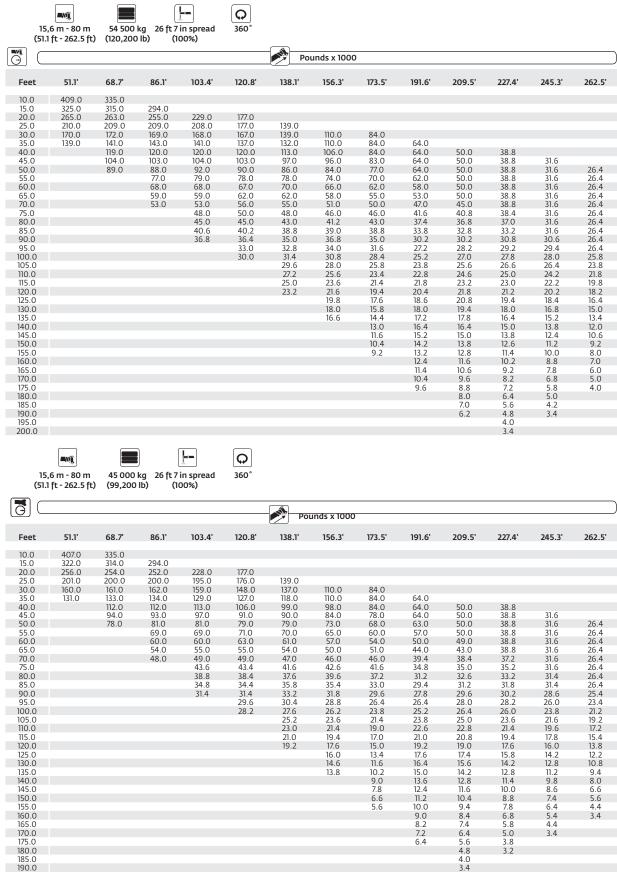



Load charts

Main boom

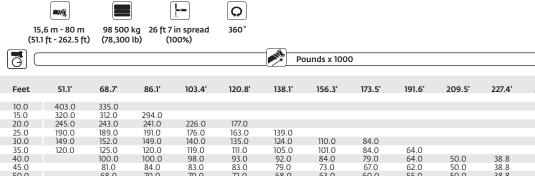


Feet	51.1'	68.7'	86.1'	103.4'	120.8'	138.1'	156.3'	173.5'	191.6'	209.5'	227.4'	245.3'	262.5'
10.0	403.0	335.0											
15.0	320.0	312.0	294.0										
20.0	245.0	243.0	241.0	226.0	177.0								
25.0	190.0	189.0	191.0	176.0	163.0	139.0							
30.0	149.0	152.0	149.0	140.0	135.0	124.0	110.0	84.0					
35.0	120.0	125.0	120.0	119.0	111.0	105.0	101.0	84.0	64.0				
40.0		100.0	100.0	98.0	93.0	92.0	84.0	79.0	64.0	50.0	38.8		
45.0		81.0	84.0	83.0	83.0	79.0	73.0	67.0	62.0	50.0	38.8	31.6	
50.0		68.0	70.0	70.0	72.0	68.0	63.0	60.0	55.0	50.0	38.8	31.6	26.4
55.0			61.0	62.0	63.0	60.0	55.0	55.0	48.0	46.0	38.8	31.6	26.4
60.0			54.0	55.0	54.0	53.0	50.0	49.0	41.6	41.0	38.6	31.6	26.4
65.0			46.0	47.0	47.0	46.0	48.0	43.4	37.2	38.4	38.0	31.6	26.4
70.0			40.6	41.8	41.4	42.4	42.6	38.6	34.8	36.6	36.2	31.6	26.4
75.0				37.0	37.0	38.8	37.6	34.4	32.8 31.0	34.2	33.6	30.4 28.2	26.2
80.0				32.8	33.6	34.8	33.2	30.6 26.8		31.8	30.6 27.6		25.2
85.0 90.0				29.2 27.4	31.6 28.6	31.0 28.0	29.6 26.4	26.8	29.4 27.6	29.8 27.2	25.0	25.0 22.6	22.4 20.0
95.0				27.4	25.6	25.6	23.4	20.8	25.4	24.8	22.6	20.2	
100.0					23.0	23.6	20.8	18.2	23.4	22.4	20.4	18.2	17.8 15.8
105.0					23.2	22.0	18.6	15.8	20.8	20.0	18.2	16.4	
110.0						20.2	17.6	13.8	18.8	18.0	16.4	14.4	13.8 12.2
115.0						18.4	16.8	12.0	16.8	16.2	14.6	12.8	10.6
120.0						16.6	15.8	10.2	15.0	14.4	12.8	11.4	9.2
125.0						10.0	15.0	8.8	13.6	12.6	11.4	9.8	7.8
130.0							13.6	7.4	12.0	11.4	9.8	8.4	6.6
135.0							12.2	6.0	10.8	10.0	8.6	7.0	5.2
140.0								4.8	9.6	8.8	7.4	5.8	4.0
145.0								3.8	8.4	7.6	6.2	4.8	
150.0								2.8	7.4	6.6	5.2	3.8	
155.0									6.4	5.8	4.2		
160.0									5.6	4.8			
165.0									4.8	3.8			
170.0									4.0	3.2			
175.0									3.4				



$\left[\overline{\Theta} \right]$						F	ounds x 10	00					
<u> </u>													
Feet	51.1'	68.7'	86.1'	103.4'	120.8'	138.1'	156.3'	173.5'	191.6'	209.5'	227.4'	245.3'	262.5'
10.0	401.0	335.0											
15.0	312.0	307.0	293.0										
20.0	234.0	230.0	225.0	201.0	175.0								
25.0	177.0	178.0	165.0	158.0	145.0	131.0							
30.0	134.0	139.0	129.0	125.0	116.0	111.0	104.0	84.0					
35.0	100.0	107.0	106.0	101.0	98.0	93.0	85.0	79.0	64.0				
40.0		84.0	87.0	84.0	84.0	78.0	71.0	68.0	62.0	50.0	38.8		
45.0		67.0	72.0	75.0	72.0	67.0	61.0	61.0	52.0	49.0	38.8	31.6	
50.0		55.0	61.0	62.0	62.0	57.0	57.0	53.0	46.0	46.0	38.8	31.6	26.4
55.0			52.0	53.0	53.0	51.0	51.0	45.0	42.4	43.2	38.4	31.6	26.4
60.0			44.0	45.0	45.0	46.0	44.0	39.4	39.4	39.4	37.2	31.4	26.4
65.0			37.6	39.0	40.0	41.2	38.8	34.4	37.0	36.4	33.8	30.6	26.4
70.0			32.4	34.4	36.2	36.2	34.2	30.2	34.0	32.6	30.0	27.4	24.0
75.0				31.0	32.4	32.2	30.0	26.6	30.8	29.0	26.6	24.0	21.4
80.0				28.0	28.4	29.2	26.4	23.2	27.6	26.0	23.6	21.2	18.6
85.0				24.6	25.2	26.6	24.8	19.8	24.8	23.4	20.8	18.6	16.0
90.0				21.8	22.8	23.8	23.2	17.0	22.2	21.0	18.6	16.4	13.8
95.0					20.4	21.2	21.0	14.6	19.6	18.6	16.6	14.4	11.8
100.0					18.2	19.0	18.8	12.4	17.4	16.6	14.6	12.4	10.2
105.0						16.8	16.8	10.4	15.2	14.6	13.0	10.8	8.6
110.0						15.0	15.0	8.6	13.6	12.6	11.2	9.4	7.0
115.0						13.4	13.2	6.8	11.8	11.0	9.6	8.0	5.6
120.0						11.8	11.8	5.4	10.2	9.6	8.0	6.6	4.4
125.0							10.2	4.2	9.0	8.2	6.8	5.2	
130.0							9.2	3.0	7.8	7.0	5.6	4.0	
135.0							8.0		6.6	5.8	4.4		
140.0									5.6	4.8			
145.0									4.6	3.8			
150.0									3.6	2.8			




Load charts Main boom

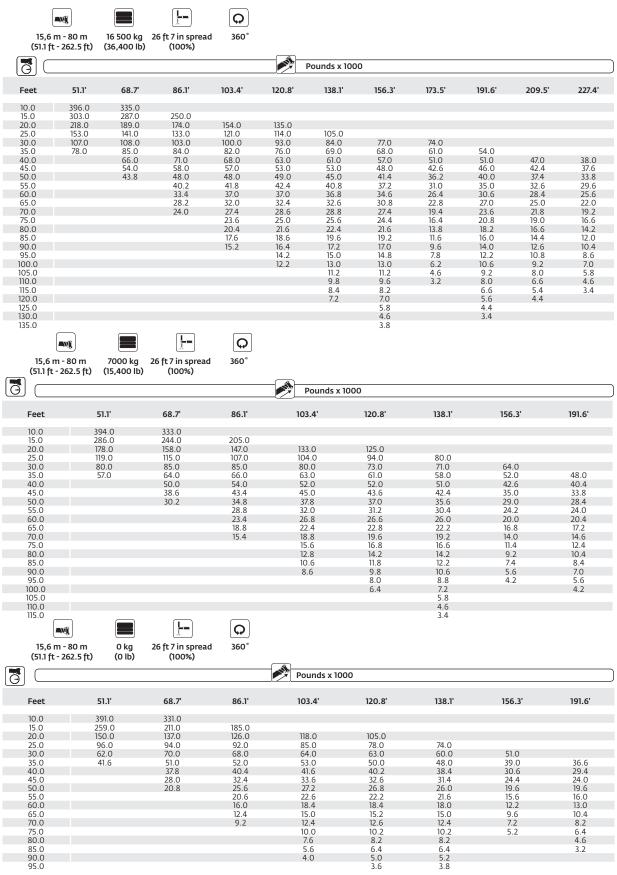



Working range Hydraulic offsettable swingaway

263 ft main boom with 39 ft - 69 ft swingaway and 26 ft insert

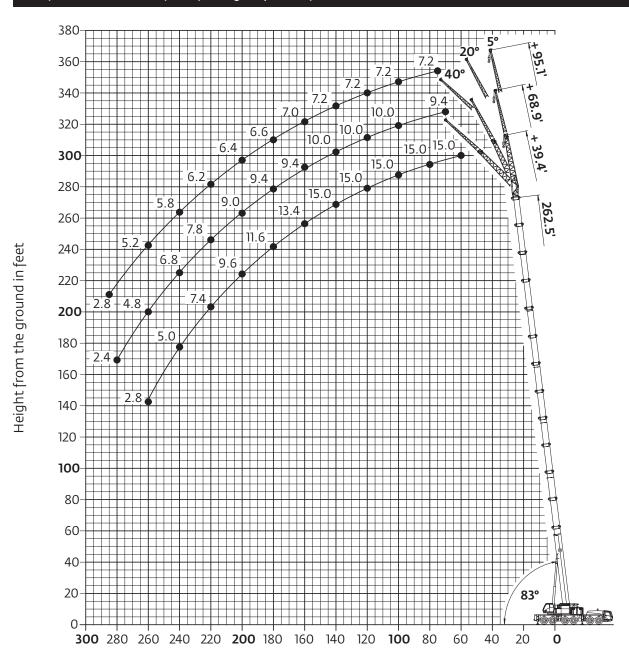

Operating radius in feet from axis of rotation

Hook heights shown in the working diagram do not consider loaded boom deflection.




Load charts Hydraulic offsettable swingaway

Intermediate angle and loads for luffing *NIK ZZZ <u>|</u>-**≡**Ni<u>ľ</u> Q 12-21-29 m (39-69-95 lb) 92 500 kg (203,900 lb) 26 ft 7 in spread (100%) 80 m (262.5 ft) 360° **3** Pounds x 1000 262.5' + 39' 5°- 20° 262.5' + 69' 5°- 20° 262.5' + 95' 5°- 20° 5° 20°- 40° 20°- 40° 20°- 40° 60.0 65.0 70.0 15.0 15.0 15.0 75.0 80.0 15.0 15.0 9.4 9.4 15.0 15.0 85.0 90.0 9.4 9.4 9.4 9.4 9.4 9.4 9.4 10.0 10.0 10.0 10.0 15.0 15.0 15.0 15.0 15.0 15.0 95.0 100.0 105.0 7.2 7.2 7.2 7.2 7.2 7.0 7.0 6.8 9.0 8.8 8.8 110.0 115.0 120.0 8.8 10.0 10.0 6.0 9.4 9.4 8.6 14.8 14.8 14.6 14.6 14.6 14.2 13.8 13.4 14.8 130.0 15.0 15.0 15.0 15.0 14.4 14.0 13.4 135.0 140.0 145.0 14.6 14.4 14.0 9.4 9.4 9.4 9.4 8.4 8.4 8.4 8.4 6.8 6.8 6.8 6.6 6.0 6.0 6.0 6.0 10.0 10.0 150.0 9.4 9.4 155.0 160.0 13.8 13.4 9.2 8.2 8.2 6.6 6.0 165.0 170.0 175.0 180.0 13.0 12.4 12.0 11.4 13.0 12.4 12.0 11.4 13.2 12.6 12.2 11.6 9.4 9.4 9.4 9.4 8.2 8.2 8.2 8.2 6.8 6.8 6.6 6.6 6.6 6.4 6.4 6.4 6.0 6.0 6.0 6.0 8.8 185.0 190.0 195.0 9.4 9.4 9.4 9.0 6.6 6.6 6.4 6.4 10.8 10.8 10.4 9.8 9.2 8.6 8.2 11.2 10.6 10.2 9.6 9.0 8.6 9.8 9.2 8.6 8.4 8.4 8.0 6.2 6.2 6.2 6.0 200.0 205.0 8.8 8.4 6.0 8.0 6.4 8.4 8.0 7.4 6.8 8.2 7.8 7.4 215.0 220.0 7.6 7.0 7.6 7.0 8.2 7.8 7.4 7.0 6.6 6.2 5.6 8.0 7.8 7.6 7.4 7.2 6.8 6.4 6.2 6.0 6.0 6.4 6.0 5.6 5.0 4.4 5.8 5.8 5.8 5.8 5.6 5.8 5.8 5.8 5.8 5.6 6.4 6.0 5.4 5.0 230.0 235.0 240.0 245.0 7.0 6.6 6.2 5.8 5.8 5.6 250.0 255.0 260.0 4.0 3.4 2.8 5.0 4.6 4.0 5.2 4.8 4.2 5.8 5.4 4.8 5.4 5.0 4.4 4.0 5.4 5.4 5.2 3.2 2.6 5.2 4.6 3.6 3.2 2.8 2.2 4.8 265.0 3.8 270.0 275.0 280.0 3.6 3.2 2.6 2.2



Working range Integrated heavy duty jib


Heavy duty jib 7.5 ft

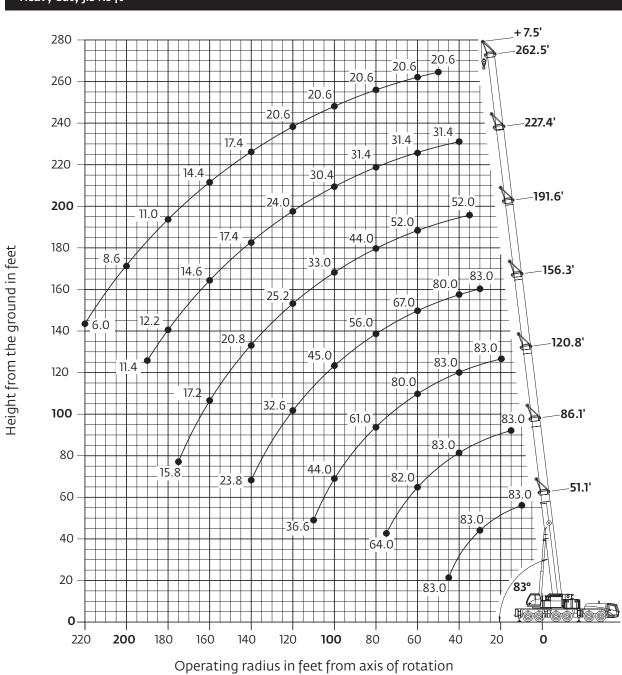

Hook heights shown in the working diagram do not consider loaded boom deflection.




Load charts Integrated heavy duty jib

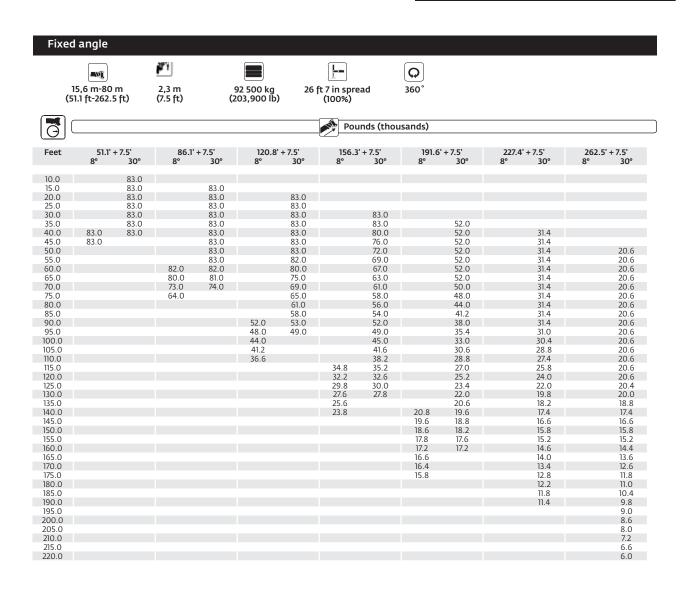



Symbols glossary

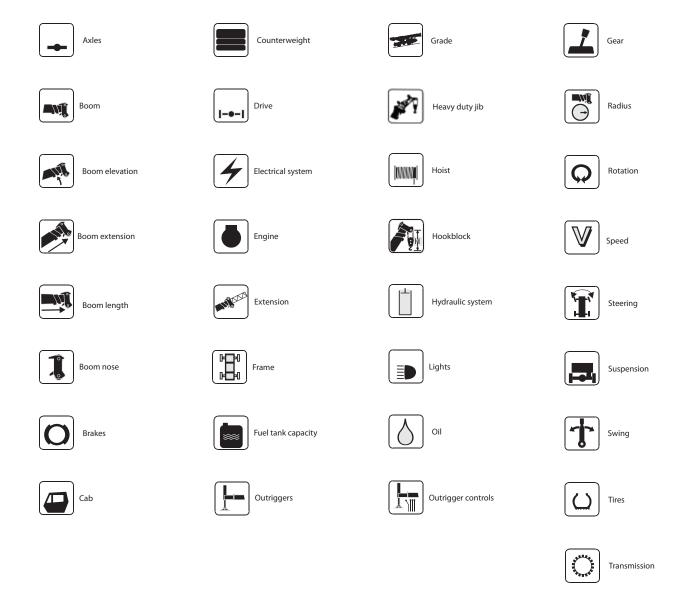



Notes



Notes



Notes

Grove GMK6350L 23



Grove Manitowoc National Crane Potain



Regional headquarters

Manitowoc - Americas Manitowoc, Wisconsin, USA

Tel: +1 920 684 6621 Fax: +1 920 683 6277

Shady Grove, Pennsylvania, USA

Tel: +1717 597 8121 Fax: +17175974062

Manitowoc - Europe, Middle East & Africa

Ecully, France Tel: +33 (0)472182020 Fax: +33 (0)472182000 **Manitowoc - Asia Pacific**

Shanghai, China Tel: +86 21 6457 0066 Fax: +86 21 6457 4955

Regional offices

Americas Brazil Alphaville Mexico Monterrey Chile Santiago

Europe, Middle East

& Africa

Portugal Baltar Russia Moscow U.A.E. Dubai U.K. Gawcott

Asia - Pacific

Czech Republic Netvorice Brisbane Melbourne France Sydney Baudemont Cergy China Decines Beijing Xi'an Germany India Langenfeld Hyderabad Hungary Pune Budapest Korea Italy Seoul Parabiago **Philippines** Netherlands Makati City Breda Singapore Poland Warsaw

France Charlieu La Clayette Moulins Germany Australia Wilhelmshaven India Pune Italy Niella Tanaro Portugal Baltar Fânzeres

Slovakia Saris USA Manitowoc Port Washington Shady Grove

Factories

Brazil

China

TaiAn

Alphaville

Zhangjiagang

This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.



Grove Manitowoc National Crane Potain







Manitowoc sets the standard for lifting

For almost a century, Manitowoc has been a premier crane manufacturer. Headquartered in Manitowoc, Wis., our manufacturing, service and sales network extends around the world, with operations in the Americas, Europe, the Middle East, Africa and Asia-Pacific. By maintaining this worldwide presence, we are everywhere our customers need us, keeping their operations running and profitable. We're well positioned to understand and serve our customers. That's most of what defines a global industry leader — but just part of what underlines the Manitowoc difference.







Lattice-boom crawler cranes



Boom trucks and truck-mounted cranes



Tower and self-



innovation



Manitowoc is the single-source solution for any construction lifting need. Dedicated exclusively to this industry, our legacy is providing the most innovative, advanced and comprehensive range of lifting solutions, with products that have long set the standard for excellence worldwide. When customers need Grove mobile telescopic cranes, Manitowoc lattice-boom crawler cranes, Potain tower cranes, National Crane boom trucks, Shuttlelift or YardBoss industrial cranes, or Manitowoc Crane Care parts and services, we deliver.

We back our brands with thousands of the best people in the business, located at more than a dozen manufacturing facilities and over 20 regional sales and support offices around the world. In just over 80 years, we have set the standard for lifting innovation, obtaining more than 150 patents and 500 trademarks.

There is a lot riding on getting the job done right — safety, profitability, even reputations. With so much on the line, everyone must be committed to delivering the best, no matter what. At Manitowoc, our commitment goes even further. We're passionate about exceeding our customers' expectations.









erecting cranes Manitowoc Crane Care

Manitowoc Finance

CraneSTAR



Mobile telescopic cranes

Groundbreaking. Innovative. Mobile solutions for the world.


















Boom trucks and truck-mounted cranes

Rugged. Reliable. Truck-mounted cranes that prove their worth, time after time.

Anyone who values the benefits that rugged boom trucks bring to the jobsite knows the names National Crane, Grove and Dongyue well.

- National Crane offers 12 series of telescoping boom trucks, ranging in capacity from 7,25 t 50 t (8 USt 55 USt).
- Grove truck cranes are a popular choice with contractors, thanks to highway-speed travel capabilities and high-capacity booms. With five different models ranging in capacity from 35 t 90 t (45 USt 110 USt), Grove offers a truck crane model for any job.













Tower and self-erecting cranes

Dependable. Efficient. Tower cranes that get the job done right.









Manitowoc Crane Care

The best cranes deserve the best service.

Manitowoc Crane Care is the lifting industry's most comprehensive and advanced service and support network. With Crane Care, we offer global access to parts, technical assistance, expert repairs and training — all designed to keep our customers productive for the life of any Manitowoc crane.

Parts

We know how important it is to have the right replacement parts available should our customers need them. To satisfy those needs promptly, we have major parts operations and warehousing facilities around the world, backed by an advanced parts inventory and logistics system, including:

- Global Parts Express 2 (GPX2) an Internet-based, worldwide distributor parts ordering system with 24/7 availability and service
- Customer Accessible Parts eXpress (CAPX) and D3 electronic catalogs and technical manuals — customers can locate parts quickly from their electronic parts manuals, request pricing and delivery information as well







Service and technical support

Our worldwide — yet locally based — network of technicians and support staff are skilled, knowledgeable and ready to serve. No matter when a customer has a need, or where in the world a crane happens to be operating, Crane Care offers local distributors, regional contact centers and rapid response teams offering 24/7 support. Master-level product service engineers can be dispatched within hours to provide on-site damage evaluations and develop step-by-step procedures on how to perform repairs to OEM standards.

EnCORE

With EnCORE from Crane Care, crane owners are assured their equipment will keep performing year after year. EnCORE is available for single components or entire machines, and it encompasses a range of services from repair to rebuild, and from remanufacture to exchange. This ensures that our customers receive maximum value from their original investment, with minimized lifetime operating costs and reduced downtime.

Training

We're dedicated to offering the highest-quality technical service training available anywhere. Every year, we train thousands of customers — from beginner to master level — at Manitowoc Crane Care training centers located around the world. We have our own dedicated classrooms and training aids, including on-site cranes, for practical hands-on learning. In addition, we offer online e-learning training courses for the basics — and as refresher courses when required.





Technical publications

We provide our customers with comprehensive replacement parts and service information, including hardcopy and electronic versions of technical publications such as parts catalogs, operators manuals, service manuals, etc. These publications include the latest engineering design features and updates. They are available in multiple languages and are created at a serial-number-specific level.

Manitowoc Crane Care provides:

- Contact centers, available 24/7
- Global access to parts and service
- Comprehensive training
- Technical publications
- Repair and erection services*
- Remanufacturing





Manitowoc Finance

Flexible, convenient financing that puts customers in control.



In addition to designing, building and supporting outstanding cranes, we also offer our customers a wide range of attractive financing and leasing options through Manitowoc Finance. Our team of financing professionals offers industry experience and outstanding customer service and products to help customers meet their business goals and stay competitive.

With Manitowoc Finance, equipment can be acquired with virtually no cash outlay; and unlike traditional lending, our financial products don't affect bank lines of credit. Our customers' capital resources remain intact for times when they need ready access to cash.

We offer special low, competitive rates, and customers can take advantage of flexible financing options and payment schedules that are adaptable to virtually any business need. Our financing agreements can be structured to help them make the best use of their cash reserves and to compensate for seasonal business fluctuations — they can make lower payments when revenue drops or higher payments when business is at its peak. With Manitowoc Finance, we structure our products to put our customers in control.







Manitowoc CraneSTAR makes it easier for crane owners to monitor and maintain their equipment. CraneSTAR is the most extensive and innovative OEM-produced crane asset management system available. With its flexible, dual-mode communications capability, GPS and data monitoring and diagnostics, CraneSTAR gives customers near-real-time crane fleet information, no matter where in the world a crane is working.

CraneSTAR enables them to monitor locations and working conditions, plan maintenance and lifting schedules and maximize their company's efficiency, productivity and profitability. They can easily access the CraneSTAR Web site using any Web-enabled device connected to the Internet, and then export data easily into their own business system or program of choice. In addition, customers can monitor and analyze critical data such as engine use, daily productivity and more, thereby enabling them to recognize trends, make more efficient decisions, schedule routine maintenance, and ultimately improve profitability and reduce costs.



Grove Manitowoc National Crane Potain



Manitowoc Cranes regional headquarters

Americas

2401 South 30th Street Manitowoc, WI 54220 USA

Tel: +1 920 684 6621 **Fax:** +1 920 683 6277

1565 Buchanan Trail East Shady Grove, PA 17256 USA

Tel: +1 717 597 8121 **Fax:** +1 717 597 4062

Europe, Middle East and Africa

18, rue de Charbonnieres B.P. 173 69132 Ecully Cedex, France

Tel: +33 (0)4 72 18 20 20 **Fax:** +33 (0)4 72 18 20 00

Asia-Pacific

16F Xu Hui Yuan Building 1089 Zhongshan No. 2 Road (S) Shanghai 200030 China

Tel: +86 21 6457 0066 **Fax:** +86 21 6457 4955

www.manitowoc.com

A number of trade and brand names appear in this brochure. For ease of design, these are displayed without their superscript or subscript symbols. The most common names are: MANITOWOC®, NATIONAL CRANE®, MANITOWOC CRANE CARE®, MANITOWOC FINANCE®, GROVE®, POTAIN®, TWIN-LOCK $^{\text{TM}}$, MEGATRAK®, MEGAFORM $^{\text{TM}}$, EPIC®, VISION CAB $^{\text{TM}}$, MAX-ER $^{\text{TM}}$ and RINGER®.







Discover the Benefits of Manitowoc Finance



There are plenty of good reasons to select Manitowoc Finance.

Here are some of the best:

Low rates

Special low rates available on new equipment offered only through Manitowoc Finance.
Competitive rates are also available on used equipment.

Hold on to your cash

You can acquire the equipment you need with virtually no cash outlay. In most cases, all you need is a small down payment, or in the case of a lease, one payment in advance.

Keep your existing lines of credit open

Unlike traditional lending, our financial products don't affect your bank lines of credit. Your other capital resources remain intact for times when you need ready access to cash to subsidize growth or meet operational needs.

Be smart — be flexible

From flexible payment schedules to add-on equipment requirements during the life of the equipment, our financial solutions are variable enough to adapt to just about any business situation.

Get the technological edge

Using the latest equipment technology can give you a decided edge in job site efficiencies. But, today's equipment can look obsolete when compared to tomorrow's technology. Why settle for yesterday's level of efficiency? Working through Manitowoc Finance lets you upgrade to new and better equipment anytime during or at the end of the equipment contract term.

Enjoy tax benefits

Depending on the type of finance product you select, your payments may be treated as a fully deductible operating expense or you may depreciate the equipment. For a business needing to shelter income, this can be a huge benefit.







Go with the flow — cash flow!

Our flexible financing options let you schedule your payments to fit fluctuations in cash flow. For businesses tied to seasonal fluctuations, your equipment agreement can be structured to provide seasonal payments when you have income. And, for construction situations that have fluctuating revenue streams, lower monthly payments when revenue drops, and higher payments when your business is at its peak combined with skip payments during those really slow months, may be the best use of cash reserves. Manitowoc Finance can match cash flow to fit your income streams whether annual, semi-annual, quarterly or monthly.

Flexible end-of-term leasing options

We structure all of our products to put you in control. At the end of your agreement you can choose to keep on financing the same crane equipment, finance new Manitowoc equipment or return the equipment. It's up to you. You make the choice.

You can finance just about any piece of Manitowoc or Manitowoc related equipment

Just about any piece of Manitowoc equipment that produces income or saves time and labor can be financed including boom trucks, cranes, and more.

The best reason of all to use Manitowoc Finance...financing with us is quick and easy!

In most cases, just one phone call is all it takes to get the process started. Depending on the transaction size, credit approval can take place in the same day and if you have an existing line of credit, it's even faster.



Plenty of Flexibility and Choice

Manitowoc Finance offers a wide range of financing and leasing programs designed to meet the various business needs of today's customer. Some of our most popular programs are featured below. Take a moment to review them and call your dealer or Manitowoc Finance representative for additional information or with any questions you may have.

Full Payout Loan	Features	Benefits
With a Full Payout Loan, your company has fixed payments over the term of the contract while building ownership equity in the equipment over time.	 Level monthly payments Depreciation and interest deductions claimed by borrower Payment of equipment over time 	 Fixed costs aid budgeting Borrower takes full advantage of tax benefits Conserves working capital

Fixed Price Purchase Option	Features	Benefits
With a Fixed Price Purchase Option your company may purchase the equipment for an amount specified at the beginning of the term or return the equipment to Manitowoc Finance.	 Level monthly payments Option to purchase for a fixed price Payment of equipment over time 	 Fixed cost aids budgeting Operational ownership Conserves working capital Pay only for equipment use

Tax or True Lease (Fair Market Value)	Features	Benefits
An operating lease in which your company may purchase the equipment for a fair market value at lease end, extend the lease or return the equipment to Manitowoc Finance.	 Level monthly payments Option to purchase for market price Lessee may claim payments as expense (subject to advice of counsel or accountant) Pay only for equipment use May provide planned replacement 	 Fixed costs aid budgeting Operational ownership May provide tax benefits and minimize or negate the impact of AMT Conserves working capital At term end, equipment may be replaced with new unit Lower monthly payments

Early Buyout Lease	Features	Benefits
With an Early Buyout Lease, your company experiences the benefit of a Tax or True Lease (FMV) and having a one-time option to purchase the equipment at a stated amount.	 Low monthly payments based on FMV residuals Option to purchase for a fixed price prior to end of lease term Lessee may claim payments as expense (subject to advise of counsel or accountant) 	 Conserves working capital Pre-determined purchase option Tax/True Lease treatment May provide tax benefits and minimize AMT Option to return equipment at end of lease term



Types of Leases

Accounting Perspective

Capital Lease: A Capital Lease is one that meets any one or more of the four criteria per Financial Accounting Standards Board Statement Number 13 (FASB-13). A Capital Lease is often structured with a bargain purchase option that can range from \$1.00 to some amount below the expected fair market value. A lease in which the present value of the rents exceeds 90 percent of the cost of the equipment would also qualify as a Capital Lease regardless of the purchase option.

A Capital Lease represents nominal ownership for the customer. The cost of the equipment and the lease obligation must be presented on the customer's balance sheet with a Capital Lease.

Operating Lease: An Operating Lease must not meet any of the criteria of FASB-13. An Operating Lease is structured so that the customer uses the equipment for the term of the lease with the options to renew, return the equipment, or purchase it at its fair market value at the end of the lease term. An Operating Lease is basically a "Longterm Rental Agreement" in which the customer obtains the use of the equipment without the risk or benefits of ownership. For accounting purposes these transactions are usually treated as off-balance sheet.

IRS/Tax Perspective

Non-Tax Lease: A lease in which the lessee (customer) is considered by the IRS to be the owner is classified as a Non-Tax Lease. This type of arrangement is like a conditional sales contract. The title to the equipment does not pass to the customer until all required payments have been made, including the purchase option payment.

A Non-Tax Lease often has a purchase option for a predetermined price that is below the expected fair market value. The customer, in such a lease, assumes the risks of ownership and, from a tax standpoint, is considered the owner. The lessor in this type of lease is considered, from a tax standpoint, to have only provided the financing.

Tax Lease/True Lease: From a tax standpoint, a lessee would not be considered the owner of the leased equipment with a Tax or True Lease. The lessor is considered to be the owner of the equipment being leased in a Tax Lease. With a Tax Lease, the lessee is likely to receive lower rental payments because the lessor will receive the benefits of accelerated depreciation in computing his tax liability. For the lessee, all payments on a tax-oriented lease are deductible. To qualify as a Tax Lease, certain IRS guidelines must be met. These guidelines are not the same as the four criteria outlined in FASB-13 used to determine Operating or Capital Lease status from an accounting perspective.

Tax advice should always be sought from a tax professional.

Lease Classification — At a Glance

To summarize the typical tax and accounting classification on leases from the lessee's viewpoint:

	Tax Lease/True Lease	Non-Tax Lease
Tax	Lessee does not take tax benefits	Lessee takes tax benefits
Accounting	Operating Lease	Capital Lease

Please note: These materials are for informational purposes only. The availability of any financing described herein is subject to credit and equipment approval. Nothing herein constitutes tax advice and customers are advised to consult with their tax advisors prior to electing specific rates or options.



Manitowoc Finance: The best way to keep your most valued assets.

Capital starts a business and keeps it growing. Equipment lets the business do its job more efficiently and competitively. Both are essential. Holding on to both of them often requires considerable effort and the right financial solution.

Keep your capital and acquire the equipment you need—by contacting Manitowoc Finance.

An Irresistible Alternative to Ownership

Through Manitowoc Finance you can acquire a significant construction asset without a down payment. You pay for its use out of your operating budget, not from capital reserves. And, at the end of the finance term, you can often buy the equipment for a fraction of the original cost, upgrade to newer technology, extend the finance term or return the equipment to Manitowoc Finance.

The vast majority of American companies, including most of the Fortune 500, utilize some form of equipment financing. This number will continue to grow as more and more businesses discover the vast array of flexible financial solutions available in today's marketplace.

Is Manitowoc Finance right for you?


Which is right for your business, a flexible financing structure or outright purchase? The choice depends.

For example, what will happen to the equipment's value as time goes on? Will it appreciate or depreciate? What will the value be at the end of the economic life cycle? Will the equipment remain functional or become obsolete before the end of its useful life? Can your capital or credit line be better used to leverage your financial returns? Which option will provide the best tax advantage?

If it's equipment that will increase in value and can be acquired without draining your pool of capital, consider buying it. But most equipment needs are not so easily met, and that's where Manitowoc Finance can help.

Manitowoc Finance's team of construction financing professionals offers proven industry experience wrapped around the highest level of service quality. This deep commitment to our customers is the reason why we've been so successful providing flexible financial solutions to the construction industry. Our knowledgeable industry specialists are ready to provide you with the products and services you need to meet your business goals and keep you competitive.



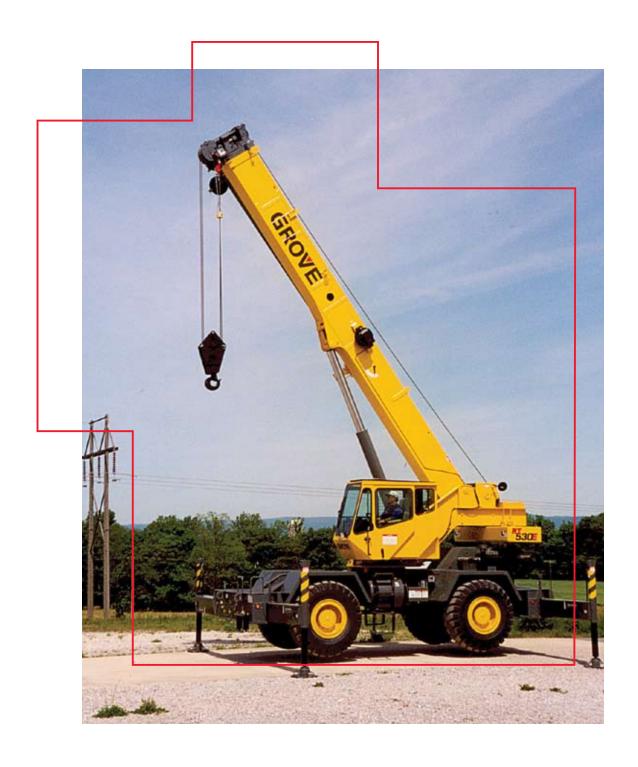



For additional information or questions regarding financing programs or financing in general from Manitowoc Finance, call:

800 377 7262

Call us today to ask us about:

Retail Loans Fair Market Value Leases Fixed Price Purchase Option Leases \$1 Option Leases Rental Fleet Financing Wholesale Financing Asset Based Lending

We also provide services in these industries to accommodate all your capital needs:

Construction Forklifts Trucks & Trailers Office Equipment Information Technology Telecommunication



Manitowoc Finance 1111 Old Eagle School Road Wayne, PA 19087

T 800 377 7262 F 866 287 1176



Grove Manitowoc National Crane Potain





CraneSTAR. Built by crane professionals — for crane professionals.





Features and benefits

As the most extensive OEM-produced crane asset management system available today, CraneSTAR leads in a new era of data management and planning for crane owners around the world.

CraneSTAR gives you up-to-date crane fleet information, no matter where you or your cranes are located. You can monitor locations and working conditions; plan maintenance and lifting schedules; and maximize your company's efficiency, productivity and profitability.

Rugged construction

CraneSTAR is designed for the tough applications your cranes see on a daily basis. All hardware is weatherproof and meets or exceeds industry environmental standards as well as SAE J1455 specifications for mechanical, electrical and environmental design and use. With its IP67 sealed, compact aluminum enclosure, the hardware is built to withstand harsh environments.


Built-in diagnostic tools

CraneSTAR allows for efficient troubleshooting with six onboard LEDs. A complete user guide is also available to help maintain and troubleshoot all components.



Dual-mode communication

Dual-mode communications provide versatility and flexibility to ensure the system can communicate under varied conditions. Whether over GSM (cell) networks or from satellite (for jobsites beyond the reach of GSM networks), users receive messages in near real time. Antennas have been selected and mounted to optimize signal strength and transmissions.

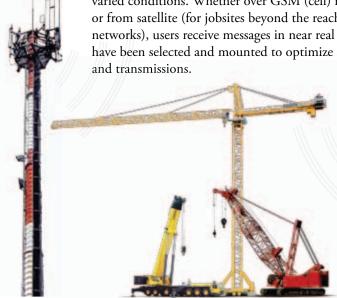

Advanced communications technology

By using the latest processor and communications technology on the market today, CraneSTAR can function nearly anywhere on the globe. CraneSTAR features a 32-bit processor, GPS, quad-band GSM, and satellite channels. These features provide the best possible options for GSM connectivity around the world.




Easy data retrieval and customization

The easy-to-use CraneSTAR Web site allows you to view your crane data from any PC or Web-enabled device with Internet connection. Users can customize reports so they can analyze data quickly and identify trends in the equipment. This secure Web site provides users a login name and password and ability to control who can access information.



Mapping and geo-fence

The mapping and geo-fence functions allow users to know where the assets are at all times. Custom setup tools and location tracking provide users the opportunity to monitor the fleet on a local, regional, national, or global level. Users can also define a jobsite boundary or fence an entire state or country.

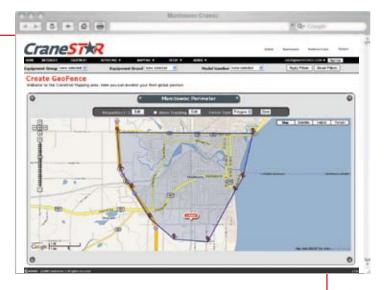



Standard installation

Available in Q3 of 2009, CraneSTAR will be phased in as standard equipment on many new models of Manitowoc cranes. Please check our Web site for specific model information.

System integration

CraneSTAR helps you manage your assets and your business by easily exporting data from the system database to your business system or any program you choose. With daily and historical data from the asset users can integrate with existing business systems for more accurate reporting and management of assets.

Data monitoring

CraneSTAR reduces costs and improves profitability by helping users monitor critical data, recognize trends, and make more efficient decisions. Users can monitor engine use, location changes, daily productivity, critical systems — and more. By monitoring and reducing idle time, users can save on fuel costs. Users can also monitor equipment for routine service and keep equipment running longer with improved maintenance.





Grove Manitowoc National Crane Potain



Manitowoc regional headquarters

Americas

Manitowoc Cranes 2401 S. 30th Street Manitowoc, WI 54220 USA

Tel: +1 920 684 6621 **Fax:** +1 920 683 6277

Shady Grove Facility 1565 Buchanan Trail East Shady Grove, PA 17256 USA

Tel: +1 717 597 8121 **Fax:** +1 717 592 5929

Europe, Middle East and Africa

Manitowoc France SAS 18, rue de Charbonnieres B.P. 173 69132 ECULLY Cedex, France

Tél: +33 (0)4 72 18 20 20 **Fax:** +33 (0)4 72 18 20 00

Asia-Pacific

Manitowoc Shanghai 16F Xu Hui Yuan Building 1089 Zhongshan No. 2 Road (S) SHANGHAI 200030 China

Tel: + 86 21 6457 0066 **Fax:** +86 21 6457 4955

www.manitowoc.com

Visit www.manitowoc.com for the most up-to-date information. This document is non-contractual. Constant improvement and engineering progress make it necessary that we reserve the right to make specification, equipment, and price changes without notice. Illustrations shown may include optional equipment and accessories and may not include all standard equipment.





