



## VERTICAL MASTS



# STAR 22 J STAR 26 J

### Excellent maneuverability in the most congested areas

- Proportional controls allow for smooth and progressive movements
- Compact turning radius
- Vertical jib allowing better accessibility to the work area (10 ft 6 in outreach)

### Optimal productivity

- Driveable at full height
- Low machine weight means longer working cycles

### Reliable and easy to maintain



**Haulotte**   
GROUP

More than lifting

[www.haulotte-usa.com](http://www.haulotte-usa.com)





# STAR 22 J / STAR 26 J

## VERTICAL MASTS




### TECHNICAL DATA

#### STAR 22 J

#### STAR 26 J

Working height	26 ft 4 in	32 ft 3 in
Platform height	20 ft 4 in	26 ft 3 in
Horizontal outreach	10 ft 6 in	10 ft 6 in
Lift capacity	441 lbs	500 lbs
Platform size	3 ft 1 in x 2 ft 7 in	3 ft 1 in x 2 ft 7 in
<b>D</b> Length	8 ft 10 in	8 ft 10 in
<b>B</b> Width	3 ft 3 in	3 ft 3 in
<b>A</b> Height - stowed	6 ft 6 in	6 ft 6 in
Tailswing	0 in	0 in
<b>C</b> Wheelbase	3 ft 11 in	3 ft 11 in
<b>E</b> Ground clearance	4 in	4 in
Driveable at full height up to	20 ft 4 in	26 ft 3 in
Drive speed	0.4 - 2.8 mph	0.4 - 2.8 mph
Turning radius - outside	6 ft 2 in	6 ft 2 in
Turntable rotation	345°	345°
Vertical jib rotation	140° (+70/-60)	130° (+70/-60)
Tires	16x5x10.5	16x5x10.5
Gradeability	23 %	23 %
Hydraulic tank capacity	2 gal	2 gal
Batteries	24 V - 240 Amph	24 V - 240 Amph
Weight	5,909 lbs	6,836 lbs

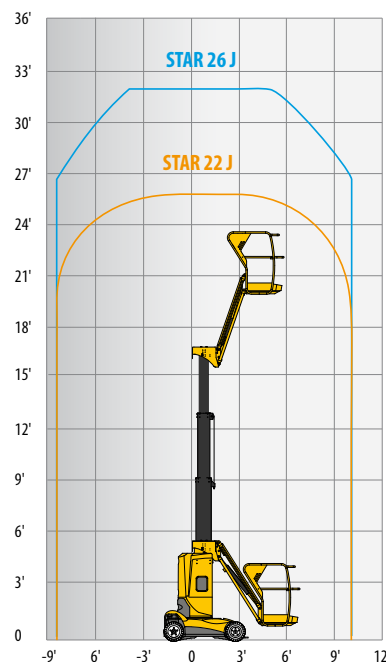

### STANDARD EQUIPMENT

- Battery charger 110 V / 60 Hz
- Descent alarm
- Non-marking tires
- Battery charge indicator
- Fixed pothole protection
- Hour meter
- 2 front steering wheels
- 2 rear driving wheels
- AC power to the platform
- Remote control for brake release
- Electric horn
- Emergency hand pump
- Lanyard attachment points
- Towing hooks
- Tilt alarm

### OPTIONS AND ACCESSORIES

- Centralized battery filling
- Alarm package (motion alarm)
- Motion flashing light
- Airline to platform
- 55 W platform working light
- Lifting lugs on mast footage
- Upper control box protection cover (transparent plastic and fixed place)

