




| Technical Data                                                   | HIAB 300-2                                                                                                                                        | HIAB 300-3                                                                                                                      | HIAB 300-4                                                                                                                               | HIAB 300-5                                                                                                                                                  |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Hydraulic outreach, standard                                     | 7.7 m                                                                                                                                             | 9.8 m                                                                                                                           | 11.6 m                                                                                                                                   | 13.5 m                                                                                                                                                      |
| Outreach/lifting capacity, standard                              | 2.1 m/12 000 kg *<br>4.2 m/ 7 000 kg<br>4.4 m/ 6 700 kg<br>6.0 m/ 4 900 kg<br>7.6 m/ 3 900 kg                                                     | 2.1 m/12 000 kg *<br>4.2 m/ 6 800 kg **<br>4.7 m/ 6 100 kg<br>6.3 m/ 4 500 kg<br>7.9 m/ 3 500 kg<br>9.7 m/ 2 850 kg             | 2.1 m/12 000 kg **<br>4.2 m/ 6 600 kg **<br>4.7 m/ 6 000 kg<br>6.3 m/ 4 350 kg<br>7.9 m/ 3 350 kg<br>9.7 m/ 2 650 kg<br>11.5 m/ 2 200 kg | 2.1 m/12 000 kg *<br>4.2 m/ 6 500 kg **<br>4.7 m/ 5 900 kg<br>6.3 m/ 4 250 kg<br>7.9 m/ 3 200 kg<br>9.7 m/ 2 500 kg<br>11.5 m/ 2 050 kg<br>13.3 m/ 1 760 kg |
| Outreach/lifting capacity, with manual boom extensions           | 9.7 m/2 900 kg<br>11.4 m/2 300 kg<br>13.3 m/1 900 kg<br>15.2 m/1 580 kg<br>17.1 m/1 320 kg<br>19.0 m/1 120 kg<br>21.0 m/ 870 kg<br>22.9 m/ 670 kg | 11.5 m/2 250 kg<br>13.3 m/1 860 kg<br>15.2 m/1 540 kg<br>17.2 m/1 300 kg<br>19.1 m/1 100 kg<br>21.0 m/ 870 kg<br>22.9 m/ 670 kg | 13.3 m/1 820 kg<br>15.2 m/1 500 kg<br>17.2 m/1 260 kg<br>19.1 m/1 060 kg<br>21.0 m/ 870 kg<br>22.9 m/ 670 kg                             | 15.2 m/1 460 kg<br>17.2 m/1 220 kg<br>19.1 m/1 020 kg<br>21.0 m/ 870 kg<br>22.9 m/ 670 kg                                                                   |
| Rec. oil flow                                                    | 50 l/min                                                                                                                                          | 50 l/min                                                                                                                        | 50 l/min                                                                                                                                 | 50 l/min                                                                                                                                                    |
| Slewing angle                                                    | 400°                                                                                                                                              | 400°                                                                                                                            | 400°                                                                                                                                     | 400°                                                                                                                                                        |
| Height in folded position                                        | 2.3 m                                                                                                                                             | 2.3 m                                                                                                                           | 2.3 m                                                                                                                                    | 2.3 m                                                                                                                                                       |
| Weight in standard version with 4.7 m outrigger and support legs | 3 220 kg                                                                                                                                          | 3 490 kg                                                                                                                        | 3 700 kg                                                                                                                                 | 3 880 kg                                                                                                                                                    |
| Weight with top-seat controls, 4.7 m outrigger and support legs  | 3 410 kg                                                                                                                                          | 3 680 kg                                                                                                                        | 3 890 kg                                                                                                                                 | 4 070 kg                                                                                                                                                    |


\*) Special hook in inner hook attachment

\*\*) Hook on extension 2

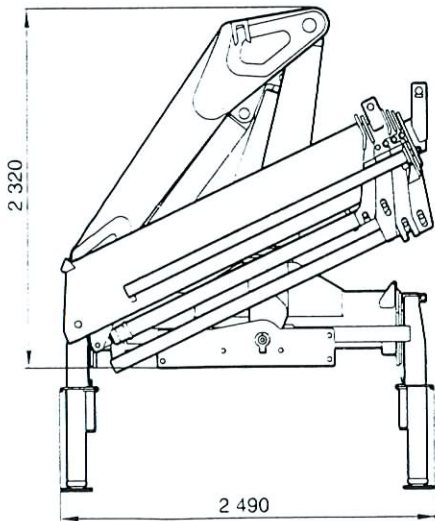

DIN 15018 B3. The HIAB 300 has been built to meet the highest standards of safety, and strength calculations have been carried out in accordance with the German DIN norm 15018, crane group B 3. In Sweden the HIAB 300 has been type-approved by Swedish Plant Inspectorate (SA) in accordance with the corresponding Swedish standard.

Note. Specifications are subject to change without notice. For complete and current details see our technical data folder. Also note some items that appear in this brochure may be optional and some applications may require the approval of local authorities.

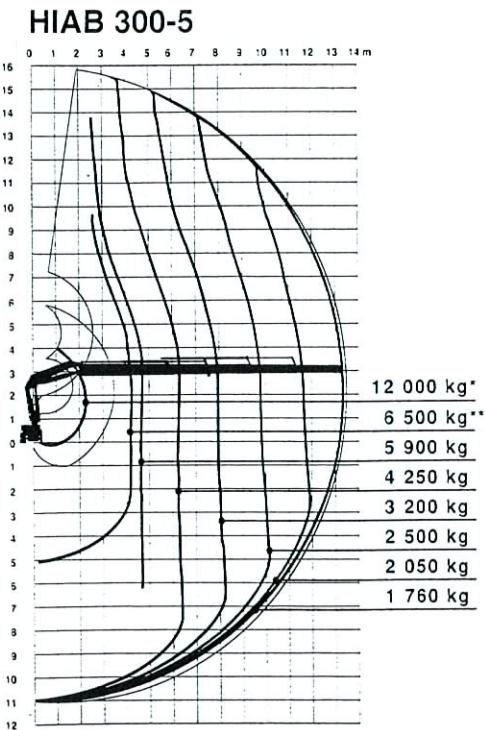

For more information about the HIAB 300, or any other HIAB crane, please write to the address below or contact your local HIAB distributor.



HUDIKSVALL • SWEDEN  
The World's No.1 Selling Articulated Crane

Partek Cargotec Pte Ltd  
2 Gul Street 4, Jurong,  
Singapore 629234

Telephone : 65 8618600  
Telefax : 65 8618601