





HIAB **XS** 144 Range 11-14 tm

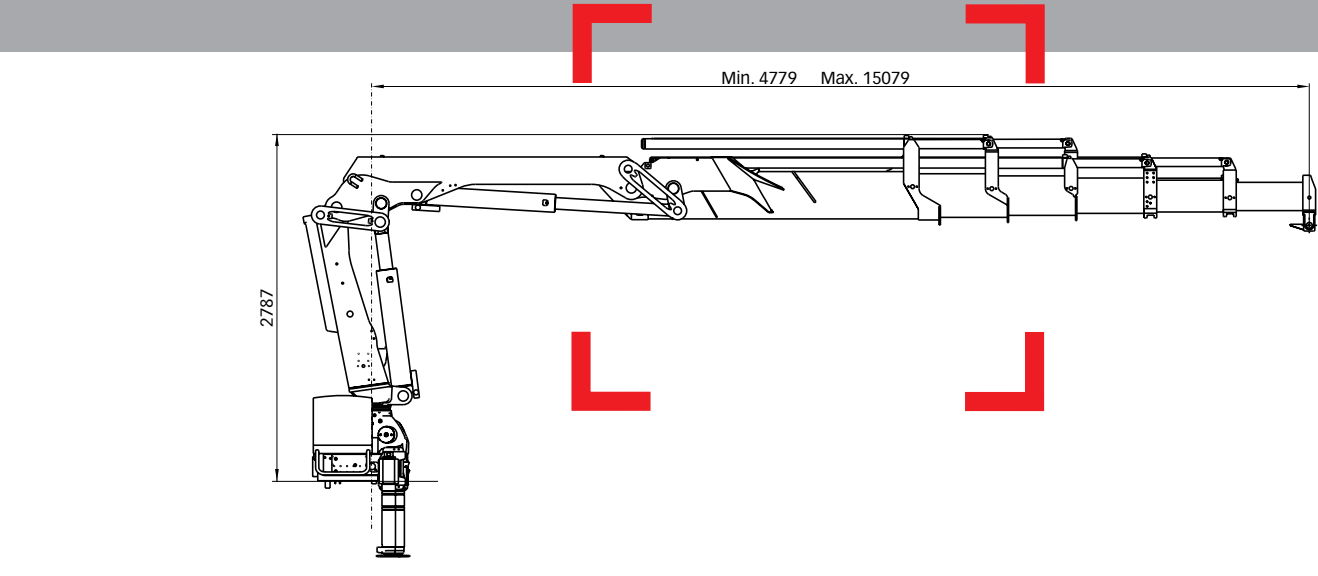

Basic data








HIAB XS 144 Basic data

Technical data	B-1 CL	B-2 CL	B-3 CL	E-4 CL	E-5 CL
Max. lifting capacity (kNm)	124	123	115	111	110
Outreach - hydraulic extensions (m)	6.3	8.4	10.6	12.8	15.1
Outreach - manual extensions (m)	12.8	12.8	12.8	17.4	17.4
Outreach / lifting capacity (m / kg)	2.8 / 4500	2.8 / 4300	3.0 / 3900	2.5 / 4500	2.6 / 4300
	4.2 / 3000	4.3 / 2800	4.5 / 2600	4.7 / 2400	4.8 / 2300
	6.0 / 2100	6.1 / 1980	6.3 / 1840	6.5 / 1600	6.6 / 1520
	-	8.0 / 1520	8.3 / 1360	8.4 / 1160	8.5 / 1080
	-	-	10.3 / 1080	10.5 / 880	10.6 / 800
	-	-	-	12.7 / 720	12.8 / 640
	-	-	-	-	15.0 / 540
Slewing angle	415°	415°	415°	415°	415°
Height in folded position (mm)	2233	2233	2233	2256	2301
Width in folded position (mm)	2500	2500	2500	2500	2500
Installation space needed (mm)	773	773	861	770	855
Weight - "standard" crane without stabilizers (kg)	1410	1540	1650	2030	2140
Weight - stabilizer equipment (kg)	195 - 366	195 - 366	195 - 366	195 - 366	195 - 366

HIAB XS 144 E-5 CL

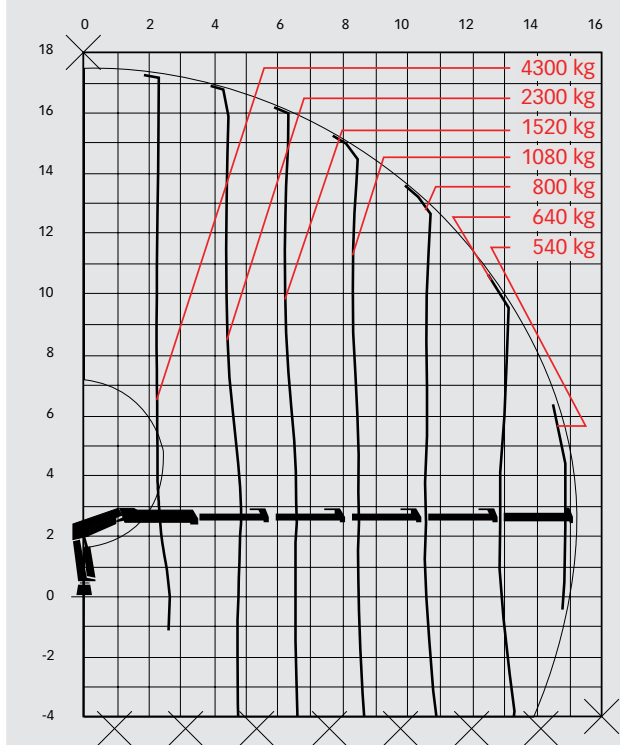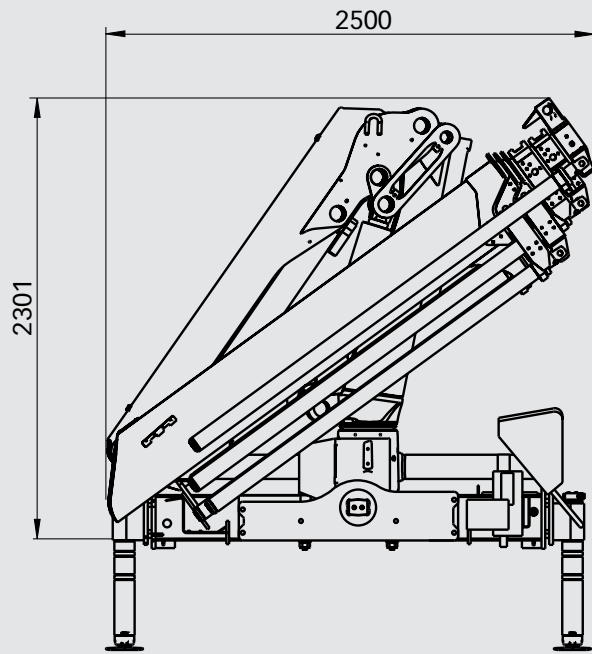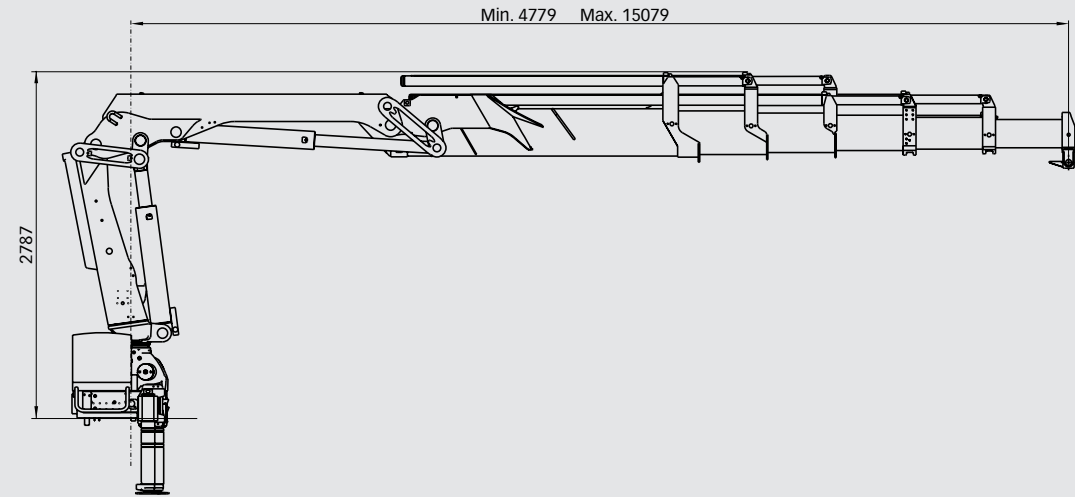

Disclaimer

Hiab cranes have been built to meet the highest standards of safety and service life and have been thoroughly tested. Strength calculations for this model have been carried out in accordance with EN13001. Hiab's certified Quality Assurance System complies with the ISO 9001. Some of the items in our literature may be extra equipment. Certain applications may require an official permit. We reserve the right to change technical specifications without prior notice. Hiab cranes produced for EU-countries are CE-marked and comply with the European Standard EN 12999.