



HITACHI SUMITOMO

SCX1200-2

HYDRAULIC CRAWLER CRANE

Specifications

ASIAN ISSUE





Specifications

HITACHI SUMITOMO

SCX1200-2

Superstructure

UPPER REVOLVING FRAME:

All-welded, precision machined, robust construction. A machined surface provided for mounting load hoist, opt. 3rd drum and boom hoist assemblies, and mounting itself on turntable bearing.

TURNTABLE BEARING WITH INTERNAL SWING GEAR:

Single shear ball type; inner race of turntable bearing with integral, internal swing (ring) gear bolted to carbody frame, and outer race of turntable bearing bolted to upper revolving frame.

CONTROL SYSTEM:

System contains one set each of quadruplicate and triplicate tandem valves which direct oil to various machine function and are actuated by control levers via remote controlled hydraulic servo for all motions. Working speeds can be precisely controlled by pilot-operated armchair single axis control levers in cooperation with “EPC” controller that varies engine rpm and hyd. pump discharge simultaneously, or varies just hyd. pump discharge while keeping engine rpm via motorcycle type grip throttle. System also takes a specially-tailored unique hydraulic circuits to maximizes drum horsepower, and reduces horsepower loss with eliminating the possibility of engine stall.

Pump control system — By “EPC” controller that provides two modes of engine-pump control.

MODE I:

The “EPC” controller is normally programmed to vary the engine speed and pump discharge simultaneously. Simply twisting the grip advances the engine to maximum speed and the hydraulic pumps to maximum flow at the same time. This mode is suitable to precision crane work.

MODE II:

By activating a switch, it is able to vary just the pump discharge by means of the grip throttle, while keeping engine speed fixed. Mode II is convenient for duty cycle works such as clamshell operation, where the engine is normally run at full throttle.

A specially-tailored pressure compensating valve —

Utilized in hydraulic circuits to realize a good minute operation of two main, boom hoist and opt. 3rd drums.

HYDRAULIC SYSTEM:

System provided with three variable displacement axial piston pumps for both independent and combined operations of all functions, and one fixed displacement duplicate tandem gear pump for system valve and cylinder controls.

Main/aux. crane hoist motors — Variable displacement axial piston motor with counterbalance valve.



- Boom hoist motor** — Axial piston type with counterbalance valve and spring-applied/power hydraulically released multiple wet-disc type automatic brake.
- Third drum motor** — Optional extra; variable displacement axial piston motor with counterbalance valve as same as that of main/aux. winches.
- Swing motor** — Two; axial piston type with spring-applied/power hydraulically released multiple wet-disc type brake.
- Travel motors** — Shoe-in design; variable displacement axial piston motor with brake valve and spring-applied/power hydraulically released multiple wet-disc type automatic brake.
- Oil cooler** — Aluminum-make; available for not only a good rustproof but also high cooling efficiency.
- Hydraulic oil reservoir** — 450 liters capacity.
- Kind of hyd. oil** — Standardized with ISO VG46 having viscosity ranging from 41.4 thru 50.6mm²/sec at 40°C.

LOAD HOIST ASSEMBLY:

- Front and rear main operating drums driven by independent hydraulic motor of bi-directional, variable displacement axial piston motor through a 2-stage planetary reduction gear unit powering the rope drum in either direction for hoisting and lowering load. Reduction gear unit installed within drum inside together with multiple wet-disc brake unit. Drum each sized in same dimension.
- Brakes** — Multiple wet-disc unit with negative brake design that takes the function of "spring-applied, power hydraulically released", and maintains a high brake safety even if a hydraulic pressure drop in the circuit happens; installed within drum inside together with shaft-coupled reduction gear unit. Eliminate clutch, and require no brake maintenance on this brake design.
- Brake control** — Applies dynamic hydraulic pressure for brake release operation with an extreme light pedaling force.
- Brake mode** — Available in two modes; one is automatic as suitable for liftcrane operation, and the other is free-fall mode as suitable for bucket operation. Free-fall interlocking is also designed for fail-safe operation.
- A forced-oil cooling system** — Available in both front and rear drum brake units to keep brake performance even in continuous heavy-duty operations.
- Drum rotation sensors** — Fitted on top of control levers. Available to let operator sense a drum rotation speed decrease when the load is just lifted off ground.
- Drum rotation speed control** — Max. rotation speed can be tuned according to arbitrary value that is electrically controlled by dialing, and then varies pump discharge. Available on two main operating drums independently.
- Motor swash plate angle setting switch** — Available to set motor swash plates of front/rear drum winch motors at a certain angle for easily synchronizing front and rear drum rotation speeds as good for clamshell /diaphragm wall bucket applications.

- Drums** — One piece, parallel grooved lagging with locking ratchet wheel cast integral; bolted to reduction gear unit. Available to wind up 41.9m long cable of 26mm dia. at drum 1st layer.
- Drum locks** — Electrically operated pawl.
- Drum rollers** — Optional extra; available for right cable winding onto drums.

BOOM HOIST ASSEMBLY:

- Driven by bi-directional, axial piston hydraulic motor through 2-stage planetary reduction gear unit powering the rope drum in either direction for hoisting and lowering boom.
- Brake** — Spring-applied, power hydraulically released multiple wet-disc type automatic brake.
- Drum rotation sensor** — Fitted on top of control lever. Available to let operator sense a drum rotation speed decrease when the load is just applied.
- Drum rotation speed control** — Max. rotation speed can be tuned according to arbitrary value that is electrically controlled by dialing, and then varies pump discharge.
- Drum** — One piece, parallel grooved lagging with locking ratchet wheel cast integral; bolted to reduction gear unit.
- Drum lock** — Power hydraulically operated pawl with automatic locking device.

THIRD DRUM WINCH MECHANISM:

- Optional extra; available in almost same design as that of front and rear main operating winches except drum lagging flange diameter.
- Brake** — Multiple wet-disc unit with negative brake design as same as that of front/rear main operating winches.
- Brake control** — Applies dynamic hydraulic pressure for brake release operation as same as that of front/rear main operating winches.
- Brake mode** — Available in two modes of automatic and free-fall as same as that of front/rear main operating winches. Free-fall interlocking is also designed for fail-safe operation.
- A forced-oil cooling system** — Available to keep brake performance as same as that of front/rear main operating winches.
- Drum** — One piece, parallel grooved lagging as same as that of front/rear main operating winches, except drum lagging flange diameter.
- Drum lock** — Electrically operated pawl.

SWING:

- Driven by two units of bi-directional, axial piston hydraulic motors through one set each of single stage spur and planetary reduction gear unit powering swing pinion. Swing pinion meshes with internal teeth of swing (ring) gear of turntable bearing inner race.
- Brakes** — Spring-applied, power hydraulically released multiple wet-disc type; provided on each of hydraulic motor.
- Swing speed control** — Max. swing speed can be tuned according to arbitrary value that is electrically controlled by dialing, and then varies pump discharge.
- Lock** — Mechanically operated drop pin.
- Speed** — 1.9min⁻¹ <1.9rpm>.

GANTRY:

- A-frame type; raised and lowered by power hydraulic cylinders.



OPERATOR'S CAB:

A 2.3mm thickness steel plate construction with 940mm wide and a stamped-and-rounded corner designs; acoustically treated, full-vision, cushion rubber mounted, well-ventilated, full compartment, roomy operator's cab with a large straighted front window with green-tinted safety glass; provided with an arrangement of "EPC" control/swing lever, armchair control station, sunvisor, sunshade, rear-view mirrors, dual intermittent type window shield wipers with washer on both front and roof windows, sliding windows on both sides of cab, and swing-link type sliding door.

Instrument panel — Contains engine monitoring lamps, graphic display panel of Load Moment Indicator, gauges & meter, warning lamps and other necessary controllers and switches.

Operator's seat — Full adjustable reclining seat with head rest and both R/H and L/H side arm rests.

Anemometer — Optional extra; recommended for luffing towercrane attachment.

Air-conditioner — Optional extra; built-in type full air-conditioning.

Heater — Optional extra; hot water type.

Electric cab fan — Optional extra; wind-direction adjustable type.

Engine foot throttle — Optional extra; available for right-hand foot with electrical control.

Electric outlet — 24V; available in cab.

Operator's cab sidestep — Available for access ease to operator's cab.

AM/FM radio — Provided as std. with clock.

Fire extinguisher — Optional extra; powder type with 1kg capacity.

MACHINERY CAB:

Equipped with hinged doors on both sides for machinery access and inspection; affixed with tape-type non-skid material on the roof.

CATWALKS WITH RAILINGS:

Optional extra; hitched in place along both sides of machinery cab.

HYDRAULIC TAGLINE WINDER:

Optional extra; available for clamshell application. Provided in front of upper revolving frame for preventing a shake of suspended load by a 10mm dia. tug cable with light force.

COUNTERWEIGHTS:

Weights 45ton with a 5-block, removable, corner-rounded design. Five blocks consist of "A" (9,400kg), "B" (8,900kg), "C" (8,900kg), "D" (8,900kg) and "E" (8,900kg).

AUXILIARY WEIGHT:

Weights 2.0ton. Mounted on part of optional 3rd drum location; if 3rd drum is optionally required, this aux. weight is not required.

ELECTRICAL SYSTEM:

24-volt negative ground system; provided with two maintenance free batteries of 12V×150AH.

LIGHTING SYSTEM:

- Includes following lights.
- Two 70 W working lights;
 - One 10 W interior cab light.

SHAFTS AND PINS:

Most of shafts and pins used on superstructure are with zinc or nickel or chromiun plating for rustproof except A-frame gantry peak shaft.

POWER UNIT:

Make & Model	Isuzu 6HK1X
Type	Water-cooled, 4-cycle, direct injection, turbo-charged, diesel
No. of Cylinders	Six (6)
Bore & Stroke	115 mm × 125 mm
Displacement	7,790 cc
Rated Output	212 kW/2,000 min ⁻¹ 288 ps/2,000 rpm
Maximum Torque	1,125 N·m/1,500 min ⁻¹ 115 kgf-m/1,500 rpm
Fuel Tank	415 liters

Note:

1. The engine meets Stage/Tier 3 of current smoke emission regulations in Europe, America and Japan.
2. A 212kW engine horsepower shown above is defined under a current international engine horsepower indication formura which includes necessary horsepower for engine alternator drive but excludes engine fan drive.

Undercarriage

CARBODY FRAME:

All-welded, precision machined, box type construction; provided with four tip blocks w/pins and lugs to hook and then assemble crawler side frames on. To mount turntable bearing, a machined surface is provided too.

Hyd. joint-pin removal cylinder — Two; available to fix crawler side frames on carbody frame with a face-contact design to bear reaction force of crewer side frame.

CARBODY JACK-UP DEVICE:

Contains four hydraulic jack cylinders with cylinder beams pinned to carbody frame for disassembling/assembling ease of crawler side frames.

Remote control box — Provided for control of carbody jack cylinders.

Pontoon — All-welded construction; four pontoons each stored at an inside part of jack cylinder beams.

CRAWLER SIDE FRAMES:

All-welded, box type construction, precision machined; each provided with two steel plate hooks for an assembling ease on carbody frame. Held in place by hydraulic removal heavy duty joint-pins provided on four tip blocks of carbody frame.

Crawler side steps — Provided at both ends of the frames for easy access to superstructure.



DRIVE SPROCKETS:

Cast steel, heat treated; one per side frame. Track drive sprocket assembly bolt-coupled to 3-stage planetary reduction gear unit outer case as an integral part of shoe-in type traction motor. Sealed between parts of rotation and non-rotation of the motor with floating seal.

IDLER WHEELS:

Cast steel, heat treated; one per side frame. Mounted on two bronze bushings with floating seals for lifetime lubrication.

TRACK ROLLERS:

Eleven per side frame; each heat treated cast steel with double flange design. All mounted on two bronze bushings with floating seals for lifetime lubrication.

CARRIER ROLLERS:

Three per side frame; each heat treated cast steel with double flange design. All mounted on two bronze bushings with floating seals for lifetime lubrication.

TRACKS:

Heat treated, self-cleaning, multiple hinged track shoes joined by full floating pins; 55pcs. per side frame.

Shoe width — 965mm wide.

Track adjustment — Manual adjustment with oil jack and shim plate packs is standardized.

Automatic track tension adjusting device — Optional extra; available instead of std. track adjustment to always keep track tension at optimum level by means of power hyd. cylinder thru idler wheel actuated by power hydraulic supplied from superstructure.

TRAVEL AND STEERING:

A bi-directional, shoe-in type axial piston hydraulic motor bolt-couples with drive sprocket thru 3-stage planetary reduction gear unit outer case at each crawler side frame end for travel and steer. Straight-line travel (forward or reverse), pivot or differential turns, and counter-rotation for spin turns available.

Brake — Spring-applied, power hydraulically released multiple wet-disc type automatic brake; located within hydraulic motor. Brakes automatically set when travel levers are in neutral or when engine is shut down.

Travel speed — Two stages; 1.7/1.0km/hr. (based on flat, level and firm supporting surface, and under the conditions that no load must be applied and front-end att. must be the 15.0m basic boom only).

Gradeability — 30% (17°) permissible based on basic machine without front-end attachment.

load preventing system including total safe operation control system; provided with the designs of (1) no zero-point adjustment, (2) data input according to interface counter-indication/message on display panel, and (3) a graphic display panel with setting ease of viewing angle.

Construction (standard version) — Comprises (1) load detecting device with amplifier, (2) boom angle detector, (3) computerized Micro Processing Unit (M.P.U.), and (4) graphic display panel.

Functions — This system functions that if the lifting load reaches 90% of the rated one specified in the crane capacity chart, an intermittent pre-warning buzzer is given; if it is 100%, a warning is given by a continuous buzzer, and all peril side motions are automatically stopped. The machine, however, can be operated in safety side motions.

Display panel design — A graphic display panel is designed, and it is able to input necessary operating conditions/data according to interface counter-indication/message on the display panel, and the display panel indicates ten and some kinds of the present lifting and working conditions/data like “lifting load”, “max. allowable lifting load”, “working radius”, “max. allowable working radius”, “boom angle”, “load ratio”, “boom/jib lengths”, “engine rpm” and so on when working. In addition, the display panel is provided with three warning indicators over “engine over-heat”, “hyd. oil over-temp.” and “brake oil over-temp.”.

HOOK OVER-HOIST LIMITING DEVICE:

Limit switch type. Available to prevent hook over-hoisting with functions of automatic drum braking with hydraulic lock, and warning by buzzer.

BOOM OVER-HOIST AND -LOWERING LIMITING DEVICE:

Available in two kinds of devices; one is limit switch located on a part of boom foot for preventing boom over-hoisting, and the other is the safety function of the LMI available to automatically prevent boom over-hoisting and-lowering with the functions of automatic drum braking with hydraulic lock, and warning by buzzer. Further boom protection from rapid boom over-hoist by hook over-hoist motion under mal-function of hook over-hoist limiting device is available as one of functions of the LMI.

BOOM BACKSTOPS:

Dual; telescopic design with spring buffers.

DUAL BOOM OVER-HOIST LIMITING DEVICE:

Additional limit switch located on boom backstops; this is as a further safety device for redundant boom protection.

SWING LOCK:

Mechanically operated drop pin; available to firmly lock superstructure in four positions of facing front or rear or left or right to undercarriage.

LOAD MOMENT INDICATOR:

This is a fully computerized automatic over-

Safety Devices



DRUM LOCKS:

Electrically operated pawl locks is available on front and rear main drums while power hydraulically operated pawl lock is available on boom hoist drum with an automatic locking device as std.

THIRD DRUM LOCK:

Provided as std. when an optional 3rd drum winch is provided.

FREE-FALL INTERLOCKING DEVICE:

Available on both front and rear main drum brake lines for fail-safe operation. Functions that free-fall brake mode is only available when drum brake pedal is pressed even though brake mode is switched on free-fall mode.

SWING BRAKE SAFETY CIRCUIT:

Available not to start engine whenever swing brake is off.

BOOM ANGLE INDICATOR:

Pendulum type; mounted on right-hand side of bottom section of crane main boom.

HOOK LATCH:

Provided on every kinds of hook to prevent out of place of cable from hook.

LEVEL GAUGE:

Bubble type; located on operator's cab floor of superstructure.

CONTROL LEVER LOCKS:

Provided on all control levers (except swing lever) to lock levers in neutral.

SWING ALARM:

This is by buzzer, and flasher lamps located on both sides of machinery cab.

TRAVEL ALARM:

Available by an intermittent buzzer.

SPEED SLOWDOWN DEVICE:

This is for speed slowdown of hoisting and lowering motions of boom (and tower jib in case of luffing towercrane att.) which are available just before automatic stopping at both upper and lower side limits of boom/tower jib angle even though control lever(s) is still at hoisting/lowering position to prevent a shock.

SWING BRAKE LAMP:

Provided on operator's cab instrument panel; this is available to confirm whether or not swing brake is applied.

SIGNAL HORN:

Available as warning just before every kinds of motions are initiated.

FOOL PROOF SHUT-OFF SYSTEM:

Located in the cab exit; this is available to automatically deactivate and lock hydraulic system.

FRONT-END ATT. ERECTION MODE:

This is an internal, integral function of the LMI. In the range out of crane working area, the LMI display panel automatically indicates "Now, out of crane working range" with a rigging instruction, and it is available to lift front-end att. off ground without the influence of LMI safety functions, and, after front-end att. is lifted over

the range of crane working area, LMI safety fuction gets back automatically for safe erection work. This function is also available for the work of vice-versa.

LMI SAFETY CIRCUIT-OFF SWITCH:

Available in key type for a good crane safety operation management without fail.

TRAVEL DIRECTION ARROW:

Attached each on crawler side frames.

GAUGES & METER:

Engine water temperature gauge, fuel gauge and hour-meter are provided on instrument panel.

WARNING LAMPS:

Available to let operator warn abnormal machine conditions as to pilot pressure and brake system of two main and opt. 3rd drums.; provided on instrument panel.

ENGINE MONITORING LAMPS:

Available to let operator warn engine abnormal conditions as to battery charge, lubrication oil pressure, radiator coolant level, oil filter clogging, air filter clogging, water temp., contorol unit and glow plug.; provided on instrument panel.

EMERGENCY ENGINE STOP SWITCH:

Located at cab instrument panel, and available to stop engine whenever it is necessary.

REAR VIEW MIRRORS:

Two; provided on front-left and -right corners of super-structure.

THREE COLOR PERCENTAGE INDICATOR:

Optional extra; this is with three colours of Green, Yellow and Red. Each colour indicates the load percentage to rated capacity; Green shows less than 90% as safety, Yellow shows 90 to 99% as marginal, and Red shows over 100% as over-loading. As further function, Red lamp comes on automatically when operator cuts off safety circuit of the LMI absent-mindedly.

LIFTING HEIGHT INDICATION DEVICE:

Optional extra; available to indicate lifting height above ground or depth below ground on display panel of the LMI. Aiso, hook hoisting speed slowdown function is available just before automatic stopping at a desired height under hook height setting before operation.

MICROPHONE & LOUD-SPEAKER:

Optional extra; this is for operator's convenience for loud speaking.

DRUM LIGHT & MIRROR:

Optional extra; these are available for checking rope winding onto front and/or rear drum(s).

AUX. CRANE HOOK OVER-HOIST LIMITING DEVICE:

Optional extra; this is available for auxilliary crane hoist with optional aux. short jib and/or fly jib. Performs the same function as that of "Hook over-hoist limiting device" mentioned before.



In addition to the above, following safety devices are standard for luffing towercrane attachment except anemometer.

- TOWER JIB ANGLE DETECTOR:**
This is one of key safety device in the case of luffing towercrane attachment.
- TOWERCRANE LOAD DETECTOR:**
This is also important safety device when luffing towercrane attachment is required.
- TOWER JIB OVER-HOIST AND -LOWERING LIMITING DEVICE:**
Available in the same construction and function as that of "Boom over-hoist and -lowering limiting device" stated before.
- TOWER JIB HOOK OVER-HOIST LIMITING DEVICE:**
Available in the same construction and function as that of "Hook over-hoist limiting device" described before.

- TOWER JIB BACKSTOPS:**
Dual; telescopic design with spring buffers.
- DUAL TOWER JIB OVER-HOIST LIMITING DEVICE:**
Additional limit switch located on tower jib backstops; this is as a further safety device for redundant tower jib protection.
- TOWER JIB ELECTRIC WIRING MONITOR:**
Available to automatically set all of electrical system as available for luffing towercrane operation when tower jib electric wirings are set.
- ANEMOMETER:**
Optional extra; analogue type. Indicates wind velocity and alarms when the velocity exceeds a figure set.

Front-end Attachment

- BOOM:**
Lattice construction, round tubular main chords, alloy, hi-ten steel, with bracing of round steel tubing.
Boom connections.....In-line pin connections at 1.85m deep and 1.85m wide.
Basic boom.....Two-piece, 15.0m basic length; 7.5m bottom and tapered top sections.
Boom head machinery.....Six head sheaves and two guide sheaves with rigid type rope guard. Sheaves all mounted on anti-friction bearings of conventional, non sealed-grease type.
Boom extensions.....Optional extra; available in 3.0m, 6.0m and 9.0m lengths with pendants.
Maximum boom length.....72.0m for liftcrane application.
27.0m for clamshell application.
- FLY JIB:**
Optional extra; lattice construction, round tubular main chords, alloy, hi-ten steel, with bracing of round steel tubing having in-line pin connections at 0.75m deep and 0.94m wide, and jib head machinery with single sheave mounted on anti-friction bearings of conventional, non sealed-grease type. Provided with jib strut, jib backstops, and jib/boom guyline pendants. Mounted on 6.0m tapered crane top section, and available for light load lifting operation with less than 11ton with single part hoist line.
Basic fly jib.....Two-piece, 10.0m basic length; 5.0m bottom and top sections.
Fly jib extensions.....Available in 6.0m length with pendants.
Maximum fly jib length.....28.0m.
Boom plus fly jib length.....Max. 60.0m + 28.0m / 63.0m + 22.0m.
- AUXILIARY SHORT JIB:**
Optional extra; all-welded construction having single sheave head machinery. Pinned to 7.5m tapered crane top section. Available for 11ton lift as maximum with single part hoist line.
- HOOK BLOCKS:**
Sheaves all mounded on anti-friction bearings. Available in 6 kinds of capacities as under:
120t, four sheaves plus an in-line hanger sheave with duplex type hook.....Optional extra.
80t, four sheaves with duplex type hook.....Optional extra.
70t, three sheaves.....Optional extra.
50t, two sheaves.....Optional extra.
30t, one sheave.....Optional extra.
11t, ball hook.....Optional extra.
- BAIL AND BRIDLE:**
All-welded construction; provided with larger sheaves of a 21.0 D/d ratio on both bail and bridle for 12-part boom hoist rope reeving. Bail pinned to A-frame gantry, and bridle suspended between a 12-part boom hoist rope and pendant ropes connecting to tip of 7.5m tapered crane top section. Sheave all mounted on anti-friction bearings of conventional,

DRUM DATA:

Drum	Root dia.	Type	Line speed (Hoisting, Lowering)	Cable	Max. line pull
Front (main crane hoist) (clamshell bucket holding) (hammer grab crown holding via hook) (MHL/MEH bucket hoist) (towercrane hoist)	554mm	Parallel grooved	110 ~ 2mpm *75 ~ 2mpm	26mm	196kN 20t
Rear (aux. crane hoist) (clamshell bucket closing) (hammer grab holding & closing) (MHL/MEH bucket hoist) (tower jib hoist)	554mm	Parallel grooved	110 ~ 2mpm *75 ~ 2mpm **37 ~ 2mpm	26mm	196kN 20t
Boom hoist	463.6mm	Parallel grooved	46 ~ 2mpm	22.4mm	152kN 15.5t
Optional 3rd	554mm	Parallel grooved	73 ~ 2mpm	26mm	196kN 20t

- Notes:
- 1. Line speed is based on drum first layer and rated engine rpm.
 - 2. Hoisting line speed varies under load and operating conditions.
 - 3. The figures with an asterisk mark(*) indicate the rope line speed as available for clamshell and MHL/MEH bucket applications.
 - 4. The figure with two asterisk mark(**) indicates the rope line speed as available for tower jib hoist as automatically set in the case of luffing towercrane application.

HOIST REEVING: (t)

Kind of hook block \ No. of partline	11	10	9	8	7	6	5	4	3	2	1
120t (w/ Hanger)	120.0	110.0	99.0	88.0	77.0	66.0	55.0	44.0	—	—	—
80t (w/out Hanger)	—	—	—	80.0	77.0	66.0	55.0	44.0	—	—	—
70t	—	—	—	—	70.0	66.0	55.0	44.0	33.0	22.0	—
50t	—	—	—	—	—	—	50.0	44.0	—	—	—
30t	—	—	—	—	—	—	—	—	30.0	22.0	—
11t	—	—	—	—	—	—	—	—	—	—	11.0

CABLES:

- Front drum.....3×F (a+40), non-spin type, 26mm dia./300m long, breaking load 569kN 58.0t .
- Rear drumOptional extra; 3×F (a+40), non-spin type, 26mm dia./200m long, breaking load 569kN 58.0t .
- Boom hoist drumIWRC 6×P•WS (31), 22.4mm dia./195m long, breaking load 367kN 37.4t .
- Optional 3rd drumOptional extra; 3×F (a+40), non-spin type, 26mm dia., breaking load 569kN 58.0t . Length depends on request.



Liftcrane 120 metric tons

▪ LIFTCRANE CAPACITIES:

Boom length (m) Working radius (m)	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0	42.0	45.0	48.0	51.0	54.0	57.0	60.0	63.0	66.0	69.0	72.0
4.5	120.0																			
5.0	118.0	110.0	99.0/5.5																	
6.0	99.2	99.1	98.9	88.0/6.1	77.0/6.6															
7.0	85.5	85.4	85.2	85.3	77.0	66.0/7.1	66.0/7.6													
8.0	72.0	72.0	72.0	72.1	72.1	66.0	66.0	55.0/8.2	55.0/8.7											
9.0	60.1	60.0	60.0	60.1	60.1	60.1	60.0	55.0	55.0	44.0/9.2	44.0/9.7									
10.0	51.4	51.4	51.3	51.4	51.4	51.4	51.3	51.2	51.1	44.0	44.0	33.0/10.2	33.0/10.8	33.0/11.3	33.0/11.8					
12.0	39.8	39.7	39.6	39.7	39.6	39.6	39.5	39.4	39.3	39.3	39.1	33.0	33.0	33.0	33.0	22.0/12.4	22.0/12.9	22.0/13.4	22.0/13.9	
14.0	32.3	32.2	32.0	32.1	32.0	32.0	31.9	31.8	31.7	31.6	31.5	31.5	31.4	31.2	31.1	22.0	22.0	22.0	22.0	19.8/14.4
16.0	30.8/14.5	26.9	26.8	26.8	26.7	26.7	26.6	26.5	26.4	26.3	26.1	26.1	26.0	25.8	25.7	22.0	22.0	22.0	20.5	18.3
18.0		24.7/17.1	22.9	23.0	22.8	22.8	22.7	22.5	22.4	22.4	22.2	22.2	22.1	21.9	21.8	21.8	21.6	21.0	18.6	16.6
20.0			20.3/19.7	20.0	19.8	19.8	19.6	19.5	19.4	19.4	19.2	19.2	19.0	18.9	18.7	18.7	18.6	18.4	17.1	15.1
22.0				17.6	17.5	17.4	17.3	17.2	17.0	17.0	16.8	16.8	16.6	16.5	16.3	16.3	16.1	16.0	15.8	14.0
24.0				17.3/22.3	15.6	15.5	15.4	15.2	15.1	15.0	14.9	14.8	14.7	14.5	14.4	14.3	14.2	14.0	13.9	12.8
26.0					14.8/24.9	13.9	13.8	13.6	13.5	13.4	13.2	13.2	13.1	12.9	12.7	12.7	12.5	12.4	12.3	12.0
28.0						12.9/27.5	12.4	12.3	12.2	12.1	11.9	11.8	11.7	11.5	11.4	11.4	11.2	11.0	10.9	10.7
30.0							11.3	11.2	11.0	10.9	10.7	10.7	10.6	10.4	10.2	10.2	10.0	9.9	9.7	9.6
32.0							11.3/30.1	10.2	10.0	10.0	9.8	9.7	9.6	9.4	9.2	9.2	9.0	8.9	8.7	8.6
34.0								9.9/32.7	9.2	9.1	8.9	8.8	8.7	8.5	8.4	8.3	8.1	8.0	7.8	7.7
36.0									8.7/35.3	8.3	8.1	8.1	7.9	7.7	7.6	7.5	7.4	7.2	7.1	6.9
38.0										7.7/37.9	7.5	7.4	7.3	7.1	6.9	6.9	6.7	6.5	6.4	6.2
40.0											6.9	6.8	6.7	6.5	6.3	6.2	6.1	5.9	5.8	5.6
42.0											6.8/40.5	6.3	6.1	5.9	5.8	5.7	5.5	5.4	5.2	5.0
44.0												6.0/43.1	5.6	5.4	5.3	5.2	5.0	4.9	4.7	4.5
46.0													5.3/45.7	5.0	4.9	4.8	4.6	4.4	4.2	4.0
48.0														4.6	4.5	4.3	4.1	3.9	3.7	3.5
50.0														4.6/48.3	4.0	3.9	3.7	3.5	3.3	3.1
52.0															3.9/50.9	3.5	3.3	3.1	2.9	2.7
54.0																3.3/53.2	3.0	2.8	2.6	2.3
56.0																	2.7/55.8	2.4	2.2	2.0
58.0																		2.1	1.9	1.7
60.0																		2.1/58.4	1.7	
61.0																			1.5	

▪ WORKING MASS & GROUND PRESSURE:

Shoe width	Mass	Pressure
965mm	117.0t	85.0kPa <0.87kg/cm²>

Note: Working mass shown above is with 15.0m basic boom, 45ton counterweight, 2.0ton auxiliary weight and optional 120t hook block.



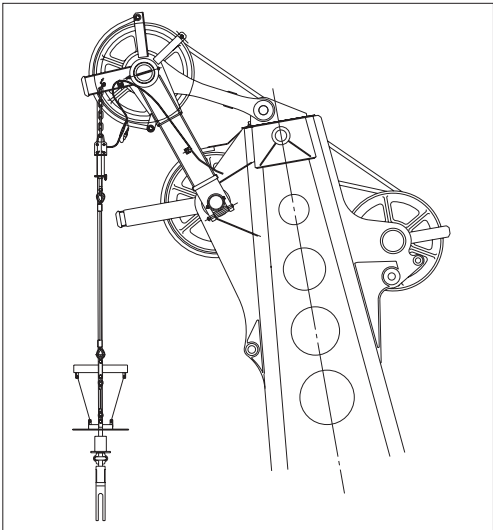
Notes — Liftcrane capacities

- 1. Capacities included in this chart are the maximum allowable, and are based on machine standing level on firm supporting surface under ideal job conditions.
- 2. Capacities are in metric tons, and are not more than 78% of minimum tipping loads except the figures surrounded by bold lines which are based on other factor of machine structural strength limitation; the design codes/standards applied to the capacity are from “Construction Codes for Mobile Crane” and “Ordinance on Safety of Crane and Similar Equipment” issued by Ministry of Health, Labour and Welfare, Japan.
- 3. Capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, and operating speeds. Operator must reduce load ratings to take such conditions into account. Deduction from rated capacities must be made for mass of hook block, weighted ball/hook, sling, spreader bar, or other suspended gear.
Hook block mass is as follows:

120t	1.76ton	80t	1.49ton	70t	1.01ton
50t	0.90ton	30t	0.73ton	11t	0.37ton
- 4. All capacities are rated for 360° swing.
- 5. Least stable rated condition is over the side.
- 6. A 45ton counterweight and 1.7ton aux. weight (or opt. 3rd drum) are required for all capacities on this chart.
- 7. Attachment must be erected and lowered over the ends of the crawler mounting.
- 8. Main boom length must not exceed 72.0m.
Maximum fly jib length permitted — 28.0m.
Maximum boom and fly jib combination length permitted — 60.0m + 28.0m / 63.0m + 22.0m.
Maximum boom length when mounting auxiliary short jib is 69.0m.
- 9. Capacities when handling load off main boom head sheaves in case of mounting fly jib or auxiliary short jib on top of boom are detailed; if required, please consult us or nearest distributor.

**SCX1200-2 AUXILIARY SHORT JIB CAPACITIES:
Max. 11t**

Note: Jib capacities is almost equal to the figures made by the deduction of a 300kg from the liftcrane capacities for boom length up to 69.0m unless restricted by the maximum jib capacity shown above. As to the details, please consult us or nearest distributor.



Auxiliary short jib (Option)

Fly Jib Capacities

Boom length(m)	39.0								42.0							
Jib length(m)	10.0		16.0		22.0		28.0		10.0		16.0		22.0		28.0	
Jib offset angle(°)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
Working radius(m)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
11.9	11.0								11.0/12.5							
12.0	11.0															
14.0	11.0	11.0/15.2	11.0/14.4						11.0	11.0/15.7	11.0/14.9					
16.0	11.0	11.0	11.0		8.8/16.2		5.5/17.4		11.0	11.0	11.0		8.8/16.8		5.5/17.9	
18.0	11.0	11.0	11.0	8.6/19.3	8.6		5.4		11.0	11.0	11.0	8.5/19.8	8.6		5.5	
20.0	11.0	10.9	11.0	8.4	8.5		5.1		11.0	11.0	11.0	8.5	8.5		5.3	
22.0	11.0	10.5	11.0	8.1	8.3	6.5/22.8	5.0		11.0	10.7	11.0	8.1	8.3	6.5/23.3	5.0	
24.0	11.0	10.1	11.0	7.8	8.1	6.4	4.7	3.4/25.8	11.0	10.3	11.0	7.9	8.2	6.4	4.8	
26.0	11.0	9.8	11.0	7.5	8.0	6.2	4.5	3.4	11.0	10.0	11.0	7.6	8.1	6.3	4.6	3.4/26.3
28.0	11.0	9.6	10.9	7.2	7.8	6.0	4.4	3.3	11.0	9.7	11.0	7.4	7.9	6.1	4.4	3.3
30.0	11.0	9.3	10.7	7.0	7.5	6.0	4.1	3.2	11.0	9.5	10.8	7.1	7.6	6.0	4.3	3.2
32.0	10.1	9.1	10.3	6.8	7.3	5.8	4.0	3.1	10.0	9.2	10.3	6.9	7.4	5.9	4.1	3.1
34.0	9.2	8.8	9.5	6.6	7.1	5.6	3.9	3.0	9.1	9.0	9.3	6.7	7.2	5.7	4.0	3.0
36.0	8.4	8.6	8.7	6.4	6.9	5.5	3.7	3.0	8.3	8.5	8.6	6.5	7.0	5.5	3.8	3.0
38.0	7.8	7.9	8.0	6.3	6.8	5.3	3.6	2.9	7.6	7.8	7.9	6.4	6.9	5.4	3.7	2.9
40.0	7.1	7.3	7.4	6.1	6.5	5.1	3.5	2.8	7.0	7.1	7.3	6.3	6.7	5.2	3.6	2.9
42.0	6.6	6.7	6.9	6.0	6.4	5.0	3.4	2.7	6.5	6.6	6.7	6.1	6.5	5.1	3.5	2.8
44.0	6.1	6.2	6.4	5.9	6.3	4.9	3.3	2.7	6.0	6.1	6.2	6.0	6.4	5.0	3.4	2.7
46.0	5.9/45.0	5.8/45.6	5.9	5.8	6.0	4.8	3.2	2.7	5.5	5.6	5.8	5.9	5.9	4.9	3.3	2.7
48.0			5.5	5.6	5.6	4.6	3.2	2.6	5.2/47.6	5.2	5.4	5.5	5.5	4.8	3.2	2.7
50.0			5.1	5.2	5.3	4.5	3.0	2.5		5.1/48.2	5.0	5.1	5.1	4.6	3.1	2.6
52.0			5.0/50.8	4.9/51.6	4.9	4.5	3.0	2.5			4.6	4.7	4.8	4.5	3.0	2.5
54.0					4.6	4.5	2.9	2.5			4.4/53.4	4.4	4.5	4.5	3.0	2.5
56.0					4.3	4.4	2.9	2.5				4.4/54.2	4.1	4.3	2.9	2.5
58.0					4.3/56.4	4.1/57.6	2.8	2.5					3.9	4.0	2.9	2.5
60.0							2.7	2.5					3.7/59.0	3.7	2.8	2.5
62.0							2.7/61.7	2.5						3.7/60.2	2.7	2.5
64.0								2.5/63.6							2.7	2.5
66.0															2.7/64.3	2.5
66.2																2.5

Boom length(m)	45.0								48.0							
Jib length(m)	10.0		16.0		22.0		28.0		10.0		16.0		22.0		28.0	
Jib offset angle(°)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
Working radius(m)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
12.0	11.0/13.0								11.0/13.5							
14.0	11.0		11.0/15.5						11.0							
16.0	11.0	11.0/16.2	11.0		8.8/17.3				11.0	11.0/16.7	11.0		8.8/17.8			
18.0	11.0	11.0	11.0		8.7		5.5/18.4		11.0	11.0	11.0		8.7		5.5/18.9	
20.0	11.0	11.0	11.0	8.5/20.3	8.6		5.3		11.0	11.0	11.0	8.5/20.8	8.6		5.4	
22.0	11.0	10.8	11.0	8.3	8.4	6.5/23.8	5.0		11.0	11.0	11.0	8.3	8.4		5.1	
24.0	11.0	10.5	11.0	8.0	8.3	6.5	4.9		11.0	10.6	11.0	8.1	8.3	6.5/24.4	4.9	
26.0	11.0	10.1	11.0	7.7	8.1	6.3	4.6	3.4/26.8	11.0	10.3	11.0	7.8	8.1	6.3	4.8	3.4/27.3
28.0	11.0	9.8	11.0	7.5	8.0	6.1	4.5	3.3	11.0	10.1	11.0	7.5	8.0	6.2	4.5	3.4
30.0	10.8	9.6	10.9	7.2	7.8	6.0	4.3	3.2	10.7	9.8	11.0	7.3	7.9	6.0	4.4	3.2
32.0	9.8	9.3	10.1	7.0	7.5	5.9	4.1	3.2	9.7	9.5	10.0	7.1	7.6	6.0	4.3	3.2
34.0	8.9	9.1	9.2	6.8	7.3	5.8	4.0	3.0	8.8	9.1	9.1	6.9	7.5	5.9	4.1	3.1
36.0	8.1	8.3	8.4	6.6	7.1	5.6	3.9	3.0	8.0	8.3	8.3	6.8	7.3	5.7	4.0	3.0
38.0	7.4	7.6	7.7	6.5	7.0	5.5	3.7	3.0	7.4	7.5	7.6	6.6	7.1	5.5	3.9	3.0
40.0	6.8	7.0	7.1	6.4	6.8	5.3	3.7	2.9	6.7	6.9	7.0	6.5	6.9	5.4	3.7	2.9
42.0	6.3	6.4	6.5	6.2	6.6	5.1	3.5	2.8	6.1	6.4	6.5	6.3	6.6	5.3	3.6	2.9
44.0	5.8	5.9	6.0	6.1	6.2	5.0	3.5	2.7	5.6	5.8	5.9	6.1	6.1	5.1	3.5	2.7
46.0	5.4	5.5	5.5	5.8	5.8	5.0	3.4	2.7	5.2	5.4	5.5	5.7	5.6	5.0	3.4	2.7
48.0	5.0	5.0	5.1	5.4	5.3	4.8	3.2	2.7	4.8	4.9	5.0	5.3	5.2	4.9	3.4	2.7
50.0	4.5	4.6	4.8	5.0	5.0	4.7	3.2	2.6	4.4	4.5	4.6	4.9	4.8	4.8	3.2	2.7
52.0	4.5/50.2	4.5/50.8	4.5	4.5	4.6	4.6	3.1	2.6	4.0	4.1	4.3	4.5	4.5	4.7	3.2	2.6
54.0			4.1	4.2	4.3	4.5	3.0	2.5	3.9/52.8	3.9/53.4	4.0	4.1	4.1	4.4	3.1	2.5
56.0			3.7	3.9	4.0	4.1	3.0	2.5			3.6	3.7	3.8	4.0	3.0	2.5
58.0				3.7/56.8	3.7	3.9	2.9	2.5			3.3	3.4	3.5	3.7	3.0	2.5
60.0					3.4	3.5	2.9	2.5			3.2/58.6	3.2/59.4	3.2	3.4	2.9	2.5
62.0					3.2/61.6	3.2	2.8	2.5					2.9	3.1	2.9	2.5
64.0						3.1/62.8	2.7	2.5					2.7	2.8	2.8	2.5
66.0							2.7	2.5					2.7/64.2	2.6/65.4	2.5	2.5
68.0							2.6/66.9	2.5							2.3	2.5
70.0								2.5/68.8							2.2/69.5	2.2
71.4																2.1

Boom length(m)	51.0								54.0							
Jib length(m)	10.0		16.0		22.0		28.0		10.0		16.0		22.0		28.0	
Jib offset angle(°)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
Working radius(m)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
14.0	11.0								11.0/14.5							
16.0	11.0	11.0/17.3	11.0/16.5						11.0	11.0/17.8	11.0/17.0					
18.0	11.0	11.0	11.0		8.7/18.3		5.5/19.4		11.0	11.0	11.0		8.7/18.8			
20.0	11.0	11.0	11.0	8.5/21.3	8.6		5.4		11.0	11.0	11.0	8.5/21.9	8.6		5.5	
22.0	11.0	11.0	11.0	8.4	8.5		5.2		11.0	11.0	11.0	8.5	8.5		5.3	
24.0	11.0	10.8	11.0	8.1	8.3	6.5/24.9	5.0		11.0	10.9	11.0	8.2	8.3	6.4/25.4	5.0	
26.0	11.0	10.5	11.0	7.9	8.2	6.4	4.8	3.4/27.8	11.0	10.6	11.0	8.0	8.2	6.4	4.9	
28.0	11.0	10.1	11.0	7.6	8.1	6.3	4.6	3.4	11.0	10.3	11.0	7.7	8.1	6.3	4.7	3.4/28.4
30.0	10.6	9.9	10.9	7.4	8.0	6.1	4.5	3.2	10.3	10.1	10.8	7.5	8.0	6.1	4.5	3.3
32.0	9.6	9.6	9.8	7.2	7.8	6.0	4.3	3.2	9.3	9.7	9.7	7.3	7.9	6.0	4.4	3.2
34.0	8.6	9.0	9.0	7.0	7.5	5.9	4.1	3.1	8.5	8.8	8.8	7.1	7.6	6.0	4.3	3.2
36.0	7.9	8.1	8.1	6.9	7.4	5.8	4.0	3.0	7.6	8.0	8.0	7.0	7.5	5.9	4.1	3.0
38.0	7.1	7.4	7.5	6.7	7.2	5.6	3.9	3.0	7.0	7.3	7.3	6.8	7.3	5.7	4.0	3.0
40.0	6.5	6.8	6.9	6.5	7.0	5.5	3.8	2.9	6.4	6.6	6.6	6.6	6.9	5.5	3.9	3.0
42.0	6.0	6.2	6.3	6.4	6.5	5.4	3.7	2.9	5.8	6.0	6.1	6.5	6.3	5.4	3.7	2.9
44.0	5.5	5.7	5.8	6.0	6.0	5.2	3.6	2.8	5.3	5.5	5.6	5.9	5.8	5.3	3.7	2.8
46.0	5.0	5.2	5.3	5.5	5.5	5.1	3.5	2.7	4.9	5.0	5.1	5.4	5.3	5.1	3.5	2.7
48.0	4.6	4.8	4.9	5.1	5.0	5.0	3.4	2.7	4.4	4.5	4.7	5.0	4.9	5.0	3.5	2.7
50.0	4.2	4.4	4.5	4.7	4.6	4.9	3.3	2.7	4.0	4.1	4.3	4.5	4.5	4.9	3.4	2.7
52.0	3.8	4.0	4.1	4.4	4.3	4.6	3.2	2.6	3.5	3.7	3.9	4.1	4.0	4.5	3.3	2.7
54.0	3.5	3.5	3.7	4.0	4.0	4.3	3.2	2.6	3.2	3.4	3.5	3.7	3.7	4.1	3.2	2.6
56.0	3.2/55.4	3.2	3.4	3.6	3.6	3.9	3.1	2.5	2.9	3.0	3.2	3.4	3.4	3.7	3.2	2.5
58.0			3.1	3.2	3.3	3.5	3.0	2.5	2.6	2.7	2.9	3.0	3.0	3.4	3.1	2.5
60.0			2.8	2.9	3.0	3.2	3.0	2.5		2.5/58.6	2.5	2.7	2.7	3.0	2.9	2.5
62.0			2.7/61.2	2.6	2.7	2.9	2.9	2.5			2.3	2.4	2.5	2.7	2.6	2.5
64.0					2.5	2.7	2.5	2.5			2.0/63.8	2.1	2.2	2.5	2.4	2.5
66.0					2.2	2.4	2.4	2.5				2.0/64.6	2.0	2.2	2.1	2.4
68.0					2.2/66.8	2.1	2.1	2.4					1.7	1.9	1.8	2.2
70.0						1.9	2.1						1.6/69.4	1.7	1.7	1.9
72.0							1.7	1.9						1.6/70.6		1.7
74.0							1.7/72.1	1.7								



Boom length(m)	57.0								60.0							
Jib length(m)	10.0		16.0		22.0		28.0		10.0		16.0		22.0		28.0	
Jib offset angle(°)																
Working radius(m)	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30
14.0	11.0/15.1								11.0/15.6							
16.0	11.0		11.0/17.6						11.0							
18.0	11.0	11.0/18.3	11.0		8.7/19.4				11.0	11.0/18.8	11.0/18.1		8.6/19.9			
20.0	11.0	11.0	11.0		8.6		5.5/20.5		11.0	11.0	11.0		8.6		5.5/21.0	
22.0	11.0	11.0	11.0	8.5/22.4	8.5		5.3		11.0	11.0	11.0	8.5/22.9	8.6		5.4	
24.0	11.0	11.0	11.0	8.3	8.4	6.4/25.9	5.1		11.0	11.0	11.0	8.3	8.4		5.1	
26.0	11.0	10.7	11.0	8.0	8.3	6.4	4.9		11.0	10.8	11.0	8.1	8.3	6.4/26.4	5.0	
28.0	11.0	10.5	11.0	7.8	8.1	6.3	4.8	3.4/28.9	11.0	10.6	11.0	7.9	8.1	6.3	4.8	3.4/29.4
30.0	10.2	10.1	10.6	7.5	8.0	6.1	4.6	3.3	10.1	10.3	10.5	7.6	8.1	6.2	4.6	3.3
32.0	9.2	9.6	9.6	7.4	7.9	6.0	4.5	3.2	9.1	9.5	9.4	7.5	8.0	6.1	4.5	3.2
34.0	8.3	8.6	8.6	7.2	7.8	6.0	4.3	3.2	8.1	8.5	8.5	7.3	7.9	6.0	4.4	3.2
36.0	7.5	7.9	7.9	7.0	7.5	5.9	4.1	3.1	7.4	7.7	7.7	7.1	7.6	5.9	4.2	3.1
38.0	6.8	7.1	7.1	6.9	7.4	5.8	4.0	3.0	6.6	7.0	7.0	7.0	7.2	5.8	4.1	3.0
40.0	6.2	6.5	6.5	6.7	6.7	5.6	3.9	3.0	6.0	6.4	6.4	6.8	6.5	5.7	4.0	3.0
42.0	5.6	5.9	6.0	6.3	6.1	5.5	3.8	2.9	5.5	5.8	5.8	6.2	6.0	5.5	3.9	2.9
44.0	5.1	5.4	5.5	5.8	5.6	5.4	3.7	2.9	5.0	5.2	5.3	5.6	5.5	5.4	3.7	2.9
46.0	4.6	4.9	5.0	5.3	5.1	5.3	3.6	2.8	4.4	4.7	4.8	5.1	5.0	5.3	3.7	2.8
48.0	4.1	4.4	4.5	4.9	4.7	5.1	3.5	2.7	4.0	4.2	4.3	4.7	4.5	5.0	3.6	2.7
50.0	3.7	4.0	4.0	4.4	4.3	4.7	3.5	2.7	3.5	3.7	3.9	4.2	4.1	4.6	3.5	2.7
52.0	3.4	3.5	3.7	4.0	3.9	4.4	3.4	2.7	3.2	3.4	3.5	3.8	3.7	4.1	3.4	2.7
54.0	3.0	3.2	3.3	3.5	3.5	3.9	3.2	2.6	2.8	3.0	3.1	3.4	3.3	3.7	3.4	2.7
56.0	2.7	2.8	3.0	3.2	3.2	3.5	3.2	2.6	2.5	2.6	2.7	3.0	3.0	3.4	3.0	2.6
58.0	2.4	2.5	2.7	2.9	2.9	3.2	3.0	2.5	2.2	2.2	2.5	2.7	2.7	3.0	2.7	2.6
60.0	2.1	2.2	2.4	2.5	2.5	2.9	2.7	2.5	1.8	2.0	2.2	2.4	2.4	2.7	2.5	2.5
62.0	2.0/60.6	2.0/61.2	2.1	2.2	2.2	2.5	2.4	2.5	1.6	1.7	1.8	2.0	2.0	2.4	2.2	2.5
64.0			1.8	2.0	2.0	2.2	2.2	2.5			1.6	1.7	1.8	2.1	2.0	2.4
66.0			1.6	1.7	1.8	2.0	1.9	2.2					1.6	1.8	1.7	2.1
68.0			1.6/66.4	1.6/67.2	1.6	1.7	1.7	2.0						1.6		1.8
70.0								1.7								1.6

Boom length(m)	63.0					
Jib length(m)	10.0		16.0		22.0	
Jib offset angle(°)						
Working radius(m)	10	30	10	30	10	30
16.1	11.0					
18.0	11.0	11.0/19.3	11.0/18.6			
20.0	11.0	11.0	11.0		8.6/20.4	
22.0	11.0	11.0	11.0	8.5/23.4	8.6	
24.0	11.0	11.0	11.0	8.4	8.5	
26.0	10.6	11.0	10.7	8.1	8.3	6.4/27.0
28.0	10.3	10.6	10.4	8.0	8.2	6.4
30.0	9.9	10.3	10.1	7.7	8.1	6.2
32.0	8.8	9.3	9.2	7.5	8.0	6.1
34.0	8.0	8.3	8.3	7.4	7.9	6.0
36.0	7.1	7.5	7.5	7.2	7.7	6.0
38.0	6.5	6.8	6.8	7.0	7.0	5.9
40.0	5.9	6.1	6.1	6.6	6.4	5.8
42.0	5.3	5.5	5.6	6.0	5.8	5.6
44.0	4.7	5.0	5.0	5.5	5.3	5.5
46.0	4.1	4.5	4.5	5.0	4.8	5.4
48.0	3.7	4.0	4.0	4.5	4.3	4.9
50.0	3.2	3.5	3.6	4.0	3.9	4.4
52.0	2.9	3.1	3.2	3.5	3.5	4.0
54.0	2.5	2.7	2.9	3.2	3.0	3.5
56.0	2.2	2.4	2.5	2.8	2.7	3.2
58.0	1.9	2.0	2.2	2.5	2.4	2.8
60.0	1.6	1.7	1.9	2.2	2.1	2.5
62.0			1.6	1.8	1.8	2.2
64.0				1.6	1.6	1.9
66.0						1.6

Notes — Fly jib capacities

1. Capacities included in these charts are the maximum allowable, and are based on machine standing level on firm supporting surface under ideal job conditions.

2. Capacities are in metric tons, and are based on 78% of minimum tipping loads except the figures surrounded by bold lines which are based on other factor of machine structural strength limitation; the design codes/standards applied to the capactie are from “Construction Codes for Mobile Crane” and “Ordinance on Safety of Crane and Similar Equipment” issued by Ministry of Health, Labour and Welfare, Japan.

3. Capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, and operating speeds. Operator must reduce load ratings to take such conditions into account. Deduction from rated jib capacities must be made for weight of hook block, weighted ball/hook, sling, spreader bar, or other suspended gear.
Hook block weight is as follows;
11t0.37ton

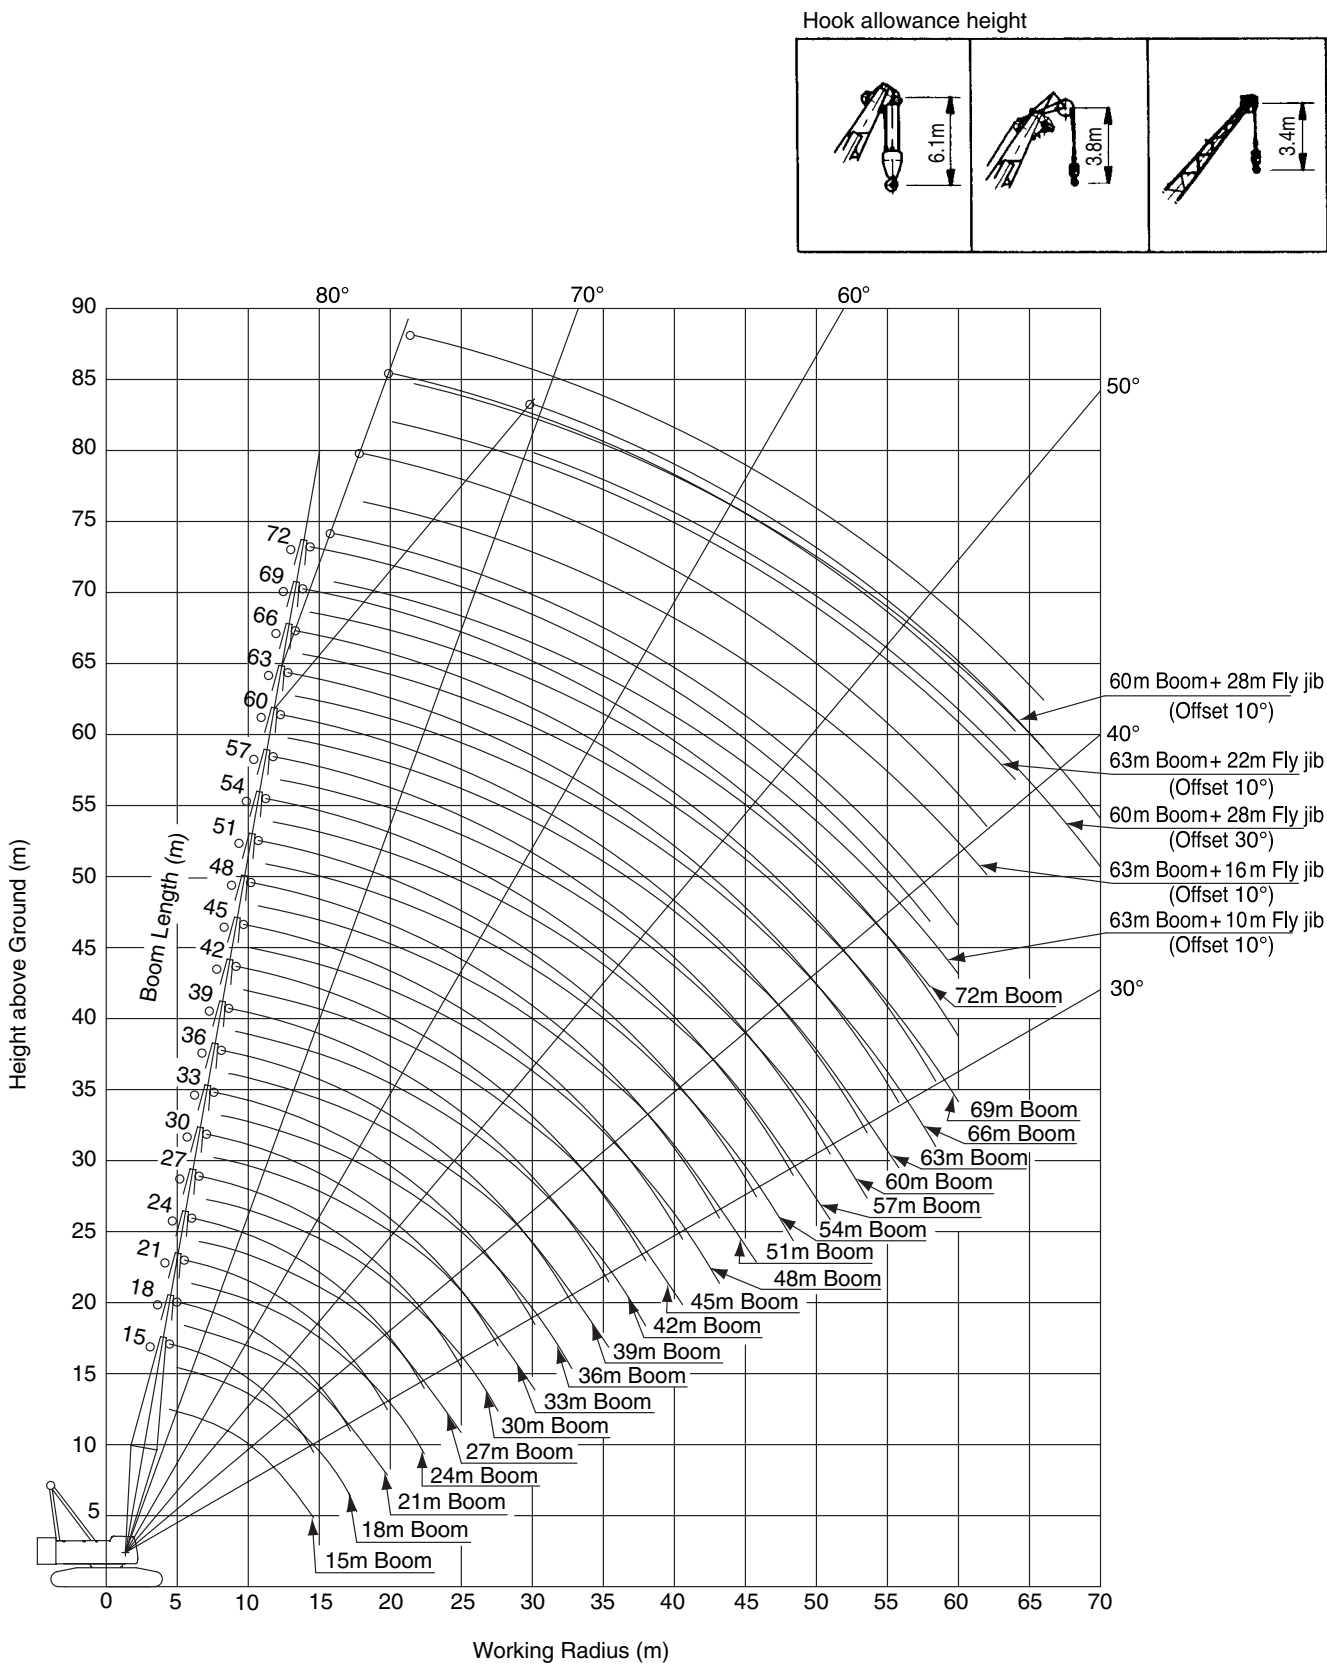
4. All capacities are rated for 360° swing.

5. Least stable rated position is over the side.

6. A 45ton counterweight and 1.7ton aux.weight (or opt.3rd drum) are required for all capacities on these charts.

7. Attachment must be erected and lowered over the ends of the crawler mounting.
8. Maximum fly jib length permitted is 28.0m, and maximum boom and fly jib combination length permitted is 63.0m boom plus 22.0m fly jib.

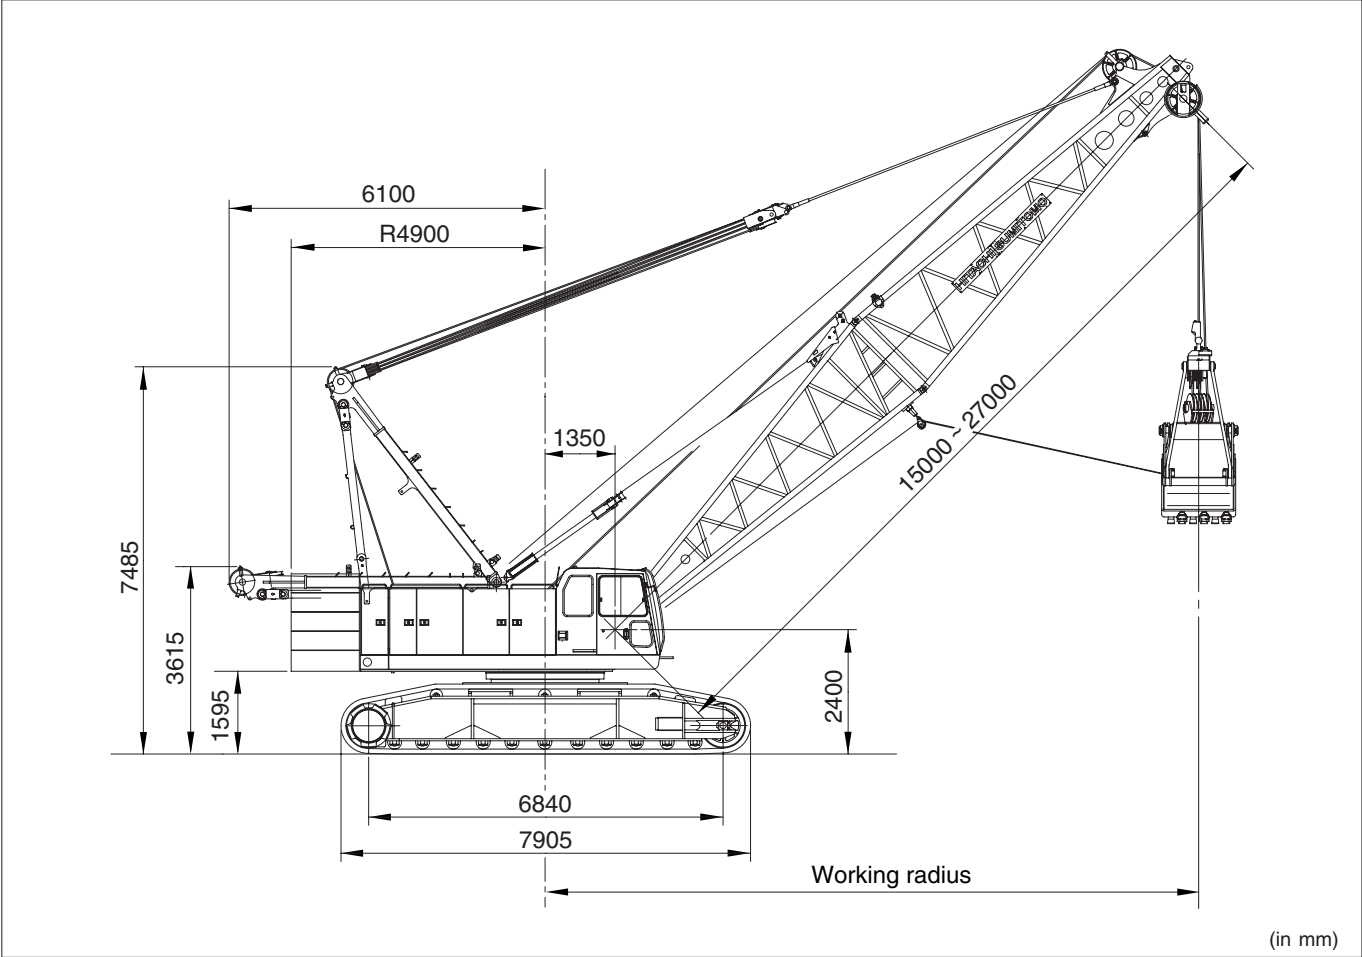
Liftcrane Working Ranges



Notes :
The above diagram shows two kinds of locuses of boom peak sheave and hook points; the lower lines each of boom / fly jib indicate the locus of hook point, and the upper lines each show the locus of boom peak sheave point.



Clamshell 2.0m³ over



CLAMSHELL RATINGS:

(in metric tons)

Boom length (m)	15.0	18.0	21.0	24.0	27.0
Working radius (m)	8.5	9.0	10.0	11.0	12.0
8.5	10.00				
9.0	10.00	10.00/9.7			
10.0	10.00	10.00	10.00/11.0		
12.0	10.00	10.00	10.00	10.00/12.3	10.00/13.5
14.0	10.00	10.00	10.00	10.00	10.00
16.0	10.00/14.2	10.00	10.00	10.00	10.00
18.0		10.00/16.6	10.00	10.00	10.00
20.0			10.00/19.1	10.00	10.00
22.0				10.00/21.5	10.00
24.0					10.00

Notes:

- Max. clamshell rating is 10.0t.
- Mass of bucket plus load should not exceed clamshell ratings shown above. Following data are for a general digging application buckets.
- Boom length shall not exceed 27.0m.
- Apparent specific gravity of lifting material:
Earth1.7~1.8t/m³
Gravel1.8~2.0t/m³
- High gantry is required and side frame must be fully extended for all operating conditions. Also, 45t counterweight and 2.0t aux. weight are required for all clamshell ratings shown above.
- Max. digging depth below ground shall be 36m.

Bucket capacity	2.0m³	2.5m³
Bucket mass	4.5t	5.5t

WORKING MASS & GROUND PRESSURE:

Shoe width	Mass	Pressure
965mm	122 t	89 kPa < 0.91kg/cm²>

Note: Working mass shown above is with 15.0m boom, 45ton counterweight, 2.0ton aux. weight, hydraulic tagline winder and 2.5m³/5.5t clamshell bucket.


BUCKET DIMENSIONS:

(in m)

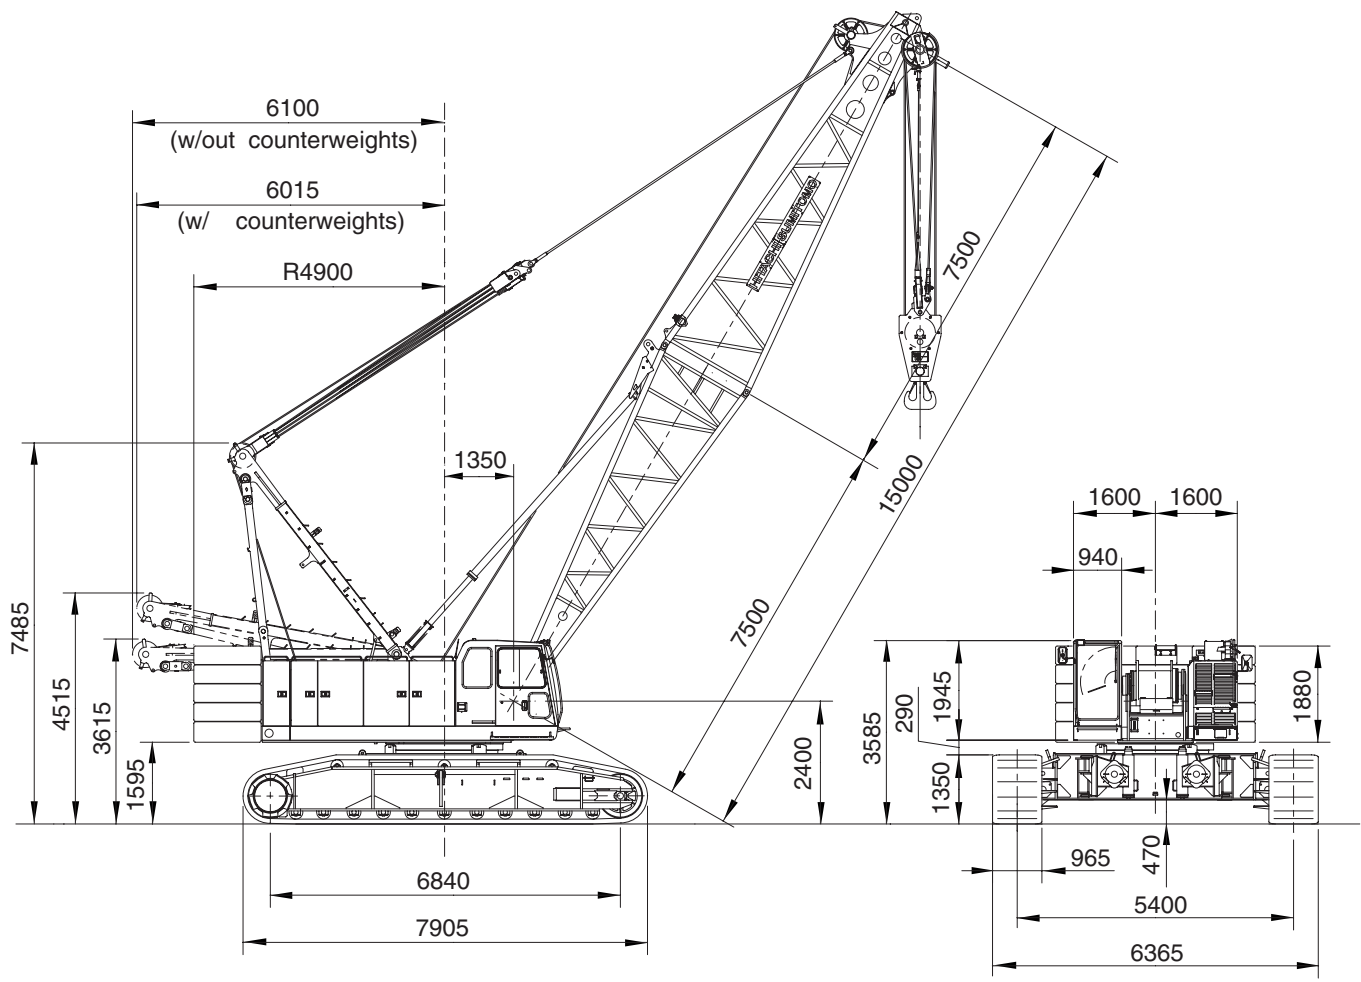
		2.0m ³	2.5m ³
A	Bucket overall height (opened)	4.59	5.13
B	Bucket overall height (closed)	3.78	4.18
C	Bucket opening width	3.24	3.63

Notes:

- Buckets of 2.0/2.5m³ are for a general excavating purpose.
- Other type of bucket than above is also available.



General Dimensions



Note: The above general arrangement is under liftcrane application with 15.0m basic boom, 45t counterweight, 2.0t aux.weight carbody jack-up device and optional 120t hook block.



Standard and Optional Equipment

	Standard equipment	Optional equipment
Superstructure	● Isuzu 6HK1X diesel engine with an 212kW <288ps> rated output; ● Hydraulic system with three variable displacement axial piston pumps and one fixed displacement duplicate tandem gear pump; provided with aluminum-make oil cooler; ● Control system with one each of quadruplicate and triplicate tandem valves and pilot-operated arm chair single axis control levers; provided with motorcycle type “EPC” controller (easy-precise-minute engine rpm and hyd. pump oil flow control device), and specially-tailored pressure compensating valves; ● Front and rear main operating drum winches of 196kN 20t line pull with 554mm dia. drum lagging driven by independent variable displacement hyd. motor; provided with multiple wet-disc type brake installed within drum inside together with reduction gear unit with negative brake design, brake release control under dynamic hyd. pressure, and a forced-oil cooling system. In addition, drum rotation speed control and drum rotation sensor are also provided. Available to operate in two brake modes of automatic and free-fall; ● Boom hoist mechanism driven by hyd. motor with automatic brake; provided with drum rotation speed control and drum rotation sensor; ● Swing mechanism with turntable bearing; driven by two hyd. motor w/spring-applied, power hydraulically released multiple wet-disc brake; provided with speed control device; ● Power hydraulically retractable A-frame gantry; ● 940mm wide, full-vision operator's cab with a stamped-and-round corner design and large front window; provided with an arrangement of armchair operator control station and instrument panel; ● 45ton counterweight; ● 2.0ton auxiliary weight; if opt. 3rd drum winch is required, this aux. weight is not furnished; ● Machinery cab with hinged doors; ● 24-volt electrical system with two 12-volt batteries; ● Lighting system: • Two 70W working lights; • One 10W interior cab light; ● Accessories: • AM/FM radio w/clock; • Engine hourmeter; • Engine tachometer;indicated on display panel of LMI; • Fuel gauge; • Eng. water temp. gauge; • Engine over-heat indicator; available on display panel of LMI; • Hyd. oil over-temp. indicator; available on display panel of LMI; • Brake oil over-temp. indicator; available on display panel of LMI; • 24V electric outlet; • Dual, intermittent window shield wipers with washers; available on both front and roof windows; • Cigar lighter; • Ash tray; • Book holder; • Sunvisor; • Sunshade; • Cup Holder; • Non-skid surfaces; • Cab front step; • Cab sidestep; • Cab floor mat; • Superstructure under-cover. ● Std. spare parts and tools.	● Third drum winch; ● Third drum cable; ● Hyd. tagline winder; available for clamshell application; ● Drum rollers; available on front/rear main drums; ● Fire extinguisher; ● Catwalks with railings along both sides of machinery cab; ● Built-in type full air-conditioning; ● Anemometer; recommended for luffing towercrane application; ● Re-fuel pump; ● Heater; ● Engine foot throttle; ● Electric cab fan.































	Standard equipment	Optional equipment
Undercarriage	● 5,400mm gauge by 7,905mm long crawler lower with removable crawler side frames; provided with two of hyd. joint-pin removal cylinder; ● Crawler drive units with shoe-in type traction motor with wet-disc type automatic brakes; ● Carbody jack-up device w/4-vertical hyd. jack-up cylinder and remote control unit; ● 965mm wide track shoes; ● Manual track tension adjusting devices; ● Lifetime lubricated track components; ● Crawler side steps.	● Automatic track tension adjusting device, i/o manual one as std.
Liftcrane Att.	● 15.0m basic bom; 7.5m bottom section, and 7.5m tapered top section; ● Six boom head sheaves w/two guide sheaves and rigid type cable guard; ● Bail and bridle assemblies; ● Main crane hoist cable; 26mm dia./300m long; ● Boom hoist cable; 22.4mm dia./195m long.	● 3.0m boom extension; ● 6.0m boom extension; ● 9.0m boom extension; ● 10.0m basic fly jib; 5.0m bottom and top sections with strut and guyline pendants; ● 6.0m fly jib extension; ● Auxiliary short jib; ● 120t duplex type hook block with hanger; ● 80t duplex type hook block; ● 70t hook block; ● 50t hook block; ● 30t hook block; ● 11t ball hook; ● Aux. crane hoist cable, 26mm dia./200m long; ● Boom skywalk; available for all sections of liftcrane main boom.



—To be advised later —

Boom & Fly Jib Combination Diagram

■ Crane Boom Coustruction:

Boom Length (m)	Boom Combination	Boom Length (m)	Boom Combination
15.0		45.0	★  
18.0			
21.0	★  	48.0	★  
24.0	★  	51.0	★  
27.0	★  	54.0	★  
30.0	★  	57.0	★  
33.0	★  	60.0	★  
36.0	★  	63.0	★  
39.0	★  	66.0	★  
42.0	★  	69.0	
		72.0	

- Notes :**
1. A star mark (★) indicates manufacturer's recommendable boom configuration. If other boom configuration is required than the above, please consult us or nearest distributor.

2. Auxiliary short jib is able to attach on boom ranging from 15.0m thru 69.0m in length.

3. The meanings of figures and symbols shown above are as follows:.
-  : 7.5m bottom section

 : 7.5m tapered top section




 : 3.0m boom extension

 : 6.0m boom extension

 : 9.0m boom extension



■ Fly Jib Combination (Available offset angle : 10 & 30 degrees):

Jib Length (m)	Jib Combination
10.0	
16.0	
22.0	
28.0	

Notes :
The meanings of figures and symbols shown above are as follows:.

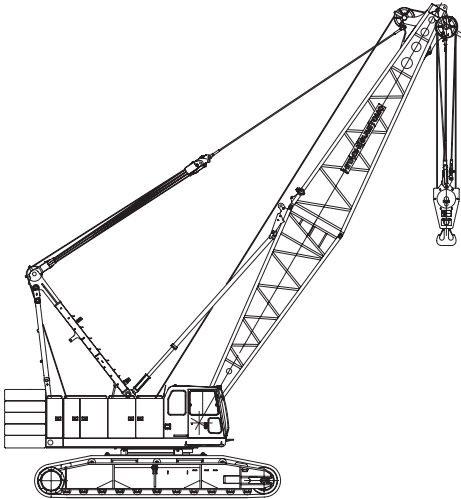
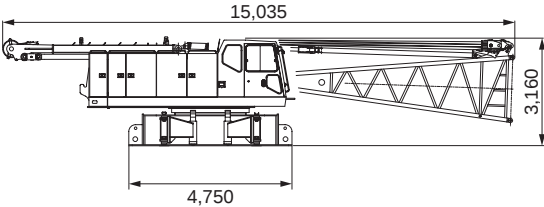



-  : 5.0m bottom section
-  : 5.0m top section
-  : 6.0m jib extension

Boom Length (m)		15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0	42.0	45.0	48.0	51.0	54.0	57.0	60.0	63.0	66.0	69.0	72.0
Jib Length (m)	10.0	x	x	x	x	x	x	x	x	o	o	o	o	o	o	o	o	o	x	x	x
	16.0	x	x	x	x	x	x	x	x	o	o	o	o	o	o	o	o	o	x	x	x
	22.0	x	x	x	x	x	x	x	x	o	o	o	o	o	o	o	o	o	x	x	x
	28.0	x	x	x	x	x	x	x	x	o	o	o	o	o	o	o	o	x	x	x	x

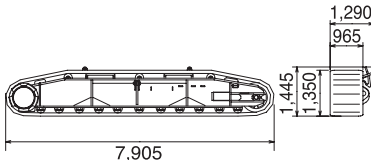








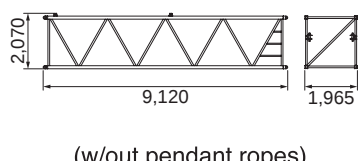

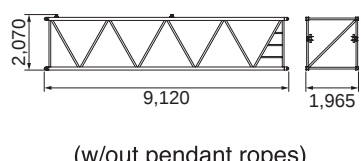

(○:possible ×:impossible)














Transport Data

Description	Dimensions(mm)	Mass(kg)
General Arrangement (w/liftcrane att.)	 (w/12.0m basic boom and 120t hook block)	117,000
Superstructure with: Gantry Boom base section Derricking rope Front drum rope Jack-up unit (w/out Float)		38,000
Superstructure with: Gantry Derricking rope Front drum rope Jack-up unit (w/out Float)		35,300
Superstructure with: Gantry Derricking rope Front drum rope Jack-up unit	 	30,000



Description	Dimevsions	Mass(kg)	Description	Dimevsions	Mass(kg)
Crawler Side Frame		14,100 × 2	Boom Base Section		2,800
Counterweight (A)		9,400	Boom Top Section		2,200
Counterweight (B)		8,900	3m Boom Extension		460
Counterweight (C)		8,900 × 2	6m Boom Extension		770
Counterweight (D)		8,900	9m Boom Extension		1,100
Gantry (w/bridle)		2,600	9m Special Boom Extension		1,200
Bridle		430			



Description	Dimevsions	Mass(kg)	Description	Dimevsions	Mass(kg)
Jib Base Section	 (w/jib mast)	580	50t Hook Block		900
Jib Top Section		290			
6m Jib Ex tension		190	30t Hook Block		730
Aux Short Jib		400	11t Ball Hook Block		370
Hanger		300			
120t Hook Block w/hanger		1,760			
80t Hook Block		1,490			
70t Hook Block		1,010			



SCX1200-2



Hitachi Sumitomo Heavy Industries Construction Crane Co.,Ltd.

12-14, Ueno 7-chome, Taito-ku, Tokyo 110-0005, Japan
Phone: 81-3-3845-1387 Facsimile:81-3-3845-1394

- We are constantly improving our products and therefore reserve the right to change designs and specifications without notice.
- Units in this specification are shown under International System of Units; the figures in parenthesis are under Gravitational System of Units as old one.

Address Inquires to:

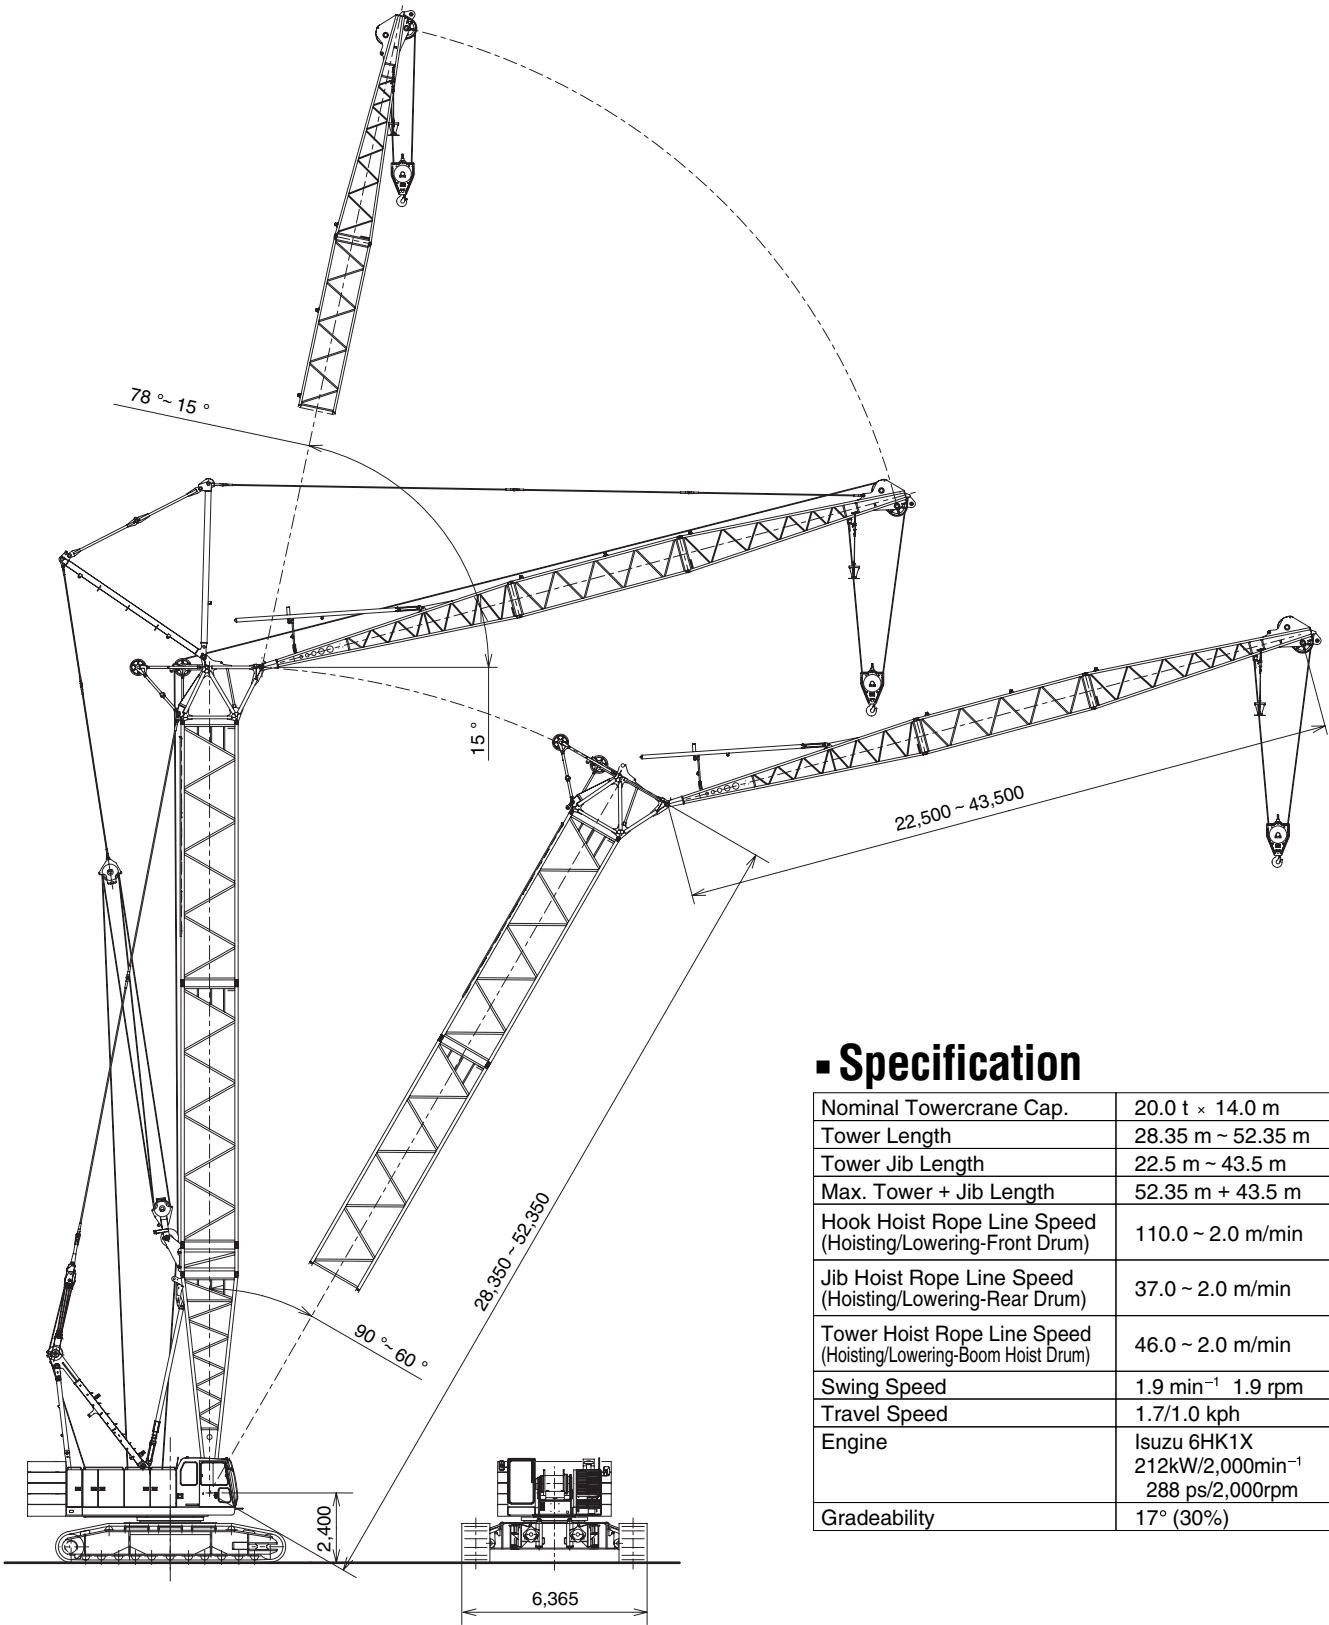


HITACHI SUMITOMO



SCX1200-2

120-M ton Hydraulic Crawler Crane
Luffing Towercrane Att.



■ Specification

Nominal Towercrane Cap.	20.0 t × 14.0 m
Tower Length	28.35 m ~ 52.35 m
Tower Jib Length	22.5 m ~ 43.5 m
Max. Tower + Jib Length	52.35 m + 43.5 m
Hook Hoist Rope Line Speed (Hoisting/Lowering-Front Drum)	110.0 ~ 2.0 m/min
Jib Hoist Rope Line Speed (Hoisting/Lowering-Rear Drum)	37.0 ~ 2.0 m/min
Tower Hoist Rope Line Speed (Hoisting/Lowering-Boom Hoist Drum)	46.0 ~ 2.0 m/min
Swing Speed	1.9 min ⁻¹ 1.9 rpm
Travel Speed	1.7/1.0 kph
Engine	Isuzu 6HK1X 212kW/2,000min ⁻¹ 288 ps/2,000rpm
Gradeability	17° (30%)

Front-end Attachment

- TOWER BOOM:**
Lattice construction, round tubular main chords, alloy, hi-ten steel, with bracing of round steel tubing.
Tower boom connections.....In-line pin connections at 1.85m deep by 1.85m wide.
Special tower boom extensions.....(1) 1.0m long, lattice construction; pins tower jib bail assembly on upper part, and just pinned next to 7.5m bottom section. Available to use as liftcrane boom extension.
(2) 9.0m long, lattice construction; provided with luffing jib hoist bridle guide rails, and pinned next to 9.0m extension as 4th section in the configuration. Available to use as liftcrane boom extension.
Tower boom extensionsAvailable in length of 3.0m, 6.0m and 9.0m with tower boom/tower jib hoist pendants, and to use as liftcrane boom extension.
Tower head section.....1.85m long, lattice construction; pinned on top of tower boom. Pins tower jib and fan-shaped post, and provides one guide sheave for hoist cable and two guide rollers for tower jib hoist pendant ropes.
Tower boom length28.35m to 52.35m; the configuration of a 52.35m tower boom as maximum is as under as recommended:
(1) 7.5m bottom section + (2) 1.0m special ext. + (3) 9.0m ext. + (4) 9.0m special ext. + (5) 3.0m ext. × 2 pcs. + (6) 9.0m ext. × 2 pcs. + (7) 1.85m head section.
Tower boom luffing angle90° thru 60° (according to tower boom/jib combination).

- Notes:**
1. Bottom section of 7.5m long and boom extensions of 3.0m, 6.0m and 9.0m long as necessary to complete liftcrane boom attachment are available from those of luffing towercrane boom attachment.
2. In a case of converting luffing towercrane boom attachment of 52.35m as max. as shown above to liftcrane boom attachment of 73.0m as maximum as available, three items of one set each of 6.0m boom extension, 9.0m boom extension and 7.5m tapered crane top section are only additionally required.

- TOWER JIB:**
Lattice construction, round tubular main chords, alloy hi-ten steel, with bracing of round steel tubing.
Tower jib connectionsIn-line pin connections at 1.2m deep by 1.27m wide.
Basic tower jib.....Three-piece, 22.5m basic length; 9.0m bottom section, one 6.0m extension and 7.5m tower jib top section.
Tower jib top head machinerySingle head and one guide sheaves mounted on anti-friction bearings.
Tower jib extensionsAvailable in 3.0m, 6.0m and 9.0m lengths with pendants.
Maximum tower jib length.....43.5m; a 43.5m tower jib as maximum consists of (1) 9.0m bottom section + (2) 3.0m ext. + (3) 6.0m ext. + (4) 9.0m ext. × 2 pcs. + (5) 7.5m top section.
Tower jib angleAvailable from 15° thru 78° to ground (according to tower boom/jib combination)

- FAN-SHAPED POST:**
All-welded construction; pinned to tower head section. Serves as mechanical connection for tower jib hoisting and lowering motions.

- TOWER JIB BAIL AND BRIDLE:**
All-welded construction; provided with larger sheaves of a 21.4 D/d ratio on both bail and bridle for an 8-part tower jib hoist rope reeving. Bail pinned to an 1.0m special tower boom extension, and bridle suspended between an 8-part tower jib hoist rope and pendant ropes connecting to tower post.

- HOOK BLOCKS:**
To be selected from 30ton and 11ton hook blocks (as same as those of the HOOK BLOCKS mentioned in to “Crane 120 metric tons” of the separate SCX1200-2 SPECIFICATIONS).

- DRUM DATA:**
See DRUM DATA mentioned into page 8 of the separate SCX1200-2 SPECIFICATIONS. In case that machine is operated under luffing towercrane attachment, rope line speed of rear main drum (as used for tower jib hoisting/lowering motion) is automatically changed to “37–2.0mpm”.

Towercrane hoist		
No. of part line	2	1
Max. load (ton)	20.0	11.0

- CABLES:**
Front drum.....3×F (a+40), non-spin type, 26mm dia./300m long, breaking load 569kN (58.0t).
Rear drumIWRC 6×WS (31), 26mm dia./200m long, breaking load 500kN(51.0t).
Boom hoist drum.....Same as that of liftcrane application.
Optional 3rd drumSame as that of liftcrane application.

- WORKING WEIGHT:**
Approx. 130.0ton with 52.35m tower boom, 43.50m tower jib, 45.0ton counterweight, 2.0ton auxiliary weight, 965mm wide track shoes and 30t hook block.

- GROUND PRESSURE:**
93kPa <0.95kg/cm²> under an 130.0ton working weight mentioned above.



Luffing Towercrane Capacities 20 metric tons

■w/28.35mTower

Jib length(m)	22.50			
Tower angle (°)	90	80	70	60
Working radius(m)				
8.0	20.0			
9.0	20.0			
10.0	20.0			
12.0	20.0			
14.0	20.0			
16.0	18.6	18.4/16.5		
18.0	17.2	17.4		
20.0	15.9	16.0		
22.0	14.5	14.5		
24.0	10.2	13.3	13.0/24.6	
26.0	9.6/24.2	12.3	12.3	
28.0		11.4	11.4	
30.0		11.0/29.1	10.7	9.2/31.9
32.0			9.9	9.1
34.0			9.2/33.8	8.5
36.0				7.9
38.0				7.4
40.0				7.3/38.1

■w/31.35mTower

Jib length(m)	22.50				25.50			
Tower angle (°)	90	80	70	60	90	80	70	60
Working radius(m)								
8.0	20.0				19.4/8.7			
9.0	20.0				19.4			
10.0	20.0				19.2			
12.0	20.0				18.9			
14.0	20.0				18.6			
16.0	18.6	18.0/17.0			18.2			
18.0	17.2	17.3			17.7	17.6/18.2		
20.0	15.7	16.0			15.8	16.0		
22.0	14.3	14.6			14.2	14.5		
24.0	10.4	13.3	12.5/25.6		12.9	13.3		
26.0	9.8/24.2	12.3	12.3		10.7	12.3	11.7/27.2	
28.0		11.4	11.4		8.5/27.1	11.4	11.3	
30.0		10.8/29.6	10.5			10.7	10.3	
32.0			9.7	8.3/33.4		10.0	9.5	
34.0			8.9	8.2		9.9/32.5	8.8	7.6/35.4
36.0			8.7/34.8	7.6			8.2	7.4
38.0				7.1			7.7/37.7	6.9
40.0				6.7/39.6				6.5
42.0								6.1
44.0								6.0/42.5

■w/34.35m Tower

Jib length (m)	22.50				25.50				28.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60
Working radius (m)												
8.0	20.0				19.4/8.7							
9.0	20.0				19.4				16.6/9.3			
10.0	20.0				19.2				16.5			
12.0	20.0				18.9				16.2			
14.0	20.0				18.6				16.0			
16.0	18.5	17.6/17.6			18.2				15.7			
18.0	17.0	17.4			17.3	17.2/18.7			15.5	15.2/19.8		
20.0	15.5	16.0			15.5	16.0			15.2	15.2		
22.0	14.0	14.5			13.9	14.5			13.9	14.5		
24.0	10.5	13.3			12.6	13.3			12.6	13.3		
26.0	9.9/24.2	12.3	11.9/26.6		10.8	12.3			11.5	12.3		
28.0		11.4	11.1		8.7/27.1	11.4	10.9/28.2		10.5	11.4	10.0/29.8	
30.0		10.7	10.2			10.7	10.1		7.6	10.7	9.9	
32.0		10.6/30.1	9.4			10.0	9.3			10.0	9.1	
34.0			8.7	7.6/34.9		9.7/33.0	8.6			9.4	8.5	
36.0			8.2/35.8	7.3			8.0	6.9/36.9		8.8/35.9	7.9	
38.0				6.8			7.5	6.6			7.3	6.3/38.9
40.0				6.4			7.3/38.7	6.2			6.9	6.1
42.0				6.1/41.1				5.8			6.5/41.6	5.7
44.0								5.5				5.3
46.0												5.0
48.0												5.0/46.9

■w/37.35m Tower

Jib length (m)	22.50				25.50				28.50				31.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
Working radius (m)																
8.0	20.0				19.4/8.7											
9.0	20.0				19.4				16.6/9.3				15.4/9.9			
10.0	20.0				19.2				16.5				15.4			
12.0	20.0				18.9				16.2				15.2			
14.0	20.0				18.6				16.0				15.0			
16.0	18.4				18.2				15.7				14.8			
18.0	16.9	17.2/18.1			16.8	16.7/19.2			15.5				14.6			
20.0	15.1	15.9			15.0	16.0			14.7	15.1/20.3			14.4	14.3/21.5		
22.0	13.7	14.5			13.6	14.5			13.3	14.5			13.0	14.2		
24.0	10.6	13.3			12.3	13.3			12.1	13.3			11.8	13.3		
26.0	10.1/24.2	12.3	11.1/27.6		10.9	12.3			11.1	12.3			10.8	12.3		
28.0		11.4	10.9		8.8/27.1	11.4	10.2/29.2		10.2	11.4			10.0	11.4		
30.0		10.7	10.0			10.7	9.8		7.7	10.7	9.4/30.8		9.2	10.7		
32.0		10.4/30.7	9.2			10.0	9.1			10.0	8.9		7.7	10.0	8.7/32.4	
34.0			8.5			9.5/33.6	8.4			9.4	8.2		6.8/32.9	9.3	8.1	
36.0			7.9	6.9/36.4			7.8			8.7	7.7			8.6	7.6	
38.0			7.7/36.9	6.5			7.3	6.3/38.4		8.5/36.5	7.1			8.0	7.0	
40.0				6.1			6.8/39.8	5.9			6.7	5.7/40.4		7.7/39.4	6.6	
42.0				5.7				5.6			6.3	5.4			6.2	5.3/42.4
44.0				5.6/42.6				5.2			6.1/42.7	5.1			5.8	5.0
46.0								5.0/45.5				4.8			5.5/45.6	4.7
48.0												4.5				4.4
50.0												4.5/48.4				4.2
52.0																4.0/51.3
54.0																



■w40.35m Tower

Jib length (m)	22.50				25.50				28.50				31.50				34.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
Working radius (m)																				
8.0	19.1				17.6/8.7															
9.0	18.9				17.6				16.1/9.3				15.0/9.9							
10.0	18.7				17.4				16.0				15.0				13.6/10.5			
12.0	18.3				17.1				15.7				14.8				13.4			
14.0	18.0				16.8				15.5				14.6				13.2			
16.0	17.6				16.4				15.2				14.4				13.0			
18.0	16.5	16.9/18.6			16.1	15.8/19.7			15.0				14.2				12.8			
20.0	14.8	16.0			14.7	15.8			14.4	14.6/20.9			14.0				12.6			
22.0	13.4	14.5			13.3	14.5			13.0	14.4			12.8	13.8			12.3	12.3/23.1		
24.0	10.7	13.3			12.1	13.3			11.8	13.3			11.7	13.3			11.3	12.2		
26.0	10.1/24.2	12.3			10.7	12.3			10.8	12.3			10.7	12.3			10.4	12.0		
28.0		11.4	10.2/28.7		8.8/27.1	11.4			10.0	11.4			9.9	11.4			9.5	11.4		
30.0		10.7	9.7			10.7	9.4/30.3		7.4	10.7	8.7/31.8		9.1	10.7			8.8	10.6		
32.0		10.3/31.2	8.9			10.0	8.8			10.0	8.6		7.7	9.9	8.1/33.4		8.2	9.8		
34.0			8.3			9.3	8.1			9.2	8.0		6.5/32.9	9.2	7.9		7.6	9.1	7.5/35.0	
36.0			7.7	6.2/37.9		9.3/34.1	7.6			8.6	7.4			8.5	7.3		5.8/35.8	8.4	7.2	
38.0			7.2/37.9	6.2			7.0	5.7/39.9		8.3/37.0	6.9			7.9	6.8			7.8	6.7	
40.0				5.8			6.6	5.6			6.5	5.1/41.9		7.4/39.9	6.4			7.3	6.3	
42.0				5.4			6.4/40.8	5.3			6.1	5.1			6.0	4.7/43.9		6.9	5.9	
44.0				5.1				5.0			5.7/43.7	4.8			5.6	4.7		6.7/42.8	5.5	4.3/45.9
46.0				5.1/44.1				4.7				4.5			5.3	4.4			5.2	4.3
48.0								4.5/47.0				4.2			5.2/46.6	4.1			4.9	4.0
50.0												4.0/49.9				3.9			4.7/49.5	3.8
52.0																3.7				3.6
54.0																3.6/52.8				3.4
56.0																				3.2/55.7

■w/43.35m Tower

Jib length (m)	22.50				25.50				28.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60
Workingradius(m)												
8.0	19.1				17.2/8.7							
9.0	18.9				17.2				16.1/9.3			
10.0	18.7				17.0				16.0			
12.0	18.3				16.7				15.7			
14.0	18.0				16.4				15.5			
16.0	17.6				16.0				15.2			
18.0	16.2	16.6/19.1			15.7				15.0			
20.0	14.5	16.0			14.3	15.3/20.3			14.2	14.5/21.4		
22.0	13.1	14.5			12.9	14.5			12.8	14.4		
24.0	10.5	13.3			11.7	13.3			11.7	13.3		
26.0	9.9/24.2	12.3			10.7	12.3			10.6	12.3		
28.0		11.4	9.5/29.7		8.6/27.1	11.4			9.8	11.4		
30.0		10.7	9.4			10.7	8.8/31.3		7.5	10.7		
32.0		10.1/31.7	8.7			10.0	8.5			9.8		
34.0			8.0			9.2	7.9			9.1	8.1/32.9	
36.0			7.5			9.0/34.6	7.3			8.5	7.8	
38.0			7.0	5.6/39.4			6.8			8.0/37.5	7.2	
40.0			6.8/38.9	5.5			6.4	5.1/41.4			6.7	
42.0				5.1			6.0/41.8	5.0			6.3	4.6/43.4
44.0				4.8				4.7			5.9	4.5
46.0				4.6/45.6				4.4			5.5	4.3
48.0								4.1			5.4/44.7	4.0
50.0								4.1/48.5				3.8
52.0												3.6/51.4



■w/43.35m Tower

Jib length (m)	31.50				34.50				37.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60
Workingradius(m)	90	80	70	60	90	80	70	60	90	80	70	60
9.0	15.0/9.9											
10.0	15.0				13.7/10.5				12.4/11.2			
12.0	14.8				13.5				12.3			
14.0	14.6				13.3				12.1			
16.0	14.4				13.1				11.9			
18.0	14.2				12.9				11.7			
20.0	14.0				12.7				11.5			
22.0	12.6	13.7/22.5			12.5	12.3/23.6			11.3			
24.0	11.5	13.3			11.3	12.3			11.0	11.0/24.8		
26.0	10.5	12.3			10.4	12.1			10.1	10.9		
28.0	9.6	11.4			9.5	11.4			9.3	10.7		
30.0	8.9	10.6			8.8	10.5			8.6	10.2		
32.0	7.8	9.8			8.1	9.7			7.9	9.5		
34.0	6.6/32.9	9.0	7.5/34.5		7.5	8.9			7.4	8.8		
36.0		8.4	7.1		5.8/35.8	8.3	7.0/36.1		6.9	8.2	6.4/37.6	
38.0		7.8	6.6			7.7	6.5		5.7	7.6	6.3	
40.0		7.3	6.2			7.2	6.1		5.1/38.7	7.1	5.9	
42.0		7.2/40.4	5.8			6.8	5.7			6.7	5.5	
44.0			5.4	4.2/45.4		6.5/43.3	5.3			6.3	5.2	
46.0			5.1	4.1			5.0	3.9/47.4		5.9	4.8	
48.0			4.9/47.6	3.9			4.7	3.8		5.9/46.2	4.6	3.5/49.4
50.0				3.7			4.4	3.6			4.3	3.4
52.0				3.5			4.4/50.5	3.3			4.1	3.2
54.0				3.3				3.2			3.9/53.4	3.0
56.0				3.2/54.3				3.0				2.8
58.0								2.9/57.2				2.7
60.0												2.5
62.0												2.5/60.1

■w/46.35m Tower

Jib length (m)	22.50				25.50				28.50				31.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
Working radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
8.0	19.1				17.2/8.7											
9.0	18.9				17.2				16.1/9.3				15.0/9.9			
10.0	18.7				17.0				16.0				15.0			
12.0	18.3				16.7				15.7				14.8			
14.0	18.0				16.4				15.5				14.6			
16.0	17.6				16.0				15.2				14.4			
18.0	16.0	16.2/19.7			15.7				15.0				14.2			
20.0	14.3	16.0			14.2	15.1/20.8			14.0	14.5/21.9			14.0			
22.0	12.9	14.5			12.8	14.5			12.6	14.4			12.6	13.6/23.0		
24.0	10.5	13.3			11.6	13.3			11.4	13.3			11.5	13.3		
26.0	10.0/24.2	12.3			10.6	12.3			10.4	12.3			10.4	12.3		
28.0		11.4			8.6/27.1	11.4			9.6	11.4			9.6	11.4		
30.0		10.7	8.9/30.7			10.7			7.5	10.5			8.8	10.5		
32.0		9.9	8.4			9.8	8.2/32.3			9.7	7.5/33.9		7.8	9.6		
34.0		9.9/32.2	7.8			9.1	7.7			9.0	7.5		6.6/32.9	8.9	7.0/35.5	
36.0			7.3			8.7/35.1	7.1			8.4	7.0			8.3	6.9	
38.0			6.8				6.6			7.8	6.5			7.7	6.4	
40.0			6.3	5.0/40.9			6.2				6.0			7.2	5.9	
42.0				4.9			5.8	4.6/42.9			5.7			7.0/40.9	5.6	
44.0				4.6			5.6/42.8	4.4			5.3	4.1/44.9			5.2	
46.0				4.3				4.1			5.0/45.7	4.0			4.9	3.8/46.9
48.0				4.1/47.1				3.9				3.7			4.6	3.6
50.0								3.7				3.5			4.5/48.6	3.4
52.0												3.3				3.2
54.0												3.2/52.9				3.0
56.0																2.9/55.8



■w/46.35m Tower

Jib length (m)	34.50				37.50				40.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60
Working radius(m)	90	80	70	60	90	80	70	60	90	80	70	60
10.0	13.7/10.5				12.4/11.2				11.0/11.8			
12.0	13.5				12.3				11.0			
14.0	13.3				12.1				10.8			
16.0	13.1				11.9				10.6			
18.0	12.9				11.7				10.4			
20.0	12.7				11.5				10.2			
22.0	12.5				11.3				10.0			
24.0	11.3	12.3/24.1			11.0	11.0/25.3			9.8			
26.0	10.3	12.1			10.0	10.9			9.1	9.6/26.4		
28.0	9.5	11.3			9.2	10.7			8.5	9.4		
30.0	8.7	10.4			8.5	10.2			7.9	9.2		
32.0	8.0	9.5			7.8	9.4			7.3	9.0		
34.0	7.4	8.8			7.2	8.7			6.8	8.6		
36.0	5.8/35.8	8.2	6.5/37.1		6.7	8.1			6.3	8.0		
38.0		7.6	6.3		5.7	7.5	6.0/38.7		5.9	7.4		
40.0		7.1	5.8		5.1/38.7	7.0	5.7		5.5	6.9	5.5/40.3	
42.0		6.7	5.5			6.6	5.3		4.5/41.6	6.5	5.2	
44.0		6.3/43.8	5.1			6.2	5.0			6.1	4.9	
46.0			4.8			5.8	4.7			5.7	4.6	
48.0			4.5	3.4/48.9		5.7/46.7	4.4			5.4	4.3	
50.0			4.3	3.3			4.1	3.0/50.9		5.1/49.6	4.0	
52.0			4.1/51.5	3.1			3.9	2.9			3.8	2.7/53.0
54.0				2.9			3.7	2.7			3.6	2.6
56.0				2.7			3.6/54.4	2.5			3.4	2.4
58.0				2.6				2.4			3.3/57.3	2.2
60.0				2.5/58.7				2.2				2.1
62.0								2.1/61.6				1.9
64.0												1.8
66.0												1.8/64.5

■w/49.35m Tower

Jib length (m)	22.50				25.50				28.50				31.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
Working radius(m)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
8.0	18.6				17.2/8.7											
9.0	18.4				17.2				16.1/9.3				15.0/9.9			
10.0	18.2				17.0				16.0				15.0			
12.0	17.8				16.7				15.7				14.8			
14.0	17.5				16.4				15.5				14.6			
16.0	17.1				16.0				15.2				14.4			
18.0	15.8				15.7				15.0				14.2			
20.0	14.1	15.9/20.2			14.1	14.8/21.3			14.1				14.0			
22.0	12.7	14.5			12.7	14.5			12.7	14.2/22.4			12.6	13.5/23.5		
24.0	10.6	13.3			11.5	13.3			11.5	13.3			11.4	13.3		
26.0	10.0/24.2	12.3			10.4	12.3			10.4	12.3			10.4	12.3		
28.0		11.4			8.7/27.1	11.4			9.5	11.3			9.5	11.2		
30.0		10.6	8.2/31.7			10.5			7.5	10.4			8.7	10.3		
32.0		9.8	8.1			9.7	7.6/33.3			9.6			7.8	9.5		
34.0		9.5/32.7	7.5			9.0	7.5			8.9	7.0/34.9		6.6/32.9	8.8		
36.0			7.0			8.5/35.6	6.8			8.2	6.7			8.1	6.5/36.5	
38.0			6.5				6.4			7.7	6.2			7.6	6.1	
40.0			6.1				5.9			7.5/38.5	5.8			7.1	5.7	
42.0			5.9/41.0	4.5/42.4			5.6				5.4			6.8/41.4	5.3	
44.0				4.2			5.2/43.9	4.0/44.4			5.1				5.0	
46.0				4.0				3.8			4.8	3.6/46.4			4.7	
48.0				3.7				3.6			4.7/46.8	3.4			4.4	3.3/48.4
50.0				3.7/48.6				3.4				3.2			4.2/49.7	3.1
52.0								3.2/51.5				3.0				2.9
54.0													2.8			2.7
56.0													2.8/54.4			2.5
58.0																2.4/57.3

■w/49.35m Tower

Jib length (m)	34.50				37.50				40.50				43.50		
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70
Working radius(m)															
10.0	13.7/10.5				12.4/11.2				10.8/11.8						
12.0	13.5				12.3				10.8				9.1/12.4		
14.0	13.3				12.1				10.6				9.0		
16.0	13.1				11.9				10.4				8.9		
18.0	12.9				11.7				10.2				8.7		
20.0	12.7				11.5				10.0				8.6		
22.0	12.5				11.3				9.8				8.5		
24.0	11.3	12.2/24.7			11.0	10.9/25.8			9.6				8.3		
26.0	10.3	12.1			10.0	10.9			9.1	9.3/26.9			7.7		
28.0	9.4	11.1			9.2	10.7			8.4	9.2			7.2	8.0	
30.0	8.7	10.2			8.4	10.1			7.8	9.0			6.6	7.9	
32.0	8.0	9.4			7.8	9.2			7.2	8.8			6.2	7.8	
34.0	7.4	8.7			7.2	8.5			6.7	8.4			5.7	7.6	
36.0	5.8/35.8	8.0			6.7	7.9			6.2	7.8			5.3	7.5	
38.0		7.5	6.0/38.1		5.8	7.4	5.5/39.7		5.8	7.3			5.0	6.9	
40.0		7.0	5.6		5.1/38.7	6.9	5.4		5.4	6.8	5.1/41.3		4.6	6.5	
42.0		6.6	5.2			6.4	5.1		4.5/41.6	6.3	5.1		4.3	6.1	4.7/42.9
44.0		6.2	4.9			6.0	4.7			6.0	4.6		3.9	5.7	4.5
46.0		6.1/44.3	4.6			5.7	4.4			5.6	4.3		3.8/44.5	5.3	4.2
48.0			4.3			5.5/47.2	4.2			5.3	4.1			5.0	4.0
50.0			4.1	2.9/50.4			3.9			5.0	3.8			4.6	3.7
52.0			3.8	2.7			3.7	2.5/52.4		5.0/50.1	3.6			4.3	3.5
54.0			3.8/52.6	2.5			3.5	2.3			3.4	2.2/54.5		4.2/53.0	3.3
56.0				2.4			3.3/55.5	2.2			3.2	2.0			3.1
58.0				2.2				2.0			3.0	1.9			2.9
60.0				2.1				1.9			3.0/58.4	1.7			2.8
62.0				2.0/60.2				1.7				1.6			2.7/61.3
64.0								1.7/63.1				1.5			
66.0												1.3			

■w/52.35m Tower

Jib length (m)	22.50				25.50				28.50				31.50			
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	60	90	80	70	60
Working radius(m)																
8.0	18.6				17.2/8.7											
9.0	18.4				17.2				16.1/9.3				15.0/9.9			
10.0	18.2				17.0				16.0				15.0			
12.0	17.8				16.7				15.7				14.8			
14.0	17.5				16.4				15.5				14.6			
16.0	17.1				16.0				15.2				14.4			
18.0	15.8				15.7				15.0				14.2			
20.0	14.1	15.5/20.7			14.1	14.6/21.8			14.1				14.0			
22.0	12.7	14.5			12.7	14.5			12.7	13.9/22.9			12.6			
24.0	10.6	13.3			11.5	13.3			11.5	13.3			11.4	13.3/24.1		
26.0	10.0/24.2	12.3			10.4	12.3			10.4	12.3			10.4	12.2		
28.0		11.4			8.7/27.1	11.3			9.5	11.2			9.5	11.1		
30.0		10.5				10.4			7.6	10.2			8.7	10.1		
32.0		9.7	7.6/32.8			9.6				9.4			7.8	9.3		
34.0		9.2/33.3	7.3			8.8	7.0/34.4			8.7			6.6/32.9	8.6		
36.0			6.7			8.2	6.6			8.1	6.4			8.0	6.0/37.5	
38.0			6.3			8.2/36.2	6.1			7.5	6.0			7.5	5.9	
40.0			5.9				5.7			7.3/39.1	5.6			7.0	5.5	
42.0			5.5	4.0/43.9			5.3				5.2			6.5	5.1	
44.0				3.9			5.0	3.6/45.9			4.9				4.8	
46.0				3.7			4.9/44.9	3.5			4.6	3.1/47.9			4.5	
48.0				3.5				3.3			4.3/47.8	3.1			4.2	2.7/49.9
50.0				3.3				3.1				2.9			4.0	2.7
52.0				3.3/50.1				2.9				2.7			3.9/50.7	2.5
54.0								2.8/53.0				2.5				2.4
56.0												2.3/55.9				2.2
58.0																2.0
60.0																2.0/58.8



■w/52.35m Tower

Jib length (m)	34.50				37.50				40.50			43.50		
Tower angle (°)	90	80	70	60	90	80	70	60	90	80	70	90	80	70
Working radius(m)														
10.0	13.7/10.5				12.4/11.2				10.5/11.8					
12.0	13.5				12.3				10.5			9.1/12.4		
14.0	13.3				12.1				10.3			9.0		
16.0	13.1				11.9				10.1			8.9		
18.0	12.9				11.7				9.9			8.7		
20.0	12.7				11.5				9.7			8.6		
22.0	12.5				11.3				9.5			8.5		
24.0	11.3	12.2/25.2			11.0				9.3			8.3		
26.0	10.3	12.1			10.0	10.9/26.3			9.1	9.0/27.4		7.7		
28.0	9.4	11.0			9.2	10.7			8.4	8.9		7.1	8.0/28.6	
30.0	8.7	10.0			8.4	9.9			7.8	8.7		6.6	7.9	
32.0	8.0	9.2			7.8	9.1			7.2	8.5		6.1	7.8	
34.0	7.4	8.5			7.2	8.4			6.7	8.3		5.7	7.6	
36.0	5.9/35.8	7.9			6.7	7.8			6.2	7.7		5.3	7.4	
38.0		7.4	5.5/39.1		5.8	7.2			5.8	7.2		4.9	7.1	
40.0		6.9	5.4		5.1/38.7	6.8	5.1/40.7		5.4	6.7		4.6	6.6	
42.0		6.4	5.0			6.3	4.8		4.5/41.6	6.2	4.7/42.3	4.2	6.1	4.3/43.9
44.0		6.1	4.7			5.9	4.5			5.8	4.4	3.9	5.7	4.3
46.0		5.9/44.9	4.4			5.6	4.2			5.5	4.1	3.8/44.5	5.4	4.0
48.0			4.1			5.3/47.8	4.0			5.2	3.9		5.0	3.8
50.0			3.9	2.4/51.9			3.7			4.9	3.6		4.7	3.5
52.0			3.6	2.4			3.5	2.0/53.9		4.8/50.7	3.4		4.4	3.3
54.0			3.5/53.6	2.2			3.3	2.0			3.2		4.1/53.6	3.1
56.0				2.0			3.1	1.8			3.0			2.9
58.0				1.9			3.1/56.5	1.7			2.8			2.7
60.0				1.7				1.5			2.7/59.4			2.6
62.0				1.6/61.7				1.4						2.4
64.0								1.3						2.4/62.3
66.0								1.3/64.6						

Notes:

1. Capacities included in these charts are the maximum allowable, and are based on machine standing level on firm supporting surface under ideal job conditions.
2. Capacities are in metric tons, and are based on 78% of minimum tipping load except the figures surrounded by bold lines which are based on factors other than those which would cause a tipping condition; the design codes/standards applied to the capactie are from “Construction Codes for Mobile Crane” and “Ordinance on Safety of Crane and Similar Equipment” issued by Ministry of Health, Labour and Welfare, Japan.
3. Capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, and operating speeds. Operator must reduce load ratings to take such conditions into account. Deduction from rated capacities must be made for weight of hook block, weighted ball/hook, sling, spreader bar, or other suspended gear. Hook block weight is as follows:
30t0.73ton
4. A 45ton counterweight and 2.0ton auxiliary weight (or opt. 3rd drum winch) are required for all capacities on these charts.
5. All capacities are rated for 360° swing.
6. Least stable rated condition is over the side.
7. Attachment must be erected and lowered over the front of the crawler mounting.
8. Working radii shown above are at loading condition.
9. The machine can be steplessly operated at tower angle between 60 and 90 degrees safely according to tower boom/jib combination; towercrane capacities available under any tower angle are automatically set up by a computerized automatic over-load preventing system, Load Moment Indicator.
10. The machine must be operated in accordance with correct tower boom and jib combination shown right.

11. Capacities under single part hoist line are detailed; if required, please consult us or nearest distributor.
12. It is required to strictly observe any instructions mentioned into the SCX1200-2 Operation Manual whenever machine is operated.

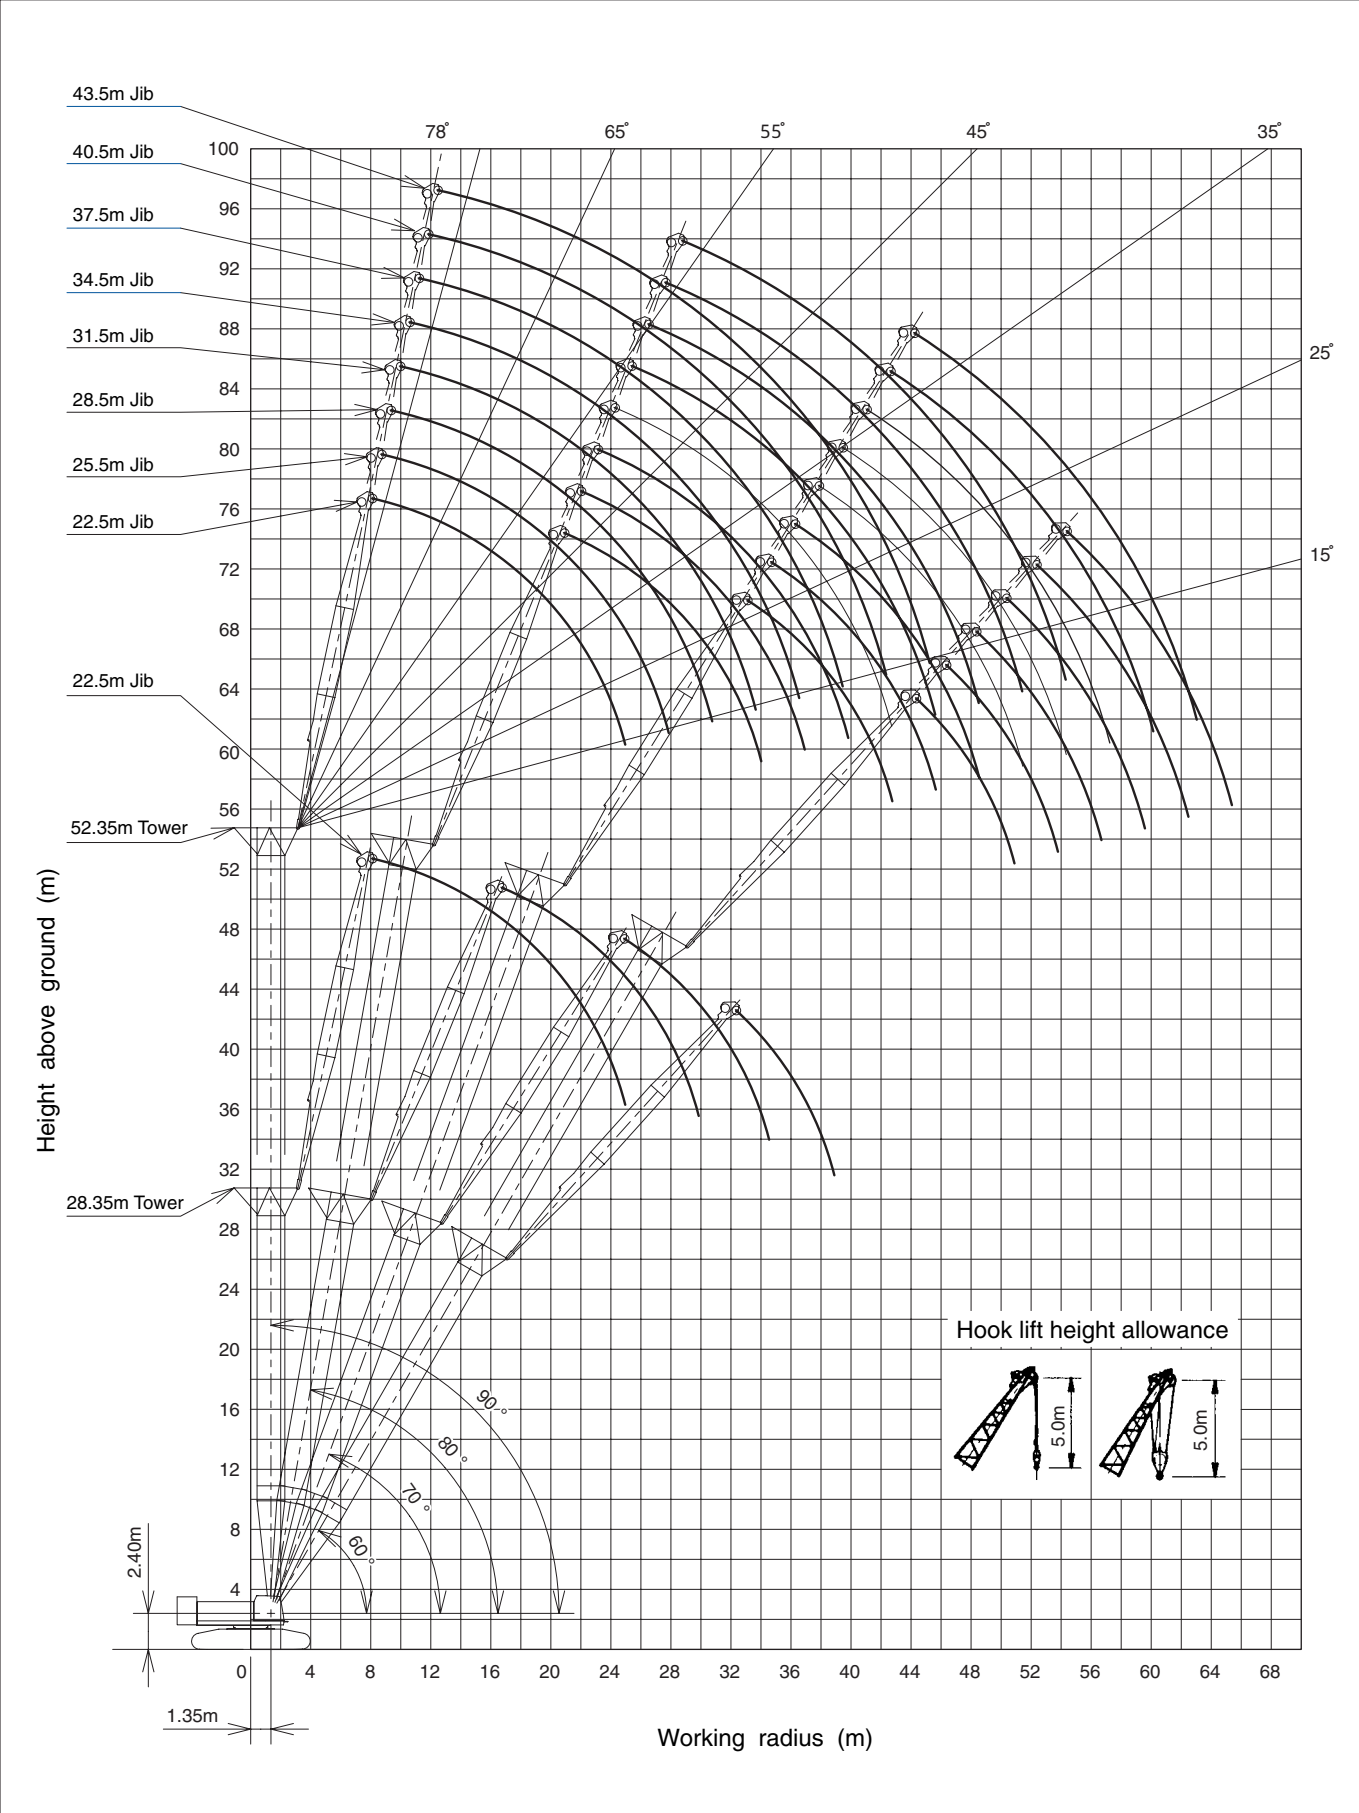
■Combination Table

Jib length (m)	22.50	25.50	28.50	31.50	34.50	37.50	40.50	43.50
Tower length (m)								
28.35	●	×	×	×	×	×	×	×
31.35	●	●	×	×	×	×	×	×
34.35	●	●	●	×	×	×	×	×
37.35	●	●	●	●	×	×	×	×
40.35	●	●	●	●	●	×	×	×
43.35	●	●	●	●	●	●	×	×
46.35	●	●	●	●	●	●	●	×
49.35	●	●	●	●	●	●	●	
52.85	●	●	●	●	●	●		

Notes:

- The meaning of symbols shown in the above table is as follows;
1. Symbol of “●” : Possible to luff tower between 90° thru 60°;
2. Symbol of “ ” : Possible to luff tower between 90° thru 70°;
3. Symbol of “×” : Impossible to make tower boom and jib combination.

Luffing Towercrane Working Ranges





Liftcrane Capacities 120 metric tons

■w/1.0m & 9.0m Special Tower Boom Extensions

Boom length (m) Working radius (m)	16	19	22	25	28	31	34	37	40	43	46	49	52	55	58	61	64	67	70	73
4.7	120.0																			
5.0	117.7	110.0 / 5.2	99.0 / 5.7																	
6.0	98.9	98.8	98.6	88.0 / 6.2	77.0 / 6.8															
7.0	85.2	85.1	85.0	85.0	77.0	66.0 / 7.3	66.0 / 7.8													
8.0	71.9	71.9	71.9	72.0	72.0	66.0	66.0	55.0 / 8.3	55.0 / 8.8											
9.0	59.9	59.9	59.9	60.0	60.0	60.0	59.9	55.0	55.0	44.0 / 9.4	44.0 / 9.9									
10.0	51.3	51.2	51.2	51.3	51.3	51.3	51.2	51.1	50.9	44.0	44.0	33.0 / 10.4	33.0 / 10.9	33.0 / 11.5						
12.0	39.6	39.5	39.4	39.6	39.5	39.5	39.3	39.3	39.1	39.1	38.9	33.0	33.0	33.0	33.0	22.0 / 12.5	22.0 / 13.1	22.0 / 13.6		
14.0	32.0	32.0	31.9	32.0	31.9	31.9	31.7	31.6	31.5	31.5	31.3	31.3	31.2	31.0	30.9	22.0	22.0	22.0	21.6 / 14.1	18.8 / 14.6
16.0	28.2 / 15.4	26.7	26.6	26.7	26.6	26.6	26.4	26.3	26.1	26.1	25.9	25.9	25.8	25.7	25.6	22.0	22.0	21.9	19.6	17.5
18.0		22.9		22.7	22.6	22.5	22.4	22.2	22.2	22.0	22.0	21.9	21.7	21.6	21.6	21.4	20.0	17.9	15.8	
20.0			19.7	19.8	19.7	19.6	19.5	19.4	19.2	19.2	19.0	19.0	18.9	18.7	18.6	18.6	18.4	18.3	16.3	14.4
22.0			19.0 / 20.6	17.5	17.3	17.3	17.1	17.0	16.8	16.8	16.6	16.6	16.4	16.3	16.1	16.1	16.0	15.9	15.0	13.2
24.0				16.3 / 23.2	15.4	15.3	15.2	15.0	14.8	14.8	14.6	14.6	14.5	14.3	14.2	14.2	14.0	13.9	13.8	12.2
26.0					14.0 / 25.8	13.8	13.6	13.4	13.2	13.2	13.0	13.0	12.9	12.7	12.6	12.6	12.4	12.3	12.1	11.2
28.0						12.4	12.3	12.1	11.9	11.9	11.6	11.6	11.5	11.3	11.2	11.2	11.0	10.9	10.8	10.4
30.0						12.2 / 28.4	11.1	11.0	10.7	10.7	10.5	10.5	10.4	10.2	10.0	10.0	9.8	9.7	9.6	9.4
32.0							10.6 / 31.0	10.0	9.8	9.7	9.5	9.5	9.4	9.2	9.0	9.0	8.8	8.7	8.6	8.4
34.0								9.3 / 33.6	8.9	8.9	8.6	8.6	8.5	8.3	8.2	8.1	7.9	7.8	7.7	7.5
36.0									8.2	8.1	7.9	7.8	7.7	7.5	7.4	7.4	7.2	7.0	6.9	6.7
38.0								8.1 / 36.2	7.4	7.2	7.2	7.0	6.8	6.7	6.7	6.5	6.4	6.2	6.0	
40.0									7.2 / 38.8	6.6	6.6	6.4	6.2	6.1	6.1	5.9	5.7	5.6	5.4	
42.0										6.2 / 41.4	6.0	5.9	5.7	5.6	5.5	5.3	5.2	5.0	4.8	
44.0											5.6	5.4	5.2	5.1	5.0	4.8	4.6	4.5	4.2	
46.0												5.0	4.8	4.6	4.5	4.3	4.1	4.0	3.7	
48.0												4.9 / 46.6	4.3	4.2	4.1	3.8	3.7	3.5	3.2	
50.0													4.1 / 49.2	3.8	3.7	3.4	3.3	3.1	2.8	
52.0														3.4 / 51.8	3.3	3.0	2.9	2.7	2.4	
54.0															2.9	2.7	2.5	2.3	2.1	
56.0																2.9 / 54.1	2.4	2.2	2.0	1.8
58.0																	2.2 / 56.7	1.9	1.7	1.5
59.3																		1.7	1.4	

Notes — Liftcrane capacities

- Capacities on this chart are available when converting luffing towercrane boom to liftcrane attachment under the condition that an 1m special tower boom extension is necessarily used for all length of boom; a 9m special tower boom extension shall be available to use in the boom configuration ranging from 25.0m up to 73.0m long.
- Capacities included in this chart are the maximum allowable, and are based on machine standing level on firm supporting surface under ideal job conditions.
- Capacities are in metric tons, and are not more than 78% of minimum tipping loads except the figures surrounded by bold lines which are based on other factor of machine structural strength limitation; the design codes/standards applied to the capactie are from “Construction Codes for Mobile Crane” and “Ordinance on Safety of Crane and Similar Equipment” issued by Ministry of Health, Labour and Welfare, Japan.
- Capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, and operating speeds. Operator must reduce load ratings to take such conditions into account. Deduction from rated capacities must be made for weight of hook block, weighted ball/hook, sling, spreader bar, or other suspended gear.
Hook block weight is as follows:
120t.....1.76ton 80t1.49ton 70t1.01ton
50t0.9ton 30t0.73ton 11t0.37ton
- All capacities are rated for 360° swing.
- Least stable rated condition is over the side.
- Counterweight must be 45.0ton for all capacities on this chart together with 2.0ton auxiliary weight (or opt. 3rd drum winch).
- Attachment must be erected and lowered over the front of the crawler mounting.
- Main boom length must not exceed 73.0m.
Maximum fly jib length permitted—28.0m.
Maximum boom and fly jib combination length permitted—61.0m+28.0m/64.0m+22.0m.
Maximum boom length when mounting auxiliary short jib is 70.0m.
- Capacities when handling load off main boom head sheaves in case of mounting fly jib or auxiliary short jib on top of boom are detailed; if required, please consult us or nearest distributor.
- Boom configurations when converting luffing towercrane boom to liftcrane att. shall be in accordance with the SCX1200-2 Operation Manual.

12. It is required to strictly observe any instructions mentioned into the SCX1200-2 Operation Manual whenever machine is operated.



Hitachi Sumitomo Heavy Industries Construction Crane Co.,Ltd

12-14, Ueno 7-chome, Taito-ku, Tokyo 110-0005, Japan
Phone: 81-3-3845-1387 Facsimile:81-3-3845-1394

- We are constantly improving our products and therefore reserve the right to change designs and specifications without notice.
- Units in this specification are shown under International System of Units; the figures in parenthesis are under Gravitational System of Units as old one.

Address Inquires to: