



SCX1200-3
Stage III A / Tier 3

SCX 1200-3

HYDRAULIC CRAWLER CRANE

Specifications & Lifting Capacities

Hoist Rope 26mm

HITACHI SUMITOMO






SCX1200-3

VARIATION

Variation of The Attachment


Line Speed *	Front / Rear Winch (Rated with 12 t load)	m/min	110 (45)
	Third Winch (Rated with 12 t load)		95 (30)
	Boom Hoist Winch		44
	Tower Jib Hoist Winch		55
Swing Speed		min ⁻¹ (rpm)	1.7
Travel Speed High / Low *		km/h	1.5 / 0.9
Gradeability		% (Degree)	30 (17)
Engine Model		ISUZU 6HK1 (Stage IIIA / Tier 3)	
Engine Rated Output Power		kW/min ⁻¹ (ps/rpm)	200.6 / 1850 (272 / 1850)

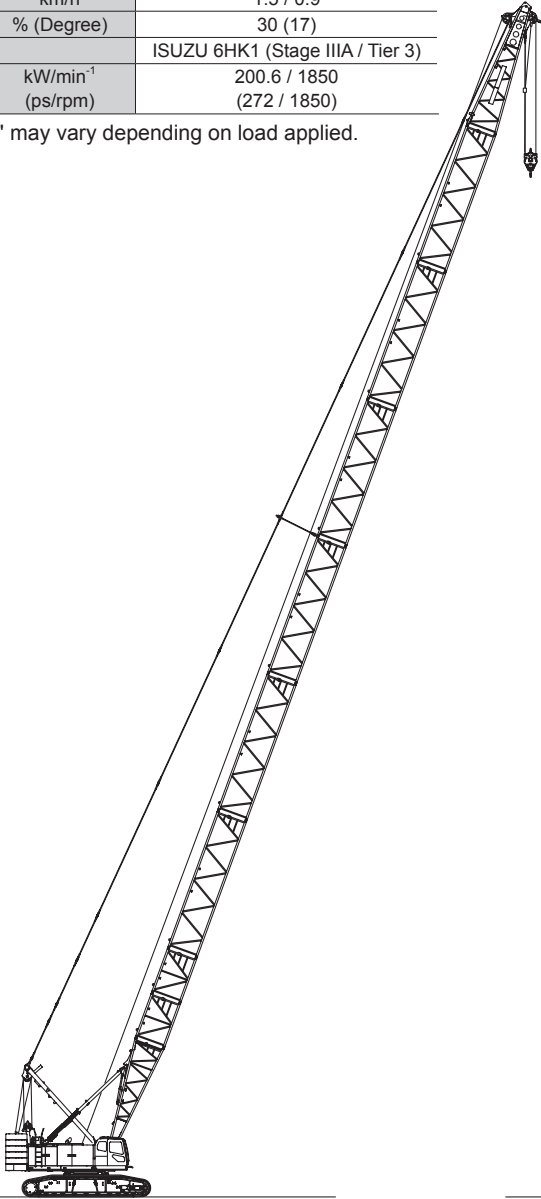Note : Speeds marked with "*" may vary depending on load applied.



Crane Specification
(Boom Longest Length)

Boom Length	m	15 to 75
Ground Contact Pressure	kPa (kgf/cm ²)	96 (0.98) (Boom longest length with 35 t hook)
Overall Operating Weight	t	Approximately 130 (Boom longest length with 35 t hook)

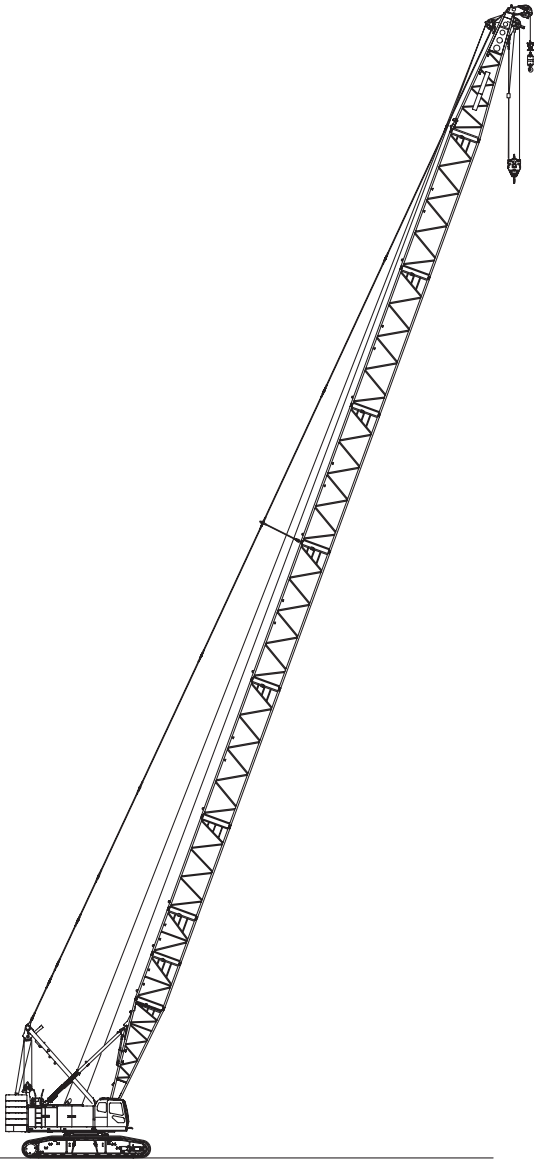


Crane Specification
(Boom Longest Length with Aux. Sheave)

Boom Length	m	15 to 72
Ground Contact Pressure	kPa (kgf/cm ²)	97 (0.99) (Boom longest length + 35 t aux. sheave + 12 t hook attached)
Overall Operating Weight	t	Approximately 131 (Boom longest length + 35 t aux. sheave + 12 t hook attached)




VARIATION

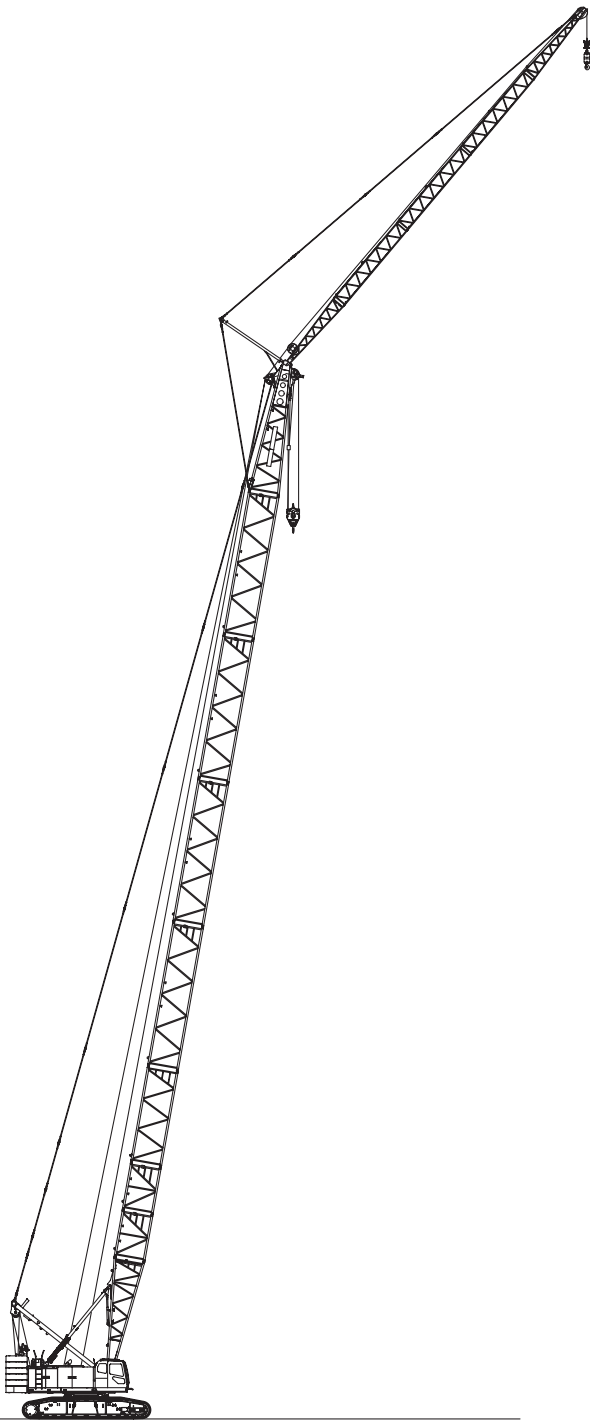SCX1200-3



Crane Specification
(Boom Longest Length with Crane Jib)

Boom Length	m	24 to 63
Crane Jib Length	m	10 to 28
Boom + Crane Jib Longest Length	m	63 + 28
Ground Contact Pressure	kPa (kgf/cm²)	97 (0.99) (Boom + crane jib longest length 35 t + 12 t hook attached)
Overall Operating Weight	t	Approximately 131 (Boom + crane jib longest length 35 t + 12 t hook attached)

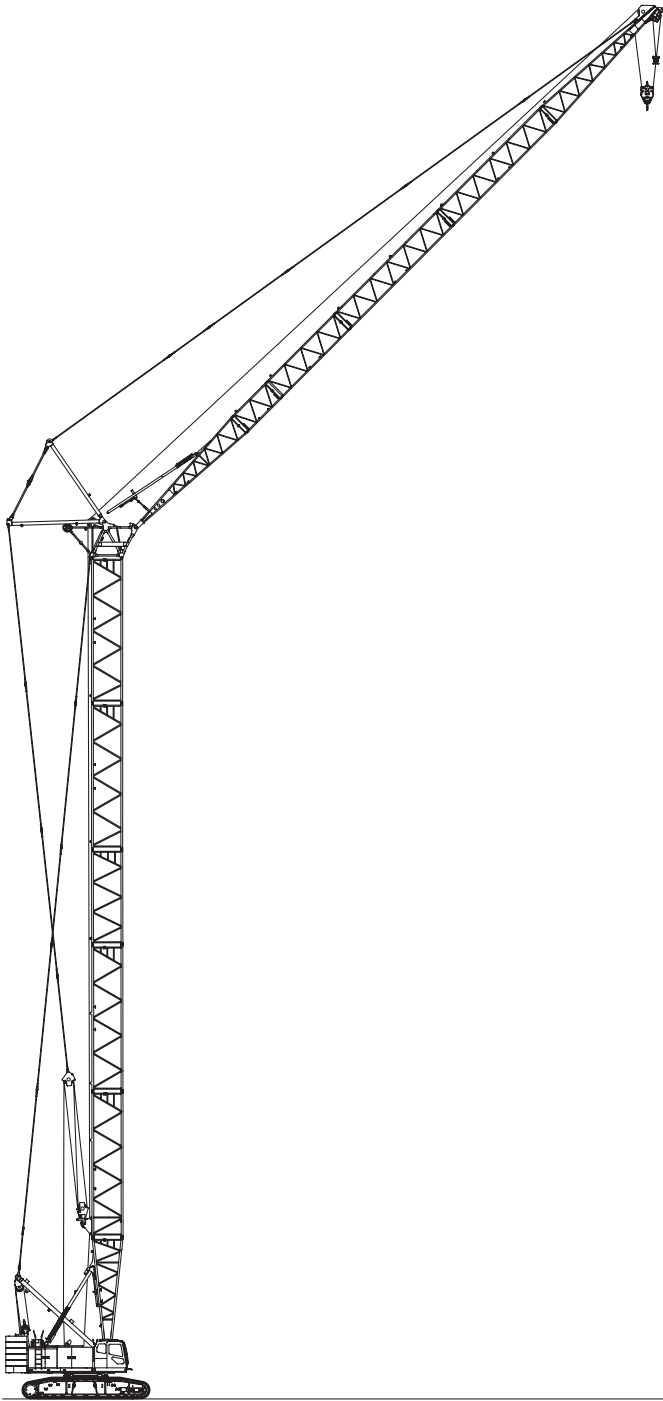

Tower Specification
(Tower + Tower Jib Longest Length)

Tower Length	m	30.35 to 51.35
Tower Jib Length	m	24 to 45
Tower + Tower Jib Longest Length	m	51.35 + 45
Ground Contact Pressure	kPa (kgf/cm²)	102 (1.04) (Tower + tower jib longest length with 35 t hook attached)
Overall Operating Weight	t	Approximately 137 (Tower + tower jib longest length with 35 t hook attached)



VARIATION

Variation of The Attachment	2
-----------------------------	---

SPECIFICATIONS

Specifications	6
Crane Specifications	7
Dimensions and Specifications	7
Boom and Crane Jib Configurations.....	8
Combination of Boom and Crane Jib (Offset Angle 10° and 30°)	10
Working Ranges	11
Main Boom (With Crane Boom Extensions).....	11
Aux. Sheave (With Crane Boom Extensions).....	12
Crane Jib (With Crane Boom Extensions).....	13
Main Boom (With Tower Boom Extensions).....	14
Aux. Sheave (With Tower Boom Extensions).....	15
Crane Jib (With Tower Boom Extensions).....	16
Gross Rated Load Table	17
Main Boom (With Crane Boom Extensions).....	17
Aux. Sheave (With Crane Boom Extensions).....	18
Main Boom with Aux. Sheave (With Crane Boom Extensions)	19
Crane Jib (With Crane Boom Extensions).....	20
Main Boom with Crane Jib (With Crane Boom Extensions).....	27
Main Boom (Using Third Winch) (With Crane Boom Extensions).....	34
Main Boom with Aux. Sheave (Using Third Winch) (With Crane Boom Extensions)	35
Main Boom (With Tower Boom Extensions).....	36
Aux. Sheave (With Tower Boom Extensions).....	37
Main Boom with Aux. Sheave (With Tower Boom Extensions)	38
Crane Jib (With Tower Boom Extensions).....	39
Main Boom with Crane Jib (With Tower Boom Extensions)	46



■ Main Boom (Using Third Winch) (With Tower Boom Extensions)	53
■ Main Boom with Aux. Sheave (Using Third Winch) (With Tower Boom Extensions).....	54

Tower Specifications

55

Dimensions and Specifications	55
Tower and Tower Jib Configurations.....	56
Working Ranges	57
Gross Rated Load Table	58
■ 30.35 m Tower	58
■ 33.35 m Tower	58
■ 36.35 m Tower	59
■ 39.35 m Tower	60
■ 42.35 m Tower	61
■ 45.35 m Tower	62
■ 48.35 m Tower	63
■ 51.35 m Tower	65

Clamshell Specifications

67

Dimensions and Specifications	67
■ Working Ranges	67
■ Specifications	67
■ Clamshell Bucket.....	67
■ Gross Rated Load Table.....	67

TECHNICAL DATA

Weights and Dimensions of Disassembled Units

68

Weights and Dimensions List	68
-----------------------------------	----

Equipment List

74

Standard and Optional Equipment	74
---------------------------------------	----



SCX1200-3

SPECIFICATIONS

Specifications

Specifications



Engine

Model	ISUZU 6HK1
Type	4-cycle, Water-cooled, Direct injection, Turbo-charged, Diesel engine
Displacement	7.79 liters
Rated Output	200.6 kW / 1,850 min ⁻¹ (272 ps / 1,850 rpm)
Fuel Tank Capacity	460 liters
Notes	Engine meets Tier 3 / Stage IIIA of engine exhaust gas emission regulations . Engine rated horsepower is based on international rating formula that includes engine alternator and without fan.



Control

Control System	Main actuators are actuated by main hydraulic system controlled with pilot hydraulic system. Safety devices are securely operated by combined various electronic control with hydraulic system. Working speed can be precisely controlled according to control lever stroke and control dials depending on work.
Control Levers	Designed and positioned based on ergonomics. Armchair lever type is standard. Cross operation lever type and front lever type are available as option.
Display Panel Design	8 inches size. Located to check work state easily without disturbing the view of the operator.



Hydraulic System

Hydraulic Oil Tank Capacity	320 liters		
Hydraulic Pump Capacity	Max.	31.4 MPa	
	P1	266 liters / min	for Front, Rear , boom hoist winch and travel
	P2	266 liters / min	for Front, Rear , third winch and travel
	P3	152 liters / min	for Swing, Jack and Sideframe connect
	P4	38 liters / min	
	P5	38 liters / min	Pilot control, Brake cooling,
	P6	38liters / min	Reeving tagline, etc
	P7	30 liters / min	



Winch

Front and Rear Winch				
Winch		Front	Rear	
Rope Diameter		26 mm	26 mm	
Rope Length	Standard	285 m	160 m	for Aux. sheave
	Winding Capacity	-	195 m	for Crane jib
Line Pull	Rated	360 m	360 m	
		117 kN	117 kN	
Standard Equipment		High-speed winching is possible by ECO winch mode with low engine speed under light loads.		
Optional Equipment		Free fall winch with brake controlled by pedal operation.		
Boom Hoist Winch				
Rope Diameter		22.4 mm		
Rope Length	Incorporated	195 m		
Hydraulic motor with multi-disc brakes.				

Third Winch(Optional)		
Rope Diameter		26 mm
Rope Length	Standard	220 m
	Winding Capacity	220 m
Line Pull	Rated	117 kN
Free fall winch with brake controlled by pedal operation.		



Swing System

Consisted of 2 hydraulic motors with reduction gear and multi-disc brakes and a swing bearing which has inner tooth. Optional swing brake pedal enables operator to control swing precisely.
--



Mast

Mast is box structure. Easy assemble for front attachment.
--



Counterweight

Upper Weight	Total Weight	49.6 ton
	9.1 ton Base Weight	1 piece
	8.1 ton Insert Weight	5 pieces



Carbody Frame

Welded steel construction with jack up device and crawler sideframe connect cylinders.
--




Crawler Sideframe

Frame	Welded steel box construction. Hook on and joint pin design for crawler sideframe connection to carbody frame.	
Crawler Shoe	Cast iron 965mm width flat shoes each side.	
Upper Roller	5 pieces each side.	
	Double flange type : 3 pieces Single flange type : 2 pieces	
Lower Roller	11 pieces each side.	
	Forging heat treated steel with double flange type. 2 plane bearing with floating seal for lifetime lubrication.	
Travel Device	1 peace each side.	
	Hydraulic travel device (Hydrayulic motor and reducer)	
	Travel speed (Gradability : 30%)	High : 1.5 km/h Low : 0.9 km/h



Crane Specifications

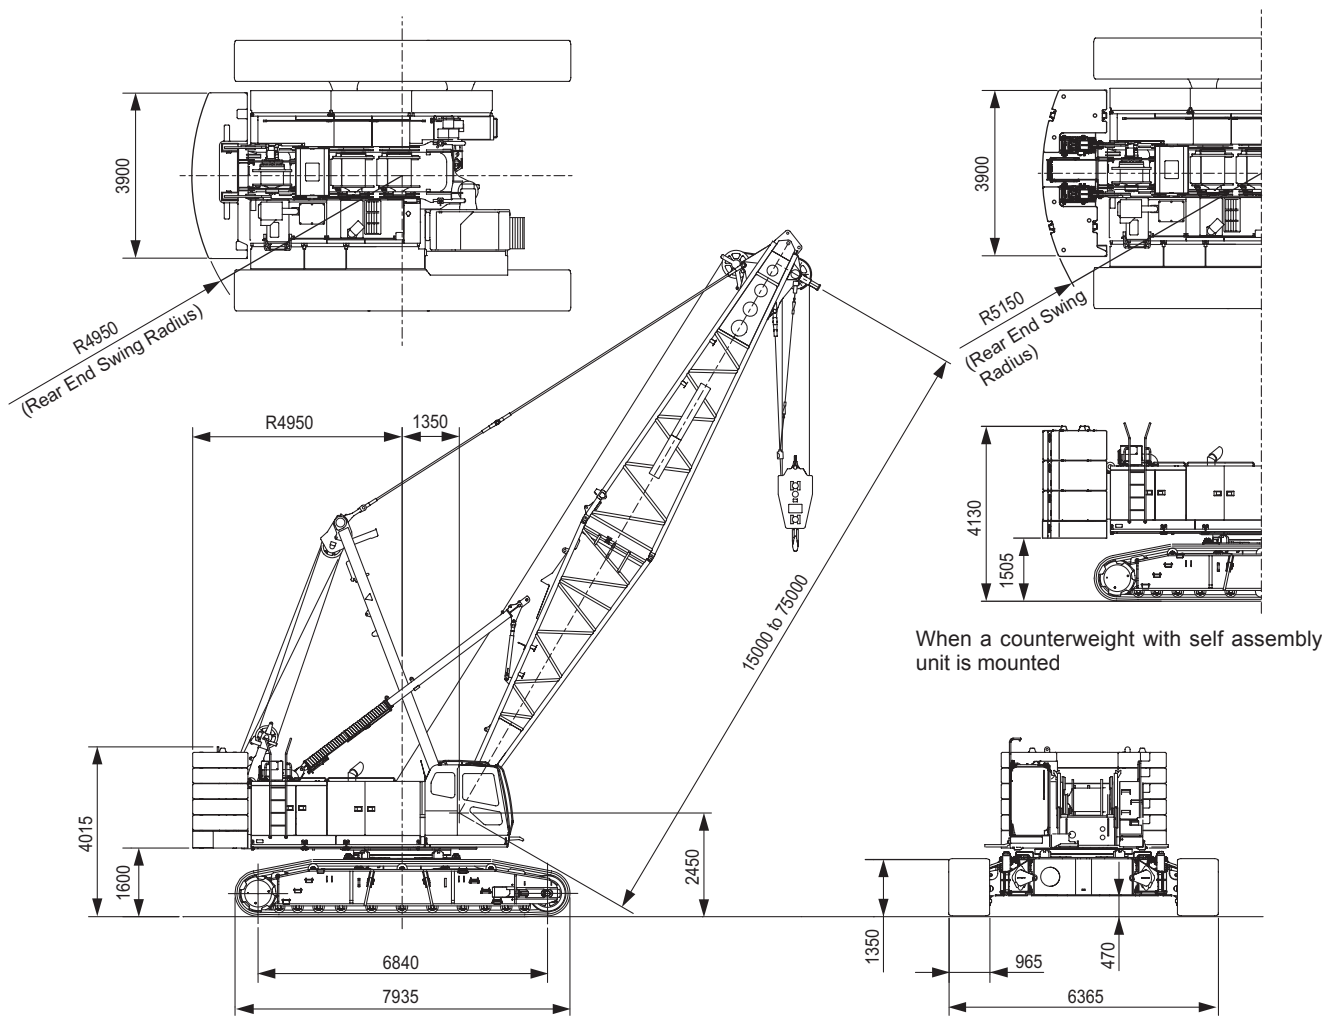Dimensions and Specifications



Crane Specifications		
Max. Lifting Load × Working Radius	t × m	120×5.0
Basic Boom Length	m	15
Max. Boom Length	m	75
Max. Crane Jib Length	m	10 to 28
Max. Boom + Jib Length	m	63 + 28
Ground Contact Pressure	kPa (kgf/cm²)	91 (0.92) (w / Basic Boom, 120 t Hook)
Overall Operating Weight	t	Approximately 122 (w / Basic Boom, 120 t Hook)

Hook Weight	
120 t	1,640 kg
80 t	1,350 kg
35 t	900 kg
12 t	510 kg

NOTE : Data is expressed in SI units followed by conventional units in ().

Front/Rear Third Winch Rope No. of Falls and Lifting Load										
Hook Capacity (t)	Maximum Rated Load (t)									
	10 Falls	9 Falls	8 Falls	7 Falls	6 Falls	5 Falls	4 Falls	3 Falls	2 Falls	1 Fall
120	120	108	96	84	72	60	48	36	24	-
80	-	-	-	80	72	60	48	36	24	-
35	-	-	-	-	-	-	-	35	24	-
12	-	-	-	-	-	-	-	-	-	12

SCX1200-3

SPECIFICATIONS

Specifications
Boom and Crane Jib Configurations

Boom and Crane Jib Configurations


With Crane Boom Extensions

Boom (1/2)		Boom (2/2)	
Boom Length (m)	Boom Configurations	Boom Length (m)	Boom Configurations
15		48	
18			
21		51	
24		54	
27		57	
30		60	
33		63	
36		66	
39		69	
42		72	
45		75	

▽ indicates the midpoint pendant rope connection position.

Aux. Sheave Installable Boom Length																					
Boom Length (m)	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
With Aux. Sheave	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×
(○ : Attachable × : Not Attachable)																					

Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure		Pendant Rope			
Symbols	Boom Length (m)	Length (m)	Rope Diameter (mm)	Imprint	
3	3	1.2	40	□ • △ • 40 • 1.2 • C	
6	6	2.6	40	□ • △ • 40 • 2.55 • C	
7.5	7.5	3	40	□ • △ • 40 • 3 • C	
9	9	6	40	□ • △ • 40 • 6 • C	
		6.9	40	□ • △ • 40 • 6.9 • C	
		9	40	□ • △ • 40 • 9 • C	


With Tower Boom Extensions

Boom (1/2)		Boom (2/2)	
Boom Length (m)	Boom Configurations	Boom Length (m)	Boom Configurations
15		48	
18			
21		51	
24		54	
27			
30		57	
33		60	
36			
39		63	
42		66	
45		69	
		72	
		75	

▽ indicates the midpoint pendant rope connection position.

Aux. Sheave Installable Boom Length																					
Boom Length (m)	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
With Aux. Sheave	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×
(○ : Attachable × : Not Attachable)																					

Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure		Pendant Rope			
Symbols	Boom Length (m)	Length (m)	Rope Diameter (mm)	Imprint	
3	3	1.2	40	□ • △ • 40 • 1.2 • C	
6	6	2.6	40	□ • △ • 40 • 2.55 • C	
7.5	7.5	3	40	□ • △ • 40 • 3 • C	
9	9	6	40	□ • △ • 40 • 6 • C	
		6.9	40	□ • △ • 40 • 6.9 • C	
		9	40	□ • △ • 40 • 9 • C	



SCX1200-3

SPECIFICATIONS

Specifications

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)																						
Boom Length (m)		15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
Jib Length (m)	10	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
	16	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
	22	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
	28	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
(○ : Attachable × : Not Attachable)																						

Crane Jib (Offset Angle 10° and 30°)			Crane Jib Configurations	
Crane Jib Length (m)	Offset Angle			
10	10°			
	30°			
16	10°			
	30°			
22	10°			
	30°			
28	10°			
	30°			


Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure		Jib Pendant Rope			
Symbols	Jib Length (m)	Length (m)	Rope Diameter (mm)	Imprint	
5	5	1.4	24	□ • △ • 24 • 1.4 • S	
6	6	5.7	24	□ • △ • 24 • 5.7 • S	
		9.6	24	□ • △ • 24 • 9.6 • S	
		10	26	□ • △ • 26 • 10 • S	



Working Ranges

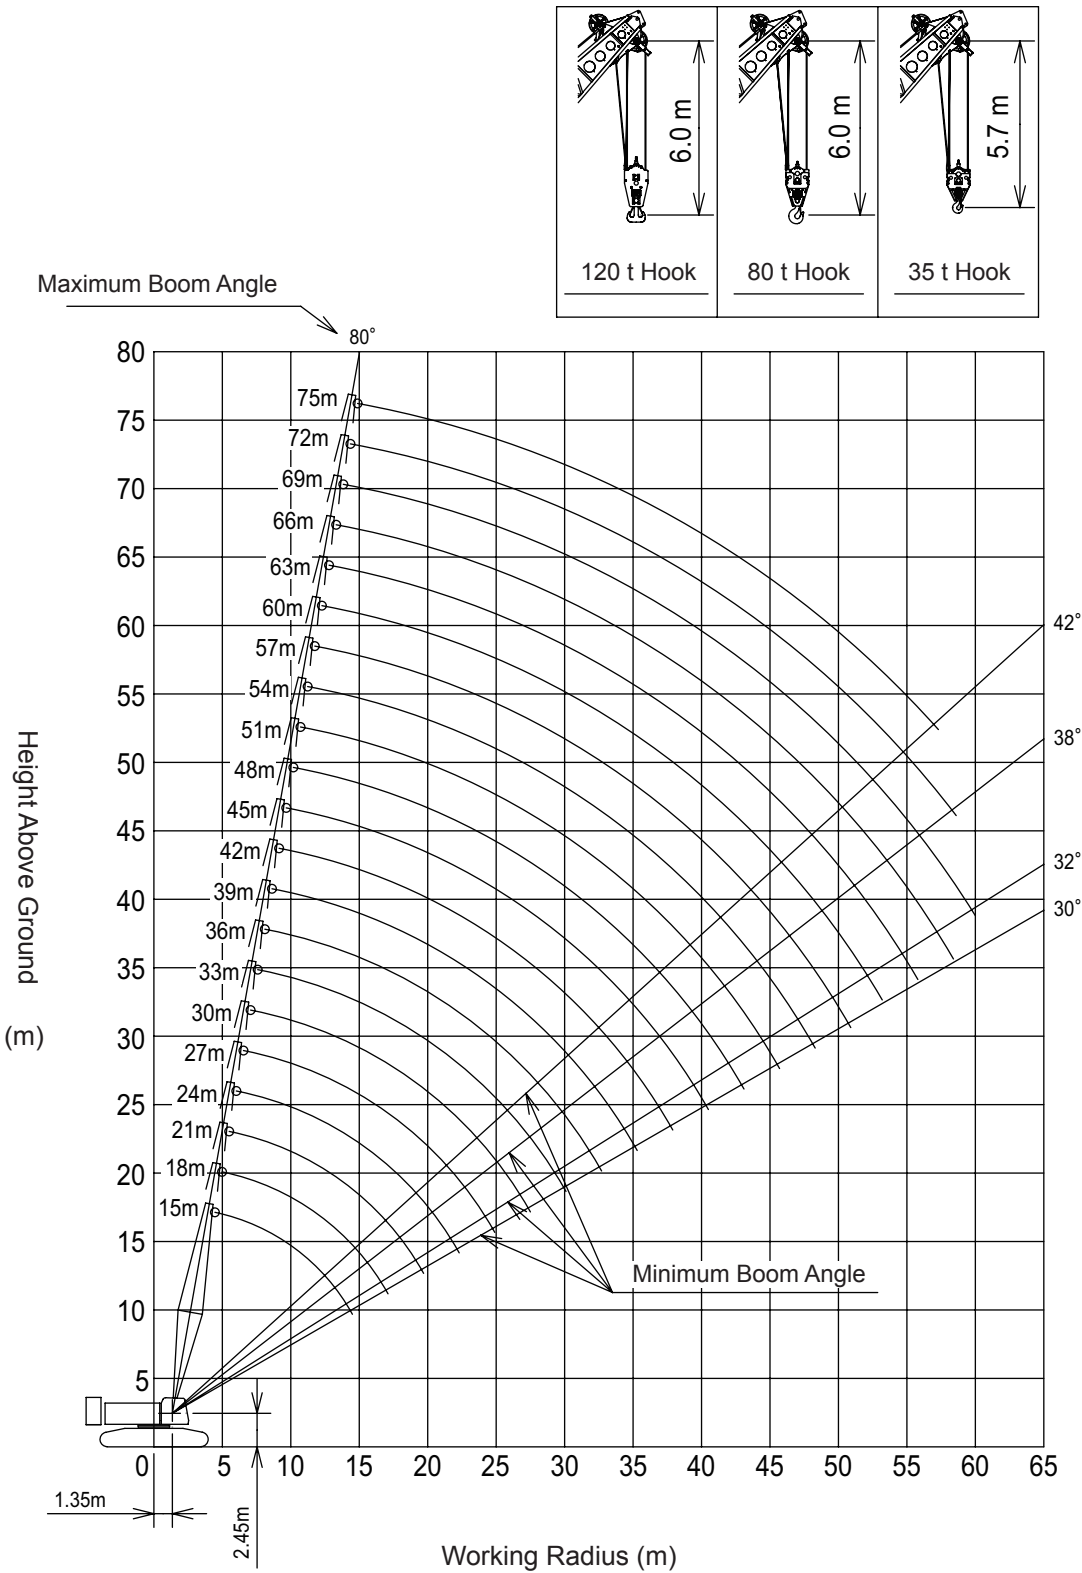■ Main Boom (With Crane Boom Extensions)






SCX1200-3

SPECIFICATIONS


Specifications
Working Ranges

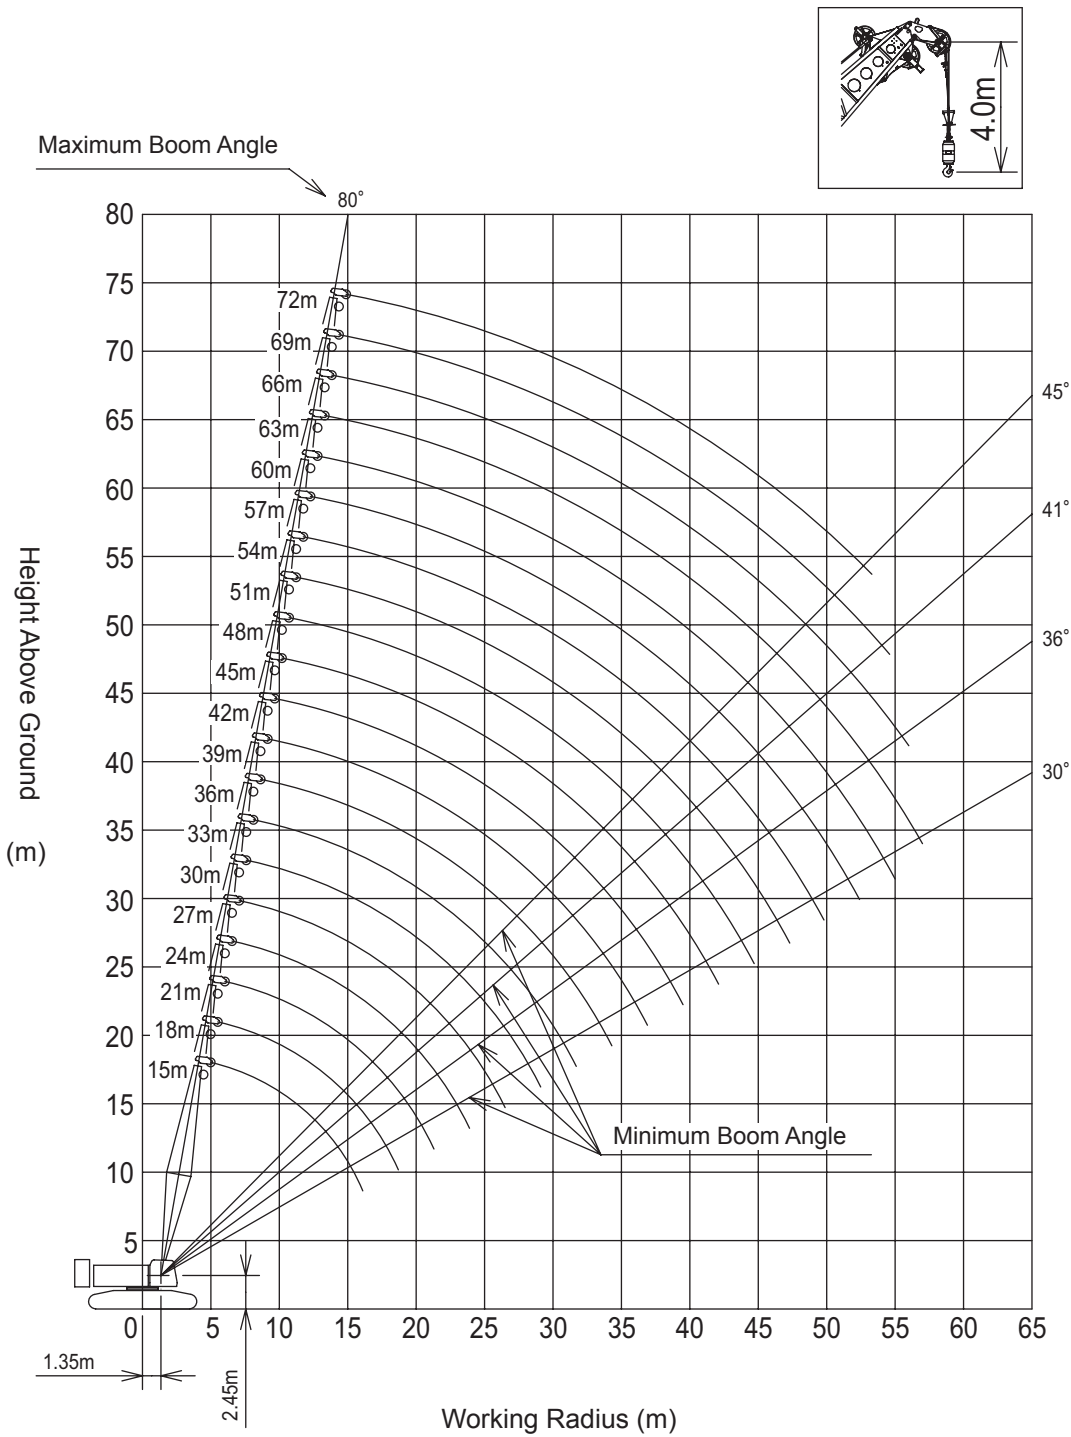■ Aux. Sheave (With Crane Boom Extensions)





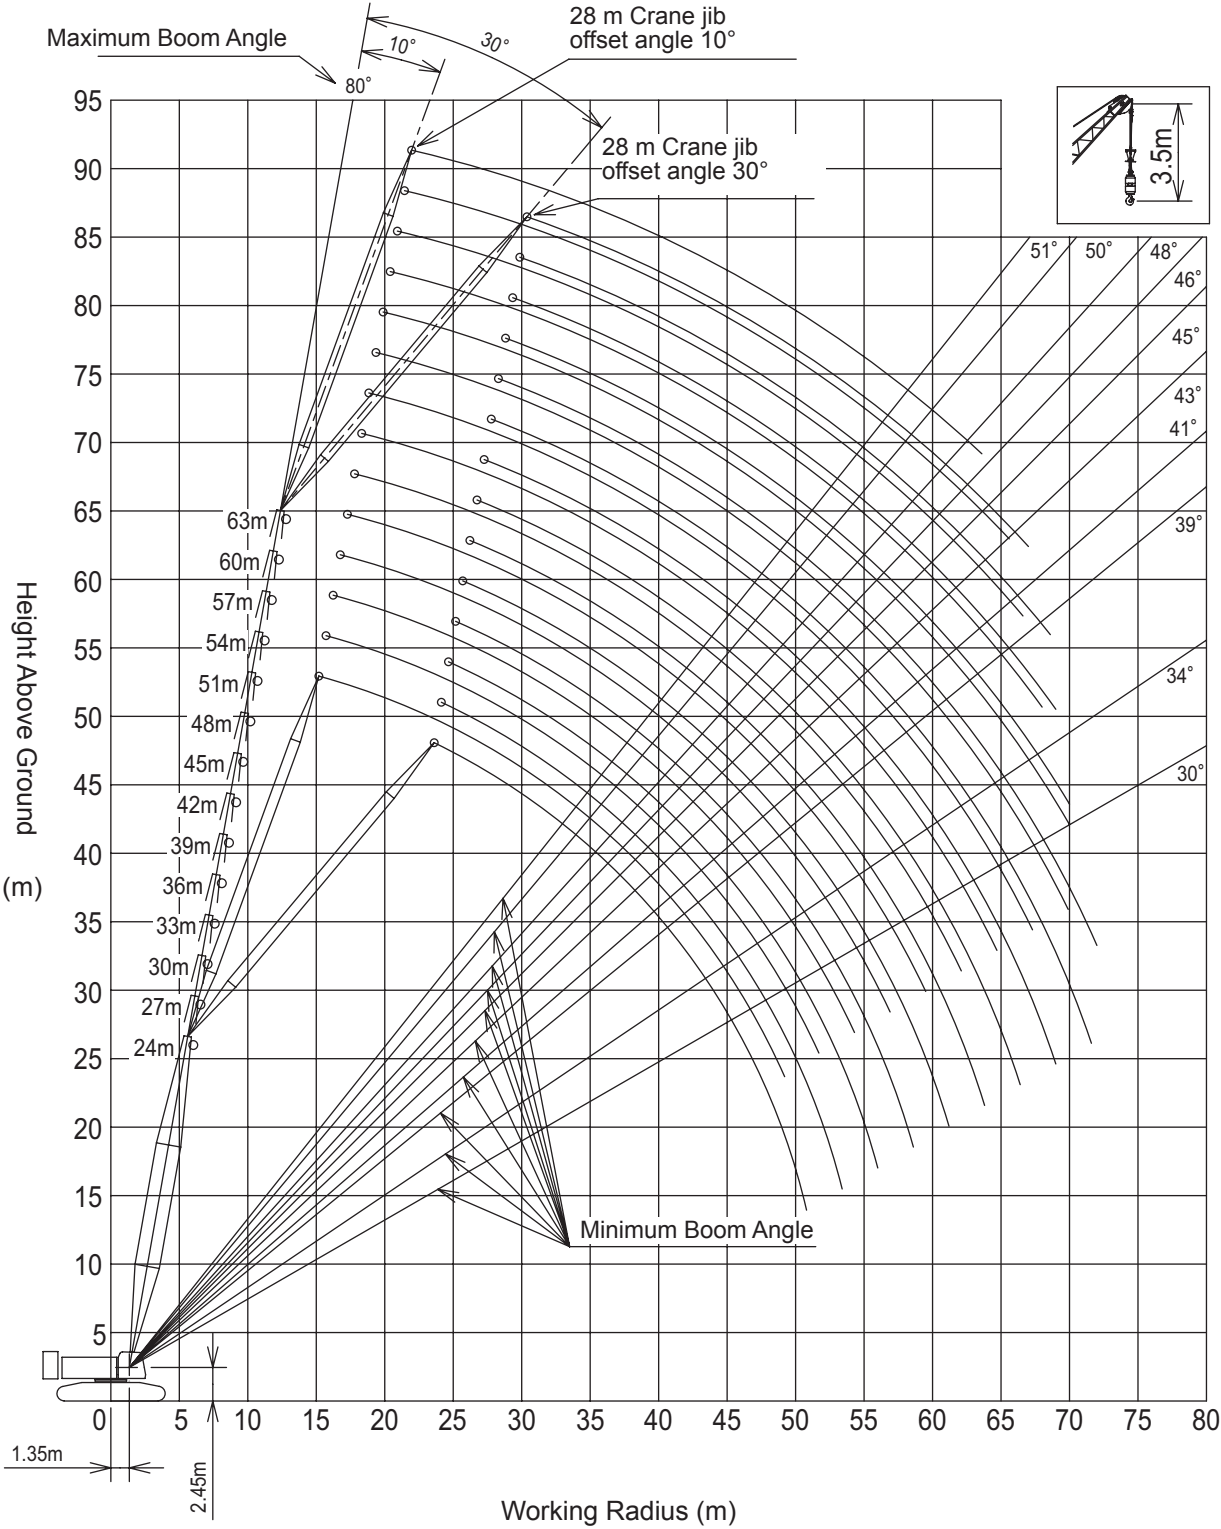■ Crane Jib (With Crane Boom Extensions)






SCX1200-3

SPECIFICATIONS


Specifications
Working Ranges

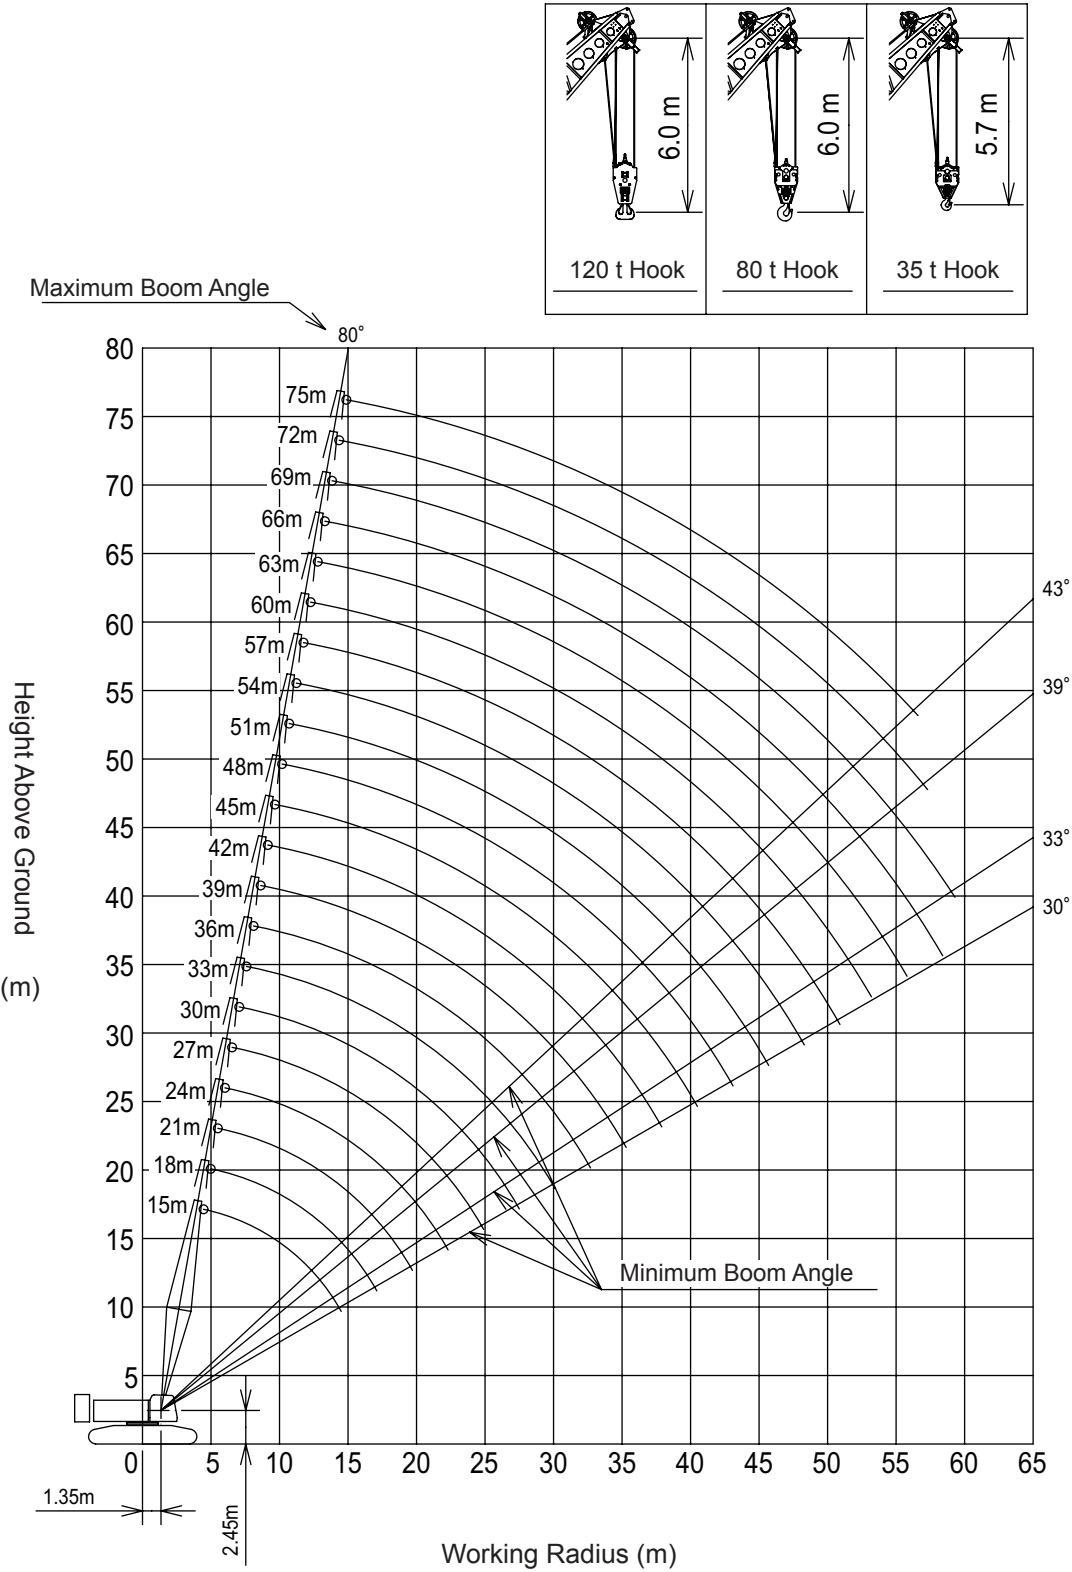■ Main Boom (With Tower Boom Extensions)





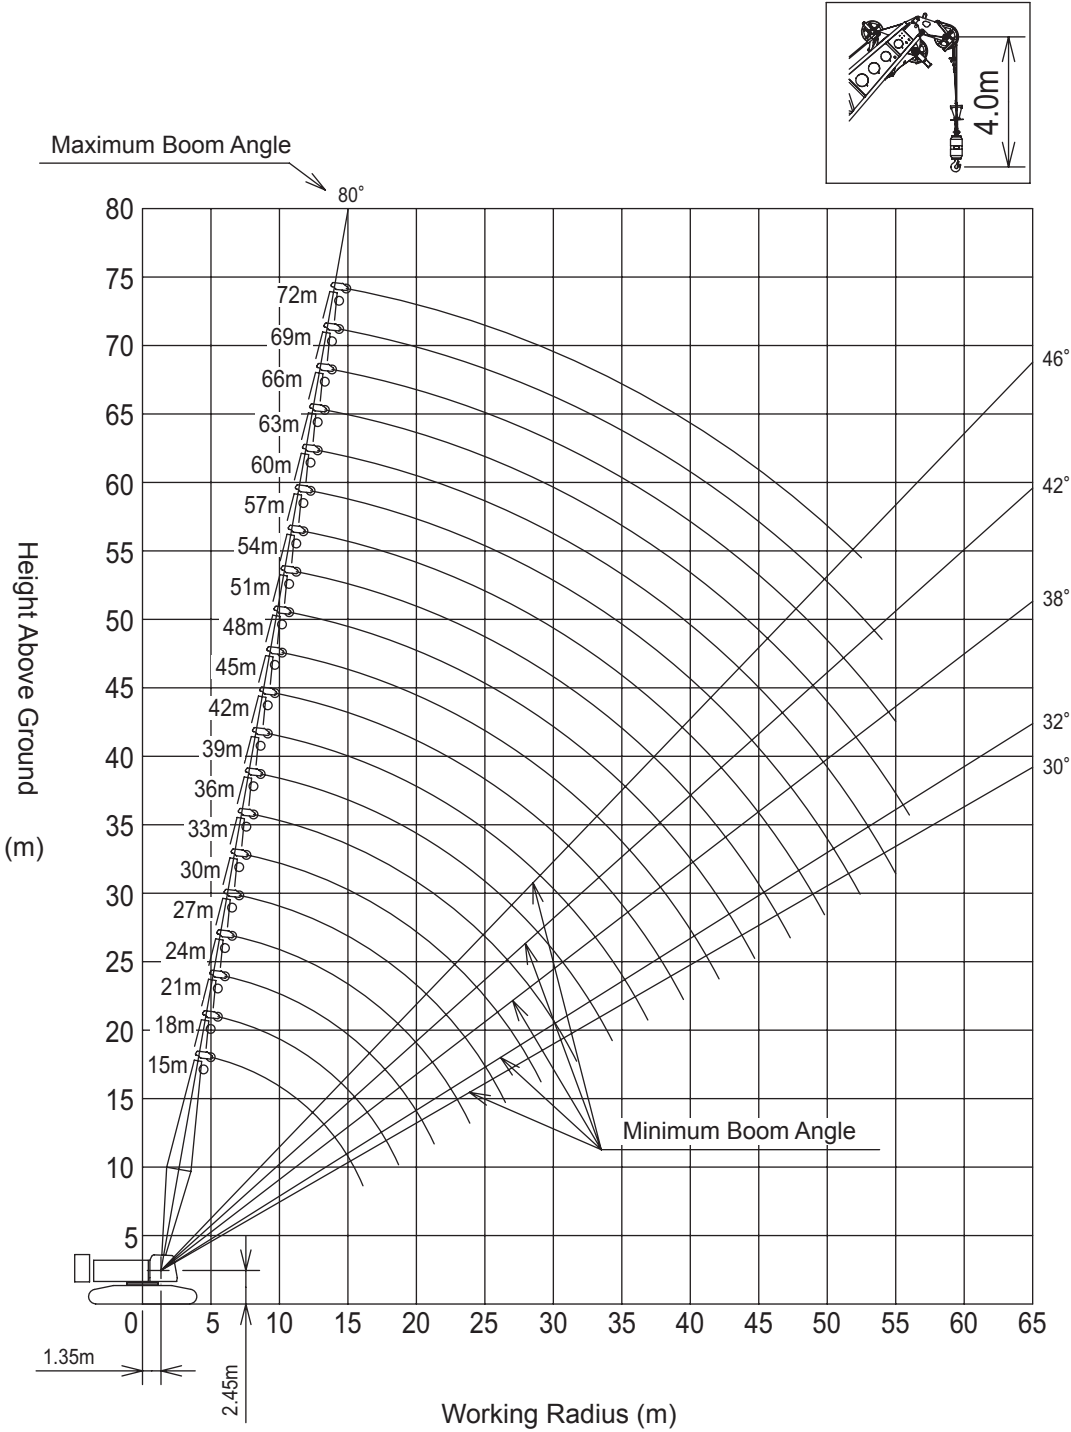■ Aux. Sheave (With Tower Boom Extensions)




SCX1200-3

SPECIFICATIONS

Specifications
Working Ranges

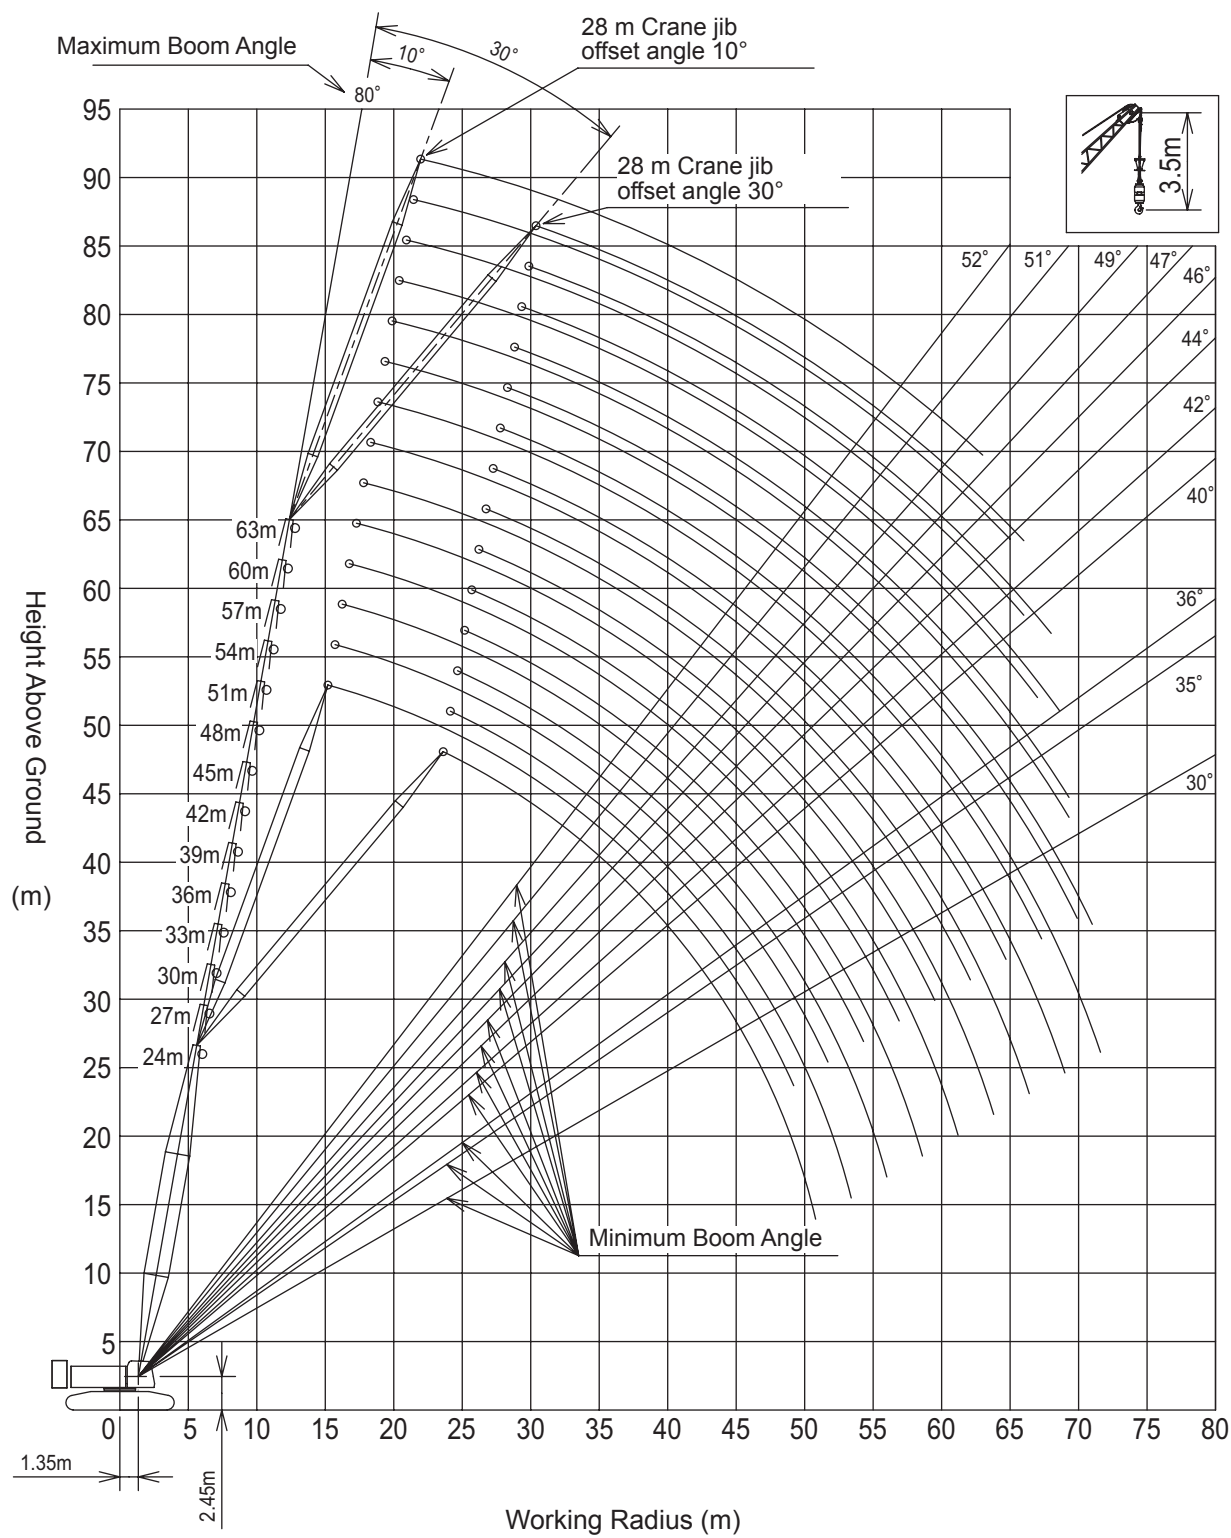■ Crane Jib (With Tower Boom Extensions)





Gross Rated Load Table

■ Main Boom (With Crane Boom Extensions)



Working Radius (m)	Boom length (m)											Working Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
4.6	120.0											4.6
5.0	120.0	115.8 / 5.2										5.0
5.5	109.9	109.7	105.9 / 5.7									5.5
6.0	101.1	100.9	100.7	96.0 / 6.3	84.0 / 6.8							6.0
7.0	87.0	86.8	86.7	86.6	84.0	72.0 / 7.4	72.0 / 7.9					7.0
8.0	76.3	76.1	75.9	75.9	75.7	72.0	72.0	60.0 / 8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.8	64.8	63.7	60.0	60.0	48.0 / 9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.4	55.4	55.3	54.9	53.8	48.0	48.0 / 10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.6	42.5	42.4	42.3	42.3	41.6	12.0
14.0	34.5	34.5	34.5	34.5	34.4	34.4	34.2	34.1	34.0	34.0	33.8	14.0
16.0	32.9 / 14.5	28.8	28.7	28.7	28.6	28.6	28.5	28.3	28.2	28.2	28.0	16.0
18.0		26.3 / 17.1	24.5	24.5	24.3	24.3	24.2	24.1	23.9	23.9	23.7	18.0
20.0			21.6 / 19.7	21.2	21.1	21.0	20.9	20.8	20.6	20.6	20.4	20.0
22.0				18.6	18.5	18.4	18.3	18.2	18.0	17.9	17.7	22.0
24.0				18.3 / 22.3	16.4	16.3	16.2	16.0	15.9	15.8	15.6	24.0
26.0					15.5 / 24.9	14.6	14.4	14.3	14.1	14.1	13.8	26.0
28.0						13.4 / 27.5	13.0	12.8	12.7	12.6	12.4	28.0
30.0							11.7	11.5	11.4	11.3	11.1	30.0
32.0							11.7 / 30.1	10.5	10.3	10.2	10.0	32.0
34.0								10.1 / 32.7	9.4	9.3	9.1	34.0
36.0									8.8 / 35.3	8.4	8.2	36.0
38.0										7.7 / 37.9	7.5	38.0
40.0											6.8	40.0
42.0											6.7 / 40.5	42.0

Working Radius (m)	Boom length (m)										Working Radius (m)
	48	51	54	57	60	63	66	69	72	75	
10.0	36.0 / 10.6	36.0 / 11.2	36.0 / 11.7								10.0
12.0	36.0	36.0	36.0	36.0 / 12.3	24.0 / 12.9	24.0 / 13.5					12.0
14.0	33.8	33.3	32.5	31.8	24.0	24.0	24.0	24.0 / 14.5	23.7 / 15.1	21.0 / 15.6	14.0
16.0	27.9	27.8	27.6	27.2	24.0	24.0	24.0	24.0	23.2	20.8	16.0
18.0	23.6	23.5	23.3	23.1	22.9	22.4	21.8	21.3	20.7	20.0	18.0
20.0	20.3	20.2	20.0	19.8	19.8	19.6	19.1	18.6	18.0	17.5	20.0
22.0	17.7	17.5	17.3	17.2	17.1	16.9	16.8	16.3	15.8	15.4	22.0
24.0	15.6	15.4	15.2	15.0	15.0	14.8	14.6	14.4	14.0	13.6	24.0
26.0	13.8	13.6	13.4	13.3	13.2	13.0	12.8	12.7	12.5	12.0	26.0
28.0	12.3	12.1	11.9	11.8	11.7	11.5	11.3	11.2	10.9	10.7	28.0
30.0	11.0	10.9	10.7	10.5	10.4	10.2	10.1	9.9	9.7	9.5	30.0
32.0	9.9	9.8	9.6	9.4	9.3	9.1	8.9	8.8	8.6	8.4	32.0
34.0	9.0	8.8	8.6	8.4	8.4	8.1	8.0	7.8	7.6	7.4	34.0
36.0	8.1	8.0	7.8	7.6	7.5	7.3	7.1	7.0	6.7	6.6	36.0
38.0	7.4	7.2	7.0	6.8	6.8	6.5	6.4	6.2	6.0	5.8	38.0
40.0	6.7	6.6	6.3	6.2	6.1	5.9	5.7	5.5	5.3	5.1	40.0
42.0	6.1	6.0	5.8	5.6	5.5	5.3	5.1	4.9	4.7	4.5	42.0
44.0	5.8 / 43.1	5.4	5.2	5.0	4.9	4.7	4.6	4.4	4.2	4.0	44.0
46.0		5.0 / 45.7	4.7	4.6	4.5	4.2	4.1	3.9	3.7	3.5	46.0
48.0			4.3	4.1	4.0	3.8	3.6	3.4	3.2	3.0	48.0
50.0			4.2 / 48.3	3.7	3.6	3.4	3.2	3.0	2.8	2.6	50.0
52.0				3.6 / 50.9	3.2	3.0	2.8	2.7	2.4	2.3	52.0
54.0					3.0 / 53.2	2.7	2.5	2.3	2.1	1.9	54.0
56.0						2.4 / 55.8	2.2	2.0	1.8	1.6	56.0
58.0							1.9	1.7	1.5	1.4 / 57.3	58.0
60.0							1.8 / 58.4	1.4	1.4 / 58.6		60.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1fall
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Aux. Sheave (With Crane Boom Extensions)



Radius (m)	Boom length (m)											Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
5.8	12.0											5.8
6.0	12.0	12.0 /6.3	12.0 /6.9									6.0
7.0	12.0	12.0	12.0	12.0 /7.4								7.0
8.0	12.0	12.0	12.0	12.0	12.0	12.0 /8.5						8.0
9.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 /9.6				9.0
10.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 /10.1	12.0 /10.7	12.0 /11.2	10.0
12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	16.0
18.0	12.0 /16.1	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0		12.0 /18.7	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0			12.0 /21.3	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0				12.0 /23.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0					12.0	12.0	12.0	12.0	12.0	12.0	12.0	26.0
28.0					12.0 /26.5	12.0	12.0	12.0	12.0	12.0	12.0	28.0
30.0						12.0 /29.1	11.5	11.4	11.2	11.1	10.9	30.0
32.0							10.6 /31.7	10.3	10.1	10.0	9.8	32.0
34.0								9.3	9.2	9.1	8.8	34.0
36.0								9.2 /34.3	8.3	8.2	8.0	36.0
38.0									8.0 /36.9	7.5	7.2	38.0
40.0										7.0 /39.5	6.6	40.0
42.0											6.0	42.0
44.0											6.0 /42.1	44.0

Radius (m)	Boom length (m)									Radius (m)
	48	51	54	57	60	63	66	69	72	
10.0	12.0 /11.8									10.0
12.0	12.0	12.0 /12.3	12.0 /12.9	12.0 /13.4						12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0 /14.5	12.0 /15.1	12.0 /15.6		14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 /16.2	16.0
18.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.8	26.0
28.0	12.0	11.9	11.7	11.5	11.5	11.3	11.1	10.9	10.5	28.0
30.0	10.8	10.6	10.4	10.3	10.2	10.0	9.8	9.6	9.3	30.0
32.0	9.7	9.5	9.3	9.1	9.1	8.9	8.7	8.5	8.3	32.0
34.0	8.7	8.6	8.4	8.2	8.1	7.9	7.7	7.5	7.3	34.0
36.0	7.9	7.7	7.5	7.3	7.3	7.0	6.9	6.7	6.5	36.0
38.0	7.1	7.0	6.8	6.6	6.5	6.3	6.1	5.9	5.7	38.0
40.0	6.5	6.3	6.1	5.9	5.8	5.6	5.4	5.2	5.0	40.0
42.0	5.9	5.7	5.5	5.3	5.2	5.0	4.8	4.6	4.4	42.0
44.0	5.3	5.2	4.9	4.8	4.7	4.5	4.3	4.1	3.9	44.0
46.0	5.2 /44.7	4.7	4.5	4.3	4.2	4.0	3.8	3.6	3.4	46.0
48.0		4.4 /47.3	4.0	3.8	3.7	3.5	3.3	3.1	2.9	48.0
50.0			3.6 /49.8	3.4	3.3	3.1	2.9	2.7	2.5	50.0
52.0				3.1	2.9	2.7	2.5	2.3	2.1	52.0
54.0				3.0 /52.4	2.6	2.4	2.2	2.0	1.9 /53.3	54.0
56.0					2.4 /55.0	2.1	1.9	1.9 /54.6		56.0
58.0						1.9 /57.0				58.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.



■ Main Boom with Aux. Sheave (With Crane Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
4.6	120.0											4.6
5.0	119.5	114.9 / 5.2										5.0
5.5	109.1	108.9	105.0 / 5.7									5.5
6.0	100.2	100.0	99.9	95.1 / 6.3	84.0 / 6.8							6.0
7.0	86.2	86.0	85.8	85.7	84.0	72.0 / 7.4	72.0 / 7.9					7.0
8.0	75.4	75.2	75.1	75.0	74.8	72.0	72.0	60.0 / 8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	64.3	63.1	60.0	60.0	48.0 / 9.6		9.0
10.0	55.0	55.1	55.0	55.0	55.0	54.9	54.8	54.2	53.1	48.0	48.0 / 10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.2	42.1	42.0	41.9	41.8	40.9	12.0
14.0	34.2	34.2	34.1	34.1	34.0	34.0	33.8	33.7	33.6	33.5	33.3	14.0
16.0	32.6 / 14.5	28.4	28.4	28.4	28.2	28.2	28.1	27.9	27.8	27.7	27.5	16.0
18.0		26.0 / 17.1	24.1	24.1	24.0	23.9	23.8	23.7	23.5	23.4	23.2	18.0
20.0			21.3 / 19.7	20.8	20.7	20.6	20.5	20.4	20.2	20.1	19.9	20.0
22.0				18.3	18.1	18.1	17.9	17.8	17.6	17.5	17.3	22.0
24.0				17.9 / 22.3	16.0	15.9	15.8	15.6	15.5	15.4	15.2	24.0
26.0					15.2 / 24.9	14.2	14.1	13.9	13.7	13.7	13.4	26.0
28.0						13.1 / 27.5	12.6	12.4	12.3	12.2	12.0	28.0
30.0							11.4	11.2	11.0	10.9	10.7	30.0
32.0							11.3 / 30.1	10.1	10.0	9.8	9.6	32.0
34.0								9.8 / 32.7	9.0	8.9	8.7	34.0
36.0									8.5 / 35.3	8.1	7.8	36.0
38.0										7.4 / 37.9	7.1	38.0
40.0											6.5	40.0
42.0											6.3 / 40.5	42.0

Radius (m)	Boom length (m)									Radius (m)
	48	51	54	57	60	63	66	69	72	
10.0	36.0 / 10.6	36.0 / 11.2	36.0 / 11.7							10.0
12.0	36.0	36.0	36.0	36.0 / 12.3	24.0 / 12.9	24.0 / 13.5				12.0
14.0	33.3	32.6	31.8	31.1	24.0	24.0	24.0	24.0 / 14.5	22.5 / 15.1	14.0
16.0	27.5	27.3	27.1	26.5	24.0	24.0	24.0	23.9	22.1	16.0
18.0	23.2	23.0	22.8	22.6	22.2	21.7	21.1	20.5	19.9	18.0
20.0	19.9	19.7	19.5	19.3	19.3	18.8	18.3	17.8	17.3	20.0
22.0	17.3	17.1	16.9	16.7	16.7	16.4	16.1	15.6	15.1	22.0
24.0	15.1	15.0	14.7	14.6	14.5	14.3	14.1	13.7	13.3	24.0
26.0	13.4	13.2	13.0	12.8	12.7	12.5	12.3	12.2	11.7	26.0
28.0	11.9	11.7	11.5	11.3	11.2	11.0	10.8	10.7	10.4	28.0
30.0	10.6	10.4	10.2	10.0	10.0	9.7	9.6	9.4	9.2	30.0
32.0	9.5	9.4	9.1	8.9	8.9	8.6	8.5	8.3	8.1	32.0
34.0	8.6	8.4	8.2	8.0	7.9	7.7	7.5	7.3	7.1	34.0
36.0	7.7	7.6	7.3	7.2	7.1	6.8	6.7	6.5	6.2	36.0
38.0	7.0	6.8	6.6	6.4	6.3	6.1	5.9	5.7	5.5	38.0
40.0	6.4	6.2	5.9	5.8	5.7	5.4	5.2	5.1	4.8	40.0
42.0	5.8	5.6	5.4	5.2	5.1	4.8	4.6	4.5	4.2	42.0
44.0	5.5 / 43.1	5.1	4.8	4.6	4.5	4.3	4.1	3.9	3.7	44.0
46.0		4.7 / 45.7	4.3	4.2	4.0	3.8	3.6	3.4	3.2	46.0
48.0			3.9	3.7	3.6	3.4	3.2	3.0	2.8	48.0
50.0			3.9 / 48.3	3.3	3.2	3.0	2.8	2.6	2.3	50.0
52.0				3.2 / 50.9	2.8	2.6	2.4	2.2	2.0	52.0
54.0					2.6 / 53.2	2.2	2.1	1.9	1.9 / 52.5	54.0
56.0						2.0 / 55.8	1.9 / 55.3			56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines , maximum rated loads , hook weights are shown in the table below

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1fall
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	24							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
9.7	12.0							
10.0	12.0		12.0 / 11.8					
12.0	12.0	12.0 / 12.6	12.0		8.8 / 13.9			
14.0	12.0	12.0	12.0		8.8			
16.0	12.0	12.0	12.0	9.0 / 16.5	8.8		5.4	
18.0	12.0	12.0	12.0	9.0	8.6		5.1	
20.0	12.0	12.0	12.0	9.0	8.3	6.4 / 20.4	4.8	
22.0	12.0	11.7	12.0	9.0	7.9	6.4	4.5	
24.0	12.0	11.2	12.0	9.0	7.6	6.4	4.3	3.4 / 24.3
26.0	12.0	10.8	12.0	8.7	7.3	6.4	4.1	3.4
28.0	12.0	10.4	11.9	8.3	7.0	6.4	3.9	3.3
30.0	12.0	10.2	11.1	8.0	6.8	6.2	3.7	3.1
32.0	11.4	10.0	10.4	7.7	6.6	5.9	3.6	3.0
34.0	11.3 / 32.2	9.9 / 32.8	9.8	7.5	6.4	5.7	3.4	2.9
36.0			9.3	7.3	6.2	5.4	3.3	2.9
38.0			8.9 / 37.9	7.2	6.1	5.3	3.2	2.8
40.0				7.2 / 38.8	5.9	5.1	3.1	2.7
42.0					5.8	5.0	3.0	2.7
44.0					5.8 / 43.5	4.9	2.9	2.6
46.0						4.9 / 44.8	2.8	2.6
48.0							2.7	2.6
50.0							2.7 / 49.2	2.6
52.0								2.6 / 50.8

Unit: ton								
Boom length (m)	27							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.0	12.0 / 10.2							
12.0	12.0	12.0 / 13.2	12.0 / 12.3					
14.0	12.0	12.0	12.0		8.8 / 14.4			
16.0	12.0	12.0	12.0	9.0 / 17.1	8.8		5.4 / 16.5	
18.0	12.0	12.0	12.0	9.0	8.8		5.2	
20.0	12.0	12.0	12.0	9.0	8.4	6.4 / 21.0	4.9	
22.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	
24.0	12.0	11.5	12.0	9.0	7.8	6.4	4.4	3.4 / 24.9
26.0	12.0	11.1	12.0	8.9	7.5	6.4	4.2	3.4
28.0	12.0	10.7	12.0	8.5	7.2	6.4	4.0	3.3
30.0	12.0	10.4	11.8	8.2	7.0	6.3	3.8	3.2
32.0	11.2	10.2	11.1	7.9	6.7	6.1	3.7	3.1
34.0	10.2	10.0	10.4		6.5	5.8	3.5	3.0
36.0	9.9 / 34.8	9.7 / 35.4	9.8	7.5	6.4	5.6	3.4	2.9
38.0			9.0	7.3	6.2	5.4	3.3	2.8
40.0			8.3	7.2	6.1	5.2	3.2	2.8
42.0			8.2 / 40.5	7.2 / 41.4	5.9	5.1	3.1	2.7
44.0					5.9	5.0	3.0	2.7
46.0					5.8	4.9	2.9	2.6
48.0					5.8 / 46.1	4.8 / 47.4	2.8	2.6
50.0							2.8	2.6
52.0							2.7 / 51.7	2.6
54.0								2.6 / 53.4

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.



■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	30							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.7	12.0							
12.0	12.0	12.0 / 13.7	12.0 / 12.8					
14.0	12.0	12.0	12.0		8.8 / 15.0			
16.0	12.0	12.0	12.0	9.0 / 17.6	8.8		5.4 / 17.1	
18.0	12.0	12.0	12.0	9.0	8.8		5.2	
20.0	12.0	12.0	12.0	9.0	8.6	6.4 / 21.5	5.0	
22.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7	
24.0	12.0	11.8	12.0	9.0	7.9	6.4	4.5	3.4 / 25.4
26.0	12.0	11.4	12.0	9.0	7.6	6.4	4.3	3.4
28.0	12.0	11.0	12.0	8.7	7.4	6.4	4.1	3.3
30.0	12.0	10.7	12.0	8.4	7.1	6.4	3.9	3.2
32.0	11.1	10.4	11.4	8.1	6.9	6.2	3.8	3.1
34.0	10.1	10.2	10.5	7.9	6.7	6.0	3.6	3.0
36.0	9.3	9.4	9.6	7.7	6.5	5.8	3.5	2.9
38.0	8.7 / 37.4	8.6	8.8	7.5	6.3	5.6	3.4	2.9
40.0			8.2	7.3	6.2	5.4	3.2	2.8
42.0			7.6	7.2	6.1	5.2	3.1	2.7
44.0			7.3 / 43.1	7.1	6.0	5.1	3.0	2.7
46.0					5.9	5.0	3.0	2.7
48.0					5.8	4.9	2.9	2.6
50.0					5.8 / 48.7	4.8	2.8	2.6
52.0							2.8	2.6
54.0							2.7	2.6
56.0							2.7 / 54.3	2.6

Unit: ton								
Boom length (m)	33							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.7	12.0 / 11.3							
12.0	12.0		12.0 / 13.4					
14.0	12.0	12.0 / 14.3	12.0		8.8 / 15.5			
16.0	12.0	12.0	12.0		8.8		5.4 / 17.6	
18.0	12.0	12.0	12.0	9.0 / 18.2	8.8		5.3	
20.0	12.0	12.0	12.0	9.0	8.7		5.0	
22.0	12.0	12.0	12.0	9.0	8.4	6.4 / 22.1	4.8	
24.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	
26.0	12.0	11.7	12.0	9.0	7.8	6.4	4.4	3.4
28.0	12.0	11.3	12.0	8.9	7.5	6.4	4.2	3.4
30.0	12.0	11.0	12.0	8.6	7.3	6.4	4.0	3.2
32.0	10.9	10.7	11.3	8.3	7.0	6.4	3.9	3.1
34.0	9.9	10.1	10.3	8.1	6.8	6.1	3.7	3.1
36.0	9.1	9.2	9.4	7.9	6.7	5.9	3.6	3.0
38.0	8.3	8.4	8.7	7.7	6.5	5.7	3.5	2.9
40.0	7.7	7.7	8.0	7.5	6.3	5.5	3.3	2.8
42.0		7.5 / 40.6	7.4	7.3	6.2	5.3	3.2	2.8
44.0			6.8	7.0	6.1	5.2	3.1	2.7
46.0			6.4 / 45.7	6.4	6.0	5.1	3.0	2.7
48.0				6.3 / 46.6	5.9	5.0	3.0	2.7
50.0					5.7	4.9	2.9	2.6
52.0					5.4 / 51.3	4.8	2.8	2.6
54.0						4.8 / 52.6	2.8	2.6
56.0							2.7	2.6
58.0							2.7 / 56.9	2.6
60.0								2.6 / 58.6



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	36							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
11.8	12.0							
12.0	12.0		12.0 /13.9					
14.0	12.0	12.0 /14.8	12.0					
16.0	12.0	12.0	12.0		8.8			
18.0	12.0	12.0	12.0	9.0 /18.7	8.8		5.4 /18.1	
20.0	12.0	12.0	12.0	9.0	8.8		5.1	
22.0	12.0	12.0	12.0	9.0	8.5	6.4 /22.6	4.9	
24.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7	
26.0	12.0	11.9	12.0	9.0	7.9	6.4	4.5	3.4 /26.5
28.0	12.0	11.5	12.0	9.0	7.7	6.4	4.3	3.4
30.0	11.8	11.2	12.0	8.8	7.4	6.4	4.1	3.3
32.0	10.7	10.9	11.1	8.5	7.2	6.4	4.0	3.2
34.0	9.7	10.0	10.1	8.3	7.0	6.2	3.8	3.1
36.0	8.9	9.1	9.2	8.0	6.8	6.0	3.7	3.0
38.0	8.1	8.3	8.5	7.8	6.6	5.8	3.5	2.9
40.0	7.5	7.6	7.8	7.6	6.5	5.6	3.4	2.9
42.0	6.9	6.9	7.2	7.4	6.3	5.5	3.3	2.8
44.0	6.7 /42.6	6.6 /43.2	6.6	6.8	6.2	5.3	3.2	2.8
46.0			6.1	6.3	6.1	5.2	3.1	2.7
48.0			5.7	5.8	5.9	5.1	3.0	2.7
50.0			5.6 /48.3	5.5 /49.2	5.5	5.0	3.0	2.6
52.0					5.1	4.9	2.9	2.6
54.0					4.8 /53.9	4.8	2.8	2.6
56.0						4.6 /55.2	2.8	2.6
58.0							2.7	2.6
60.0							2.7 /59.5	2.6
62.0								2.6 /61.2

Unit: ton								
Boom length (m)	39							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.0	12.0 /12.4							
14.0	12.0	12.0 /15.4	12.0 /14.5					
16.0	12.0	12.0	12.0		8.8 /16.6			
18.0	12.0	12.0	12.0	9.0 /19.3	8.8		5.3 /18.7	
20.0	12.0	12.0	12.0	9.0	8.8		5.2	
22.0	12.0	12.0	12.0	9.0	8.6	6.4 /23.2	5.0	
24.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	
26.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 /27.1
28.0	12.0	11.8	12.0	9.0	7.8	6.4	4.4	3.4
30.0	11.6	11.4	12.0	8.9	7.6	6.4	4.2	3.3
32.0	10.5	10.8	10.9	8.7	7.3	6.4	4.0	3.2
34.0	9.6	9.8	9.9	8.4	7.1	6.4	3.9	3.1
36.0	8.7	8.9	9.1	8.2	6.9	6.1	3.8	3.0
38.0	8.0	8.1	8.3	8.0	6.8	5.9	3.6	3.0
40.0	7.3	7.4	7.6	7.8	6.6	5.8	3.5	2.9
42.0	6.7	6.8	7.0	7.3	6.4	5.6	3.4	2.8
44.0	6.1	6.2	6.5	6.7	6.3	5.4	3.3	2.8
46.0	5.8 /45.2	5.7 /45.8	6.0	6.1	6.2	5.3	3.2	2.7
48.0			5.5	5.6	5.7	5.2	3.1	2.7
50.0			5.1	5.2	5.3	5.1	3.0	2.7
52.0			4.9 /50.9	4.8 /51.8	4.9	5.0	3.0	2.6
54.0					4.6	4.7	2.9	2.6
56.0					4.2	4.4	2.8	2.6
58.0					4.2 /56.5	4.1 /57.8	2.8	2.6
60.0							2.7	2.6
62.0							2.7	2.6
64.0							2.7 /62.1	2.6 /63.8



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	42							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.9	12.0							
14.0	12.0	12.0 / 15.9	12.0 / 15.0					
16.0	12.0	12.0	12.0		8.8 / 17.1			
18.0	12.0	12.0	12.0	9.0 / 19.8	8.8		5.3 / 19.2	
20.0	12.0	12.0	12.0	9.0	8.8		5.2	
22.0	12.0	12.0	12.0	9.0	8.7	6.4 / 23.7	5.0	
24.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	
26.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 27.6
28.0	12.0	12.0	12.0	9.0	7.9	6.4	4.4	3.4
30.0	11.5	11.6	11.9	9.0	7.7	6.4	4.3	3.3
32.0	10.4	10.7	10.8	8.8	7.5	6.4	4.1	3.2
34.0	9.4	9.7	9.8	8.6	7.3	6.4	4.0	3.1
36.0	8.6	8.8	8.9	8.3	7.1	6.3	3.8	3.1
38.0	7.8	8.0	8.2	8.1	6.9	6.1	3.7	3.0
40.0	7.2	7.3	7.5	7.8	6.7	5.9	3.6	2.9
42.0	6.5	6.7	6.9	7.2	6.6	5.7	3.5	2.9
44.0	6.0	6.1	6.3	6.6	6.4	5.5	3.4	2.8
46.0	5.5	5.6	5.8	6.0	6.0	5.4	3.3	2.8
48.0	5.1 / 47.8	5.1	5.4	5.5	5.6	5.3	3.2	2.7
50.0		5.0 / 48.4	4.9	5.1	5.2	5.2	3.1	2.7
52.0			4.6	4.7	4.8	5.0	3.0	2.6
54.0			4.3 / 53.5	4.3	4.4	4.6	2.9	2.6
56.0				4.2 / 54.4	4.1	4.3	2.9	2.6
58.0					3.8	3.9	2.8	2.6
60.0					3.6 / 59.1	3.6	2.8	2.6
62.0						3.5 / 60.4	2.7	2.6
64.0							2.7	2.6
66.0							2.7 / 64.7	2.6
68.0								2.6 / 66.4

Unit: ton								
Boom length (m)	45							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.9	12.0 / 13.5							
14.0	12.0		12.0 / 15.6					
16.0	12.0	12.0 / 16.5	12.0		8.8 / 17.7			
18.0	12.0	12.0	12.0		8.8		5.3 / 19.8	
20.0	12.0	12.0	12.0	9.0 / 20.4	8.8		5.3	
22.0	12.0	12.0	12.0	9.0	8.8		5.1	
24.0	12.0	12.0	12.0	9.0	8.5	6.4 / 24.3	4.9	
26.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	
28.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 / 28.2
30.0	11.3	11.7	11.7	9.0	7.8	6.4	4.3	3.3
32.0	10.2	10.5	10.6	9.0	7.6	6.4	4.2	3.3
34.0	9.2	9.5	9.6	8.7	7.4	6.4	4.0	3.2
36.0	8.4	8.6	8.7	8.5	7.2	6.4	3.9	3.1
38.0	7.6	7.8	7.9	8.3	7.0	6.2	3.8	3.0
40.0	6.9	7.1	7.3	7.6	6.8	6.0	3.7	3.0
42.0	6.3	6.5	6.6	7.0	6.7	5.8	3.5	2.9
44.0	5.8	5.9	6.1	6.4	6.3	5.7	3.4	2.8
46.0	5.3	5.4	5.6	5.8	5.8	5.5	3.3	2.8
48.0	4.8	4.9	5.1	5.3	5.4	5.4	3.3	2.7
50.0	4.4	4.5	4.7	4.9	4.9	5.3	3.2	2.7
52.0	4.3 / 50.4	4.3 / 51.0	4.3	4.5	4.6	4.8	3.1	2.7
54.0			4.0	4.1	4.2	4.5	3.0	2.6
56.0			3.6	3.7	3.9	4.1	2.9	2.6
58.0			3.6 / 56.1	3.6 / 57.0	3.6	3.7	2.9	2.6
60.0					3.3	3.4	2.8	2.6
62.0					3.1 / 61.7	3.1	2.8	2.6
64.0						3.0 / 63.0	2.7	2.6
66.0							2.7	2.6
68.0							2.6 / 67.3	2.6
70.0								2.5 / 69.0



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	48							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0							
16.0	12.0	12.0 / 17.0	12.0 / 16.1					
18.0	12.0	12.0	12.0		8.8 / 18.2			
20.0	12.0	12.0	12.0	9.0 / 20.9	8.8		5.3 / 20.3	
22.0	12.0	12.0	12.0	9.0	8.8		5.1	
24.0	12.0	12.0	12.0	9.0	8.6	6.4 / 24.8	4.9	
26.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	
28.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	3.4 / 28.7
30.0	11.2	11.6	11.6	9.0	7.9	6.4	4.4	3.4
32.0	10.1	10.4	10.5	9.0	7.7	6.4	4.3	3.3
34.0	9.1	9.4	9.5	8.8	7.5	6.4	4.1	3.2
36.0	8.2	8.5	8.6	8.6	7.3	6.4	4.0	3.1
38.0	7.5	7.7	7.8	8.3	7.1	6.3	3.9	3.1
40.0	6.8	7.0	7.1	7.5	7.0	6.1	3.7	3.0
42.0	6.2	6.4	6.5	6.9	6.8	5.9	3.6	2.9
44.0	5.6	5.8	6.0	6.3	6.2	5.8	3.5	2.9
46.0	5.1	5.3	5.5	5.7	5.7	5.6	3.4	2.8
48.0	4.7	4.8	5.0	5.3	5.2	5.5	3.3	2.8
50.0	4.3	4.4	4.6	4.8	4.8	5.2	3.2	2.7
52.0	3.9	4.0	4.2	4.4	4.4	4.8	3.2	2.7
54.0	3.7 / 53.0	3.7 / 53.6	3.8	4.0	4.1	4.4	3.1	2.7
56.0			3.5	3.6	3.7	4.0	3.0	2.6
58.0			3.2	3.3	3.4	3.6	2.9	2.6
60.0			3.1 / 58.7	3.0 / 59.6	3.1	3.3	2.9	2.6
62.0					2.9	3.0	2.8	2.6
64.0					2.6	2.7	2.8	2.6
66.0					2.6 / 64.3	2.5 / 65.6	2.5	2.6
68.0							2.3	2.5
70.0							2.1 / 69.9	2.3
72.0							2.1 / 71.6	2.2

Unit: ton								
Boom length (m)	51							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0 / 14.6							
16.0	12.0	12.0 / 17.6	12.0 / 16.7					
18.0	12.0	12.0	12.0		8.8 / 18.8			
20.0	12.0	12.0	12.0	9.0 / 21.5	8.8		5.3 / 20.9	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.7	6.4 / 25.4	5.0	
26.0	12.0	12.0	12.0	9.0	8.5	6.4	4.8	
28.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 29.3
30.0	11.0	11.5	11.4	9.0	8.0	6.4	4.5	3.4
32.0	9.9	10.3	10.3	9.0	7.8	6.4	4.3	3.3
34.0	8.9	9.3	9.3	9.0	7.6	6.4	4.2	3.2
36.0	8.1	8.4	8.4	8.7	7.4	6.4	4.0	3.1
38.0	7.3	7.6	7.6	8.1	7.2	6.4	3.9	3.1
40.0	6.6	6.9	7.0	7.4	7.1	6.2	3.8	3.0
42.0	6.0	6.2	6.3	6.7	6.6	6.0	3.7	2.9
44.0	5.5	5.6	5.8	6.1	6.0	5.9	3.6	2.9
46.0	5.0	5.1	5.3	5.6	5.5	5.7	3.5	2.8
48.0	4.5	4.6	4.8	5.1	5.1	5.5	3.4	2.8
50.0	4.1	4.2	4.4	4.6	4.6	5.0	3.3	2.7
52.0	3.7	3.8	4.0	4.2	4.2	4.6	3.2	2.7
54.0	3.4	3.4	3.6	3.8	3.9	4.2	3.1	2.7
56.0	3.1 / 55.6	3.1	3.3	3.5	3.5	3.8	3.1	2.6
58.0		3.1 / 56.2	3.0	3.1	3.2	3.5	3.0	2.6
60.0			2.7	2.8	2.9	3.2	2.9	2.6
62.0			2.6 / 61.3	2.5	2.7	2.9	2.9	2.6
64.0				2.5 / 62.2	2.4	2.6	2.6	2.6
66.0					2.2	2.3	2.4	2.6
68.0					2.1 / 66.9	2.1	2.1	2.4
70.0						2.0 / 68.2	1.9	2.1
72.0							1.9	2.0



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0		12.0 / 17.2					
16.0	12.0							
18.0	12.0	12.0 / 18.1	12.0		8.8 / 19.3			
20.0	12.0	12.0	12.0		8.8		5.3 / 21.4	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.8	6.4 / 25.9	5.0	
26.0	12.0	12.0	12.0	9.0	8.6	6.4	4.9	
28.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	3.4 / 29.8
30.0	10.8	11.3	11.2	9.0	8.1	6.4	4.5	3.4
32.0	9.7	10.1	10.1	9.0	7.9	6.4	4.4	3.3
34.0	8.7	9.1	9.1	9.0	7.7	6.4	4.2	3.2
36.0	7.8	8.2	8.2	8.8	7.5	6.4	4.1	3.2
38.0	7.1	7.4	7.4	7.9	7.3	6.4	4.0	3.1
40.0	6.4	6.7	6.7	7.2	7.0	6.3	3.9	3.0
42.0	5.8	6.0	6.1	6.5	6.4	6.1	3.8	3.0
44.0	5.2	5.4	5.6	5.9	5.8	5.9	3.6	2.9
46.0	4.7	4.9	5.0	5.4	5.3	5.8	3.5	2.9
48.0	4.3	4.4	4.6	4.9	4.8	5.3	3.5	2.8
50.0	3.9	4.0	4.2	4.4	4.4	4.9	3.4	2.8
52.0	3.5	3.6	3.8	4.0	4.0	4.4	3.3	2.7
54.0	3.1	3.2	3.4	3.6	3.7	4.0	3.2	2.7
56.0	2.8	2.9	3.1	3.3	3.3	3.7	3.1	2.7
58.0	2.5	2.6	2.8	2.9	3.0	3.3	3.1	2.6
60.0	2.5 / 58.2	2.4 / 58.8	2.5	2.6	2.7	3.0	2.9	2.6
62.0			2.2	2.3	2.5	2.7	2.6	2.6
64.0			2.0 / 63.9	2.1	2.2	2.4	2.4	2.6
66.0				2.0 / 64.8	2.0	2.1	2.1	2.4
68.0					1.9 / 67.0	1.9	1.9	2.2
70.0							1.9	

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0 / 15.7		12.0 / 17.8					
16.0	12.0							
18.0	12.0	12.0 / 18.7	12.0		8.8 / 19.9			
20.0	12.0	12.0	12.0		8.8			
22.0	12.0	12.0	12.0	9.0 / 22.6	8.8		5.3	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.7	6.4 / 26.5	4.9	
28.0	11.9	12.0	12.0	9.0	8.4	6.4	4.8	
30.0	10.6	11.1	11.0	9.0	8.2	6.4	4.6	3.4 / 30.4
32.0	9.5	9.9	9.9	9.0	8.0	6.4	4.4	3.3
34.0	8.5	8.9	8.9	9.0	7.8	6.4	4.3	3.3
36.0	7.7	8.0	8.0	8.6	7.6	6.4	4.2	3.2
38.0	6.9	7.2	7.2	7.8	7.4	6.4	4.0	3.1
40.0	6.2	6.5	6.5	7.1	6.8	6.4	3.9	3.1
42.0	5.6	5.9	5.9	6.4	6.2	6.2	3.8	3.0
44.0	5.0	5.3	5.4	5.8	5.6	6.0	3.7	2.9
46.0	4.5	4.7	4.9	5.2	5.1	5.7	3.6	2.9
48.0	4.1	4.3	4.4	4.7	4.7	5.2	3.5	2.8
50.0	3.7	3.8	4.0	4.3	4.2	4.7	3.4	2.8
52.0	3.3	3.4	3.6	3.9	3.8	4.3	3.3	2.7
54.0	2.9	3.1	3.2	3.5	3.5	3.9	3.3	2.7
56.0	2.6	2.7	2.9	3.1	3.1	3.5	3.2	2.7
58.0	2.3	2.4	2.6	2.8	2.8	3.2	3.0	2.6
60.0	2.0	2.1	2.3	2.5	2.5	2.8	2.7	2.6
62.0	1.9 / 60.8	1.9 / 61.4	2.0	2.2	2.3	2.5	2.5	2.6
64.0			1.9 / 63.0	1.9	2.0	2.3	2.2	2.6
66.0					1.9 / 65.0	2.0	2.0	2.3
68.0						1.9 / 66.6	1.9 / 66.6	2.0
70.0							1.9 / 69.0	



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Crane Boom Extensions)



Unit: ton								
Boom length (m)	60							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0							
18.0	12.0	12.0 / 19.2	12.0 / 18.3					
20.0	12.0	12.0	12.0		8.8 / 20.4			
22.0	12.0	12.0	12.0	9.0 / 23.1	8.8		5.3 / 22.5	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.0	5.0	
28.0	11.9	12.0	12.0	9.0	8.5	6.4	4.8	
30.0	10.5	11.1	10.9	9.0	8.3	6.4	4.6	3.4 / 30.9
32.0	9.4	9.9	9.8	9.0	8.1	6.4	4.5	3.3
34.0	8.4	8.9	8.8	9.0	7.9	6.4	4.4	3.3
36.0	7.6	7.9	7.9	8.6	7.7	6.4	4.2	3.2
38.0	6.8	7.1	7.2	7.7	7.4	6.4	4.1	3.1
40.0	6.1	6.4	6.5	7.0	6.7	6.4	4.0	3.1
42.0	5.5	5.8	5.8	6.3	6.1	6.3	3.9	3.0
44.0	4.9	5.2	5.3	5.7	5.5	6.1	3.8	3.0
46.0	4.4	4.7	4.8	5.2	5.0	5.6	3.7	2.9
48.0	4.0	4.2	4.3	4.7	4.6	5.1	3.6	2.9
50.0	3.6	3.7	3.9	4.2	4.1	4.6	3.5	2.8
52.0	3.2	3.3	3.5	3.8	3.7	4.2	3.4	2.8
54.0	2.8	3.0	3.1	3.4	3.4	3.8	3.3	2.7
56.0	2.5	2.6	2.8	3.0	3.0	3.4	3.2	2.7
58.0	2.2	2.3	2.5	2.7	2.7	3.1	2.9	2.7
60.0	1.9	2.0	2.2	2.4	2.4	2.8	2.6	2.6
62.0		1.9 / 60.6	1.9	2.1	2.1	2.5	2.3	2.6
64.0				1.9 / 63.3	1.9	2.2	2.1	2.5
66.0						1.9	1.9 / 65.6	2.2
68.0								2.0
70.0								1.9 / 68.6

Unit: ton								
Boom length (m)	63							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0 / 16.8							
18.0	12.0	12.0 / 19.8	12.0 / 18.9					
20.0	12.0	12.0	12.0		8.8 / 21.0			
22.0	12.0	12.0	12.0	9.0 / 23.7	8.8		5.3 / 23.1	
24.0	12.0	12.0	12.0	9.0	8.8		5.2	
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.5	5.0	
28.0	11.6	12.0	12.0	9.0	8.6	6.4	4.9	
30.0	10.3	10.9	10.7	9.0	8.4	6.4	4.7	3.4 / 31.4
32.0	9.2	9.7	9.6	9.0	8.2	6.4	4.6	3.4
34.0	8.2	8.7	8.6	9.0	8.0	6.4	4.4	3.3
36.0	7.3	7.8	7.7	8.4	7.8	6.4	4.3	3.2
38.0	6.6	7.0	6.9	7.6	7.2	6.4	4.2	3.2
40.0	5.9	6.2	6.2	6.8	6.5	6.4	4.0	3.1
42.0	5.3	5.6	5.6	6.1	5.9	6.4	3.9	3.0
44.0	4.7	5.0	5.1	5.5	5.3	6.0	3.8	3.0
46.0	4.2	4.5	4.5	5.0	4.8	5.5	3.7	2.9
48.0	3.8	4.0	4.1	4.5	4.3	4.9	3.6	2.9
50.0	3.3	3.5	3.6	4.0	3.9	4.5	3.5	2.8
52.0	2.9	3.1	3.3	3.6	3.5	4.0	3.5	2.8
54.0	2.6	2.8	2.9	3.2	3.1	3.6	3.4	2.7
56.0	2.3	2.4	2.6	2.8	2.8	3.2	3.0	2.7
58.0	2.0	2.1	2.3	2.5	2.5	2.9	2.7	2.7
60.0	1.9 / 58.6	1.9 / 59.3	2.0	2.2	2.2	2.6	2.4	2.7
62.0			1.9 / 60.6	1.9	1.9	2.3	2.1	2.6
64.0						2.0	1.9 / 63.6	2.3
66.0						1.9 / 64.6		2.0
68.0								1.9 / 67.0



■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton									
Boom length (m)	24								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.3	74.0	73.7	73.2	73.1	72.4	72.5	71.4	8.0
9.0	63.5	63.1	62.8	62.1	62.0	61.0	61.1	59.7	9.0
10.0	54.1	53.8	53.5	52.9	52.7	51.8	51.8	50.6	10.0
12.0	41.4	41.2	40.8	40.4	40.0	39.4	39.2	38.4	12.0
14.0	33.2	33.0	32.6	32.2	31.9	31.4	31.1	30.5	14.0
16.0	27.4	27.3	26.8	26.6	26.1	25.8	25.4	24.9	16.0
18.0	23.1	23.0	22.6	22.4	21.9	21.7	21.2	20.9	18.0
20.0	19.9	19.8	19.3	19.2	18.7	18.5	18.0	17.8	20.0
22.0	17.3	17.2	16.8	16.7	16.1	16.1	15.5	15.4	22.0
24.0	16.9 /22.3	16.9 /22.3	16.4 /22.3	16.4 /22.3	15.8 /22.3	15.7 /22.3	15.1 /22.3	15.1 /22.3	24.0

Unit: ton									
Boom length (m)	27								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.1	73.8	73.6	73.1	73.0	72.2	72.4	71.3	8.0
9.0	63.5	63.1	62.8	62.1	62.1	61.0	61.2	59.7	9.0
10.0	54.1	53.8	53.5	52.9	52.7	51.8	51.9	50.7	10.0
12.0	41.3	41.1	40.7	40.3	40.0	39.4	39.3	38.4	12.0
14.0	33.1	32.9	32.5	32.2	31.8	31.4	31.1	30.4	14.0
16.0	27.3	27.2	26.7	26.5	26.1	25.7	25.4	24.9	16.0
18.0	23.0	22.9	22.5	22.3	21.9	21.6	21.2	20.8	18.0
20.0	19.8	19.7	19.2	19.1	18.6	18.4	18.0	17.7	20.0
22.0	17.2	17.1	16.7	16.6	16.1	15.9	15.4	15.2	22.0
24.0	15.1	15.0	14.6	14.5	14.0	13.9	13.4	13.3	24.0
26.0	14.3 /24.9	14.2 /24.9	13.8 /24.9	13.7 /24.9	13.2 /24.9	13.1 /24.9	12.6 /24.9	12.5 /24.9	26.0

1. The rated loads determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The offset angles shown are of jib boom offset angle against the main boom, under load.
6. The counterweight is 49.6 ton.
7. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)						
		7falls	6falls	5falls	4falls	3falls	2falls	1fall
120	1.64	84	72	60	48	36	24	
80	1.35	80	72	60	48	36	24	
35	0.90					35	24	
12	0.51							12



SCX1200-3

SPECIFICATIONS

Specifications
Gross Rated Load Table

■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	30								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
7.4	72.0	72.0	72.0	72.0	72.0	72.0 / 7.4	72.0 / 7.4	72.0 / 7.4	7.4
8.0	72.0	72.0	72.0	72.0	72.0	71.2	71.3	69.7	8.0
9.0	63.5	63.1	62.9	62.2	62.2	61.1	61.2	59.8	9.0
10.0	54.1	53.8	53.5	52.9	52.8	51.9	52.0	50.7	10.0
12.0	41.3	41.1	40.8	40.3	40.1	39.4	39.4	38.4	12.0
14.0	33.1	32.9	32.5	32.2	31.9	31.4	31.2	30.5	14.0
16.0	27.3	27.1	26.8	26.5	26.2	25.7	25.5	24.9	16.0
18.0	23.0	22.9	22.5	22.3	21.9	21.6	21.3	20.8	18.0
20.0	19.7	19.6	19.2	19.1	18.7	18.4	18.0	17.7	20.0
22.0	17.1	17.1	16.6	16.5	16.1	15.9	15.5	15.2	22.0
24.0	15.0	15.0	14.5	14.4	14.0	13.9	13.4	13.2	24.0
26.0	13.3	13.2	12.8	12.7	12.3	12.2	11.7	11.6	26.0
28.0	12.2 / 27.5	12.1 / 27.5	11.7 / 27.5	11.7 / 27.5	11.2 / 27.5	11.1 / 27.5	10.6 / 27.5	10.5 / 27.5	28.0

Unit: ton

Boom length (m)	33								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
7.4	72.0 / 7.9	72.0 / 7.9	72.0 / 7.9	72.0 / 7.9	71.9 / 7.9	70.7 / 7.9	70.9 / 7.9	69.2 / 7.9	7.4
8.0	72.0	72.0	71.7	70.9	70.8	69.6	69.7	68.1	8.0
9.0	62.6	62.2	61.8	61.1	61.0	60.0	60.0	58.6	9.0
10.0	54.0	53.7	53.4	52.8	52.8	51.8	52.0	50.7	10.0
12.0	41.3	41.0	40.7	40.2	40.1	39.3	39.3	38.4	12.0
14.0	33.0	32.8	32.4	32.1	31.8	31.3	31.2	30.4	14.0
16.0	27.2	27.0	26.7	26.4	26.1	25.6	25.4	24.8	16.0
18.0	22.9	22.8	22.4	22.2	21.8	21.5	21.2	20.7	18.0
20.0	19.6	19.5	19.1	18.9	18.6	18.3	18.0	17.6	20.0
22.0	17.0	16.9	16.5	16.4	16.0	15.8	15.4	15.1	22.0
24.0	14.9	14.8	14.4	14.3	13.9	13.7	13.3	13.1	24.0
26.0	13.2	13.1	12.7	12.6	12.2	12.1	11.6	11.4	26.0
28.0	11.7	11.7	11.3	11.2	10.8	10.7	10.2	10.1	28.0
30.0	10.5	10.4	10.0	10.0	9.5	9.5	9.0	8.9	30.0
32.0	10.4 / 30.1	10.4 / 30.1	10.0 / 30.1	9.9 / 30.1	9.5 / 30.1	9.4 / 30.1	8.9 / 30.1	8.9 / 30.1	32.0



■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	36								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
8.5	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	8.5
9.0	60.0	60.0	60.0	59.8	59.6	58.6	58.7	57.3	9.0
10.0	53.7	53.4	53.1	52.5	52.3	51.4	51.4	50.2	10.0
12.0	41.2	40.9	40.6	40.1	40.0	39.3	39.3	38.3	12.0
14.0	32.9	32.7	32.4	32.0	31.8	31.2	31.1	30.3	14.0
16.0	27.1	26.9	26.6	26.3	26.0	25.6	25.4	24.8	16.0
18.0	22.8	22.7	22.3	22.1	21.8	21.4	21.2	20.6	18.0
20.0	19.5	19.4	19.0	18.8	18.5	18.2	17.9	17.5	20.0
22.0	16.9	16.8	16.4	16.3	15.9	15.6	15.3	15.0	22.0
24.0	14.8	14.7	14.3	14.2	13.8	13.6	13.2	13.0	24.0
26.0	13.0	13.0	12.6	12.5	12.1	11.9	11.5	11.3	26.0
28.0	11.6	11.5	11.1	11.0	10.6	10.5	10.1	9.9	28.0
30.0	10.3	10.3	9.9	9.8	9.4	9.3	8.9	8.7	30.0
32.0	9.2	9.2	8.8	8.8	8.3	8.3	7.8	7.7	32.0
34.0	8.9 / 32.7	8.9 / 32.7	8.5 / 32.7	8.4 / 32.7	8.0 / 32.7	7.9 / 32.7	7.5 / 32.7	7.4 / 32.7	34.0

Unit: ton

Boom length (m)	39								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
9.0	59.9	59.5	59.2	58.5	58.4	57.4	57.5	56.1	9.0
10.0	52.7	52.4	52.0	51.5	51.3	50.4	50.4	49.2	10.0
12.0	41.1	40.8	40.5	40.0	39.9	39.2	39.3	38.2	12.0
14.0	32.8	32.5	32.3	31.9	31.7	31.1	31.1	30.2	14.0
16.0	27.0	26.8	26.5	26.1	25.9	25.4	25.3	24.7	16.0
18.0	22.7	22.5	22.2	21.9	21.7	21.3	21.1	20.5	18.0
20.0	19.4	19.2	18.9	18.7	18.4	18.1	17.8	17.4	20.0
22.0	16.8	16.7	16.3	16.1	15.8	15.5	15.2	14.9	22.0
24.0	14.6	14.5	14.2	14.0	13.7	13.5	13.1	12.8	24.0
26.0	12.9	12.8	12.4	12.3	12.0	11.8	11.4	11.2	26.0
28.0	11.4	11.4	11.0	10.9	10.5	10.3	10.0	9.8	28.0
30.0	10.2	10.1	9.7	9.7	9.3	9.1	8.7	8.6	30.0
32.0	9.1	9.0	8.7	8.6	8.2	8.1	7.7	7.6	32.0
34.0	8.2	8.1	7.7	7.7	7.3	7.2	6.8	6.7	34.0
36.0	7.6 / 35.3	7.6 / 35.3	7.2 / 35.3	7.2 / 35.3	6.8 / 35.3	6.7 / 35.3	6.3 / 35.3	6.2 / 35.3	36.0



SCX1200-3

SPECIFICATIONS

Specifications
Gross Rated Load Table

■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	42								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
9.6	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	9.6
10.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	10.0
12.0	41.0	40.7	40.5	40.0	39.9	39.2	39.3	38.2	12.0
14.0	32.7	32.5	32.2	31.8	31.7	31.1	31.1	30.2	14.0
16.0	26.9	26.7	26.4	26.1	25.9	25.4	25.3	24.6	16.0
18.0	22.6	22.5	22.2	21.9	21.6	21.2	21.1	20.5	18.0
20.0	19.3	19.2	18.9	18.6	18.4	18.0	17.8	17.3	20.0
22.0	16.7	16.6	16.3	16.1	15.8	15.5	15.2	14.8	22.0
24.0	14.6	14.5	14.1	14.0	13.6	13.4	13.1	12.8	24.0
26.0	12.8	12.7	12.4	12.2	11.9	11.7	11.4	11.1	26.0
28.0	11.3	11.3	10.9	10.8	10.4	10.3	9.9	9.7	28.0
30.0	10.1	10.0	9.7	9.6	9.2	9.1	8.7	8.5	30.0
32.0	9.0	8.9	8.6	8.5	8.1	8.0	7.6	7.5	32.0
34.0	8.1	8.0	7.6	7.6	7.2	7.1	6.7	6.6	34.0
36.0	7.2	7.2	6.8	6.8	6.4	6.3	5.9	5.8	36.0
38.0	6.5 /37.9	6.5 /37.9	6.1 /37.9	6.1 /37.9	5.7 /37.9	5.7 /37.9	5.2 /37.9	5.2 /37.9	38.0

Unit: ton

Boom length (m)	45								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.0	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	47.7 /10.1	47.8 /10.1	46.6 /10.1	10.0
12.0	40.6	40.3	40.0	39.5	39.3	38.6	38.5	37.5	12.0
14.0	32.6	32.3	32.1	31.7	31.5	30.9	30.9	30.1	14.0
16.0	26.7	26.5	26.3	25.9	25.7	25.2	25.2	24.5	16.0
18.0	22.4	22.3	22.0	21.7	21.5	21.0	20.9	20.3	18.0
20.0	19.1	19.0	18.7	18.4	18.2	17.8	17.6	17.1	20.0
22.0	16.5	16.4	16.1	15.8	15.6	15.3	15.0	14.6	22.0
24.0	14.4	14.3	13.9	13.8	13.5	13.2	12.9	12.6	24.0
26.0	12.6	12.5	12.2	12.0	11.7	11.5	11.2	10.9	26.0
28.0	11.1	11.0	10.7	10.6	10.2	10.1	9.7	9.5	28.0
30.0	9.9	9.8	9.5	9.3	9.0	8.8	8.5	8.3	30.0
32.0	8.8	8.7	8.4	8.3	7.9	7.8	7.4	7.3	32.0
34.0	7.8	7.8	7.4	7.4	7.0	6.9	6.5	6.4	34.0
36.0	7.0	7.0	6.6	6.5	6.2	6.1	5.7	5.6	36.0
38.0	6.3	6.2	5.9	5.8	5.5	5.4	5.0	4.9	38.0
40.0	5.6	5.6	5.2	5.2	4.8	4.8	4.4	4.3	40.0
42.0	5.5 /40.5	5.5 /40.5	5.1 /40.5	5.1 /40.5	4.7 /40.5	4.6 /40.5	4.2 /40.5	4.2 /40.5	42.0



■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton									
Boom length (m)	48								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.6	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	32.5	32.3	32.0	31.6	31.5	30.9	30.9	30.0	14.0
16.0	26.7	26.5	26.2	25.9	25.7	25.2	25.2	24.4	16.0
18.0	22.4	22.2	21.9	21.6	21.4	21.0	20.9	20.3	18.0
20.0	19.1	18.9	18.6	18.4	18.1	17.8	17.6	17.1	20.0
22.0	16.4	16.3	16.0	15.8	15.5	15.2	15.0	14.6	22.0
24.0	14.3	14.2	13.9	13.7	13.4	13.1	12.9	12.5	24.0
26.0	12.5	12.4	12.1	12.0	11.7	11.4	11.2	10.8	26.0
28.0	11.1	11.0	10.6	10.5	10.2	10.0	9.7	9.4	28.0
30.0	9.8	9.7	9.4	9.3	8.9	8.8	8.5	8.2	30.0
32.0	8.7	8.6	8.3	8.2	7.9	7.7	7.4	7.2	32.0
34.0	7.8	7.7	7.4	7.3	6.9	6.8	6.4	6.3	34.0
36.0	6.9	6.9	6.5	6.4	6.1	6.0	5.6	5.5	36.0
38.0	6.2	6.1	5.8	5.7	5.4	5.3	4.9	4.8	38.0
40.0	5.5	5.5	5.1	5.1	4.7	4.7	4.3	4.2	40.0
42.0	4.9	4.9	4.6	4.5	4.2	4.1	3.7	3.6	42.0
44.0	4.7 / 43.1	4.6 / 43.1	4.3 / 43.1	4.2 / 43.1	3.9 / 43.1	3.8 / 43.1	3.4 / 43.1	3.4 / 43.1	44.0

Unit: ton									
Boom length (m)	51								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.6	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	32.3	32.1	31.7	31.3	31.1	30.5	30.4	29.6	14.0
16.0	26.5	26.3	26.1	25.7	25.6	25.0	25.0	24.3	16.0
18.0	22.2	22.1	21.8	21.5	21.3	20.8	20.8	20.1	18.0
20.0	18.9	18.8	18.5	18.2	18.0	17.6	17.5	17.0	20.0
22.0	16.3	16.2	15.9	15.6	15.4	15.1	14.9	14.4	22.0
24.0	14.2	14.0	13.7	13.5	13.3	13.0	12.8	12.4	24.0
26.0	12.4	12.3	12.0	11.8	11.5	11.3	11.0	10.7	26.0
28.0	10.9	10.8	10.5	10.3	10.0	9.8	9.6	9.3	28.0
30.0	9.6	9.5	9.2	9.1	8.8	8.6	8.3	8.1	30.0
32.0	8.5	8.5	8.1	8.0	7.7	7.5	7.2	7.0	32.0
34.0	7.6	7.5	7.2	7.1	6.8	6.6	6.3	6.1	34.0
36.0	6.8	6.7	6.4	6.3	5.9	5.8	5.5	5.3	36.0
38.0	6.0	6.0	5.6	5.6	5.2	5.1	4.8	4.6	38.0
40.0	5.4	5.3	5.0	4.9	4.6	4.5	4.1	4.0	40.0
42.0	4.8	4.7	4.4	4.3	4.0	3.9	3.5	3.5	42.0
44.0	4.2	4.2	3.9	3.8	3.5	3.4	3.0	3.0	44.0
46.0	3.8 /45.7	3.8 /45.7	3.5 /45.7	3.4 /45.7	3.1 /45.7	3.0 /45.7	2.6 /45.7	2.6 /45.7	46.0



SCX1200-3

SPECIFICATIONS

Specifications
Gross Rated Load Table

■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton

Boom length (m)	54								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
11.7	36.0	36.0	36.0	36.0	36.0	36.0	36.0	35.7	11.7
12.0	36.0	36.0	36.0	36.0	36.0	36.0	35.6	35.3	12.0
14.0	31.6	31.4	31.1	30.7	30.5	29.9	29.8	29.0	14.0
16.0	26.4	26.1	25.9	25.5	25.4	24.9	24.9	24.1	16.0
18.0	22.0	21.9	21.6	21.3	21.1	20.7	20.6	20.0	18.0
20.0	18.7	18.6	18.3	18.0	17.8	17.4	17.3	16.8	20.0
22.0	16.1	15.9	15.7	15.4	15.2	14.9	14.7	14.2	22.0
24.0	13.9	13.8	13.5	13.3	13.1	12.8	12.6	12.2	24.0
26.0	12.2	12.1	11.8	11.6	11.3	11.1	10.8	10.5	26.0
28.0	10.7	10.6	10.3	10.1	9.8	9.6	9.4	9.1	28.0
30.0	9.4	9.3	9.0	8.9	8.6	8.4	8.1	7.8	30.0
32.0	8.3	8.2	7.9	7.8	7.5	7.3	7.0	6.8	32.0
34.0	7.4	7.3	7.0	6.9	6.6	6.4	6.1	5.9	34.0
36.0	6.5	6.5	6.1	6.1	5.7	5.6	5.3	5.1	36.0
38.0	5.8	5.7	5.4	5.3	5.0	4.9	4.5	4.4	38.0
40.0	5.1	5.1	4.8	4.7	4.3	4.2	3.9	3.8	40.0
42.0	4.5	4.5	4.2	4.1	3.8	3.7	3.3	3.2	42.0
44.0	4.0	4.0	3.6	3.6	3.2	3.2	2.8	2.7	44.0
46.0	3.5	3.5	3.2	3.1	2.8	2.7	2.4	2.3	46.0
48.0	3.1	3.1	2.7	2.7	2.4	2.3	1.9	1.9	48.0
50.0	3.0 / 48.3	3.0 / 48.3	2.7 / 48.3	2.7 / 48.3	2.3 / 48.3	2.3 / 48.3	1.9 / 48.3		50.0

Unit: ton

Boom length (m)	57								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.0	35.2 / 12.3	35.2 / 12.3	34.2 / 12.3	34.1 / 12.3	33.0 / 12.3	32.9 / 12.3	31.7 / 12.3	31.5 / 12.3	12.0
14.0	31.0	30.8	30.5	30.1	29.9	29.3	29.2	28.4	14.0
16.0	26.2	26.0	25.7	25.3	25.1	24.6	24.5	23.8	16.0
18.0	21.9	21.7	21.4	21.1	21.0	20.5	20.5	19.8	18.0
20.0	18.6	18.4	18.1	17.9	17.7	17.3	17.2	16.6	20.0
22.0	15.9	15.8	15.5	15.3	15.1	14.7	14.6	14.1	22.0
24.0	13.8	13.7	13.4	13.2	12.9	12.6	12.4	12.0	24.0
26.0	12.0	11.9	11.6	11.4	11.2	10.9	10.7	10.3	26.0
28.0	10.5	10.4	10.1	10.0	9.7	9.4	9.2	8.9	28.0
30.0	9.2	9.2	8.9	8.7	8.4	8.2	8.0	7.7	30.0
32.0	8.2	8.1	7.8	7.6	7.3	7.2	6.9	6.6	32.0
34.0	7.2	7.1	6.8	6.7	6.4	6.2	5.9	5.7	34.0
36.0	6.4	6.3	6.0	5.9	5.6	5.4	5.1	4.9	36.0
38.0	5.6	5.6	5.2	5.1	4.8	4.7	4.4	4.2	38.0
40.0	5.0	4.9	4.6	4.5	4.2	4.1	3.7	3.6	40.0
42.0	4.4	4.3	4.0	3.9	3.6	3.5	3.2	3.0	42.0
44.0	3.8	3.8	3.5	3.4	3.1	3.0	2.6	2.5	44.0
46.0	3.4	3.3	3.0	2.9	2.6	2.5	2.2	2.1	46.0
48.0	2.9	2.9	2.6	2.5	2.2	2.1	1.9 / 47.5	1.9 / 47.0	48.0
50.0	2.5	2.5	2.2	2.1	1.9 / 49.5	1.9 / 49.3			50.0
52.0	2.4 / 50.9	2.3 / 50.9	2.0 / 50.9	2.0 / 50.9					52.0



■ Main Boom with Crane Jib (With Crane Boom Extensions)



Unit: ton									
Boom length (m)	60								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.9	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	12.9
14.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	14.0
16.0	24.0	24.0	24.0	24.0	24.0	24.0	23.9	23.2	16.0
18.0	21.9	21.7	21.4	21.1	20.9	20.5	20.3	19.7	18.0
20.0	18.5	18.4	18.1	17.8	17.7	17.2	17.2	16.6	20.0
22.0	15.9	15.7	15.5	15.2	15.0	14.7	14.5	14.0	22.0
24.0	13.7	13.6	13.3	13.1	12.9	12.6	12.4	12.0	24.0
26.0	12.0	11.8	11.6	11.4	11.1	10.8	10.7	10.3	26.0
28.0	10.5	10.4	10.1	9.9	9.6	9.4	9.2	8.8	28.0
30.0	9.2	9.1	8.8	8.6	8.4	8.1	7.9	7.6	30.0
32.0	8.1	8.0	7.7	7.6	7.3	7.1	6.8	6.6	32.0
34.0	7.1	7.0	6.7	6.6	6.3	6.1	5.9	5.6	34.0
36.0	6.3	6.2	5.9	5.8	5.5	5.3	5.0	4.8	36.0
38.0	5.5	5.5	5.1	5.0	4.7	4.6	4.3	4.1	38.0
40.0	4.9	4.8	4.5	4.4	4.1	4.0	3.7	3.5	40.0
42.0	4.3	4.2	3.9	3.8	3.5	3.4	3.1	2.9	42.0
44.0	3.7	3.7	3.4	3.3	3.0	2.9	2.5	2.4	44.0
46.0	3.2	3.2	2.9	2.8	2.5	2.4	2.1	2.0	46.0
48.0	2.8	2.8	2.4	2.4	2.0	2.0	1.9 /46.8	1.9 /46.5	48.0
50.0	2.4	2.4	2.0	2.0	1.9 /48.6	1.9 /48.5			50.0
52.0	2.0	2.0	1.9 /50.6	1.9 /50.5					52.0
54.0	1.9 /52.6	1.9 /52.6							54.0

Unit: ton									
Boom length (m)	63								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.9	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	23.8 /13.5	23.6 /13.5	12.9
14.0	24.0	24.0	24.0	24.0	24.0	24.0	23.4	23.2	14.0
16.0	24.0	24.0	23.6	23.6	22.7	22.7	21.7	21.6	16.0
18.0	21.5	21.3	21.0	20.7	20.4	20.0	19.8	19.2	18.0
20.0	18.3	18.2	17.9	17.6	17.5	17.1	17.0	16.4	20.0
22.0	15.7	15.5	15.3	15.0	14.8	14.5	14.4	13.9	22.0
24.0	13.5	13.4	13.1	12.9	12.7	12.4	12.2	11.8	24.0
26.0	11.7	11.6	11.4	11.2	10.9	10.6	10.5	10.1	26.0
28.0	10.2	10.1	9.9	9.7	9.4	9.2	9.0	8.6	28.0
30.0	9.0	8.9	8.6	8.4	8.2	7.9	7.7	7.4	30.0
32.0	7.9	7.8	7.5	7.3	7.1	6.9	6.6	6.3	32.0
34.0	6.9	6.8	6.5	6.4	6.1	5.9	5.7	5.4	34.0
36.0	6.1	6.0	5.7	5.6	5.3	5.1	4.8	4.6	36.0
38.0	5.3	5.2	4.9	4.8	4.5	4.4	4.1	3.9	38.0
40.0	4.6	4.6	4.3	4.2	3.9	3.7	3.4	3.3	40.0
42.0	4.0	4.0	3.7	3.6	3.3	3.2	2.9	2.7	42.0
44.0	3.5	3.4	3.1	3.1	2.7	2.6	2.3	2.2	44.0
46.0	3.0	3.0	2.7	2.6	2.3	2.2	1.9 /45.6	1.9 /45.2	46.0
48.0	2.6	2.5	2.2	2.2	1.9 /47.6	1.9 /47.5			48.0
50.0	2.2	2.1	1.9 /49.5	1.9 /49.5					50.0
52.0	1.9 /51.5	1.9 /51.3							52.0



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Main Boom (Using Third Winch) (With Crane Boom Extensions)



Working Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius (m)
4.6	120.0											4.6
5.0	120.4	108.0 /5.2										5.0
5.5	109.9	108.0	84.0 /5.7									5.5
6.0	101.1	100.9	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	87.0	86.8	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	76.3	76.1	75.9	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.8	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.4	55.4	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.6	42.5	42.4	42.3	36.0	36.0	12.0
14.0	34.5	34.5	34.5	34.5	34.4	34.4	34.2	34.1	34.0	34.0	33.8	14.0
16.0	32.9 /14.5	28.8	28.7	28.7	28.6	28.6	28.5	28.3	28.2	28.2	28.0	16.0
18.0		26.3 /17.1	24.5	24.5	24.3	24.3	24.2	24.1	23.9	23.9	23.7	18.0
20.0			21.6 /19.7	21.2	21.1	21.0	20.9	20.8	20.6	20.6	20.4	20.0
22.0				18.6	18.5	18.4	18.3	18.1	18.0	17.9	17.7	22.0
24.0				18.3 /22.3	16.4	16.3	16.2	16.0	15.9	15.8	15.6	24.0
26.0					15.5 /24.9	14.6	14.4	14.3	14.1	14.1	13.8	26.0
28.0						13.4 /27.5	13.0	12.8	12.7	12.6	12.4	28.0
30.0							11.7	11.5	11.4	11.3	11.1	30.0
32.0							11.7 /30.1	10.5	10.3	10.2	10.0	32.0
34.0								10.1 /32.7	9.4	9.3	9.1	34.0
36.0									8.8 /35.3	8.4	8.2	36.0
38.0										7.7 /37.9	7.5	38.0
40.0											6.8	40.0
42.0											6.7 /40.5	42.0

Working Radius (m)	Boom length (m)						Working Radius (m)
	48	51	54	57	60	63	
10.0	36.0 / 10.6	24.0 / 11.2	24.0 / 11.7				10.0
12.0	36.0	24.0	24.0	24.0 / 12.3	24.0 / 12.9	24.0 / 13.5	12.0
14.0	33.7	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.9	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.6	23.5	23.3	23.1	22.9	22.4	18.0
20.0	20.3	20.2	20.0	19.8	19.8	19.6	20.0
22.0	17.7	17.5	17.3	17.2	17.1	16.9	22.0
24.0	15.5	15.4	15.2	15.0	15.0	14.8	24.0
26.0	13.8	13.6	13.4	13.3	13.2	13.0	26.0
28.0	12.3	12.1	11.9	11.8	11.7	11.5	28.0
30.0	11.0	10.9	10.7	10.5	10.4	10.2	30.0
32.0	9.9	9.8	9.6	9.4	9.3	9.1	32.0
34.0	9.0	8.8	8.6	8.4	8.4	8.1	34.0
36.0	8.1	8.0	7.8	7.6	7.5	7.3	36.0
38.0	7.4	7.2	7.0	6.8	6.8	6.5	38.0
40.0	6.7	6.6	6.3	6.2	6.1	5.9	40.0
42.0	6.1	6.0	5.8	5.6	5.5	5.3	42.0
44.0	5.8 / 43.1	5.4	5.2	5.0	4.9	4.7	44.0
46.0		5.0 / 45.7	4.7	4.6	4.5	4.2	46.0
48.0			4.3	4.1	4.0	3.8	48.0
50.0			4.2 / 48.3	3.7	3.6	3.4	50.0
52.0				3.6 / 50.9	3.2	3.0	52.0
54.0					3.0 / 53.2	2.7	54.0
56.0						2.4 / 55.8	56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
7. Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

■ Main Boom with Aux. Sheave (Using Third Winch) (With Crane Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
4.6	120.0											4.6
5.0	119.5	108.0 /5.2										5.0
5.5	109.1	108.0	84.0 /5.7									5.5
6.0	100.2	100.0	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	86.2	86.0	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	75.4	75.2	75.1	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.0	55.1	55.0	55.0	55.0	54.9	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.2	42.1	42.0	41.9	36.0	36.0	12.0
14.0	34.2	34.2	34.1	34.1	34.0	34.0	33.8	33.7	33.6	33.5	33.3	14.0
16.0	32.6 /14.5	28.4	28.4	28.4	28.2	28.2	28.1	27.9	27.8	27.7	27.5	16.0
18.0		26.0 /17.1	24.1	24.1	24.0	23.9	23.8	23.7	23.5	23.4	23.2	18.0
20.0			21.3 /19.7	20.8	20.7	20.6	20.5	20.4	20.2	20.1	19.9	20.0
22.0				18.3	18.1	18.0	17.9	17.8	17.6	17.5	17.3	22.0
24.0				17.9 /22.3	16.0	15.9	15.8	15.6	15.5	15.4	15.2	24.0
26.0					15.2 /24.9	14.2	14.1	13.9	13.7	13.7	13.4	26.0
28.0						13.1 /27.5	12.6	12.4	12.3	12.2	12.0	28.0
30.0							11.4	11.2	11.0	10.9	10.7	30.0
32.0							11.3 /30.1	10.1	10.0	9.8	9.6	32.0
34.0								9.8 /32.7	9.0	8.9	8.7	34.0
36.0									8.5 /35.3	8.1	7.8	36.0
38.0										7.4 /37.9	7.1	38.0
40.0											6.5	40.0
42.0											6.3 /40.5	42.0

Radius (m)	Boom length (m)						Radius (m)
	48	51	54	57	60	63	
10.0	36.0 / 10.6	24.0 / 11.2	24.0 / 11.7				10.0
12.0	36.0	24.0	24.0	24.0 / 12.3	24.0 / 12.9	24.0 / 13.5	12.0
14.0	33.3	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.5	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.2	23.0	22.8	22.6	22.2	21.6	18.0
20.0	19.9	19.7	19.5	19.3	19.3	18.8	20.0
22.0	17.2	17.1	16.9	16.7	16.7	16.4	22.0
24.0	15.1	15.0	14.7	14.6	14.5	14.3	24.0
26.0	13.4	13.2	13.0	12.8	12.7	12.5	26.0
28.0	11.9	11.7	11.5	11.3	11.2	11.0	28.0
30.0	10.6	10.4	10.2	10.0	10.0	9.7	30.0
32.0	9.5	9.3	9.1	8.9	8.9	8.6	32.0
34.0	8.6	8.4	8.2	8.0	7.9	7.7	34.0
36.0	7.7	7.6	7.3	7.2	7.1	6.8	36.0
38.0	7.0	6.8	6.6	6.4	6.3	6.1	38.0
40.0	6.4	6.2	5.9	5.8	5.6	5.4	40.0
42.0	5.8	5.6	5.3	5.2	5.1	4.8	42.0
44.0	5.5 / 43.1	5.1	4.8	4.6	4.5	4.3	44.0
46.0		4.7 / 45.7	4.3	4.2	4.0	3.8	46.0
48.0			3.9	3.7	3.6	3.4	48.0
50.0			3.9 / 48.3	3.3	3.2	3.0	50.0
52.0				3.2 / 50.9	2.8	2.6	52.0
54.0					2.6 / 53.2	2.2	54.0
56.0						2.0 / 55.8	56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
7. Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom (With Tower Boom Extensions)



Working Radius(m)	Boom length (m)											Working Radius(m)
	15	18	21	24	27	30	33	36	39	42	45	
4.6	120.0											4.6
5.0	120.0	115.8 /5.2										5.0
5.5	109.9	109.7	105.9 /5.7									5.5
6.0	101.1	100.9	100.7	95.9 /6.3	84.0 /6.8							6.0
7.0	87.0	86.8	86.7	86.5	84.0	72.0 /7.4	72.0 /7.9					7.0
8.0	76.3	76.1	75.9	75.8	75.6	72.0	72.0	60.0 /8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.7	64.7	63.6	60.0	60.0	48.0 /9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.3	55.2	55.2	54.8	53.5	48.0	48.0 /10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.5	42.4	42.3	42.1	42.1	41.4	12.0
14.0	34.5	34.5	34.5	34.4	34.3	34.2	34.2	34.0	33.8	33.8	33.6	14.0
16.0	32.9 /14.5	28.8	28.7	28.7	28.6	28.4	28.4	28.2	28.0	28.0	27.8	16.0
18.0		26.3 /17.1	24.5	24.4	24.3	24.2	24.1	23.9	23.7	23.7	23.5	18.0
20.0			21.6 /19.7	21.2	21.0	20.9	20.8	20.6	20.4	20.4	20.2	20.0
22.0				18.6	18.4	18.3	18.2	18.0	17.8	17.8	17.5	22.0
24.0				18.2 /22.3	16.3	16.2	16.1	15.9	15.7	15.6	15.4	24.0
26.0					15.5 /24.9	14.4	14.3	14.1	13.9	13.9	13.6	26.0
28.0						13.3 /27.5	12.9	12.7	12.4	12.4	12.2	28.0
30.0							11.6	11.4	11.2	11.1	10.9	30.0
32.0							11.6 /30.1	10.3	10.1	10.0	9.8	32.0
34.0								10.0 /32.7	9.2	9.1	8.8	34.0
36.0									8.6 /35.3	8.3	8.0	36.0
38.0										7.6 /37.9	7.3	38.0
40.0											6.6	40.0
42.0											6.5 /40.5	42.0

Working Radius(m)	Boom length (m)										Working Radius(m)
	48	51	54	57	60	63	66	69	72	75	
10.0	36.0 /10.6	36.0 /11.2	36.0 /11.7								10.0
12.0	36.0	36.0	36.0	36.0 /12.3	24.0 /12.9	24.0 /13.5					12.0
14.0	33.6	33.1	32.4	31.7	24.0	24.0	24.0	24.0 /14.5	23.5 /15.1	21.0 /15.6	14.0
16.0	27.8	27.7	27.4	27.0	24.0	24.0	24.0	24.0	23.1	20.8	16.0
18.0	23.5	23.3	23.1	23.0	22.8	22.2	21.7	21.2	20.5	20.0	18.0
20.0	20.1	20.0	19.8	19.7	19.7	19.4	18.9	18.4	17.9	17.4	20.0
22.0	17.5	17.4	17.2	17.0	17.0	16.8	16.7	16.2	15.7	15.2	22.0
24.0	15.4	15.3	15.0	14.9	14.9	14.6	14.5	14.3	13.9	13.4	24.0
26.0	13.6	13.5	13.2	13.1	13.1	12.9	12.7	12.6	12.3	11.9	26.0
28.0	12.1	12.0	11.8	11.6	11.6	11.4	11.2	11.1	10.8	10.6	28.0
30.0	10.9	10.7	10.5	10.3	10.3	10.1	9.9	9.8	9.5	9.4	30.0
32.0	9.8	9.6	9.4	9.2	9.2	9.0	8.8	8.7	8.4	8.3	32.0
34.0	8.8	8.7	8.4	8.3	8.2	8.0	7.9	7.7	7.5	7.3	34.0
36.0	8.0	7.8	7.6	7.4	7.4	7.2	7.0	6.8	6.6	6.4	36.0
38.0	7.2	7.1	6.8	6.7	6.6	6.4	6.3	6.1	5.9	5.7	38.0
40.0	6.6	6.4	6.2	6.0	6.0	5.7	5.6	5.4	5.2	5.0	40.0
42.0	6.0	5.8	5.6	5.4	5.4	5.1	5.0	4.8	4.6	4.4	42.0
44.0	5.7 /43.1	5.3	5.0	4.9	4.8	4.6	4.4	4.3	4.0	3.9	44.0
46.0		4.9 /45.7	4.6	4.4	4.3	4.1	3.9	3.8	3.5	3.4	46.0
48.0			4.1	4.0	3.9	3.6	3.5	3.3	3.1	2.9	48.0
50.0			4.1 /48.3	3.6	3.5	3.2	3.1	2.9	2.7	2.5	50.0
52.0				3.4 /50.9	3.1	2.9	2.7	2.5	2.3	2.1	52.0
54.0					2.9 /53.2	2.5	2.4	2.2	2.0	1.8	54.0
56.0						2.2 /55.8	2.0	1.9	1.6	1.5	56.0
58.0							1.7	1.6	1.4 /57.3	1.4 /56.6	58.0
60.0							1.7 /58.4	1.4 /59.3			60.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1fall
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

■ Aux. Sheave (With Tower Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
5.8	12.0											5.8
6.0	12.0	12.0 /6.3	12.0 /6.9									6.0
7.0	12.0	12.0	12.0	12.0 /7.4								7.0
8.0	12.0	12.0	12.0	12.0	12.0	12.0 /8.5						8.0
9.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 /9.6				9.0
10.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 /10.1	12.0 /10.7	12.0 /11.2	10.0
12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	16.0
18.0	12.0 /16.1	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0		12.0 /18.7	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0			12.0 /21.3	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0				12.0 /23.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0					12.0	12.0	12.0	12.0	12.0	12.0	12.0	26.0
28.0					12.0 /26.5	12.0	12.0	12.0	12.0	12.0	12.0	28.0
30.0						12.0 /29.1	11.4	11.2	11.0	10.9	10.7	30.0
32.0							10.5 /31.7	10.1	9.9	9.8	9.6	32.0
34.0								9.2	9.0	8.9	8.6	34.0
36.0								9.1 /34.3	8.1	8.0	7.8	36.0
38.0									7.8 /36.9	7.3	7.0	38.0
40.0										6.8 /39.5	6.4	40.0
42.0											5.8	42.0
44.0											5.8 /42.1	44.0

Radius (m)	Boom length (m)									Unit: ton
	48	51	54	57	60	63	66	69	72	Radius (m)
10.0	12.0 /11.8									10.0
12.0	12.0	12.0 /12.3	12.0 /12.9	12.0 /13.4						12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0 /14.5	12.0 /15.1	12.0 /15.6		14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 /16.2	16.0
18.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.7	26.0
28.0	11.9	11.8	11.6	11.4	11.4	11.2	11.0	10.8	10.4	28.0
30.0	10.6	10.5	10.3	10.1	10.1	9.9	9.7	9.5	9.2	30.0
32.0	9.5	9.4	9.2	9.0	9.0	8.7	8.6	8.4	8.2	32.0
34.0	8.6	8.4	8.2	8.0	8.0	7.8	7.6	7.4	7.2	34.0
36.0	7.7	7.6	7.3	7.2	7.1	6.9	6.7	6.6	6.3	36.0
38.0	7.0	6.8	6.6	6.4	6.4	6.1	6.0	5.8	5.6	38.0
40.0	6.3	6.2	5.9	5.8	5.7	5.5	5.3	5.1	4.9	40.0
42.0	5.7	5.6	5.3	5.2	5.1	4.9	4.7	4.5	4.3	42.0
44.0	5.2	5.0	4.8	4.6	4.6	4.3	4.2	4.0	3.7	44.0
46.0	5.0 /44.7	4.5	4.3	4.1	4.1	3.8	3.7	3.5	3.2	46.0
48.0		4.3 /47.3	3.8	3.7	3.6	3.4	3.2	3.0	2.8	48.0
50.0			3.5 /49.8	3.3	3.2	2.9	2.8	2.6	2.4	50.0
52.0				2.9	2.8	2.6	2.4	2.2	2.0	52.0
54.0				2.8 /52.4	2.5	2.2	2.1	1.9	1.9 /52.5	54.0
56.0					2.3 /55.0	1.9	1.9 /55.0			56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Aux. Sheave (With Tower Boom Extensions)



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
4.6	120.0											4.6
5.0	119.5	114.9 /5.2										5.0
5.5	109.1	108.9	105.0 /5.7									5.5
6.0	100.2	100.0	99.9	95.0 /6.3	84.0 /6.8							6.0
7.0	86.2	86.0	85.8	85.6	84.0	72.0 /7.4	72.0 /7.9					7.0
8.0	75.4	75.2	75.1	74.9	74.7	72.0	72.0	60.0 /8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	64.2	63.0	60.0	60.0	48.0 /9.6		9.0
10.0	55.0	55.1	55.0	55.0	54.9	54.8	54.8	54.1	52.9	48.0	48.0 /10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.1	42.0	41.9	41.7	41.6	40.7	12.0
14.0	34.2	34.2	34.1	34.1	33.9	33.8	33.7	33.6	33.4	33.4	33.1	14.0
16.0	32.6 /14.5	28.4	28.4	28.3	28.2	28.0	28.0	27.8	27.6	27.6	27.3	16.0
18.0		26.0 /17.1	24.1	24.1	23.9	23.8	23.7	23.5	23.3	23.3	23.0	18.0
20.0			21.3 /19.7	20.8	20.6	20.5	20.4	20.2	20.0	20.0	19.7	20.0
22.0				18.2	18.1	17.9	17.8	17.6	17.4	17.4	17.1	22.0
24.0				17.9 /22.3	16.0	15.8	15.7	15.5	15.3	15.2	15.0	24.0
26.0					15.1 /24.9	14.1	14.0	13.8	13.5	13.5	13.2	26.0
28.0						12.9 /27.5	12.5	12.3	12.1	12.0	11.7	28.0
30.0							11.3	11.1	10.8	10.7	10.5	30.0
32.0							11.2 /30.1	10.0	9.7	9.7	9.4	32.0
34.0								9.6 /32.7	8.8	8.7	8.5	34.0
36.0									8.3 /35.3	7.9	7.6	36.0
38.0										7.2 /37.9	6.9	38.0
40.0											6.3	40.0
42.0											6.1 /40.5	42.0

Radius (m)	Boom length (m)									Unit: ton
	48	51	54	57	60	63	66	69	72	Radius (m)
10.0	36.0 /10.6	36.0 /11.2	36.0 /11.7							10.0
12.0	36.0	36.0	36.0	36.0 /12.3	24.0 /12.9	24.0 /13.5				12.0
14.0	33.1	32.4	31.7	31.0	24.0	24.0	24.0	24.0 /14.5	22.4 /15.1	14.0
16.0	27.3	27.2	26.9	26.3	24.0	24.0	24.0	23.8	22.0	16.0
18.0	23.0	22.9	22.6	22.5	22.1	21.5	21.0	20.4	19.8	18.0
20.0	19.7	19.6	19.3	19.2	19.2	18.7	18.2	17.7	17.1	20.0
22.0	17.1	16.9	16.7	16.6	16.5	16.3	15.9	15.5	14.9	22.0
24.0	15.0	14.8	14.6	14.4	14.4	14.2	14.0	13.6	13.1	24.0
26.0	13.2	13.0	12.8	12.7	12.6	12.4	12.2	12.1	11.6	26.0
28.0	11.7	11.6	11.3	11.2	11.1	10.9	10.7	10.6	10.3	28.0
30.0	10.4	10.3	10.0	9.9	9.8	9.6	9.4	9.3	9.0	30.0
32.0	9.3	9.2	9.0	8.8	8.7	8.5	8.3	8.2	7.9	32.0
34.0	8.4	8.3	8.0	7.8	7.8	7.5	7.4	7.2	7.0	34.0
36.0	7.6	7.4	7.2	7.0	6.9	6.7	6.5	6.4	6.1	36.0
38.0	6.8	6.7	6.4	6.3	6.2	5.9	5.8	5.6	5.4	38.0
40.0	6.2	6.0	5.8	5.6	5.5	5.3	5.1	4.9	4.7	40.0
42.0	5.6	5.4	5.2	5.0	4.9	4.7	4.5	4.3	4.1	42.0
44.0	5.3 /43.1	4.9	4.6	4.5	4.4	4.1	4.0	3.8	3.6	44.0
46.0		4.5 /45.7	4.2	4.0	3.9	3.7	3.5	3.3	3.1	46.0
48.0			3.7	3.6	3.5	3.2	3.0	2.9	2.6	48.0
50.0			3.7 /48.3	3.2	3.1	2.8	2.6	2.5	2.2	50.0
52.0				3.0 /50.9	2.7	2.4	2.3	2.1	1.9 /51.5	52.0
54.0					2.5 /53.2	2.1	1.9	1.9 /53.3		54.0
56.0						1.9 /55.2				56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1fall
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	
12	0.51										12



■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	24							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
9.7	12.0							9.7
10.0	12.0		12.0 / 11.8					10.0
12.0	12.0	12.0 / 12.6	12.0		8.8 / 13.9			12.0
14.0	12.0	12.0	12.0		8.8			14.0
16.0	12.0	12.0	12.0	9.0 / 16.5	8.8		5.4	16.0
18.0	12.0	12.0	12.0	9.0	8.6		5.1	18.0
20.0	12.0	12.0	12.0	9.0	8.3	6.4 / 20.4	4.8	20.0
22.0	12.0	11.7	12.0	9.0	7.9	6.4	4.5	22.0
24.0	12.0	11.2	12.0	9.0	7.6	6.4	4.3	3.4 / 24.3
26.0	12.0	10.8	12.0	8.7	7.3	6.4	4.1	3.4
28.0	12.0	10.4	11.9	8.3	7.0	6.4	3.9	3.3
30.0	12.0	10.2	11.1	8.0	6.8	6.2	3.7	3.1
32.0	11.4	10.0	10.4	7.7	6.6	5.9	3.6	3.0
34.0	11.3 / 32.2	9.9 / 32.8	9.8	7.5	6.4	5.7	3.4	2.9
36.0			9.3	7.3	6.2	5.4	3.3	2.9
38.0			8.9 / 37.9	7.2	6.1	5.3	3.2	2.8
40.0				7.2 / 38.8	5.9	5.1	3.1	2.7
42.0					5.8	5.0	3.0	2.7
44.0					5.8 / 43.5	4.9	2.9	2.6
46.0						4.9 / 44.8	2.8	2.6
48.0							2.7	2.6
50.0							2.7 / 49.2	2.6
52.0								2.6 / 50.8

Unit: ton								
Boom length (m)	27							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.0	12.0 / 10.2							10.0
12.0	12.0	12.0 / 13.2	12.0 / 12.3					12.0
14.0	12.0	12.0	12.0		8.8 / 14.4			14.0
16.0	12.0	12.0	12.0	9.0 / 17.1	8.8		5.4 / 16.5	16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2	18.0
20.0	12.0	12.0	12.0	9.0	8.4	6.4 / 21.0	4.9	20.0
22.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	22.0
24.0	12.0	11.5	12.0	9.0	7.8	6.4	4.4	3.4 / 24.9
26.0	12.0	11.1	12.0	8.9	7.5	6.4	4.2	3.4
28.0	12.0	10.7	12.0	8.5	7.2	6.4	4.0	3.3
30.0	12.0	10.4	11.8	8.2	7.0	6.3	3.8	3.2
32.0	11.2	10.2	11.1	7.9	6.7	6.1	3.7	3.1
34.0	10.2	10.0	10.4	7.7	6.5	5.8	3.5	3.0
36.0	9.9 / 34.8	9.7 / 35.4	9.7	7.5	6.4	5.6	3.4	2.9
38.0			9.0	7.3	6.2	5.4	3.3	2.8
40.0			8.3	7.2	6.1	5.2	3.2	2.8
42.0			8.1 / 40.5	7.2 / 41.4	5.9	5.1	3.1	2.7
44.0					5.9	5.0	3.0	2.7
46.0					5.8	4.9	2.9	2.6
48.0					5.8 / 46.1	4.8 / 47.4	2.8	2.6
50.0							2.8	2.6
52.0							2.7 / 51.7	2.6
54.0								2.6 / 53.4

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
120	1.64
80	1.35
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Tower Boom Extensions)



Unit: ton

Boom length (m)	30								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)	10	30	10	30	10	30	10	30	Radius (m)
10.7	12.0								10.7
12.0	12.0	12.0 /13.7	12.0 /12.8						12.0
14.0	12.0	12.0	12.0		8.8 /15.0				14.0
16.0	12.0	12.0	12.0	9.0 /17.6	8.8		5.4 /17.1		16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2		18.0
20.0	12.0	12.0	12.0	9.0	8.6	6.4 /21.5	5.0		20.0
22.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7		22.0
24.0	12.0	11.8	12.0	9.0	7.9	6.4	4.5	3.4 /25.4	24.0
26.0	12.0	11.4	12.0	9.0	7.6	6.4	4.3	3.4	26.0
28.0	12.0	11.0	12.0	8.7	7.4	6.4	4.1	3.3	28.0
30.0	12.0	10.7	12.0	8.4	7.1	6.4	3.9	3.2	30.0
32.0	11.0	10.4	11.4	8.1	6.9	6.2	3.8	3.1	32.0
34.0	10.0	10.1	10.4	7.9	6.7	6.0	3.6	3.0	34.0
36.0	9.2	9.3	9.5	7.7	6.5	5.8	3.5	2.9	36.0
38.0	8.6 /37.4	8.5	8.8	7.5	6.3	5.6	3.4	2.9	38.0
40.0			8.1	7.3	6.2	5.4	3.2	2.8	40.0
42.0			7.5	7.2	6.1	5.2	3.1	2.7	42.0
44.0			7.2 /43.1	7.0	6.0	5.1	3.0	2.7	44.0
46.0					5.9	5.0	3.0	2.7	46.0
48.0					5.8	4.9	2.9	2.6	48.0
50.0					5.8 /48.7	4.8	2.8	2.6	50.0
52.0							2.8	2.6	52.0
54.0							2.7	2.6	54.0
56.0							2.7 /54.3	2.6	56.0

Unit: ton									
Boom length (m)	33								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.7	12.0 /11.3								10.7
12.0	12.0		12.0 /13.4						12.0
14.0	12.0	12.0 /14.3	12.0		8.8 /15.5				14.0
16.0	12.0	12.0	12.0		8.8		5.4 /17.6		16.0
18.0	12.0	12.0	12.0	9.0 /18.2	8.8		5.3		18.0
20.0	12.0	12.0	12.0	9.0	8.7		5.0		20.0
22.0	12.0	12.0	12.0	9.0	8.4	6.4 /22.1	4.8		22.0
24.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6		24.0
26.0	12.0	11.7	12.0	9.0	7.8	6.4	4.4	3.4	26.0
28.0	12.0	11.3	12.0	8.9	7.5	6.4	4.2	3.4	28.0
30.0	11.9	11.0	12.0	8.6	7.3	6.4	4.0	3.2	30.0
32.0	10.8	10.7	11.2	8.3	7.0	6.4	3.9	3.1	32.0
34.0	9.9	10.0	10.2	8.1	6.8	6.1	3.7	3.1	34.0
36.0	9.0	9.2	9.4	7.9	6.7	5.9	3.6	3.0	36.0
38.0	8.3	8.4	8.6	7.7	6.5	5.7	3.5	2.9	38.0
40.0	7.6	7.7	7.9	7.5	6.3	5.5	3.3	2.8	40.0
42.0		7.5 /40.6	7.3	7.3	6.2	5.3	3.2	2.8	42.0
44.0			6.8	6.9	6.1	5.2	3.1	2.7	44.0
46.0			6.3 /45.7	6.4	6.0	5.1	3.0	2.7	46.0
48.0				6.2 /46.6	5.9	5.0	3.0	2.7	48.0
50.0					5.6	4.9	2.9	2.6	50.0
52.0					5.4 /51.3	4.8	2.8	2.6	52.0
54.0						4.8 /52.6	2.8	2.6	54.0
56.0							2.7	2.6	56.0
58.0							2.7 /56.9	2.6	58.0
60.0								2.6 /58.6	60.0



■ Crane Jib (With Tower Boom Extensions)



Unit: ton

Boom length (m)	36								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
11.8	12.0								11.8
12.0	12.0		12.0 /13.9						12.0
14.0	12.0	12.0 /14.8	12.0						14.0
16.0	12.0	12.0	12.0		8.8				16.0
18.0	12.0	12.0	12.0	9.0 /18.7	8.8		5.4 /18.1		18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.1		20.0
22.0	12.0	12.0	12.0	9.0	8.5	6.4 /22.6	4.9		22.0
24.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7		24.0
26.0	12.0	11.9	12.0	9.0	7.9	6.4	4.5	3.4 /26.5	26.0
28.0	12.0	11.5	12.0	9.0	7.7	6.4	4.3	3.4	28.0
30.0	11.7	11.2	12.0	8.8	7.4	6.4	4.1	3.3	30.0
32.0	10.6	10.9	11.0	8.5	7.2	6.4	4.0	3.2	32.0
34.0	9.6	9.9	10.0	8.3	7.0	6.2	3.8	3.1	34.0
36.0	8.8	9.0	9.2	8.0	6.8	6.0	3.7	3.0	36.0
38.0	8.0	8.2	8.4	7.8	6.6	5.8	3.5	2.9	38.0
40.0	7.4	7.5	7.7	7.6	6.5	5.6	3.4	2.9	40.0
42.0	6.8	6.8	7.1	7.3	6.3	5.5	3.3	2.8	42.0
44.0	6.6 /42.6	6.5 /43.2	6.5	6.7	6.2	5.3	3.2	2.8	44.0
46.0			6.0	6.2	6.1	5.2	3.1	2.7	46.0
48.0			5.6	5.7	5.8	5.1	3.0	2.7	48.0
50.0			5.5 /48.3	5.4 /49.2	5.4	5.0	3.0	2.6	50.0
52.0					5.0	4.9	2.9	2.6	52.0
54.0					4.7 /53.9	4.8	2.8	2.6	54.0
56.0						4.6 /55.2	2.8	2.6	56.0
58.0							2.7	2.6	58.0
60.0							2.7 /59.5	2.6	60.0
62.0								2.6 /61.2	62.0

Unit: ton									
Boom length (m)	39								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.0	12.0 /12.4								12.0
14.0	12.0	12.0 /15.4	12.0 /14.5						14.0
16.0	12.0	12.0	12.0		8.8 /16.6				16.0
18.0	12.0	12.0	12.0	9.0 /19.3	8.8		5.3 /18.7		18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.2		20.0
22.0	12.0	12.0	12.0	9.0	8.6	6.4 /23.2	5.0		22.0
24.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7		24.0
26.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 /27.1	26.0
28.0	12.0	11.8	12.0	9.0	7.8	6.4	4.4	3.4	28.0
30.0	11.5	11.4	11.9	8.9	7.6	6.4	4.2	3.3	30.0
32.0	10.4	10.7	10.8	8.7	7.3	6.4	4.0	3.2	32.0
34.0	9.4	9.7	9.8	8.4	7.1	6.4	3.9	3.1	34.0
36.0	8.5	8.8	8.9	8.2	6.9	6.1	3.8	3.0	36.0
38.0	7.8	8.0	8.2	8.0	6.8	5.9	3.6	3.0	38.0
40.0	7.1	7.3	7.5	7.8	6.6	5.8	3.5	2.9	40.0
42.0	6.5	6.6	6.9	7.1	6.4	5.6	3.4	2.8	42.0
44.0	6.0	6.1	6.3	6.5	6.3	5.4	3.3	2.8	44.0
46.0	5.7 /45.2	5.6 /45.8	5.8	6.0	6.1	5.3	3.2	2.7	46.0
48.0			5.3	5.5	5.6	5.2	3.1	2.7	48.0
50.0			4.9	5.0	5.2	5.1	3.0	2.7	50.0
52.0			4.8 /50.9	4.7 /51.8	4.8	5.0	3.0	2.6	52.0
54.0					4.4	4.6	2.9	2.6	54.0
56.0					4.1	4.2	2.8	2.6	56.0
58.0					4.0 /56.5	3.9 /57.8	2.8	2.6	58.0
60.0							2.7	2.6	60.0
62.0							2.7	2.6	62.0
64.0							2.7 /62.1	2.6 /63.8	64.0



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	42							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.9	12.0							12.9
14.0	12.0	12.0 / 15.9	12.0 / 15.0					14.0
16.0	12.0	12.0	12.0		8.8 / 17.1			16.0
18.0	12.0	12.0	12.0	9.0 / 19.8	8.8		5.3 / 19.2	18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.2	20.0
22.0	12.0	12.0	12.0	9.0	8.7	6.4 / 23.7	5.0	22.0
24.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	24.0
26.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	26.0
28.0	12.0	12.0	12.0	9.0	7.9	6.4	4.4	28.0
30.0	11.4	11.6	11.8	9.0	7.7	6.4	4.3	30.0
32.0	10.3	10.6	10.7	8.8	7.5	6.4	4.1	32.0
34.0	9.3	9.6	9.7	8.6	7.3	6.4	4.0	34.0
36.0	8.4	8.7	8.8	8.3	7.1	6.3	3.8	36.0
38.0	7.7	7.9	8.0	8.1	6.9	6.1	3.7	38.0
40.0	7.0	7.2	7.4	7.7	6.7	5.9	3.6	40.0
42.0	6.4	6.6	6.7	7.1	6.6	5.7	3.5	42.0
44.0	5.9	6.0	6.2	6.5	6.4	5.5	3.4	44.0
46.0	5.4	5.5	5.7	5.9	5.9	5.4	3.3	46.0
48.0	5.0 / 47.8	5.0	5.2	5.4	5.5	5.3	3.2	48.0
50.0		4.9 / 48.4	4.8	5.0	5.1	5.2	3.1	50.0
52.0			4.4	4.5	4.7	4.9	3.0	52.0
54.0			4.2 / 53.5	4.2	4.3	4.5	2.9	54.0
56.0				4.1 / 54.4	4.0	4.2	2.9	56.0
58.0					3.7	3.8	2.8	58.0
60.0					3.5 / 59.1	3.5	2.8	60.0
62.0						3.4 / 60.4	2.7	62.0
64.0							2.7	64.0
66.0							2.7 / 64.7	66.0
68.0								68.0

Unit: ton								
Boom length (m)	45							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.9	12.0 / 13.5							12.9
14.0	12.0		12.0 / 15.6					14.0
16.0	12.0	12.0 / 16.5	12.0		8.8 / 17.7			16.0
18.0	12.0	12.0	12.0		8.8		5.3 / 19.8	18.0
20.0	12.0	12.0	12.0	9.0 / 20.4	8.8		5.3	20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.1	22.0
24.0	12.0	12.0	12.0	9.0	8.5	6.4 / 24.3	4.9	24.0
26.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	26.0
28.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	28.0
30.0	11.1	11.6	11.6	9.0	7.8	6.4	4.3	30.0
32.0	10.0	10.4	10.4	9.0	7.6	6.4	4.2	32.0
34.0	9.1	9.4	9.4	8.7	7.4	6.4	4.0	34.0
36.0	8.2	8.5	8.6	8.5	7.2	6.4	3.9	36.0
38.0	7.4	7.7	7.8	8.2	7.0	6.2	3.8	38.0
40.0	6.8	7.0	7.1	7.5	6.8	6.0	3.7	40.0
42.0	6.1	6.3	6.5	6.8	6.7	5.8	3.5	42.0
44.0	5.6	5.7	5.9	6.2	6.2	5.7	3.4	44.0
46.0	5.1	5.2	5.4	5.7	5.7	5.5	3.3	46.0
48.0	4.7	4.7	5.0	5.2	5.2	5.4	3.3	48.0
50.0	4.2	4.3	4.6	4.8	4.8	5.2	3.2	50.0
52.0	4.2 / 50.4	4.1 / 51.0	4.2	4.3	4.4	4.7	3.1	52.0
54.0			3.8	3.9	4.1	4.3	3.0	54.0
56.0			3.5	3.6	3.7	4.0	2.9	56.0
58.0			3.5 / 56.1	3.4 / 57.0	3.4	3.6	2.9	58.0
60.0					3.1	3.3	2.8	60.0
62.0					2.9 / 61.7	3.0	2.8	62.0
64.0						2.8 / 63.0	2.7	64.0
66.0							2.6	66.0
68.0							2.4 / 67.3	68.0
70.0								70.0



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	48							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0							
16.0	12.0	12.0 / 17.0	12.0 / 16.1					
18.0	12.0	12.0	12.0		8.8 / 18.2			
20.0	12.0	12.0	12.0	9.0 / 20.9	8.8		5.3 / 20.3	
22.0	12.0	12.0	12.0	9.0	8.8		5.1	
24.0	12.0	12.0	12.0	9.0	8.6	6.4 / 24.8	4.9	
26.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	
28.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	3.4 / 28.7
30.0	11.1	11.5	11.5	9.0	7.9	6.4	4.4	3.4
32.0	9.9	10.3	10.3	9.0	7.7	6.4	4.3	3.3
34.0	9.0	9.3	9.3	8.8	7.5	6.4	4.1	3.2
36.0	8.1	8.4	8.5	8.6	7.3	6.4	4.0	3.1
38.0	7.3	7.6	7.7	8.2	7.1	6.3	3.9	3.1
40.0	6.7	6.9	7.0	7.4	7.0	6.1	3.7	3.0
42.0	6.1	6.3	6.4	6.8	6.7	5.9	3.6	2.9
44.0	5.5	5.7	5.8	6.2	6.1	5.8	3.5	2.9
46.0	5.0	5.1	5.3	5.6	5.6	5.6	3.4	2.8
48.0	4.5	4.7	4.9	5.1	5.1	5.5	3.3	2.8
50.0	4.1	4.2	4.4	4.7	4.7	5.1	3.2	2.7
52.0	3.8	3.8	4.1	4.3	4.3	4.6	3.2	2.7
54.0	3.6 / 53.0	3.5 / 53.6	3.7	3.9	3.9	4.3	3.1	2.7
56.0			3.4	3.5	3.6	3.9	3.0	2.6
58.0			3.1	3.2	3.3	3.5	2.9	2.6
60.0			3.0 / 58.7	2.9 / 59.6	3.0	3.2	2.9	2.6
62.0					2.7	2.9	2.8	2.6
64.0					2.5	2.6	2.7	2.6
66.0					2.5 / 64.3	2.4 / 65.6	2.4	2.6
68.0							2.2	2.4
70.0							2.0 / 69.9	2.2
72.0							2.0 / 71.6	2.0

Unit: ton								
Boom length (m)	51							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0 / 14.6							
16.0	12.0	12.0 / 17.6	12.0 / 16.7					
18.0	12.0	12.0	12.0		8.8 / 18.8			
20.0	12.0	12.0	12.0	9.0 / 21.5	8.8		5.3 / 20.9	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.7	6.4 / 25.4	5.0	
26.0	12.0	12.0	12.0	9.0	8.5	6.4	4.8	
28.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 29.3
30.0	10.9	11.4	11.3	9.0	8.0	6.4	4.5	3.4
32.0	9.8	10.2	10.2	9.0	7.8	6.4	4.3	3.3
34.0	8.8	9.2	9.2	9.0	7.6	6.4	4.2	3.2
36.0	7.9	8.3	8.3	8.7	7.4	6.4	4.0	3.1
38.0	7.2	7.5	7.5	8.0	7.2	6.4	3.9	3.1
40.0	6.5	6.8	6.9	7.3	7.1	6.2	3.8	3.0
42.0	5.9	6.1	6.2	6.6	6.5	6.0	3.7	2.9
44.0	5.3	5.5	5.7	6.0	5.9	5.9	3.6	2.9
46.0	4.8	5.0	5.2	5.5	5.4	5.7	3.5	2.8
48.0	4.4	4.5	4.7	5.0	5.0	5.4	3.4	2.8
50.0	4.0	4.1	4.3	4.5	4.5	5.0	3.3	2.7
52.0	3.6	3.7	3.9	4.1	4.1	4.5	3.2	2.7
54.0	3.2	3.3	3.5	3.7	3.8	4.1	3.1	2.7
56.0	3.0 / 55.6	3.0	3.2	3.4	3.4	3.8	3.1	2.6
58.0		2.9 / 56.2	2.9	3.0	3.1	3.4	3.0	2.6
60.0			2.6	2.7	2.8	3.1	2.9	2.6
62.0			2.4 / 61.3	2.4	2.6	2.8	2.8	2.6
64.0				2.4 / 62.2	2.3	2.5	2.5	2.6
66.0					2.1	2.2	2.3	2.5
68.0					2.0 / 66.9	2.0	2.1	2.3
70.0						1.9 / 68.2	1.9 / 69.3	2.0
72.0							1.9 / 71.0	2.0



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0							
16.0	12.0		12.0 / 17.2					
18.0	12.0	12.0 / 18.1	12.0		8.8 / 19.3			
20.0	12.0	12.0	12.0		8.8		5.3 / 21.4	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.8	6.4 / 25.9	5.0	
26.0	12.0	12.0	12.0	9.0	8.6	6.4	4.9	
28.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	3.4 / 29.8
30.0	10.7	11.2	11.1	9.0	8.1	6.4	4.5	3.4
32.0	9.5	10.0	9.9	9.0	7.9	6.4	4.4	3.3
34.0	8.6	9.0	9.0	9.0	7.7	6.4	4.2	3.2
36.0	7.7	8.1	8.1	8.7	7.5	6.4	4.1	3.2
38.0	6.9	7.2	7.3	7.8	7.3	6.4	4.0	3.1
40.0	6.2	6.5	6.6	7.1	6.9	6.3	3.9	3.0
42.0	5.6	5.9	6.0	6.4	6.3	6.1	3.8	3.0
44.0	5.1	5.3	5.4	5.8	5.7	5.9	3.6	2.9
46.0	4.6	4.8	4.9	5.3	5.2	5.7	3.5	2.9
48.0	4.1	4.3	4.5	4.8	4.7	5.2	3.5	2.8
50.0	3.7	3.9	4.0	4.3	4.3	4.8	3.4	2.8
52.0	3.3	3.5	3.6	3.9	3.9	4.3	3.3	2.7
54.0	3.0	3.1	3.3	3.5	3.5	3.9	3.2	2.7
56.0	2.7	2.7	3.0	3.2	3.2	3.5	3.1	2.7
58.0	2.4	2.4	2.7	2.8	2.9	3.2	3.1	2.6
60.0	2.3 / 58.2	2.3 / 58.8	2.4	2.5	2.6	2.9	2.8	2.6
62.0			2.1	2.2	2.3	2.6	2.5	2.6
64.0			1.9 / 63.9	1.9	2.1	2.3	2.3	2.6
66.0					1.9	2.0	2.0	2.3
68.0						1.9 / 67.0	1.9 / 67.0	2.1
70.0								1.9 / 69.3

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0 / 15.7							
16.0	12.0		12.0 / 17.8					
18.0	12.0	12.0 / 18.7	12.0		8.8 / 19.9			
20.0	12.0	12.0	12.0		8.8			
22.0	12.0	12.0	12.0	9.0 / 22.6	8.8		5.3	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.7	6.4 / 26.5	4.9	
28.0	11.8	12.0	12.0	9.0	8.4	6.4	4.8	
30.0	10.5	11.0	10.9	9.0	8.2	6.4	4.6	3.4 / 30.4
32.0	9.4	9.8	9.8	9.0	8.0	6.4	4.4	3.3
34.0	8.4	8.8	8.8	9.0	7.8	6.4	4.3	3.3
36.0	7.5	7.9	7.9	8.5	7.6	6.4	4.2	3.2
38.0	6.8	7.1	7.1	7.7	7.4	6.4	4.0	3.1
40.0	6.1	6.4	6.4	7.0	6.7	6.4	3.9	3.1
42.0	5.5	5.7	5.8	6.3	6.1	6.2	3.8	3.0
44.0	4.9	5.2	5.3	5.7	5.5	6.0	3.7	2.9
46.0	4.4	4.6	4.7	5.1	5.0	5.6	3.6	2.9
48.0	4.0	4.2	4.3	4.6	4.6	5.1	3.5	2.8
50.0	3.5	3.7	3.9	4.2	4.1	4.6	3.4	2.8
52.0	3.2	3.3	3.5	3.8	3.7	4.2	3.3	2.7
54.0	2.8	2.9	3.1	3.4	3.4	3.8	3.3	2.7
56.0	2.5	2.6	2.8	3.0	3.0	3.4	3.2	2.7
58.0	2.2	2.3	2.5	2.7	2.7	3.1	2.9	2.6
60.0	1.9	2.0	2.2	2.4	2.4	2.7	2.6	2.6
62.0		1.9 / 60.7	1.9	2.1	2.2	2.4	2.4	2.6
64.0				1.9 / 63.3	1.9	2.2	2.1	2.5
66.0						1.9	1.9	2.2
68.0								2.0
70.0								1.9 / 68.6



■ Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	60							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0							16.2
18.0	12.0	12.0 / 19.2	12.0 / 18.3					18.0
20.0	12.0	12.0	12.0		8.8 / 20.4			20.0
22.0	12.0	12.0	12.0	9.0 / 23.1	8.8		5.3 / 22.5	22.0
24.0	12.0	12.0	12.0	9.0	8.8		5.1	24.0
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.0	5.0	26.0
28.0	11.8	12.0	12.0	9.0	8.5	6.4	4.8	28.0
30.0	10.5	11.0	10.9	9.0	8.3	6.4	4.6	3.4 / 30.9
32.0	9.3	9.8	9.7	9.0	8.1	6.4	4.5	3.3
34.0	8.3	8.8	8.7	9.0	7.9	6.4	4.4	3.3
36.0	7.5	7.9	7.8	8.5	7.7	6.4	4.2	3.2
38.0	6.7	7.1	7.1	7.7	7.4	6.4	4.1	3.1
40.0	6.0	6.3	6.4	6.9	6.7	6.4	4.0	3.1
42.0	5.4	5.7	5.7	6.2	6.0	6.3	3.9	3.0
44.0	4.8	5.1	5.2	5.6	5.5	6.1	3.8	3.0
46.0	4.3	4.6	4.7	5.1	4.9	5.6	3.7	2.9
48.0	3.9	4.1	4.2	4.6	4.5	5.0	3.6	2.9
50.0	3.5	3.6	3.8	4.1	4.0	4.6	3.5	2.8
52.0	3.1	3.2	3.4	3.7	3.6	4.1	3.4	2.8
54.0	2.7	2.9	3.0	3.3	3.3	3.7	3.3	2.7
56.0	2.4	2.5	2.7	2.9	2.9	3.3	3.1	2.7
58.0	2.1	2.2	2.4	2.6	2.6	3.0	2.8	2.7
60.0	1.9 / 59.3	1.9	2.1	2.3	2.3	2.7	2.5	2.6
62.0			1.9 / 61.3	2.0	2.1	2.4	2.3	2.6
64.0				1.9 / 62.6	1.9 / 63.3	2.1	2.0	2.4
66.0						1.9 / 65.3	1.9 / 65.0	2.1
68.0							1.9	68.0

Unit: ton								
Boom length (m)	63							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0 / 16.8							16.2
18.0	12.0	12.0 / 19.8	12.0 / 18.9					18.0
20.0	12.0	12.0	12.0		8.8 / 21.0			20.0
22.0	12.0	12.0	12.0	9.0 / 23.7	8.8		5.3 / 23.1	22.0
24.0	12.0	12.0	12.0	9.0	8.8		5.2	24.0
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.5	5.0	26.0
28.0	11.5	12.0	12.0	9.0	8.6	6.4	4.9	28.0
30.0	10.2	10.8	10.6	9.0	8.4	6.4	4.7	3.4 / 31.4
32.0	9.1	9.6	9.5	9.0	8.2	6.4	4.6	3.4
34.0	8.1	8.6	8.5	9.0	8.0	6.4	4.4	3.3
36.0	7.2	7.7	7.6	8.3	7.8	6.4	4.3	3.2
38.0	6.5	6.8	6.8	7.5	7.1	6.4	4.2	3.2
40.0	5.8	6.1	6.1	6.7	6.4	6.4	4.0	3.1
42.0	5.2	5.5	5.5	6.0	5.8	6.4	3.9	3.0
44.0	4.6	4.9	4.9	5.4	5.2	5.9	3.8	3.0
46.0	4.1	4.4	4.4	4.9	4.7	5.4	3.7	2.9
48.0	3.6	3.9	4.0	4.4	4.2	4.8	3.6	2.9
50.0	3.2	3.4	3.5	3.9	3.8	4.4	3.5	2.8
52.0	2.8	3.0	3.1	3.5	3.4	3.9	3.5	2.8
54.0	2.5	2.6	2.8	3.1	3.0	3.5	3.3	2.7
56.0	2.1	2.3	2.4	2.7	2.7	3.1	2.9	2.7
58.0	1.9 / 57.3	2.0	2.1	2.4	2.4	2.8	2.6	2.7
60.0		1.9 / 58.6	1.9 / 59.3	2.1	2.1	2.5	2.3	2.7
62.0				1.9 / 61.3	1.9 / 61.3	2.2	2.0	2.5
64.0						1.9	1.9 / 63.0	2.2
66.0							1.9	66.0



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton									
Boom length (m)	24								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.2	73.9	73.7	73.2	73.1	72.3	72.4	71.4	8.0
9.0	63.5	63.1	62.8	62.1	62.0	61.0	61.1	59.6	9.0
10.0	54.1	53.8	53.4	52.9	52.7	51.8	51.8	50.6	10.0
12.0	41.4	41.1	40.7	40.3	40.0	39.4	39.2	38.3	12.0
14.0	33.1	32.9	32.5	32.2	31.8	31.4	31.0	30.4	14.0
16.0	27.4	27.2	26.8	26.5	26.1	25.8	25.4	24.9	16.0
18.0	23.1	23.0	22.5	22.4	21.9	21.6	21.2	20.8	18.0
20.0	19.8	19.8	19.3	19.2	18.6	18.5	18.0	17.7	20.0
22.0	17.2	17.2	16.7	16.6	16.1	16.0	15.4	15.3	22.0
24.0	16.9 /22.3	16.9 /22.3	16.4 /22.3	16.3 /22.3	15.8 /22.3	15.7 /22.3	15.1 /22.3	15.0 /22.3	24.0

Unit: ton									
Boom length (m)	27								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	74.0	73.7	73.5	73.0	73.0	72.2	72.3	71.2	8.0
9.0	63.5	63.1	62.8	62.1	62.0	61.0	61.2	59.7	9.0
10.0	54.1	53.7	53.4	52.8	52.7	51.8	51.9	50.6	10.0
12.0	41.3	41.0	40.7	40.2	40.0	39.3	39.2	38.3	12.0
14.0	33.0	32.8	32.5	32.1	31.8	31.3	31.1	30.4	14.0
16.0	27.3	27.1	26.7	26.4	26.1	25.7	25.4	24.8	16.0
18.0	23.0	22.9	22.4	22.2	21.8	21.5	21.1	20.8	18.0
20.0	19.7	19.6	19.2	19.0	18.6	18.4	17.9	17.6	20.0
22.0	17.1	17.0	16.6	16.5	16.0	15.9	15.4	15.2	22.0
24.0	15.0	15.0	14.5	14.4	13.9	13.9	13.3	13.2	24.0
26.0	14.2 /24.9	14.2 /24.9	13.7 /24.9	13.6 /24.9	13.1 /24.9	13.1 /24.9	12.5 /24.9	12.4 /24.9	26.0

1. The rated loads determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The offset angles shown are of jib boom offset angle against the main boom, under load.
6. The counterweight is 49.6 ton.
7. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)							
		7falls	6falls	5falls	4falls	3falls	2falls	1fall	
120	1.64	84	72	60	48	36	24		
80	1.35	80	72	60	48	36	24		
35	0.90					35	24		
12	0.51							12	



■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton									
Boom length (m)	30								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
7.4	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0 / 7.4	7.4
8.0	72.0	72.0	72.0	72.0	72.0	71.1	71.2	69.6	8.0
9.0	63.4	63.0	62.8	62.0	62.0	60.9	61.1	59.7	9.0
10.0	54.0	53.6	53.4	52.8	52.7	51.7	51.9	50.6	10.0
12.0	41.2	40.9	40.6	40.2	40.0	39.3	39.2	38.3	12.0
14.0	32.9	32.7	32.4	32.0	31.8	31.2	31.1	30.3	14.0
16.0	27.2	27.0	26.6	26.3	26.0	25.6	25.3	24.8	16.0
18.0	22.9	22.7	22.4	22.1	21.8	21.4	21.1	20.7	18.0
20.0	19.6	19.5	19.1	18.9	18.5	18.3	17.9	17.5	20.0
22.0	17.0	16.9	16.5	16.4	15.9	15.7	15.3	15.1	22.0
24.0	14.9	14.8	14.4	14.3	13.8	13.7	13.2	13.1	24.0
26.0	13.1	13.1	12.7	12.6	12.1	12.0	11.5	11.4	26.0
28.0	12.0 / 27.5	12.0 / 27.5	11.6 / 27.5	11.5 / 27.5	11.0 / 27.5	11.0 / 27.5	10.5 / 27.5	10.4 / 27.5	28.0

Unit: ton									
Boom length (m)	33								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
7.4	72.0 / 7.9	72.0 / 7.9	72.0 / 7.9	71.9 / 7.9	71.8 / 7.9	70.6 / 7.9	70.8 / 7.9	69.2 / 7.9	7.4
8.0	72.0	71.9	71.6	70.8	70.7	69.5	69.7	68.0	8.0
9.0	62.5	62.1	61.7	61.1	60.9	59.9	59.9	58.5	9.0
10.0	54.0	53.6	53.4	52.7	52.7	51.7	51.9	50.6	10.0
12.0	41.2	40.9	40.6	40.1	40.0	39.3	39.3	38.3	12.0
14.0	32.9	32.7	32.4	32.0	31.7	31.2	31.1	30.3	14.0
16.0	27.1	26.9	26.6	26.3	26.0	25.6	25.4	24.7	16.0
18.0	22.8	22.7	22.3	22.1	21.7	21.4	21.1	20.6	18.0
20.0	19.5	19.4	19.0	18.8	18.5	18.2	17.9	17.5	20.0
22.0	16.9	16.8	16.4	16.3	15.9	15.7	15.3	15.0	22.0
24.0	14.8	14.7	14.3	14.2	13.8	13.6	13.2	13.0	24.0
26.0	13.1	13.0	12.6	12.5	12.1	12.0	11.5	11.3	26.0
28.0	11.6	11.6	11.2	11.1	10.7	10.6	10.1	10.0	28.0
30.0	10.4	10.3	9.9	9.9	9.4	9.4	8.9	8.8	30.0
32.0	10.3 / 30.1	10.3 / 30.1	9.9 / 30.1	9.8 / 30.1	9.4 / 30.1	9.3 / 30.1	8.8 / 30.1	8.8 / 30.1	32.0



SCX1200-3

SPECIFICATIONS

Specifications
Gross Rated Load Table

■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton									
Boom length (m)	36								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
8.5	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	8.5
9.0	60.0	60.0	60.0	59.6	59.5	58.5	58.6	57.2	9.0
10.0	53.6	53.3	52.9	52.3	52.1	51.3	51.3	50.1	10.0
12.0	41.1	40.8	40.5	40.0	39.9	39.2	39.2	38.2	12.0
14.0	32.8	32.5	32.2	31.9	31.7	31.1	31.0	30.2	14.0
16.0	27.0	26.8	26.5	26.1	25.9	25.4	25.3	24.6	16.0
18.0	22.7	22.5	22.2	21.9	21.6	21.3	21.0	20.5	18.0
20.0	19.4	19.3	18.9	18.7	18.4	18.1	17.8	17.4	20.0
22.0	16.8	16.7	16.3	16.1	15.8	15.5	15.2	14.9	22.0
24.0	14.7	14.6	14.2	14.0	13.7	13.5	13.1	12.8	24.0
26.0	12.9	12.8	12.4	12.3	11.9	11.8	11.4	11.2	26.0
28.0	11.4	11.4	11.0	10.9	10.5	10.4	9.9	9.8	28.0
30.0	10.2	10.1	9.7	9.7	9.3	9.2	8.7	8.6	30.0
32.0	9.1	9.1	8.7	8.6	8.2	8.1	7.7	7.6	32.0
34.0	8.8 /32.7	8.7 /32.7	8.3 /32.7	8.3 /32.7	7.9 /32.7	7.8 /32.7	7.3 /32.7	7.3 /32.7	34.0

Unit: ton									
Boom length (m)	39								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
9.0	59.7	59.3	59.0	58.3	58.2	57.2	57.3	55.9	9.0
10.0	52.5	52.1	51.8	51.2	51.1	50.2	50.2	49.0	10.0
12.0	40.9	40.6	40.3	39.8	39.7	39.0	39.1	38.0	12.0
14.0	32.6	32.3	32.1	31.7	31.5	30.9	30.9	30.0	14.0
16.0	26.8	26.6	26.3	25.9	25.7	25.2	25.1	24.4	16.0
18.0	22.5	22.3	22.0	21.7	21.5	21.1	20.9	20.3	18.0
20.0	19.2	19.0	18.7	18.5	18.2	17.8	17.6	17.2	20.0
22.0	16.6	16.4	16.1	15.9	15.6	15.3	15.0	14.6	22.0
24.0	14.4	14.3	14.0	13.8	13.5	13.2	12.9	12.6	24.0
26.0	12.7	12.6	12.2	12.1	11.7	11.5	11.2	10.9	26.0
28.0	11.2	11.1	10.8	10.7	10.3	10.1	9.8	9.5	28.0
30.0	9.9	9.9	9.5	9.4	9.0	8.9	8.5	8.4	30.0
32.0	8.9	8.8	8.4	8.4	8.0	7.9	7.5	7.4	32.0
34.0	7.9	7.9	7.5	7.5	7.1	7.0	6.6	6.5	34.0
36.0	7.4 /35.3	7.4 /35.3	7.0 /35.3	6.9 /35.3	6.5 /35.3	6.5 /35.3	6.0 /35.3	6.0 /35.3	36.0



■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton									
Boom length (m)	42								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
9.6	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	9.6
10.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	10.0
12.0	40.9	40.6	40.4	39.9	39.8	39.0	39.1	38.1	12.0
14.0	32.6	32.3	32.1	31.7	31.5	30.9	30.9	30.1	14.0
16.0	26.8	26.6	26.3	25.9	25.7	25.2	25.1	24.5	16.0
18.0	22.5	22.3	22.0	21.7	21.5	21.1	20.9	20.3	18.0
20.0	19.1	19.0	18.7	18.5	18.2	17.8	17.6	17.2	20.0
22.0	16.5	16.4	16.1	15.9	15.6	15.3	15.0	14.6	22.0
24.0	14.4	14.3	14.0	13.8	13.5	13.2	12.9	12.6	24.0
26.0	12.6	12.6	12.2	12.1	11.7	11.5	11.2	10.9	26.0
28.0	11.2	11.1	10.7	10.6	10.3	10.1	9.7	9.5	28.0
30.0	9.9	9.8	9.5	9.4	9.0	8.9	8.5	8.3	30.0
32.0	8.8	8.8	8.4	8.3	7.9	7.8	7.4	7.3	32.0
34.0	7.9	7.8	7.5	7.4	7.0	6.9	6.5	6.4	34.0
36.0	7.1	7.0	6.6	6.6	6.2	6.1	5.7	5.6	36.0
38.0	6.4 /37.9	6.3 /37.9	6.0 /37.9	5.9 /37.9	5.5 /37.9	5.5 /37.9	5.1 /37.9	5.0 /37.9	38.0

Unit: ton									
Boom length (m)	45								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.0	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	47.5 /10.1	47.5 /10.1	46.3 /10.1	10.0
12.0	40.4	40.1	39.7	39.3	39.1	38.4	38.3	37.3	12.0
14.0	32.4	32.1	31.9	31.5	31.3	30.7	30.7	29.9	14.0
16.0	26.5	26.3	26.1	25.7	25.5	25.0	25.0	24.3	16.0
18.0	22.2	22.1	21.8	21.5	21.3	20.8	20.7	20.1	18.0
20.0	18.9	18.8	18.5	18.2	18.0	17.6	17.4	16.9	20.0
22.0	16.3	16.2	15.9	15.6	15.4	15.1	14.8	14.4	22.0
24.0	14.2	14.1	13.7	13.6	13.3	13.0	12.7	12.4	24.0
26.0	12.4	12.3	12.0	11.8	11.5	11.3	11.0	10.7	26.0
28.0	10.9	10.8	10.5	10.4	10.0	9.8	9.5	9.3	28.0
30.0	9.7	9.6	9.2	9.1	8.8	8.6	8.3	8.1	30.0
32.0	8.6	8.5	8.2	8.1	7.7	7.6	7.2	7.0	32.0
34.0	7.6	7.6	7.2	7.1	6.8	6.7	6.3	6.2	34.0
36.0	6.8	6.8	6.4	6.3	6.0	5.9	5.5	5.4	36.0
38.0	6.1	6.0	5.7	5.6	5.2	5.2	4.8	4.7	38.0
40.0	5.4	5.4	5.0	5.0	4.6	4.6	4.1	4.1	40.0
42.0	5.3 /40.5	5.2 /40.5	4.9 /40.5	4.9 /40.5	4.5 /40.5	4.4 /40.5	4.0 /40.5	4.0 /40.5	42.0



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton									
Boom length (m)	48								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.6	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	32.4	32.1	31.9	31.5	31.4	30.7	30.8	29.9	14.0
16.0	26.5	26.3	26.1	25.7	25.6	25.0	25.0	24.3	16.0
18.0	22.2	22.0	21.8	21.5	21.3	20.8	20.7	20.1	18.0
20.0	18.9	18.8	18.5	18.2	18.0	17.6	17.4	16.9	20.0
22.0	16.3	16.1	15.8	15.6	15.4	15.0	14.8	14.4	22.0
24.0	14.1	14.0	13.7	13.5	13.2	13.0	12.7	12.4	24.0
26.0	12.4	12.3	12.0	11.8	11.5	11.3	11.0	10.7	26.0
28.0	10.9	10.8	10.5	10.3	10.0	9.8	9.5	9.2	28.0
30.0	9.6	9.5	9.2	9.1	8.8	8.6	8.3	8.0	30.0
32.0	8.5	8.5	8.1	8.0	7.7	7.5	7.2	7.0	32.0
34.0	7.6	7.5	7.2	7.1	6.7	6.6	6.3	6.1	34.0
36.0	6.7	6.7	6.3	6.3	5.9	5.8	5.5	5.3	36.0
38.0	6.0	6.0	5.6	5.6	5.2	5.1	4.7	4.6	38.0
40.0	5.4	5.3	5.0	4.9	4.5	4.5	4.1	4.0	40.0
42.0	4.8	4.7	4.4	4.3	4.0	3.9	3.5	3.5	42.0
44.0	4.5 /43.1	4.4 /43.1	4.1 /43.1	4.1 /43.1	3.7 /43.1	3.6 /43.1	3.2 /43.1	3.2 /43.1	44.0



■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
11.7	36.0	36.0	36.0	36.0	36.0	36.0	35.7	35.5
12.0	36.0	36.0	36.0	36.0	36.0	36.0	35.3	35.1
14.0	31.5	31.2	30.9	30.5	30.3	29.7	29.6	28.8
16.0	26.2	26.0	25.8	25.4	25.3	24.7	24.7	24.0
18.0	21.9	21.7	21.4	21.1	21.0	20.5	20.4	19.8
20.0	18.6	18.4	18.1	17.9	17.7	17.3	17.1	16.6
22.0	15.9	15.8	15.5	15.3	15.0	14.7	14.5	14.1
24.0	13.8	13.7	13.4	13.2	12.9	12.6	12.4	12.0
26.0	12.0	11.9	11.6	11.4	11.2	10.9	10.7	10.3
28.0	10.5	10.4	10.1	10.0	9.7	9.4	9.2	8.9
30.0	9.2	9.2	8.8	8.7	8.4	8.2	7.9	7.7
32.0	8.1	8.1	7.8	7.6	7.3	7.2	6.9	6.6
34.0	7.2	7.1	6.8	6.7	6.4	6.2	5.9	5.7
36.0	6.4	6.3	6.0	5.9	5.6	5.4	5.1	4.9
38.0	5.6	5.6	5.2	5.2	4.8	4.7	4.4	4.2
40.0	5.0	4.9	4.6	4.5	4.2	4.1	3.7	3.6
42.0	4.4	4.3	4.0	3.9	3.6	3.5	3.2	3.0
44.0	3.8	3.8	3.5	3.4	3.1	3.0	2.6	2.6
46.0	3.4	3.3	3.0	3.0	2.6	2.5	2.2	2.1
48.0	2.9	2.9	2.6	2.5	2.2	2.1	1.9 /47.5	1.9 /47.0
50.0	2.9 /48.3	2.8 /48.3	2.5 /48.3	2.5 /48.3	2.1 /48.3	2.1 /48.3		

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.0	35.0 /12.3	35.0 /12.3	34.0 /12.3	33.9 /12.3	32.8 /12.3	32.7 /12.3	31.5 /12.3	31.3 /12.3
14.0	30.9	30.6	30.3	29.9	29.7	29.1	29.0	28.2
16.0	26.1	25.9	25.5	25.2	25.0	24.4	24.3	23.6
18.0	21.7	21.6	21.3	21.0	20.8	20.4	20.3	19.7
20.0	18.4	18.3	18.0	17.7	17.5	17.1	17.0	16.5
22.0	15.8	15.6	15.4	15.1	14.9	14.6	14.4	13.9
24.0	13.6	13.5	13.2	13.0	12.8	12.5	12.3	11.9
26.0	11.9	11.8	11.5	11.3	11.0	10.8	10.6	10.2
28.0	10.4	10.3	10.0	9.8	9.5	9.3	9.1	8.8
30.0	9.1	9.0	8.7	8.6	8.3	8.1	7.8	7.5
32.0	8.0	7.9	7.6	7.5	7.2	7.0	6.7	6.5
34.0	7.0	7.0	6.7	6.5	6.2	6.1	5.8	5.6
36.0	6.2	6.1	5.8	5.7	5.4	5.3	5.0	4.8
38.0	5.5	5.4	5.1	5.0	4.7	4.6	4.2	4.1
40.0	4.8	4.8	4.4	4.4	4.0	3.9	3.6	3.4
42.0	4.2	4.2	3.8	3.8	3.4	3.4	3.0	2.9
44.0	3.7	3.6	3.3	3.3	2.9	2.8	2.5	2.4
46.0	3.2	3.2	2.8	2.8	2.4	2.4	2.0	1.9
48.0	2.8	2.7	2.4	2.4	2.0	2.0	1.9 /46.5	
50.0	2.4	2.4	2.0	2.0	1.9 /48.5	1.9 /48.5		
52.0	2.2 /50.9	2.2 /50.9	1.9 /50.9	1.9 /50.4				



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Crane Jib (With Tower Boom Extensions)



Unit: ton									
Boom length (m)	60								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.9	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	12.9
14.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	14.0
16.0	24.0	24.0	24.0	24.0	24.0	23.9	23.8	23.1	16.0
18.0	21.8	21.6	21.3	21.0	20.8	20.4	20.2	19.6	18.0
20.0	18.4	18.3	18.0	17.7	17.5	17.1	17.1	16.5	20.0
22.0	15.8	15.6	15.4	15.1	14.9	14.6	14.4	13.9	22.0
24.0	13.6	13.5	13.2	13.0	12.8	12.5	12.3	11.9	24.0
26.0	11.8	11.7	11.4	11.3	11.0	10.7	10.5	10.2	26.0
28.0	10.3	10.2	9.9	9.8	9.5	9.3	9.1	8.7	28.0
30.0	9.1	9.0	8.7	8.5	8.2	8.0	7.8	7.5	30.0
32.0	8.0	7.9	7.6	7.4	7.2	7.0	6.7	6.4	32.0
34.0	7.0	6.9	6.6	6.5	6.2	6.0	5.8	5.5	34.0
36.0	6.1	6.1	5.8	5.7	5.4	5.2	4.9	4.7	36.0
38.0	5.4	5.3	5.0	4.9	4.6	4.5	4.2	4.0	38.0
40.0	4.7	4.7	4.4	4.3	4.0	3.8	3.5	3.4	40.0
42.0	4.1	4.1	3.8	3.7	3.4	3.3	2.9	2.8	42.0
44.0	3.6	3.5	3.2	3.2	2.8	2.7	2.4	2.3	44.0
46.0	3.1	3.1	2.7	2.7	2.4	2.3	1.9	1.9 /45.6	46.0
48.0	2.7	2.6	2.3	2.3	1.9	1.9			48.0
50.0	2.3	2.2	1.9	1.9					50.0
52.0	1.9	1.9							52.0

Unit: ton									
Boom length (m)	63								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.9	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	23.6 /13.5	23.4 /13.5	12.9
14.0	24.0	24.0	24.0	24.0	24.0	24.0	23.2	23.0	14.0
16.0	24.0	24.0	23.4	23.4	22.4	22.4	21.4	21.4	16.0
18.0	21.3	21.1	20.8	20.5	20.3	19.8	19.7	19.1	18.0
20.0	18.2	18.0	17.8	17.5	17.3	16.9	16.8	16.3	20.0
22.0	15.5	15.4	15.1	14.9	14.7	14.3	14.2	13.7	22.0
24.0	13.4	13.3	13.0	12.8	12.6	12.2	12.1	11.6	24.0
26.0	11.6	11.5	11.2	11.0	10.8	10.5	10.3	9.9	26.0
28.0	10.1	10.0	9.7	9.5	9.3	9.0	8.8	8.5	28.0
30.0	8.8	8.7	8.4	8.3	8.0	7.8	7.6	7.3	30.0
32.0	7.7	7.6	7.3	7.2	6.9	6.7	6.5	6.2	32.0
34.0	6.8	6.7	6.4	6.2	6.0	5.8	5.5	5.3	34.0
36.0	5.9	5.8	5.5	5.4	5.1	5.0	4.7	4.5	36.0
38.0	5.2	5.1	4.8	4.7	4.4	4.2	4.0	3.8	38.0
40.0	4.5	4.4	4.1	4.0	3.7	3.6	3.3	3.1	40.0
42.0	3.9	3.8	3.5	3.4	3.1	3.0	2.7	2.6	42.0
44.0	3.3	3.3	3.0	2.9	2.6	2.5	2.2	2.0	44.0
46.0	2.9	2.8	2.5	2.4	2.1	2.0	1.9 /45.2	1.9 /44.5	46.0
48.0	2.4	2.4	2.1	2.0	1.9 /47.0	1.9 /46.5			48.0
50.0	2.0	2.0	1.9 /49.0	1.9 /48.5					50.0
52.0	1.9 /50.5	1.9 /50.5							52.0



■ Main Boom (Using Third Winch) (With Tower Boom Extensions)



Working Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius (m)
4.6	120.0											4.6
5.0	120.0	108.0 /5.2										5.0
5.5	109.9	108.0	84.0 /5.7									5.5
6.0	101.1	100.9	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	87.0	86.8	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	76.3	76.1	75.9	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.8	64.8	64.8	64.8	64.7	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.4	55.5	55.4	55.4	55.3	55.2	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.7	42.8	42.7	42.7	42.6	42.5	42.4	42.3	42.1	36.0	36.0	12.0
14.0	34.5	34.5	34.5	34.4	34.3	34.2	34.2	34.0	33.8	33.8	33.6	14.0
16.0	32.9 /14.5	28.8	28.7	28.7	28.6	28.4	28.4	28.2	28.0	28.0	27.8	16.0
18.0		26.3 /17.1	24.5	24.4	24.3	24.2	24.1	23.9	23.7	23.7	23.5	18.0
20.0			21.6 /19.7	21.1	21.0	20.9	20.8	20.6	20.4	20.4	20.2	20.0
22.0				18.6	18.4	18.3	18.2	18.0	17.8	17.8	17.5	22.0
24.0				18.2 /22.3	16.3	16.2	16.1	15.9	15.7	15.6	15.4	24.0
26.0					15.5 /24.9	14.4	14.3	14.1	13.9	13.9	13.6	26.0
28.0						13.3 /27.5	12.9	12.7	12.4	12.4	12.2	28.0
30.0							11.6	11.4	11.2	11.1	10.9	30.0
32.0							11.6 /30.1	10.3	10.1	10.0	9.8	32.0
34.0								10.0 /32.7	9.2	9.1	8.8	34.0
36.0									8.6 /35.3	8.3	8.0	36.0
38.0										7.6 /37.9	7.3	38.0
40.0											6.6	40.0
42.0											6.5 /40.5	42.0

Working Radius (m)	Boom length (m)						Unit: ton
	48	51	54	57	60	63	Working Radius (m)
10.0	36.0 /10.6	24.0 /11.2	24.0 /11.7				10.0
12.0	36.0	24.0	24.0	24.0 /12.3	24.0 /12.9	24.0 /13.5	12.0
14.0	33.6	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.8	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.5	23.3	23.1	23.0	22.8	22.2	18.0
20.0	20.1	20.0	19.8	19.7	19.7	19.4	20.0
22.0	17.5	17.4	17.2	17.0	17.0	16.8	22.0
24.0	15.4	15.3	15.0	14.9	14.9	14.6	24.0
26.0	13.6	13.5	13.2	13.1	13.1	12.9	26.0
28.0	12.1	12.0	11.8	11.6	11.6	11.4	28.0
30.0	10.8	10.7	10.5	10.3	10.3	10.1	30.0
32.0	9.8	9.6	9.4	9.2	9.2	9.0	32.0
34.0	8.8	8.7	8.4	8.3	8.2	8.0	34.0
36.0	8.0	7.8	7.6	7.4	7.4	7.2	36.0
38.0	7.2	7.1	6.8	6.7	6.6	6.4	38.0
40.0	6.6	6.4	6.2	6.0	6.0	5.7	40.0
42.0	6.0	5.8	5.6	5.4	5.4	5.1	42.0
44.0	5.7 /43.1	5.3	5.0	4.9	4.8	4.6	44.0
46.0		4.9 /45.7	4.6	4.4	4.3	4.1	46.0
48.0			4.1	4.0	3.9	3.6	48.0
50.0			4.1 /48.3	3.6	3.5	3.2	50.0
52.0				3.4 /50.9	3.1	2.9	52.0
54.0					2.9 /53.2	2.5	54.0
56.0						2.2 /55.8	56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
7. Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	



SCX1200-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Aux. Sheave (Using Third Winch) (With Tower Boom Extensions)



Radius (m)	Boom length (m)											Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
4.6	120.0											4.6
5.0	119.5	108.0 /5.2										5.0
5.5	109.1	108.0	84.0 /5.7									5.5
6.0	100.2	100.0	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	86.2	86.0	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	75.4	75.2	75.1	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	64.4	64.4	64.4	64.4	64.3	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	55.0	55.1	55.0	55.0	54.9	54.8	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	42.4	42.4	42.3	42.3	42.2	42.1	42.0	41.9	41.7	36.0	36.0	12.0
14.0	34.2	34.2	34.1	34.1	33.9	33.8	33.7	33.6	33.4	33.4	33.1	14.0
16.0	32.6 /14.5	28.4	28.4	28.3	28.2	28.0	28.0	27.8	27.6	27.6	27.3	16.0
18.0		26.0 /17.1	24.1	24.1	23.9	23.8	23.7	23.5	23.3	23.3	23.0	18.0
20.0			21.3 /19.7	20.8	20.6	20.5	20.4	20.2	20.0	20.0	19.7	20.0
22.0				18.2	18.1	17.9	17.8	17.6	17.4	17.4	17.1	22.0
24.0				17.9 /22.3	16.0	15.8	15.7	15.5	15.3	15.2	15.0	24.0
26.0					15.1 /24.9	14.1	14.0	13.8	13.5	13.5	13.2	26.0
28.0						12.9 /27.5	12.5	12.3	12.1	12.0	11.7	28.0
30.0							11.3	11.1	10.8	10.7	10.5	30.0
32.0							11.2 /30.1	10.0	9.7	9.7	9.4	32.0
34.0								9.6 /32.7	8.8	8.7	8.5	34.0
36.0									8.3 /35.3	7.9	7.6	36.0
38.0										7.2 /37.9	6.9	38.0
40.0											6.3	40.0
42.0											6.1 /40.5	42.0

Radius (m)	Boom length (m)						Radius (m)
	48	51	54	57	60	63	
10.0	36.0 /10.6	24.0 /11.2	24.0 /11.7				10.0
12.0	36.0	24.0	24.0	24.0 /12.3	24.0 /12.9	24.0 /13.5	12.0
14.0	33.1	24.0	24.0	24.0	24.0	24.0	14.0
16.0	27.3	24.0	24.0	24.0	24.0	24.0	16.0
18.0	23.0	22.9	22.6	22.5	22.1	21.5	18.0
20.0	19.7	19.6	19.3	19.2	19.2	18.7	20.0
22.0	17.1	16.9	16.7	16.6	16.5	16.3	22.0
24.0	14.9	14.8	14.6	14.4	14.4	14.2	24.0
26.0	13.2	13.0	12.8	12.7	12.6	12.4	26.0
28.0	11.7	11.6	11.3	11.2	11.1	10.9	28.0
30.0	10.4	10.3	10.0	9.9	9.8	9.6	30.0
32.0	9.3	9.2	8.9	8.8	8.7	8.5	32.0
34.0	8.4	8.3	8.0	7.8	7.8	7.5	34.0
36.0	7.6	7.4	7.2	7.0	6.9	6.7	36.0
38.0	6.8	6.7	6.4	6.3	6.2	5.9	38.0
40.0	6.2	6.0	5.8	5.6	5.5	5.3	40.0
42.0	5.6	5.4	5.2	5.0	4.9	4.7	42.0
44.0	5.3 /43.1	4.9	4.6	4.5	4.4	4.1	44.0
46.0		4.5 /45.7	4.2	4.0	3.9	3.6	46.0
48.0			3.7	3.6	3.5	3.2	48.0
50.0			3.7 /48.3	3.2	3.1	2.8	50.0
52.0				3.0 /50.9	2.7	2.4	52.0
54.0					2.5 /53.2	2.1	54.0
56.0						1.9 /55.4	56.0


1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
7. Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)									
		10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	
120	1.64	120	108	96	84	72	60	48	36	24	
80	1.35				80	72	60	48	36	24	
35	0.90								35	24	



Tower Specifications

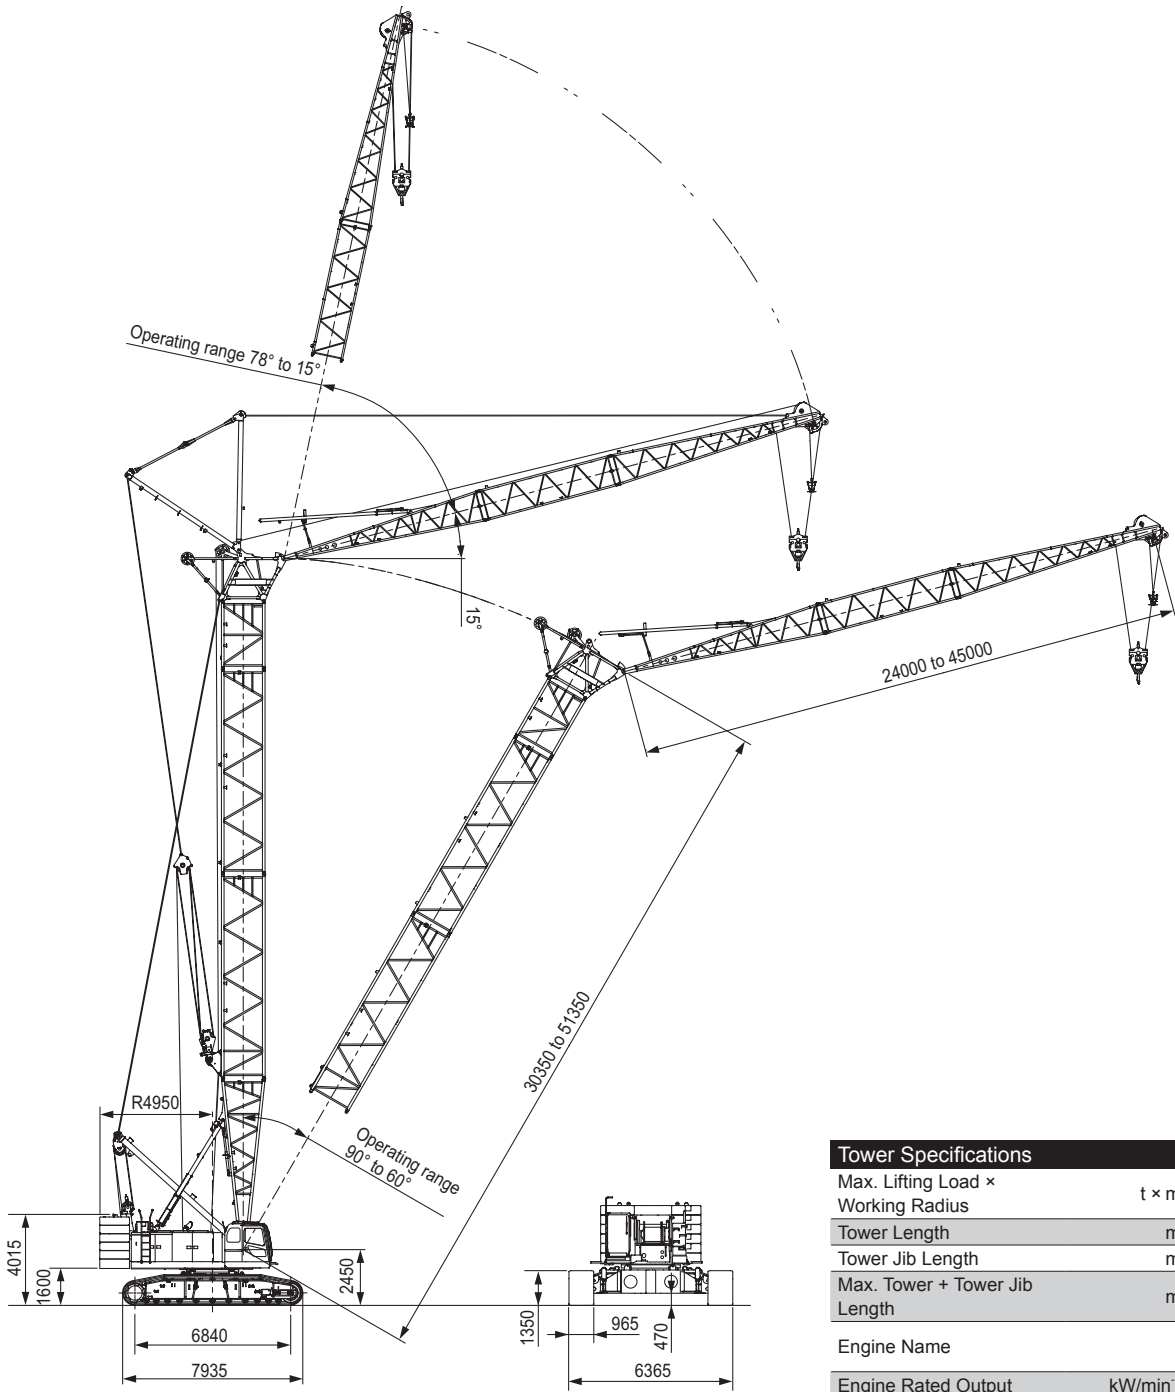Dimensions and Specifications



Tower Specifications		
Max. Lifting Load × Working Radius	t × m	35 × 9.3
Tower Length	m	30.35 to 51.35
Tower Jib Length	m	24 to 45
Max. Tower + Tower Jib Length	m	51.35 + 45
Engine Name	ISUZU 6HK1 (Stage IIIA)	
Engine Rated Output Power	kW/min ⁻¹ (ps/rpm)	200.6 / 1,850 (272 / 1,850)
Ground Contact Pressure	kPa (kgf/cm ²)	102 (1.04) (Max. Tower + Tower Jib Length)
Overall Operating Weight	t	Approximately 137 (Max. Tower + Tower Jib Length)

Note :

















- Speeds marked with "*" may vary depending on load applied.
- SI units are used for specifications. In parenthesis, conventional units are also indicated.

SCX1200-3

SPECIFICATIONS

Tower Specifications
Tower and Tower Jib Configurations

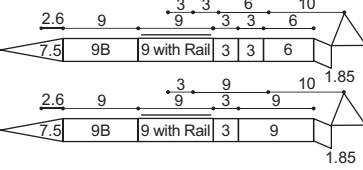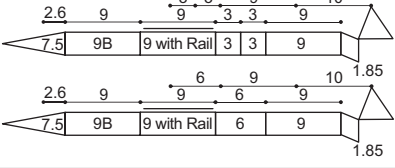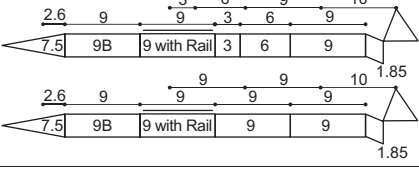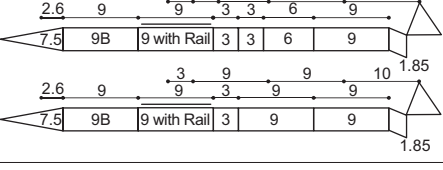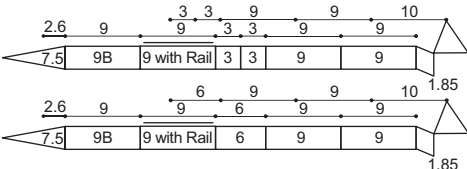Tower and Tower Jib Configurations


Tower		Tower Jib	
Tower Length (m)	Tower Boom Configurations	Tower Jib Length (m)	Tower Jib Configurations
30.35		24	
33.35		27	
36.35		30	
39.35		33	
42.35		36	
45.35		39	
48.35		42	
51.35		45	

▽ indicates the midpoint pendant rope connection position.

Dimensions Not Shown In The Figure		Dimensions Not Shown In The Figure	
Symbols	Tower Boom Length (m)	Symbols	Tower Jib Length (m)
1.85	1.85	3	3
3	3	6	6
6	6	9	9
7.5	7.5		
9	9		
9B	9		
9 with Rail	9		

Working Ranges

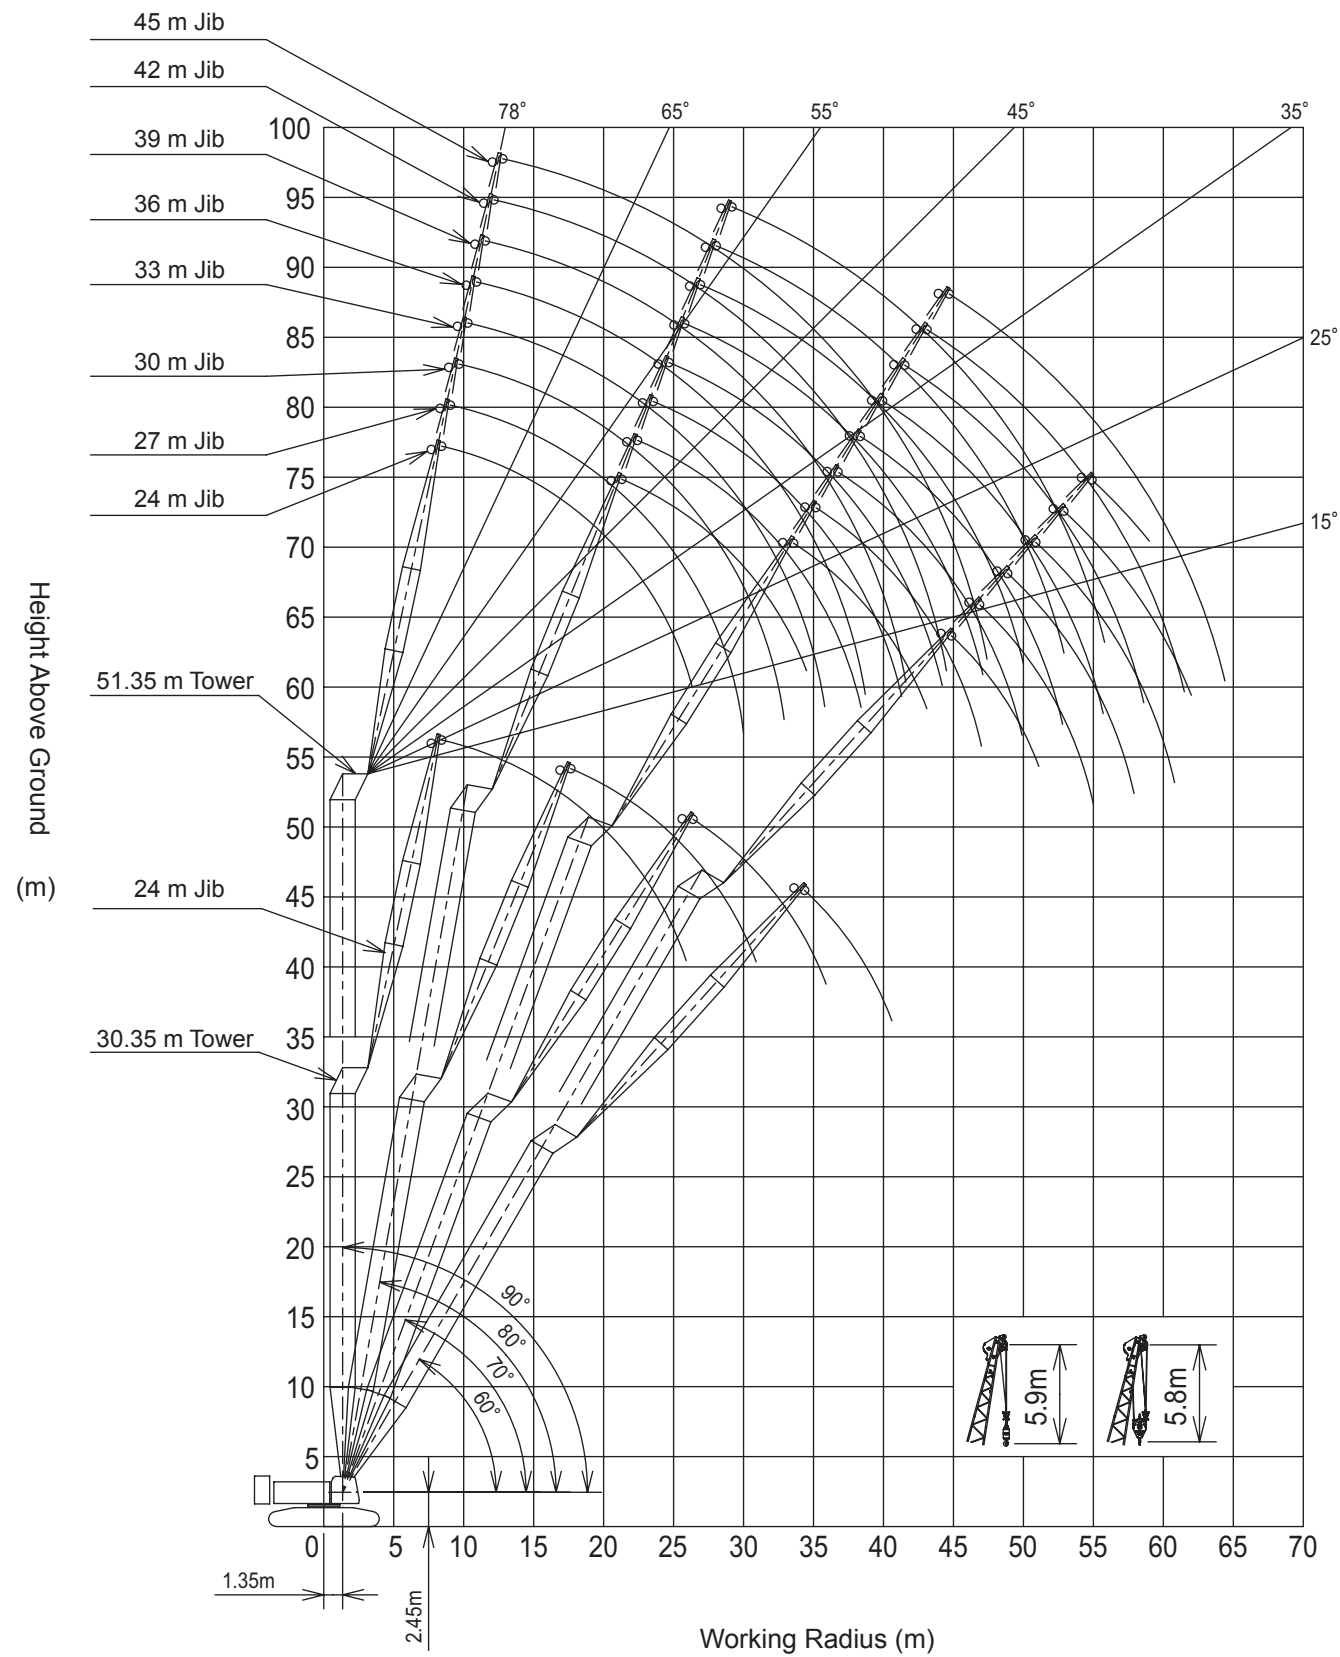Tower Boom





SCX1200-3

SPECIFICATIONS

Tower Specifications

Gross Rated Load Table

Gross Rated Load Table

30.35 m Tower



Unit: ton					
Tower Length (m)	30.35				Tower Length (m)
Jib Length (m)	24				Jib Length (m)
Tower Angle (deg)	90	80	70	60	Tower Angle (deg)
Radius (m)					Radius (m)
9.3	35.0				9.2
10.0	33.5				10.0
12.0	31.2				12.0
14.0	26.4				14.0
16.0	22.3	18.4 /17.4			16.0
18.0	19.2	17.7			18.0
20.0	16.8	15.5			20.0
22.0	15.0	13.8			22.0
24.0	13.1	12.4			24.0
26.0	8.5	11.2	10.2		26.0
28.0	7.1 /26.6	10.2	9.3		28.0
30.0		9.4	8.5		30.0
32.0		8.7 /31.6	7.9	6.6 /33.9	32.0
34.0			7.3	6.5	34.0
36.0			6.7	6.1	36.0
38.0			6.6 /36.6	5.7	38.0
40.0				5.3	40.0
42.0				5.1 /41.3	42.0

33.35 m Tower

Unit: ton									
Tower Length (m)	33.35								Tower Length (m)
Jib Length (m)	24				27				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)									Radius (m)
9.3	33.8 /9.4								9.2
10.0	33.1				29.0 /10.1				10.0
12.0	30.8				27.2				12.0
14.0	26.4				25.5				14.0
16.0	22.3				22.2				16.0
18.0	19.2	17.5			19.1	16.1 /19.1			18.0
20.0	16.9	15.3			16.8	15.2			20.0
22.0	15.0	13.6			14.9	13.5			22.0
24.0	13.1	12.2			13.4	12.1			24.0
26.0	8.8	11.1	9.4 /27.1		12.0	11.0			26.0
28.0	7.5 /26.6	10.1	9.0		9.7	10.0	8.6 /28.7		28.0
30.0		9.3	8.3		5.5 /29.8	9.2	8.2		30.0
32.0		8.5	7.6			8.5	7.5		32.0
34.0		8.5 /32.1	7.1	5.9 /35.4		7.8	7.0		34.0
36.0			6.6	5.8		7.6 /35.3	6.5	5.4 /37.4	36.0
38.0			6.1 /37.7	5.4			6.0	5.3	38.0
40.0				5.1			5.6	5.0	40.0
42.0				4.7			5.5 /40.9	4.6	42.0
44.0				4.7 /42.8				4.3	44.0
46.0								4.1	46.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The counterweight is 49.6 ton.
6. 1 reeving line on 24m jib is not permitted.



Tower Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

36.35 m Tower



36.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)													Radius (m)
9.4	33.0												9.2
10.0	32.2				29.1 / 10.1				24.9 / 10.8				10.0
12.0	29.7				27.4				24.0				12.0
14.0	26.5				25.7				22.6				14.0
16.0	22.3				22.2				21.4				16.0
18.0	19.2	16.7 / 18.5			19.2	15.4 / 19.6			19.1				18.0
20.0	16.9	15.2			16.8	15.0			16.7	14.3 / 20.7			20.0
22.0	15.0	13.5			14.9	13.4			14.9	13.2			22.0
24.0	13.2	12.2			13.4	12.0			13.3	11.9			24.0
26.0	8.9	11.1			12.0	10.8			12.1	10.7			26.0
28.0	7.4 / 26.7	10.1	8.7 / 28.1		10.0	9.9	8.0 / 29.7		10.9	9.8			28.0
30.0		9.3	8.1		5.4 / 29.9	9.1	7.9		9.5	9.0	7.4 / 31.3		30.0
32.0		8.1	7.4			8.4	7.3		6.5	8.3	7.2		32.0
34.0		6.6 / 32.6	6.9			7.7	6.8		5.4 / 32.8	7.7	6.6		34.0
36.0			6.4	5.4 / 36.9		7.3 / 35.8	6.3			7.1	6.2		36.0
38.0			5.8	5.2			5.8	4.9 / 38.9		6.5	5.7		38.0
40.0			5.7 / 38.7	4.8			5.5	4.7		6.4 / 38.7	5.4	4.4 / 40.9	40.0
42.0				4.5			5.1 / 41.9	4.4			5.0	4.3	42.0
44.0				4.2				4.1			4.6	4.0	44.0
46.0				4.2 / 44.3				3.9			4.5 / 44.8	3.7	46.0
48.0								3.7 / 47.5				3.5	48.0
50.0												3.2	50.0
52.0												3.2 / 50.4	52.0



SCX1200-3

SPECIFICATIONS

Tower Specifications

Gross Rated Load Table

39.35 m Tower



Unit: ton													
Tower Length (m)	39.35												Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg) Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg) Radius (m)
9.4	31.1												9.3
10.0	30.3				28.8 /10.1				24.8 /10.8				10.0
12.0	28.2				26.8				23.9				12.0
14.0	26.5				25.1				22.5				14.0
16.0	22.3				22.2				21.3				16.0
18.0	19.3	16.0 /19.0			19.2				19.1				18.0
20.0	16.9	15.0			16.8	14.8 /20.1			16.7	13.7 /21.2			20.0
22.0	15.0	13.3			14.9	13.2			14.9	13.1			22.0
24.0	13.2	12.0			13.4	11.9			13.3	11.7			24.0
26.0	9.1	10.8			12.0	10.7			12.1	10.6			26.0
28.0	7.7 /26.7	9.9	8.2 /29.1		10.2	9.8			10.9	9.7			28.0
30.0		9.1	7.8		5.5 /29.9	9.0	7.5 /30.7		9.5	8.9			30.0
32.0		8.4	7.2			8.3	7.1		6.7	8.2	6.9 /32.3		32.0
34.0		7.9 /33.2	6.7			7.7	6.6		5.6 /32.8	7.6	6.5		34.0
36.0			6.2			7.1	6.1			7.0	6.0		36.0
38.0			5.8	4.8 /38.4		7.0 /36.4	5.7			6.5	5.6		38.0
40.0			5.4 /39.7	4.6			5.3	4.4 /40.4		6.3 /39.3	5.2		40.0
42.0				4.3			4.9	4.2			4.9	4.0 /42.4	42.0
44.0				4.0			4.8 /42.9	3.9			4.6	3.8	44.0
46.0				3.8 /45.8				3.7			4.2 /45.8	3.5	46.0
48.0								3.4				3.3	48.0
50.0								3.3 /49.0				3.1	50.0
52.0												2.9 /51.9	52.0

Unit: ton					
Tower Length (m)	39.35				Tower Length (m)
Jib Length (m)	33				Jib Length (m)
Tower Angle (deg) Radius (m)	90	80	70	60	Tower Angle (deg) Radius (m)
10.0	22.0 /10.8				10.0
12.0	21.2				12.0
14.0	20.0				14.0
16.0	18.9				16.0
18.0	17.9				18.0
20.0	16.7				20.0
22.0	14.8	12.7 /22.4			22.0
24.0	13.3	11.7			24.0
26.0	12.0	10.5			26.0
28.0	11.0	9.6			28.0
30.0	9.9	8.8			30.0
32.0	8.8	8.1	6.4 /33.9		32.0
34.0	7.4	7.5	6.4		34.0
36.0	4.6 /35.7	7.0	5.9		36.0
38.0		6.5	5.5		38.0
40.0		6.1	5.1		40.0
42.0		5.6	4.8		42.0
44.0		5.6 /42.2	4.5	3.6 /44.4	44.0
46.0			4.2	3.5	46.0
48.0			3.9	3.2	48.0
50.0			3.9 /48.7	3.0	50.0
52.0				2.9	52.0
54.0				2.6	54.0
56.0				2.6 /54.8	56.0



Tower Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

42.35 m Tower



42.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Radius (m)
9.5	28.7												9.3
10.0	28.2				26.6 / 10.2				24.6 / 10.9				10.0
12.0	26.2				24.9				23.7				12.0
14.0	24.8				23.4				22.1				14.0
16.0	22.3				22.2				20.9				16.0
18.0	19.3	15.3 / 19.5			19.2				19.1				18.0
20.0	16.9	14.8			16.8	14.2 / 20.6			16.7	13.1 / 21.8			20.0
22.0	15.0	13.2			15.0	13.1			14.9	12.9			22.0
24.0	13.2	11.8			13.4	11.7			13.3	11.6			24.0
26.0	9.2	10.7			12.0	10.6			12.1	10.5			26.0
28.0	7.9 / 26.7	9.8			10.2	9.7			10.9	9.6			28.0
30.0		9.0	7.6 / 30.1		5.9 / 29.9	8.9	7.0 / 31.7		9.5	8.8			30.0
32.0		8.3	7.0			8.2	6.9		6.9	8.1	6.4 / 33.3		32.0
34.0		7.7 / 33.7	6.5			7.6	6.4		5.9 / 32.8	7.5	6.3		34.0
36.0			6.0			7.0	5.9			6.9	5.8		36.0
38.0			5.6	4.4 / 39.9		6.8 / 36.9	5.5			6.5	5.4		38.0
40.0			5.2	4.3			5.1	4.0 / 41.9		6.0 / 39.8	5.0		40.0
42.0			5.1 / 40.7	4.1			4.8	3.9			4.7	3.6 / 43.9	42.0
44.0				3.8			4.5 / 43.9	3.7			4.4	3.5	44.0
46.0				3.6				3.5			4.1	3.3	46.0
48.0				3.3 / 47.3				3.2			4.0 / 46.8	3.1	48.0
50.0								3.0				2.9	50.0
52.0								3.0 / 50.5				2.8	52.0
54.0												2.6 / 53.4	54.0

42.35									Unit: ton
Tower Length (m)									Tower Length (m)
Jib Length (m)	33				36				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)	90	80	70	60	90	80	70	60	Radius (m)
10.0	16.8 / 10.9				15.1 / 11.5				10.0
12.0	16.2				15.1				12.0
14.0	15.3				14.2				14.0
16.0	14.4				13.4				16.0
18.0	13.7				12.8				18.0
20.0	13.1				12.2				20.0
22.0	12.6	12.2 / 22.9			11.7				22.0
24.0	12.2	11.5			11.2	11.4			24.0
26.0	11.9	10.4			10.9	10.3			26.0
28.0	11.0	9.5			10.6	9.4			28.0
30.0	9.9	8.7			10.0	8.6			30.0
32.0	8.8	8.0			9.1	7.9			32.0
34.0	7.5	7.4	6.0 / 34.9		8.1	7.3			34.0
36.0	4.6 / 35.7	6.9	5.7		7.1	6.8	5.5 / 36.5		36.0
38.0		6.4	5.3		5.2	6.3	5.2		38.0
40.0		6.0	4.9		4.7 / 38.6	5.9	4.9		40.0
42.0		5.6	4.6			5.5	4.5		42.0
44.0		5.5 / 42.7	4.3	3.2 / 45.9		5.2	4.2		44.0
46.0			4.1	3.2		4.9 / 45.6	4.0	3.0 / 47.9	46.0
48.0			3.8	3.0			3.7	2.9	48.0
50.0			3.6 / 49.7	2.8			3.5	2.8	50.0
52.0				2.7			3.3	2.6	52.0
54.0				2.5			3.3 / 52.6	2.4	54.0
56.0				2.3				2.3	56.0
58.0				2.3 / 56.3				2.2	58.0
60.0								1.9 / 59.2	60.0



SCX1200-3

SPECIFICATIONS

Tower Specifications

Gross Rated Load Table

45.35 m Tower



45.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)													Radius (m)
9.5	26.5												9.3
10.0	26.0				24.5 / 10.2				16.5 / 10.9				10.0
12.0	24.2				23.0				15.9				12.0
14.0	22.9				21.6				15.0				14.0
16.0	22.0				20.6				14.2				16.0
18.0	19.3				19.2				13.5				18.0
20.0	16.9	14.7			16.8	13.5 / 21.2			12.9				20.0
22.0	15.0	13.0			15.0	12.9			12.5	12.6 / 22.3			22.0
24.0	13.2	11.7			13.4	11.6			12.1	11.5			24.0
26.0	9.5	10.6			12.0	10.5			11.8	10.4			26.0
28.0	6.7 / 26.8	9.6			10.3	9.5			10.9	9.4			28.0
30.0		8.8	7.0 / 31.2		5.8	8.7			9.5	8.6			30.0
32.0		8.2	6.8			8.1	6.5 / 32.8		7.0	8.0			32.0
34.0		7.4	6.3			7.5	6.2		6.0 / 32.8	7.4	6.0 / 34.4		34.0
36.0		7.4 / 34.2	5.8			6.9	5.7			6.8	5.6		36.0
38.0			5.4			6.6 / 37.4	5.3			6.4	5.2		38.0
40.0			5.1	3.9 / 41.4			5.0			5.8	4.9		40.0
42.0			4.7 / 41.8	3.8			4.7	3.5 / 43.4		5.8 / 40.3	4.5		42.0
44.0				3.6			4.3	3.5			4.3	3.2 / 45.4	44.0
46.0				3.4			4.2 / 45.0	3.2			4.0	3.1	46.0
48.0				3.1				3.0			3.7 / 47.9	2.9	48.0
50.0				3.1 / 48.8				2.9				2.7	50.0
52.0								2.7				2.6	52.0
54.0												2.3	54.0
56.0												2.3 / 54.9	56.0

45.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	33				36				39				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)													Radius (m)
10.0	15.3 / 10.9				13.9 / 11.5								10.0
12.0	14.8				13.7				12.5 / 12.2				12.0
14.0	13.9				12.9				11.8				14.0
16.0	13.1				12.2				11.2				16.0
18.0	12.5				11.6				10.6				18.0
20.0	11.9				11.0				10.1				20.0
22.0	11.5	11.7 / 23.4			10.6				9.7				22.0
24.0	11.1	11.4			10.2	10.7 / 24.5			9.3	9.6 / 25.7			24.0
26.0	10.8	10.3			9.9	10.2			9.0	9.5			26.0
28.0	10.5	9.3			9.6	9.3			8.7	9.1			28.0
30.0	9.9	8.6			9.4	8.5			8.5	8.4			30.0
32.0	8.8	7.9			9.1	7.8			8.3	7.7			32.0
34.0	7.6	7.3	5.5 / 35.9		8.1	7.2			8.1	7.1			34.0
36.0	4.8 / 35.7	6.8	5.5		7.1	6.7	5.1 / 37.5		7.4	6.6			36.0
38.0		6.3	5.1		5.3	6.2	5.0		6.6	6.1	4.7 / 39.1		38.0
40.0		5.9	4.8		4.8 / 38.6	5.8	4.7		5.7	5.7	4.6		40.0
42.0		5.5	4.5			5.4	4.4		3.8 / 41.5	5.3	4.2		42.0
44.0		5.2 / 43.2	4.2			5.1	4.1			5.0	4.0		44.0
46.0			3.9	2.9 / 47.4		4.7	3.8			4.7	3.7		46.0
48.0			3.7	2.8		4.7 / 46.1	3.6	2.6 / 49.4		4.4	3.5		48.0
50.0			3.4	2.6			3.4	2.6		4.3 / 49.0	3.3	2.3 / 51.4	50.0
52.0			3.3 / 50.8	2.5			3.2	2.4			3.1	2.3	52.0
54.0				2.3			3.0 / 53.6	2.2			2.9	2.1	54.0
56.0				2.2				2.1			2.7	2.0	56.0
58.0				2.0 / 57.8				2.0			2.7 / 56.5	1.9	58.0
60.0								1.8				1.7	60.0
62.0								1.8 / 60.7				1.6	62.0
64.0												1.6 / 63.6	64.0



Tower Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

48.35 m Tower



48.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)													Radius (m)
9.5	24.2												9.4
10.0	23.7				16.4 / 10.2				14.8 / 10.9				10.0
12.0	22.1				15.4				14.3				12.0
14.0	20.9				14.5				13.4				14.0
16.0	20.0				13.8				12.7				16.0
18.0	19.3				13.1				12.1				18.0
20.0	16.9	13.9 / 20.6			12.7	12.9 / 21.7			11.6				20.0
22.0	15.0	12.8			12.3	12.7			11.2	11.7 / 22.8			22.0
24.0	13.2	11.5			12.0	11.4			10.8	11.3			24.0
26.0	9.6	10.4			11.9	10.3			10.6	10.2			26.0
28.0	6.8 / 26.8	9.5			10.3	9.4			10.5	9.3			28.0
30.0		8.7			6.1	8.6			9.5	8.5			30.0
32.0		8.0	6.5 / 32.2			7.9	6.0 / 33.8		7.0	7.8			32.0
34.0		7.4	6.1			7.3	5.9		5.9 / 32.9	7.2	5.5 / 35.4		34.0
36.0		7.2 / 34.7	5.6			6.8	5.5			6.7	5.4		36.0
38.0			5.2			6.4 / 37.9	5.1			6.3	5.0		38.0
40.0			4.9				4.8			5.8	4.6		40.0
42.0			4.6	3.4 / 42.9			4.5			5.6 / 40.8	4.3		42.0
44.0			4.2 / 42.8	3.3			4.2	3.1 / 44.9			4.1		44.0
46.0				3.1			3.9	3.0			3.8	2.7 / 46.9	46.0
48.0				2.9				2.8			3.5	2.6	48.0
50.0				2.6				2.6			3.4 / 48.9	2.5	50.0
52.0				2.6 / 50.3				2.4				2.3	52.0
54.0								2.4 / 53.5				2.2	54.0
56.0												2.0	56.0
58.0												2.0 / 56.4	58.0

48.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	33				36				39				Jib Length (m)
Tower Angle (deg)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg)
Radius (m)													Radius (m)
10.0	13.7 / 10.9				12.4 / 11.6								10.0
12.0	13.3				12.2				11.2 / 12.2				12.0
14.0	12.4				11.5				10.6				14.0
16.0	11.8				10.9				10.0				16.0
18.0	11.2				10.3				9.5				18.0
20.0	10.7				9.8				9.0				20.0
22.0	10.3	10.4 / 23.9			9.4				8.6				22.0
24.0	9.9	10.3			9.1	9.4 / 25.1			8.3				24.0
26.0	9.6	10.0			8.8	9.2			8.0	8.4 / 26.2			26.0
28.0	9.4	9.2			8.5	8.8			7.7	8.1			28.0
30.0	9.3	8.4			8.3	8.3			7.5	7.7			30.0
32.0	8.8	7.7			8.2	7.7			7.4	7.4			32.0
34.0	7.6	7.2			8.1	7.1			7.2	7.0			34.0
36.0	4.8 / 35.8	6.6	5.1 / 37.0		7.1	6.6			7.2	6.5			36.0
38.0		6.2	4.9		5.4	6.1	4.7 / 38.6		6.6	6.0			38.0
40.0		5.8	4.5		4.8 / 38.7	5.7	4.5		5.8	5.6	4.3 / 40.1		40.0
42.0		5.4	4.2			5.3	4.2		3.8 / 41.6	5.2	4.0		42.0
44.0		5.0 / 43.7	4.0			5.0	3.9			4.9	3.8		44.0
46.0			3.7			4.7	3.6			4.6	3.5		46.0
48.0			3.5	2.5 / 48.9		4.6 / 46.6	3.4			4.3	3.3		48.0
50.0			3.3	2.4			3.2	2.2 / 50.9		4.2 / 49.5	3.1		50.0
52.0			3.1 / 51.8	2.2			3.0	2.1			2.9	1.9 / 52.9	52.0
54.0				2.1			2.8	2.0			2.7	1.9	54.0
56.0				2.0			2.8 / 54.7	1.9			2.6	1.7	56.0
58.0				1.8				1.8			2.4 / 57.6	1.6	58.0
60.0				1.8 / 59.3				1.6				1.5	60.0
62.0								1.5				1.4	62.0
64.0								1.5 / 62.2				1.4 / 63.0	64.0



SCX1200-3

SPECIFICATIONS

Tower Specifications
Gross Rated Load Table

■ 48.35 m Tower



Unit: ton					
Tower Length (m)	48.35				Tower Length (m)
Jib Length (m)	42				Jib Length (m)
Tower Angle (deg)	90	80	70	60	Tower Angle (deg)
Radius (m)					Radius (m)
12.0	10.1 /12.9				12.0
14.0	9.7				14.0
16.0	9.2				16.0
18.0	8.7				18.0
20.0	8.3				20.0
22.0	7.9				22.0
24.0	7.6				24.0
26.0	7.3	7.4 /27.3			26.0
28.0	7.0	7.4			28.0
30.0	6.8	7.1			30.0
32.0	6.6	6.8			32.0
34.0	6.5	6.5			34.0
36.0	6.4	6.3			36.0
38.0	6.3	5.9			38.0
40.0	6.1	5.5	4.0 /41.7		40.0
42.0	5.5	5.2	3.9		42.0
44.0	4.1	4.8	3.7		44.0
46.0	3.8 /44.5	4.5	3.4		46.0
48.0		4.3	3.2		48.0
50.0		4.0	3.0		50.0
52.0		3.7	2.8		52.0
54.0		3.7 /52.4	2.6	1.7 /55.0	54.0
56.0			2.5	1.6	56.0
58.0			2.3	1.5	58.0
60.0			2.1	1.4	60.0
62.0			2.1 /60.5	1.4 /61.0	62.0



Tower Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1200-3

51.35 m Tower



51.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	24				27				30				Jib Length (m)
Tower Angle (deg) Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg) Radius (m)
9.5	21.7												9.4
10.0	21.2				14.8 / 10.2				13.3 / 10.9				10.0
12.0	19.8				13.9				12.9				12.0
14.0	18.7				13.1				12.1				14.0
16.0	17.9				12.4				11.4				16.0
18.0	17.3				11.8				10.9				18.0
20.0	16.9	12.8 / 21.1			11.4				10.4				20.0
22.0	15.1	12.5			11.1	11.5 / 22.2			10.0	10.1 / 23.3			22.0
24.0	13.2	11.4			10.9	11.0			9.7	10.1			24.0
26.0	9.8	10.3			10.8	10.2			9.5	9.6			26.0
28.0	7.0 / 26.8	9.4			10.3	9.3			9.4	9.1			28.0
30.0		8.6			6.3	8.5			9.4	8.4			30.0
32.0		7.9	6.0 / 33.2			7.8			7.1	7.7			32.0
34.0		7.3	5.8			7.2	5.5 / 34.8		6.1 / 32.9	7.1			34.0
36.0		6.9 / 35.2	5.4			6.7	5.3			6.6	5.1 / 36.4		36.0
38.0			5.0			6.2	4.9			6.2	4.8		38.0
40.0			4.7			6.1 / 38.4	4.6			5.8	4.5		40.0
42.0			4.4				4.3			5.3 / 41.3	4.2		42.0
44.0			4.1 / 43.8	3.0 / 44.4			4.0				3.9		44.0
46.0				2.9			3.7	2.7 / 46.4			3.6		46.0
48.0				2.7			3.6 / 47.0	2.6			3.4	2.4 / 48.4	48.0
50.0				2.5				2.4			3.2 / 49.9	2.3	50.0
52.0				2.3 / 51.8				2.2				2.1	52.0
54.0								2.0				2.0	54.0
56.0								2.0 / 55.0				1.8	56.0
58.0												1.7 / 57.9	58.0

51.35													Unit: ton
Tower Length (m)													Tower Length (m)
Jib Length (m)	33				36				39				Jib Length (m)
Tower Angle (deg) Radius (m)	90	80	70	60	90	80	70	60	90	80	70	60	Tower Angle (deg) Radius (m)
10.0	12.4 / 10.9				11.1 / 11.6								10.0
12.0	11.9				10.9				10.0 / 12.2				12.0
14.0	11.2				10.3				9.5				14.0
16.0	10.5				9.7				8.9				16.0
18.0	10.0				9.2				8.5				18.0
20.0	9.6				8.8				8.0				20.0
22.0	9.2				8.4				7.7				22.0
24.0	8.9	9.2 / 24.5			8.1	8.2 / 25.6			7.4				24.0
26.0	8.6	8.9			7.8	8.1			7.1	7.4 / 26.7			26.0
28.0	8.4	8.5			7.6	7.8			6.9	7.1			28.0
30.0	8.3	8.1			7.5	7.5			6.7	6.8			30.0
32.0	8.3	7.6			7.3	7.2			6.5	6.5			32.0
34.0	7.6	7.0			7.3	6.9			6.4	6.3			34.0
36.0	5.0 / 35.8	6.5			7.1	6.5			6.4	6.0			36.0
38.0		6.1	4.7		5.5	6.0	4.3 / 39.6		6.4	5.9			38.0
40.0		5.7	4.4		5.0 / 38.7	5.6	4.3		5.8	5.5	4.0 / 41.2		40.0
42.0		5.3	4.1			5.2	4.0		3.8 / 41.6	5.1	3.8		42.0
44.0		4.9	3.8			4.9	3.7			4.8	3.6		44.0
46.0		4.9 / 44.2	3.6			4.6	3.5			4.5	3.3		46.0
48.0			3.3			4.6 / 47.1	3.3			4.3	3.1		48.0
50.0			3.1	2.1 / 50.4			3.1			4.0	2.9		50.0
52.0			2.9	2.0			2.9	1.9 / 52.4			2.8		52.0
54.0			2.9 / 52.8	1.9			2.7	1.8			2.6	1.6 / 54.4	54.0
56.0				1.8			2.5 / 55.7	1.7			2.4	1.5	56.0
58.0				1.6				1.6			2.2	1.4	58.0
60.0				1.4				1.5			2.2 / 58.6	1.4 / 59.0	60.0
62.0				1.4 / 60.8				1.4					62.0



SCX1200-3

SPECIFICATIONS

Tower Specifications
Gross Rated Load Table

■ 51.35 m Tower




Unit: ton							
Tower Length (m)	51.35						Tower Length (m)
Jib Length (m)	42			45			Jib Length (m)
Tower Angle (deg)	90	80	70	90	80	70	Tower Angle (deg)
Radius (m)							Radius (m)
12.0	9.0 /12.9			8.1 /13.5			12.0
14.0	8.7			7.9			14.0
16.0	8.2			7.5			16.0
18.0	7.8			7.1			18.0
20.0	7.4			6.7			20.0
22.0	7.0			6.4			22.0
24.0	6.7			6.1			24.0
26.0	6.4	6.5 /27.8		5.8			26.0
28.0	6.2	6.4		5.6	5.8 /28.9		28.0
30.0	6.0	6.2		5.4	5.7		30.0
32.0	5.9	5.9		5.3	5.4		32.0
34.0	5.7	5.7		5.1	5.2		34.0
36.0	5.6	5.5		5.0	5.0		36.0
38.0	5.6	5.3		4.9	4.8		38.0
40.0	5.6	5.1		4.9	4.6		40.0
42.0	5.5	5.0	3.6 /42.8	4.8	4.5		42.0
44.0	4.2	4.7	3.5	4.8	4.3	3.4 /44.4	44.0
46.0	3.9 /44.5	4.4	3.3	4.4	4.2	3.2	46.0
48.0		4.2	3.0	3.0 /47.4	4.1	3.0	48.0
50.0		3.9	2.8		3.9	2.8	50.0
52.0		3.7	2.7		3.6	2.6	52.0
54.0		3.6 /52.9	2.5		3.4	2.4	54.0
56.0			2.3		3.3 /55.8	2.3	56.0
58.0			2.2			2.1	58.0
60.0			2.1			2.0	60.0
62.0			1.9 /61.5			1.9	62.0
64.0						1.7	64.0
66.0						1.7 /64.4	66.0



Clamshell Specifications

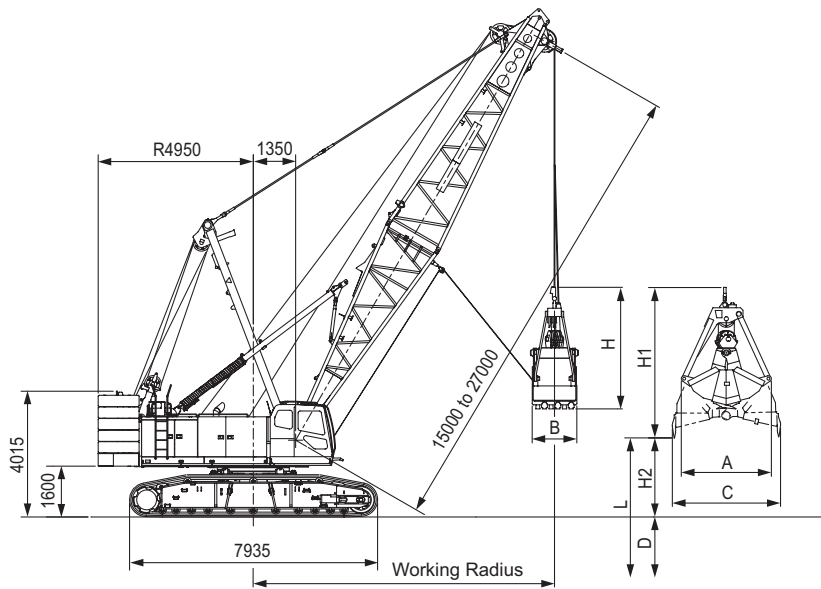Dimensions and Specifications



Working Ranges

Boom Length	m	15				18				21				24				27			
Boom Angle	°	35	45	55	65	35	45	55	65	35	45	55	65	35	45	55	65	35	45	55	65
Working Radius	m	14.2	12.6	11	8.5	16.6	14.7	12.7	9.7	19.1	16.8	14.4	11.0	21.5	19.0	16.1	12.3	24.0	21.0	17.8	13.5
Gross Rated Load	t	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Lift L (D + H2)	m	39.4	40.5	41.5	42.3	41.1	42.6	43.9	45	42.8	44.7	45.7	47.7	44.5	46.8	47.4	50.4	46.2	48.9	49.1	53.1
Max. Digging Depth D	m	36																			
Bucket Dumping Height H2	m	3.4	4.5	5.5	6.3	5.1	6.6	7.9	9	6.8	8.7	9.7	11.7	8.5	10.8	11.4	14.4	10.2	12.9	13.1	17.1

Specifications

		Clamshell Specifications	
Bucket Capacity	m ³	2.5	
Allowed Maximum Gross Weight for Clamshell Bucket and Captured Load Combined	t	10	
Boom Length	m	15 to 27	
Maximum Digging Depth	m	36	
Support Wire Rope Speed *	m/min	64	Wire Rope Diameter 26 mm
Opening/Closing Wire Rope Speed *	m/min	64	
Boom Hoist Drum Wire Rope Speed (Raise) *	m/min	44	Wire Rope Diameter 22.4 mm
Boom Hoist Drum Wire Rope Speed (Lower) *	m/min	44	
Ground Contact Pressure	kPa (kgf/cm ²)	93 (0.95) (w/ Basic Boom, 2.5 m ³ Clamshell Bucket)	
Overall Operating Weight	t	Approximately 125 (w/ Basic Boom, 2.5 m ³ Clamshell Bucket)	

NOTE :

- Speeds marked with "*" may vary depending on load applied.
- SI units are used for specifications. In parenthesis, conventional units are also indicated.
- Specifications other than those shown above are the same as those shown in the crane specifications section.

Clamshell Bucket

Capacity (m³)	Weight (t)	A (mm)	B (mm)	C (mm)	H (mm)	H1 (mm)
2.5	5.5	2,880	1,400	3,450	4,180	5,130

Gross Rated Load Table

Working Radius (m)	Boom Length (m)				
	15	18	21	24	27
8.5	10.0				
9.0	10.0	10.0 / 9.8			
10.0	10.0	10.0	10.0 / 11.1		
12.0	10.0	10.0	10.0	10.0 / 12.3	10.0 / 13.6
14.0	10.0 / 14.2	10.0	10.0	10.0	10.0
16.0		10.0	10.0	10.0	10.0
18.0		10.0 / 16.7	10.0	10.0	10.0
20.0			10.0 / 19.1	10.0	10.0
22.0				10.0 / 21.6	10.0
24.0					10.0

- Max. clamshell rating is 10.0 t.
- Mass of bucket plus load should not exceed clamshell ratings shown above. Following data are for a general digging application buckets.

Bucket capacity	2.0 m³	2.5 m³
Bucket mass	4.5 t	5.5 t

- In case of clamshell application, a 15.0 m boom is recommended as minimum length of boom, and max. boom length shall not exceed 27.0 m.
- Apparent specific gravity of lifting material :
Earth 1.7 to 1.8 t/m³
Gravel 1.8 to 2.0 t/m³
- A 49.6 t counterweight is required for all capacities on these charts.
- Max. digging depth below ground shall be 36 m.



SCX1200-3

TECHNICAL DATA

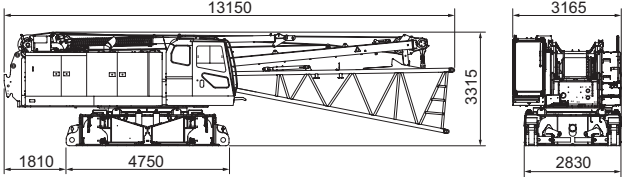
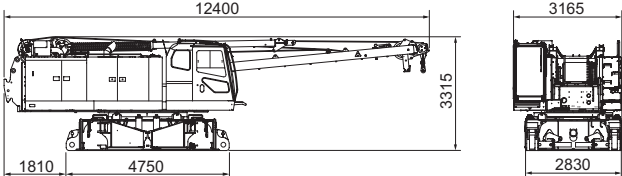
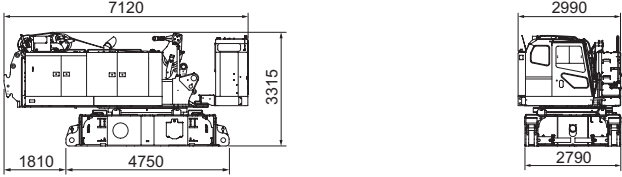
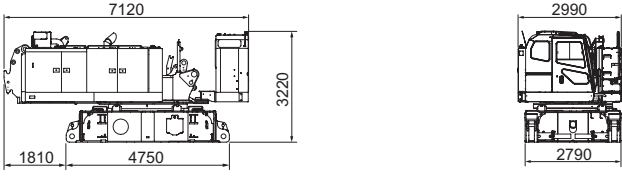
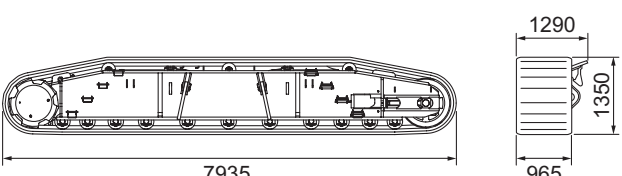
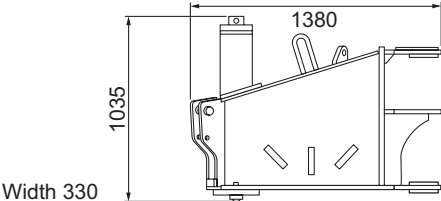
Weights and Dimensions of Disassembled Units

Weights and Dimensions List

Weights and Dimensions of Disassembled Units

Weights and Dimensions List

Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)		Weight (kg)
Base Crane with: Backstops Boom Base Mast Front Winch Wire Rope Jacks Upper & Lower Spreader Floats	1			39500
Base Crane with: Backstops Mast Front Winch Wire Rope Jacks Upper & Lower Spreader Floats	1			37300
Base Crane with: Boom Hoist Winch Wire Rope Front Winch Wire Rope Upper & Lower Spreader Without: Mast Jacks Floats	1			33100
Base Crane Without: Mast Wire Rope Jacks Upper & Lower Spreader Floats	1			30000
Crawler (Assembly)	2			14200
Jack Beams	4			420











Weights and Dimensions of Disassembled Units

Weights and Dimensions List

TECHNICAL DATA

SCX1200-3

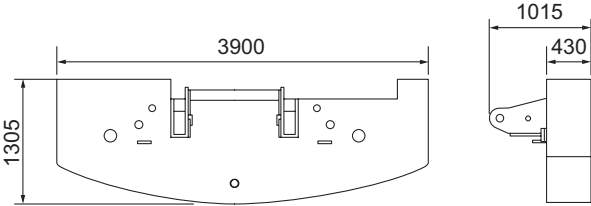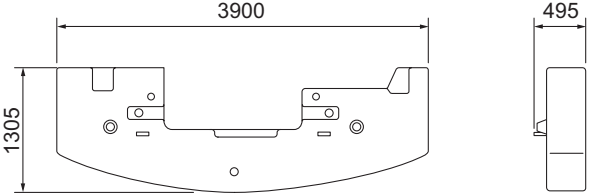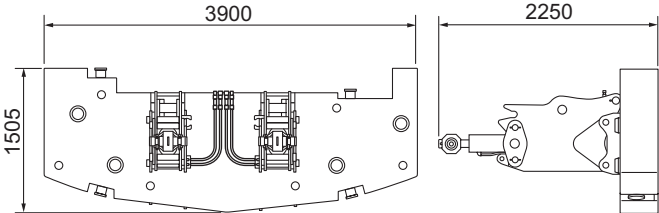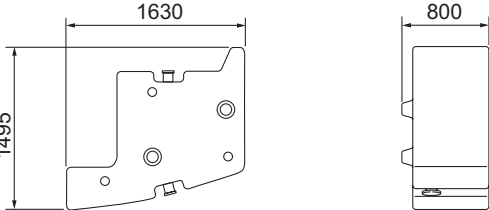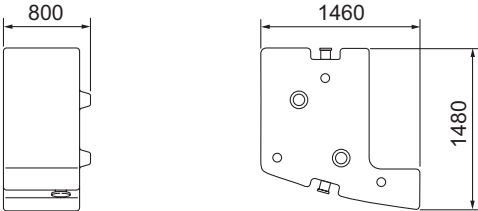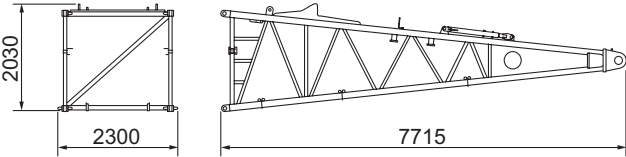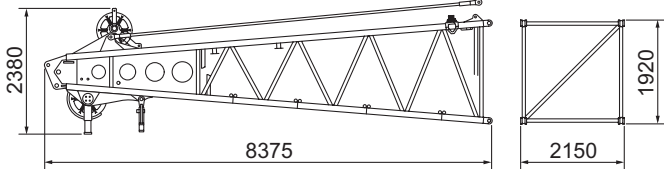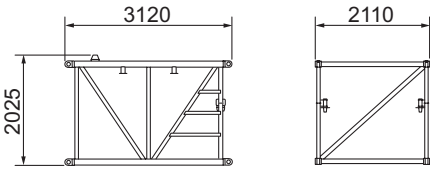Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Counterweight (Base)	1		9100
Counterweight	5		8100
Counterweight with Self Assembly Unit (Base)	1		9100
Counterweight (For Counterweight with Self Assembly Unit)	3		6410
Counterweight (For Counterweight with Self Assembly Unit)	3		6780
Boom Base	1		2300
Boom Top	1		2200
3 m Boom Insert	1		470











SCX1200-3

TECHNICAL DATA

Weights and Dimensions of Disassembled Units

Weights and Dimensions List

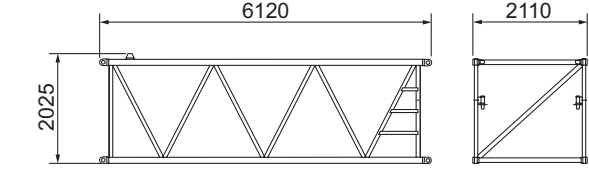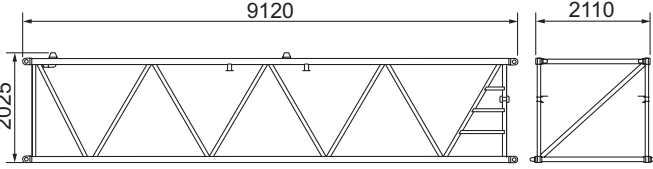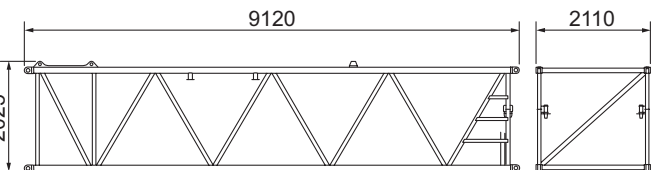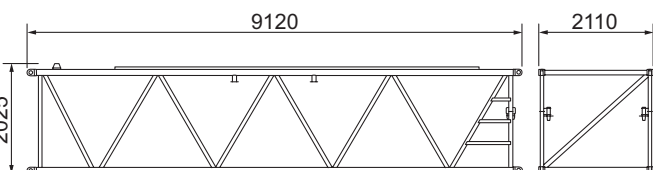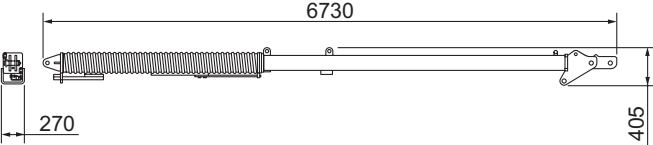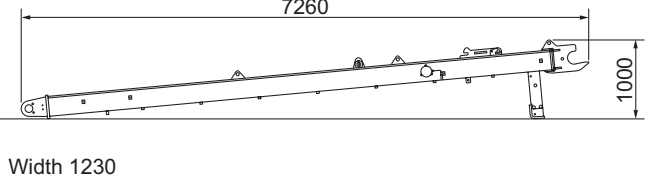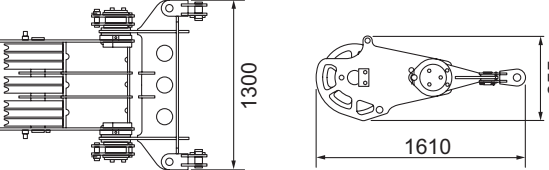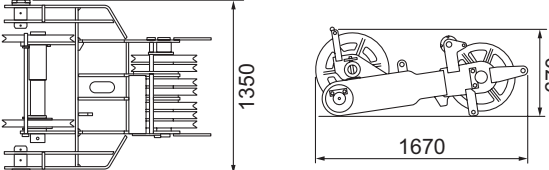Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
6 m Boom Insert	1		760
9 m Boom Insert	1		1050
9 m (B) Boom Insert	1		1380
9 m Boom Insert (with Rail)	1		1180
Boom Backstops	2		490
Mast	1		1480
Upper Spreader	1		810
Lower Spreader	1		870











Weights and Dimensions of Disassembled Units

Weights and Dimensions List

TECHNICAL DATA

SCX1200-3

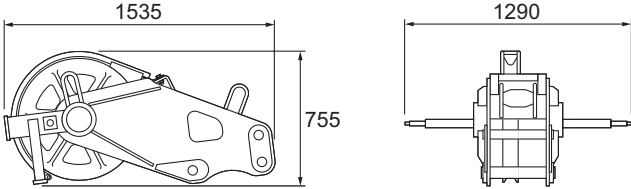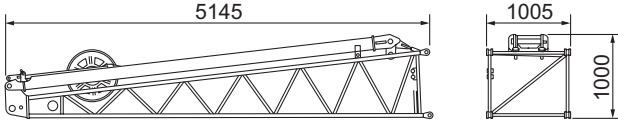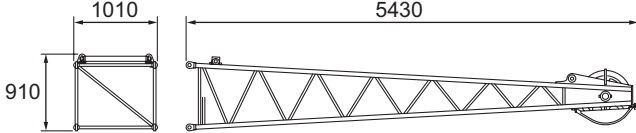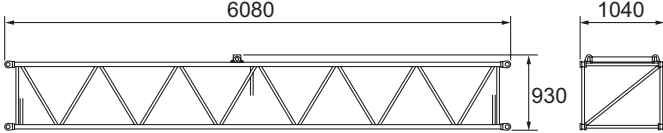Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Aux. Sheave	1		350
Jib Base (with Jib Strut)	1		580
Jib Top	1		290
6 m Jib Insert	1		190
120 t Hook	1		1640
80 t Hook	1		1350
35 t Hook	1		900
12 t Hook	1		510










SCX1200-3

TECHNICAL DATA

Weights and Dimensions of Disassembled Units
Weights and Dimensions List

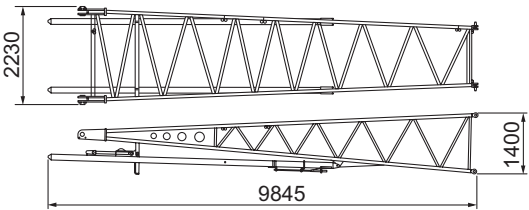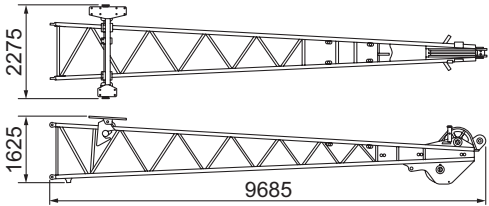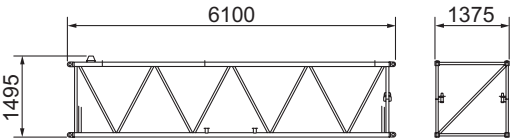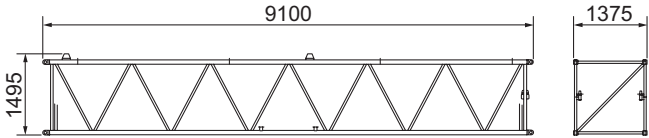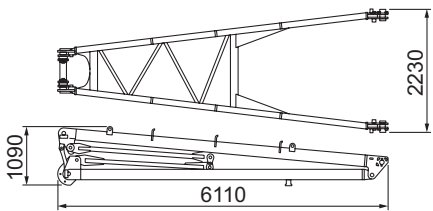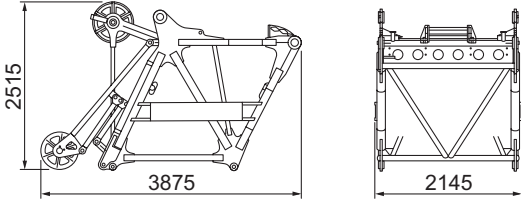Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Tower/Lifting Jib Base (with Jib Backstops)	1		1100
Tower/Lifting Jib Top (with Jib Catch)	1		1240
3 m Tower/Luffing Jib Insert	1		210
6 m Tower/Luffing Jib Insert	1		360
9 m Tower/Luffing Jib Insert	1		510
Compression Member	1		1200
Tower/Luffing Boom Top (with Link and Tower Guide Roller)	1		1300









Weights and Dimensions of Disassembled Units

Weights and Dimensions List

TECHNICAL DATA

SCX1200-3

Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)		Weight (kg)
Tower Guide Sheave	1			320
Tower Jib Upper Spreader	1			400
Tower Jib Lower Spreader	1			400



SCX1200-3

TECHNICAL DATA

Equipment List
Standard and Optional Equipment

Equipment List

Standard and Optional Equipment

○ : Standard ● : Optional — : No setting

Item		Crane	Crane / Tower	Clamshell
Lower Structure	965 mm Crawler Shoe	○	○	○
	Jack Up Unit	○	○	○
	Crawler Side Frame Connecting Unit	○	○	○
	Up/Down Steps	○	○	○
	Shoe Tension Unit (Hydraulic)	●	●	●
	Low Wear Shoe (Contiguous surface of roller)	●	●	●
Upper Structure	Cab Up/Down Catwalk	○	○	○
	Upper House Handrails (For catwalk)	○	○	○
	Under Cover (Bed lower surface)	○	○	○
	Working Light (× 2)	○	○	○
	Back Mirror (Left and right)	○	○	○
	Central Lubrication Unit (For turntable bearing)	○	○	○
	Drum Flange Cover	○	○	○
	Auto Idle Stop	○	○	○
	Eco Winch	○	○	○
	Drum Light (Front winch)	●	●	●
	Winch Rope Retainer (Front winch)	●	●	●
	Winch Rope Retainer (Rear winch)	●	●	●
	Catwalk (Folding type, Left / Right)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Electric Fuel Pump	●	●	●
	Upper House Handrails (Folding type)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Winch with Front and Rear Free Mechanism	●	●	●
Cab	Third Winch (Rope not included) (with Free mechanism)	●	● ^{*3}	-
	Air Conditioner	○	○	○
	Sunvisor	○	○	○
	Sunshade	○	○	○
	Wiper with Washer (Front window, Cab roof window)	○	○	○
	Microphone & Loud-Speaker	●	●	●
	AM / FM Radio (with Clock)	○	○	○
	Room Lamp	○	○	○
	Cup Holder	○	○	○
	24 V Power Socket (× 2)	○	○	○
	Floor Carpet	○	○	○
	Level Gauge (in Cab & lower frame)	○	○	○
	Accelerator Pedal (Right side)	●	●	●
	Armchair Lever	○	○	○
	Cross Operation Lever (Lever lock not attached)	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Front Operation Lever (with Lever lock)	●	●	●
	Seat without Suspension	○	○	○
	Seat with Suspension	● / ○ ^{*4}	● / ○ ^{*4}	● / ○ ^{*4}
	Travel Operation Pedal (Cannot be installed when winch with free mechanism attached)	●	●	●
	Boom Hoist Operation Pedal ^{*1}	●	●	●
	Swing Brake Operation Pedal ^{*1}	●	●	●
	Fan	●	●	●
	Front/Rear Operation Lever, Brake Pedal Permutation	●	●	●
	Fuel Burning Heater	●	●	●
	Accelerator Grip	○	○	○
	Drum Rotation Sensor (Front/Rear/Boom Hoist) ^{*2}	○	○	○
	Speed Control Dial (Front/Rear/Boom Hoist/Swing)	○	○	○
	Lifefammer	○	○	○

*1 Cannot be installed at the same time.
*2 Cannot be equipped when the cross operation lever or front operation lever is installed.
*3 The third winch can only be used in the crane specification. It cannot be used in the tower specification.
*4 Europe specification machines only.



○ : Standard ● : Optional — : No setting

Item		Crane	Crane / Tower	Clamshell
Attachment	15 m Basic Boom (Boom base: 7.5 m, Top: 7.5 m)	○	○	○
	3 m Boom Insert	●	●	●
	6 m Boom Insert	●	●	●
	9 m Boom Insert	●	●	●
	Parts set for 10 m crane jib [10 m Basic jib, Anti-two block, Jib mast]	●	●	-
	6 m Crane Jib Insert	●	●	-
	51.35 m Tower Boom (Tower/luffing (boom) base: 7.5 m, 3 m × 2, 9 m × 4, Tower/luffing (boom) top: 1.85 m)	-	○	-
	9 m Boom Insert (For tower, with upper spreader rail)	-	○	-
	9 m Boom Insert (For tower)	-	○	-
	45 m Tower Jib (Tower/luffing jib base: 9 m, 3 m, 6 m, 9 m × 2, Tower/luffing jib top: 9 m)	-	○	-
	Midpoint Pendant Rope (Required when the boom length is 66 m or longer)	●	●	-
	3 m Tower/Luffing Jib Insert	-	○	-
	6 m Tower/Luffing Jib Insert	-	○	-
	9 m Tower/Luffing Jib Insert	-	○	-
	Auxiliary Sheave [including Auxiliary sheave anti-two block]	●	●	-
	120 t Hook (5 sheaves)	●	●	-
	80 t Hook (3 sheaves)	●	●	-
	35 t Hook (1 sheave)	●	●	-
Wire Rope	Front Winch (φ 26)	Mono Rope EP 3XF (40)	○	-
		P · S (19) + 39XP · 7	●	-
		XP IWRC 6 X WS (31)	-	○ ^{*6}
	Rear Winch (φ 26)	Mono Rope EP 3XF (40)	●	-
		P · S (19) + 39XP · 7	●	-
		IWRC 6 X P · WS (31)	○ ^{*7}	-
		XP IWRC 6 X WS (31)	-	○ ^{*8}
	Third Winch (φ 26)	Mono Rope EP 3XF (40)	●	-
Safety Device	P · S (19) + 39XP · 7		●	-
	IWRC 6 X P · WS (31)		○	-
	XP IWRC 6 X WS (31)		○	-
	Moment Limiter		○	○
	3 Color Percentage Indicator		●	●
	Gate Lock Lever		○	○
	Individual Winch Operation Lever Lock (Front, Rear, Hoist, Travel) ^{*5}		○	○
	Automatic Drum Lock (Boom Hoist)		○	○
	Winch Drum Lock (Front/Rear)		○	○
	Swing Lock		○	○
	Swing Alarm		○	○
	Travel Alarm		○	○
	Auto Slowdown (Slow stop)		○	○
	Boom Hoist Limiting Device		○	○
	Secondary Boom Over Hoist Prevent Device		○	○
	Warning Alarm		○	○
	Monitor Panel (Machine monitoring)		○	○
	Engine Start Interlock System		○	○
	Emergency Engine Stop Switch (In cab)		○	○
	Lifting Height Indication Device		○	○
	Anti-Two Block		○	-
	Tower Strut Overhoist Prevention Device		-	○
	Tower Jib Overhoist Prevention Device		-	○
	Secondary Tower Jib Overhoist Prevention Device		-	○
	Tower Jib Connection Detection Device		-	○
	Tower Jib Position Detection Device		-	○
	Moment Limiter (M/L) Mode Selector (In left house)		● / ○ ^{*9}	● / ○ ^{*9}
	Swing Restriction Unit		●	●
	Lowering Limiter		● / ○ ^{*9}	● / ○ ^{*9}
	Anemometer		●	-
	Obstacle Lights (Fixed lights)		●	-
	TW Jib Top Crane Boom Camera Monitor System (TV monitor)		-	●
	Drum and Rear View Monitor System (3 cameras)		●	●
	Cab Roof Window Guard		● / ○ ^{*9}	● / ○ ^{*9}

^{*5} An operation lever lock is not attached to the front, rear or hoist when the cross operation lever is installed.
^{*6} Used for opening/closing rope. 82m length rope required for 12m diggind depth with 21m boom length.
^{*7} Required as a tower jib hoisting rope. In the crane jib specification, can also be used as a hoisting rope when using a crane jib or auxiliary sheave.
^{*8} Used for supporting rope. 70m length rope required for 12m diggind depth with 21m boom length.
^{*9} Europe specification machines only.



SCX1200-3

TECHNICAL DATA

Equipment List
Standard and Optional Equipment

○ : Standard ● : Optional — : No setting

Item		Crane	Crane / Tower	Clamshell
Common parts	Boom Foot Pin Removal / Installation Cylinder	●	●	●
	Boom Back Stop	○	○	○
	Boom Angle Sensor	○	○	○
	Tower and Crane Boom Angle Sensor	-	○	-
	Boom Lifting Piece	○	○	○
	Assembly Pad ^{*10}	●	●	-
	Quick Draw for Side Frame Self Assembly ^{*11}	●	●	●
	Counterweight with Self Assembly Unit	●	●	●
	Skywalk (With Stanchion)	●	●	-
	Skywalk (Without Stanchion)	●	●	-
	Boom Top Under Surface Buffer (Protector)	●	●	●
	Load Table Sign (Whiteboard, boom base installation)	●	●	●
	Insertable Company Name Plate (Both side surfaces of the machine)	●	●	●
	Opening / Closing / Support Rope Stopper	-	-	○
	Hyd. Tagline (6 × Fi (29) ϕ 10 mm × 55 m)	● ^{*12}	● ^{*12}	○
	Reeving Winch (4 × F (30) ϕ 8 mm × 250 m)	● ^{*12}	● ^{*12}	-
	Reeving Winch cum For hydraulic tagline (6 × Fi (29) ϕ 10 mm × 55 m)	● ^{*12}	● ^{*12}	-
	Hydraulic tagline For reeving (6 × Fi (29) ϕ 10 mm × 220 m)			
	Reduction Counterweight Specification	● ^{*13}	● ^{*13}	-
	Sling Ropes for Disassembly and Assembly (For counterweights, Crawlers)	●	●	●
	Air Cleaner Single Element	○	○	○
	Air Cleaner Double Element	●	●	●
	Additional Fuel Filter (Triple filter)	●	●	●
	Additional Spare Parts (Hydraulic oil filter)	●	●	●
	Additional Tools (Large hammer, Crowbar, Chisel)	●	●	●
Other	Standard Supplied Tools	○	○	○
	Standard Spare Parts	○	○	○

*10 The assembly pad is required for the following attachments.

- Crane Boom Longest Length 75m
- Crane Boom Length 72m + Aux. Sheave
- Crane Boom Length 63m + Crane Jib

It is not required for the tower attachment.

*11 When using the reeving winch or hydraulic tagline, remove the side frame self assembly quick draw.

*12 (1) Hydraulic tagline (maximum line pull: 2.9 kN (300 kg))

 (2) Reeving winch unit (maximum line pull: 11.8 ZkN (1,200 kg))

 (3) Reeving winch and hydraulic tagline

 (Line pull: For hydraulic tagline (maximum line pull: 1.5 kN (150 kg)) /for reeving winch (maximum line pull: 2.9 kN (300 kg))

*13 The reduction counterweight specification can only be used for the crane specification, with the exception of the crane jib.



[Redacted Title]

M E M O

SCX1200-3

[Dotted lines for writing content]



MEMO





- We are constantly improving our products and therefore reserve the right to change designs and speafications without notice.
- Units in this specification are shown under International System of Units; the figures in parenthesis are under Gravitational System of Units as old one.

**Hitachi Sumitomo Heavy Industries
Construction Crane Co.,Ltd.**

9-3, Higashi-Ueno 6-chome, Taito-ku, Tokyo 110-0015, Japan
Phone: 81-3-3845-1387 Facsimile: 81-3-3845-1394

<http://www.hsc-crane.com>