



SCX1500A-3
Stage III A

SCX ***1500A-3***

HYDRAULIC CRAWLER CRANE

Specifications ***&*** ***Lifting Capacities***

Hoist Rope 26mm

HITACHI SUMITOMO






SCX1500A-3

VARIATION

Variation of The Attachment


Line Speed *	Front / Rear Winch (Rated with 12 t load)	m/min	110 (45)
	Third Winch (Rated with 12 t load)		95 (30)
	Boom Hoist Winch		44
Swing Speed		min ⁻¹ (rpm)	1.7
Travel Speed High / Low *		km/h	1.5 / 0.9
Gradeability		% (Degree)	30 (17)
Engine Model		ISUZU 6HK1 (Stage IIIA)	
Engine Rated Output Power		kW/min ⁻¹ (ps/rpm)	200.6 / 1850 (269 / 1850)

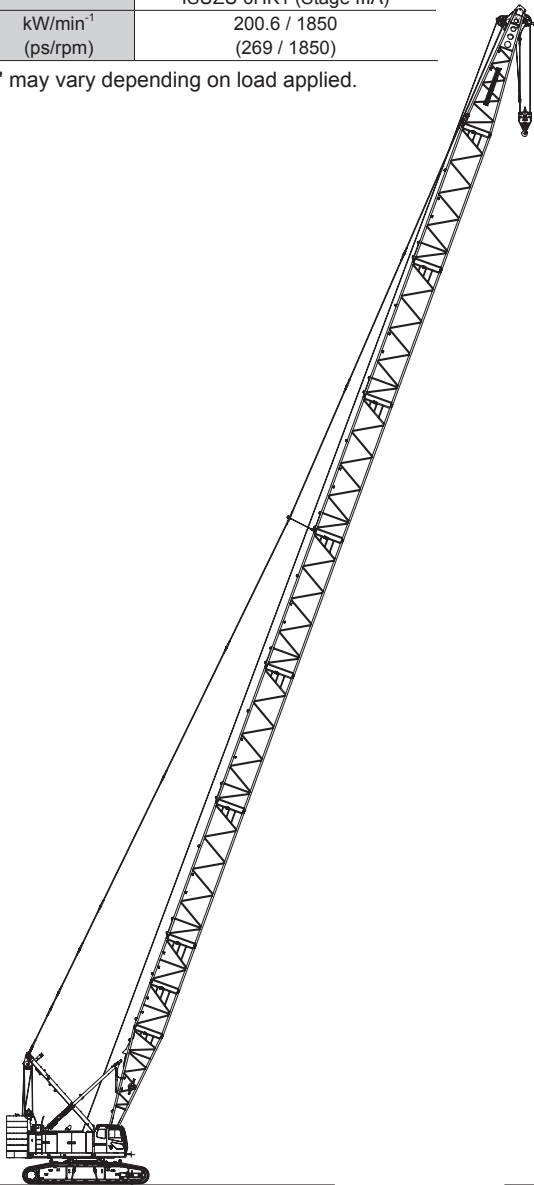Note : Speeds marked with "*" may vary depending on load applied.




Crane Specification
(Boom Longest Length)

Boom Length	m	15 to 75
Ground Contact Pressure	kPa (kgf/cm ²)	109 (1.11) (Boom longest length with 35 t hook)
Overall Operating Weight	t	Approximately 146 (Boom longest length with 35 t hook)

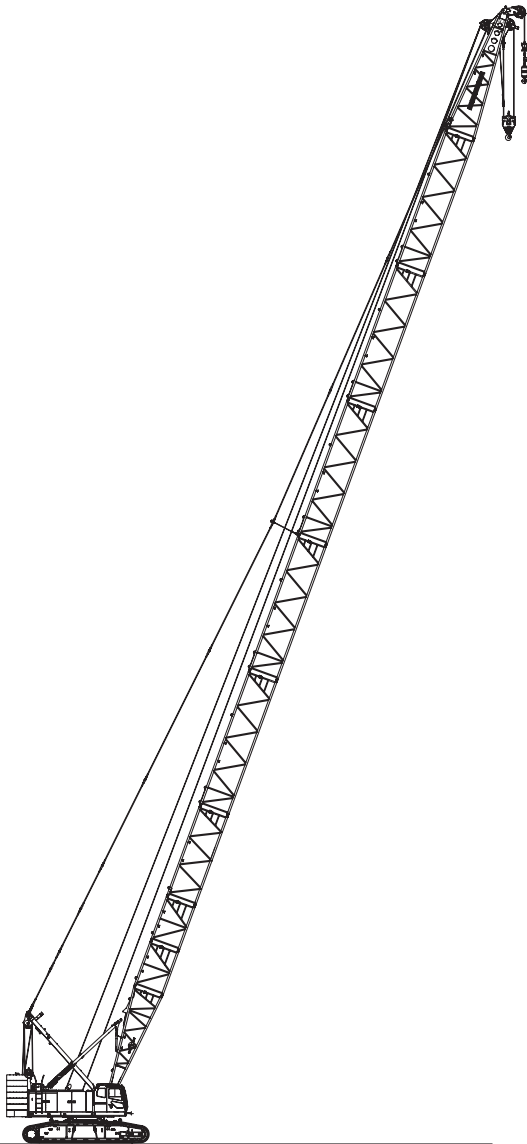

Crane Specification
(Boom Longest Length with Aux. Sheave)

Boom Length	m	15 to 72
Ground Contact Pressure	kPa (kgf/cm ²)	109 (1.11) (Boom longest length + 35 t aux. sheave + 12 t hook attached)
Overall Operating Weight	t	Approximately 147 (Boom longest length + 35 t aux. sheave + 12 t hook attached)

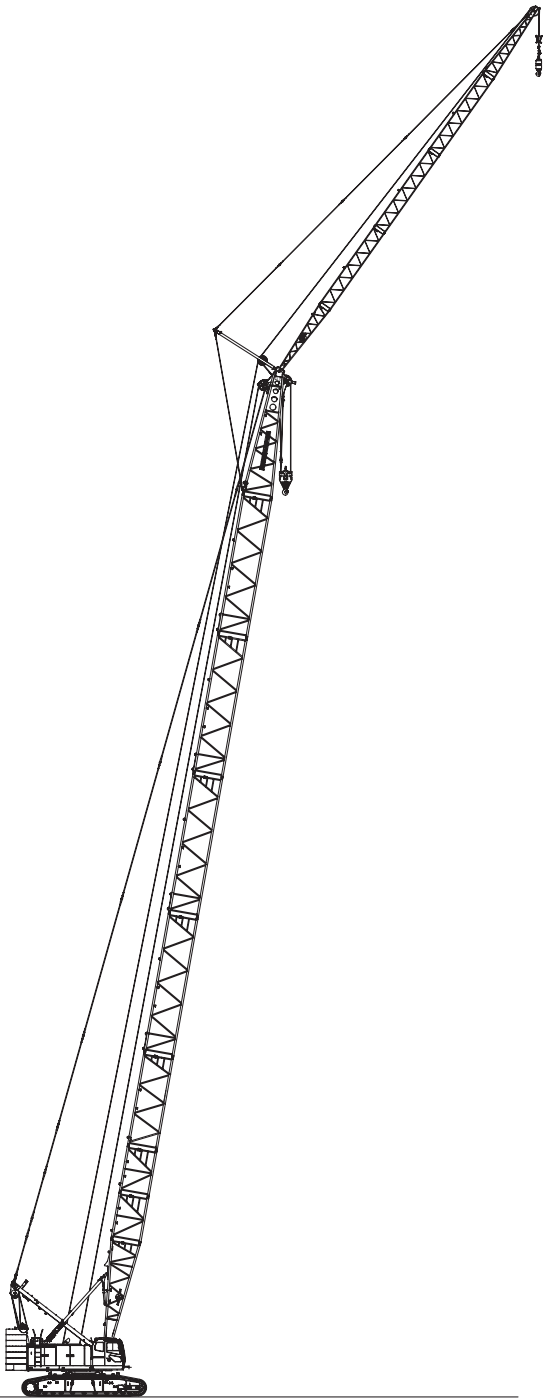

Crane Specification
(Boom Longest Length with Crane Jib)

Boom Length	m	24 to 63
Crane Jib Length	m	10 to 28
Boom + Crane Jib Longest Length	m	63 + 28
Ground Contact Pressure	kPa (kgf/cm²)	110 (1.12) (Boom + crane jib longest length 35 t + 12 t hook attached)
Overall Operating Weight	t	Approximately 148 (Boom + crane jib longest length 35 t + 12 t hook attached)



SCX1500A-3

CONTENTS

VARIATION

Variation of The Attachment	2
-----------------------------	---

SPECIFICATIONS

Specifications	6
Crane Specifications	7
Dimensions and Specifications	7
Boom and Crane Jib Configurations	8
Combination of Boom and Crane Jib (Offset Angle 10° and 30°)	9
Working Ranges	10
Main Boom	10
Main Boom with Aux. Sheave.....	11
Main Boom with 28 m Crane Jib	12
Gross Rated Load Table	13
Main Boom	13
Aux. Sheave	14
Main Boom with Aux. Sheave.....	15
Crane Jib	16
Main Boom with Crane Jib	23
Main Boom (Using Third Winch)	30
Main Boom with Aux. Sheave (Using Third Winch).....	31
Clamshell Specifications	32
Dimensions and Specifications	32
Working Ranges	32
Specifications	32
Clamshell Bucket.....	32
Gross Rated Load Table.....	32



TECHNICAL DATA

Weights and Dimensions of Disassembled Units	33
Weights and Dimensions List	33
Equipment List	38
Standard and Optional Equipment	38



Specifications



Engine

Model	ISUZU 6HK1
Type	4-cycle, Water-cooled, Direct injection, Turbo-charged, Diesel engine
Displacement	7.79 liters
Rated Output	200.6 kW / 1,850 min ⁻¹ (269 ps / 1,850 rpm)
Fuel Tank Capacity	460 liters
Notes	Engine meets Tier 3 / Stage IIIA of engine exhaust gas emission regulations. Engine rated horsepower is based on international rating formula that includes engine alternator and without fan.



Control

Control System	Main actuators are actuated by main hydraulic system controlled with pilot hydraulic system. Safety devices are securely operated by combined various electronic control with hydraulic system. Working speed can be precisely controlled according to control lever stroke and control dials depending on work.
Control Levers	Designed and positioned based on ergonomics. Armchair lever type is standard. Cross operation lever type and front lever type are available as option.
Display Panel Design	8 inches size. Located to check work state easily without disturbing the view of the operator.



Hydraulic System

Hydraulic Oil Tank Capacity	320 liters		
Hydraulic Pump Capacity	Max.	31.4 MPa	
	P1	259 liters / min	for Front, Rear , boom hoist winch and travel
	P2	259 liters / min	for Front, Rear , third winch and travel
	P3	148 liters / min	for Swing , Jack and Sideframe connect
	P4	38 liters / min	Pilot control, Brake cooling, Reeving tagline, etc
	P5	38 liters / min	
	P6	38 liters / min	
	P7	29 liters / min	



Winch

Front and Rear Winch				
Winch		Front	Rear	
Rope Diameter		26 mm	26 mm	
Rope Length	Incorporated	260 m	160 m	for Aux. sheave
		-	195 m	for Crane jib
	Max. for Work	300 m	300 m	
	Max. for Non Work	360 m	360 m	
Line Pull	Rated	117 kN	117 kN	
	Max. at 1st Lay	215 kN	215 kN	
Optional Equipment		Free fall winch with brake controlled by pedal operation.		
		High-speed winching is possible by ECO winch mode with low engine speed under light loads.		
Boom Hoist Winch				
Rope Diameter		22.4 mm		
Rope Length	Incorporated	195 m		
Hydraulic motor with multi-disc brakes.				

Third Winch		
Rope Diameter		26 mm
Rope Length	Incorporated	220 m
	Max. for Work	170 m
	Max. for Non Work	220 m
Line Pull	Rated	117 kN
	Max. at 1st Lay	215 kN
Optional Equipment		Free fall winch with brake controled by pedal operation.



Swing System

Consisted of 2 hydraulic motors with reduction gear and multi-disc brakes and a swing bearing which has inner tooth. Optional swing brake pedal enables operator to control swing precisely.
--



Mast

Mast is box structure. Easy assemble for front attachment.
--



Counterweight

Upper Weight	Total Weight	56.4 ton
	9.1 ton Base Weight	1 piece
	8.1 ton Insert Weight	5 pieces
	6.8 ton Top Weight	1 piece
Lower Weight	Total Weight	9 ton
	4.5 ton Lower Weight	2 pieces



Carbody Frame

Welded steel construction with jack up device and crawler sideframe connect cylinders.
--




Crawler Sideframe

Frame	Welded steel box construction. Hook on and joint pin design for crawler sideframe connection to carbody frame.	
Crawler Shoe	Cast iron 965mm width flat shoes each side.	
Upper Roller	5 pieces each side.	
	Double flange type : 3 pieces	
	Single flange type : 2 pieces	
Lower Roller	11 pieces each side.	
	Forging heat treated steel with double flange type. 2 plane bearing with floating seal for lifetime lubrication.	
	1 peace each side.	
Travel Device	Hydraulic travel device (Hydrayulic motor and reducer)	
	Travel speed	High : 1.5 km/h
	(Gradability : 30%)	Low : 0.9 km/h



Crane Specifications

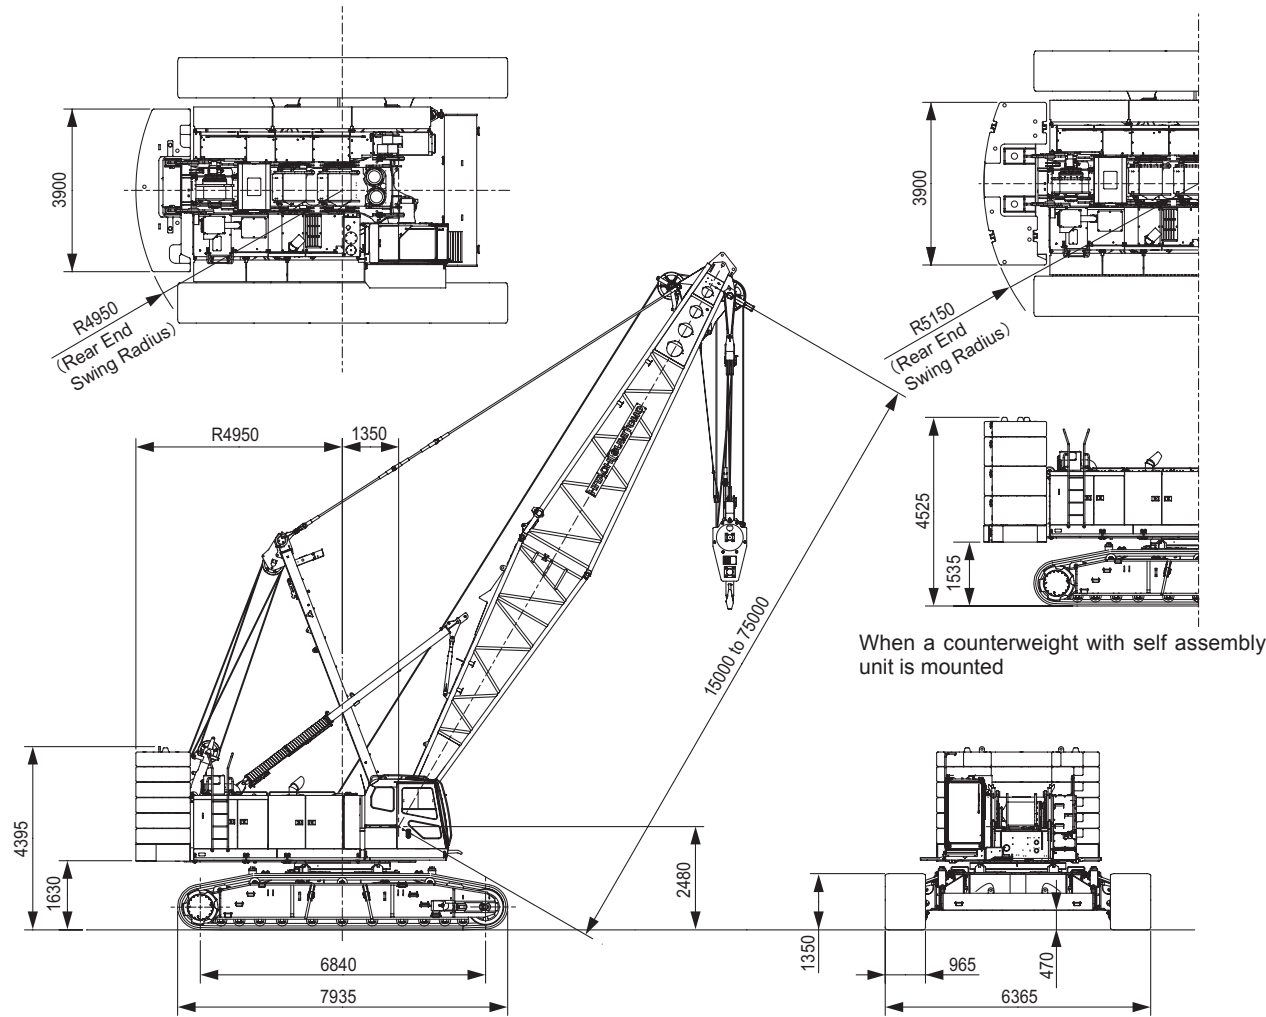Dimensions and Specifications



Crane Specifications		
Max. Lifting Load × Working Radius	t × m	150×4.5
Basic Boom Length	m	15
Max. Boom Length	m	75
Max. Crane Jib Length	m	10 to 28
Max. Boom + Jib Length	m	63 + 28
Ground Contact Pressure	kPa (kgf/cm²)	103 (1.06) (w / Basic Boom, 150 t Hook)
Overall Operating Weight	t	Approximately 139 (w / Basic Boom, 150 t Hook)

Hook Weight	
150 t	2,590 kg
120 t	2,350 kg
80 t	1,350 kg
35 t	900 kg
12 t	510 kg

NOTE : Data is expressed in SI units followed by conventional units in ().

Front/Rear Third Winch Rope No. of Falls and Lifting Load													
Hook Capacity (t)	Maximum Rated Load (t)												
	13 Falls	12 Falls	11 Falls	10 Falls	9 Falls	8 Falls	7 Falls	6 Falls	5 Falls	4 Falls	3 Falls	2 Falls	1 Fall
150	150	144	132	120	108	96	84	72	60	48	36	24	-
120	-	-	-	120	108	96	84	72	60	48	36	24	-
80	-	-	-	-	-	-	80	72	60	48	36	24	-
35	-	-	-	-	-	-	-	-	-	-	35	24	-
12	-	-	-	-	-	-	-	-	-	-	-	-	12

SCX1500A-3

SPECIFICATIONS

Specifications
Boom and Crane Jib Configurations

Boom and Crane Jib Configurations


Boom (1/2)		Boom (2/2)	
Boom Length (m)	Boom Configurations	Boom Length (m)	Boom Configurations
15		48	
18			
21		51	
24		54	
27		57	
30		60	
33		63	
36		66	
39		69	
42		72	
45		75	

▽ indicates the midpoint pendant rope connection position.

Aux. Sheave Installable Boom Length																					
Boom Length (m)	15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
With Aux. Sheave	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×

(○ : Attachable × : Not Attachable)

Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure		Pendant Rope			
Symbols	Boom Length (m)	Length (m)	Rope Diameter (mm)	Imprint	
3	3	1.2	40	□ • △ • 40 • 1.2 • C	
6	6	2.6	40	□ • △ • 40 • 2.55 • C	
7.5	7.5	3	40	□ • △ • 40 • 3 • C	
9	9	6	40	□ • △ • 40 • 6 • C	
		6.9	40	□ • △ • 40 • 6.9 • C	
		9	40	□ • △ • 40 • 9 • C	



Specifications

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)

SPECIFICATIONS

SCX1500A-3

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)

Combination of Boom and Crane Jib (Offset Angle 10° and 30°)																						
Boom Length (m)		15	18	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66	69	72	75
Jib Length (m)	10	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
	16	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
	22	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×
	28	×	×	×	○	○	○	○	○	○	○	○	○	○	○	○	○	○	×	×	×	×

(○ : Attachable × : Not Attachable)

Crane Jib (Offset Angle 10° and 30°)			Crane Jib Configurations	
Crane Jib Length (m)		Offset Angle		
10	10°			
	30°			
16	10°			
	30°			
22	10°			
	30°			
28	10°			
	30°			


Check the pendant rope with referring to the imprints on the rope end.

Dimensions Not Shown In The Figure		Jib Pendant Rope			
Symbols	Jib Length (m)	Length (m)	Rope Diameter (mm)	Imprint	
5	5	1.4	24	□ • △ • 24 • 1.4 • S	
6	6	5.7	24	□ • △ • 24 • 5.7 • S	
		9.6	24	□ • △ • 24 • 9.6 • S	
		10	26	□ • △ • 26 • 10 • S	




Working Ranges

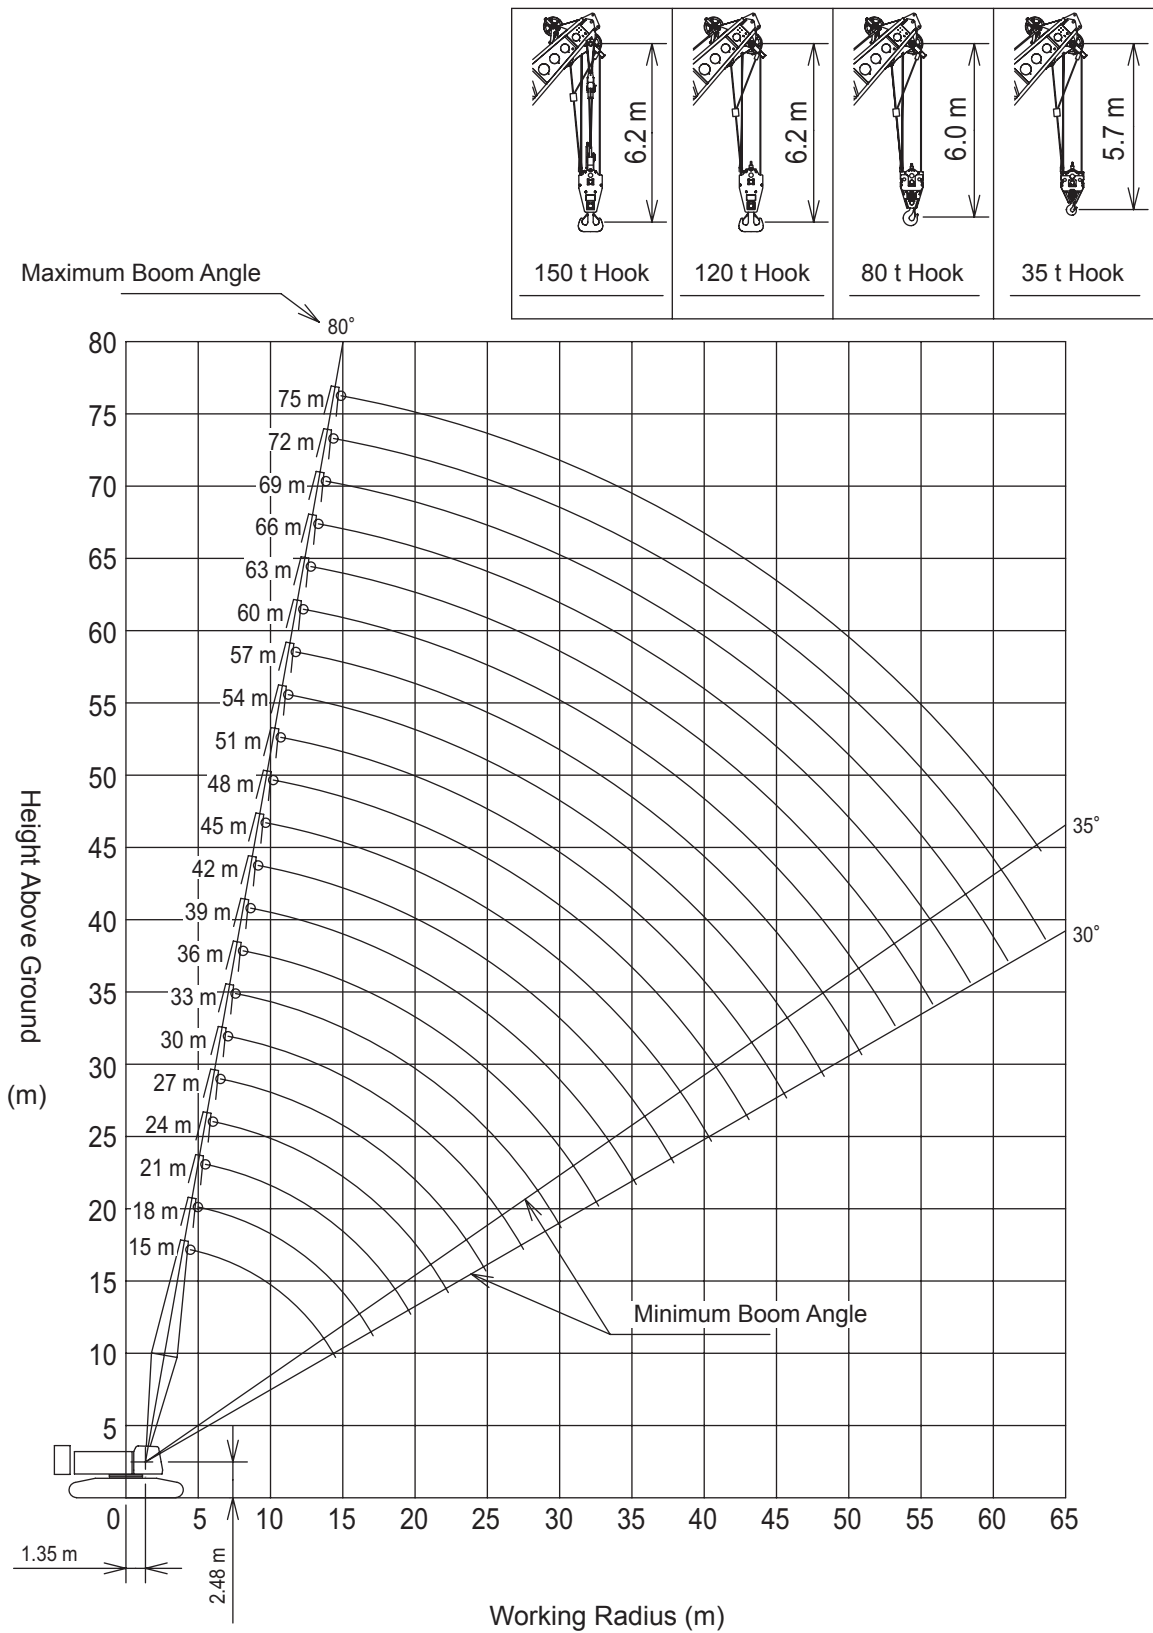■ Main Boom





■ Main Boom with Aux. Sheave

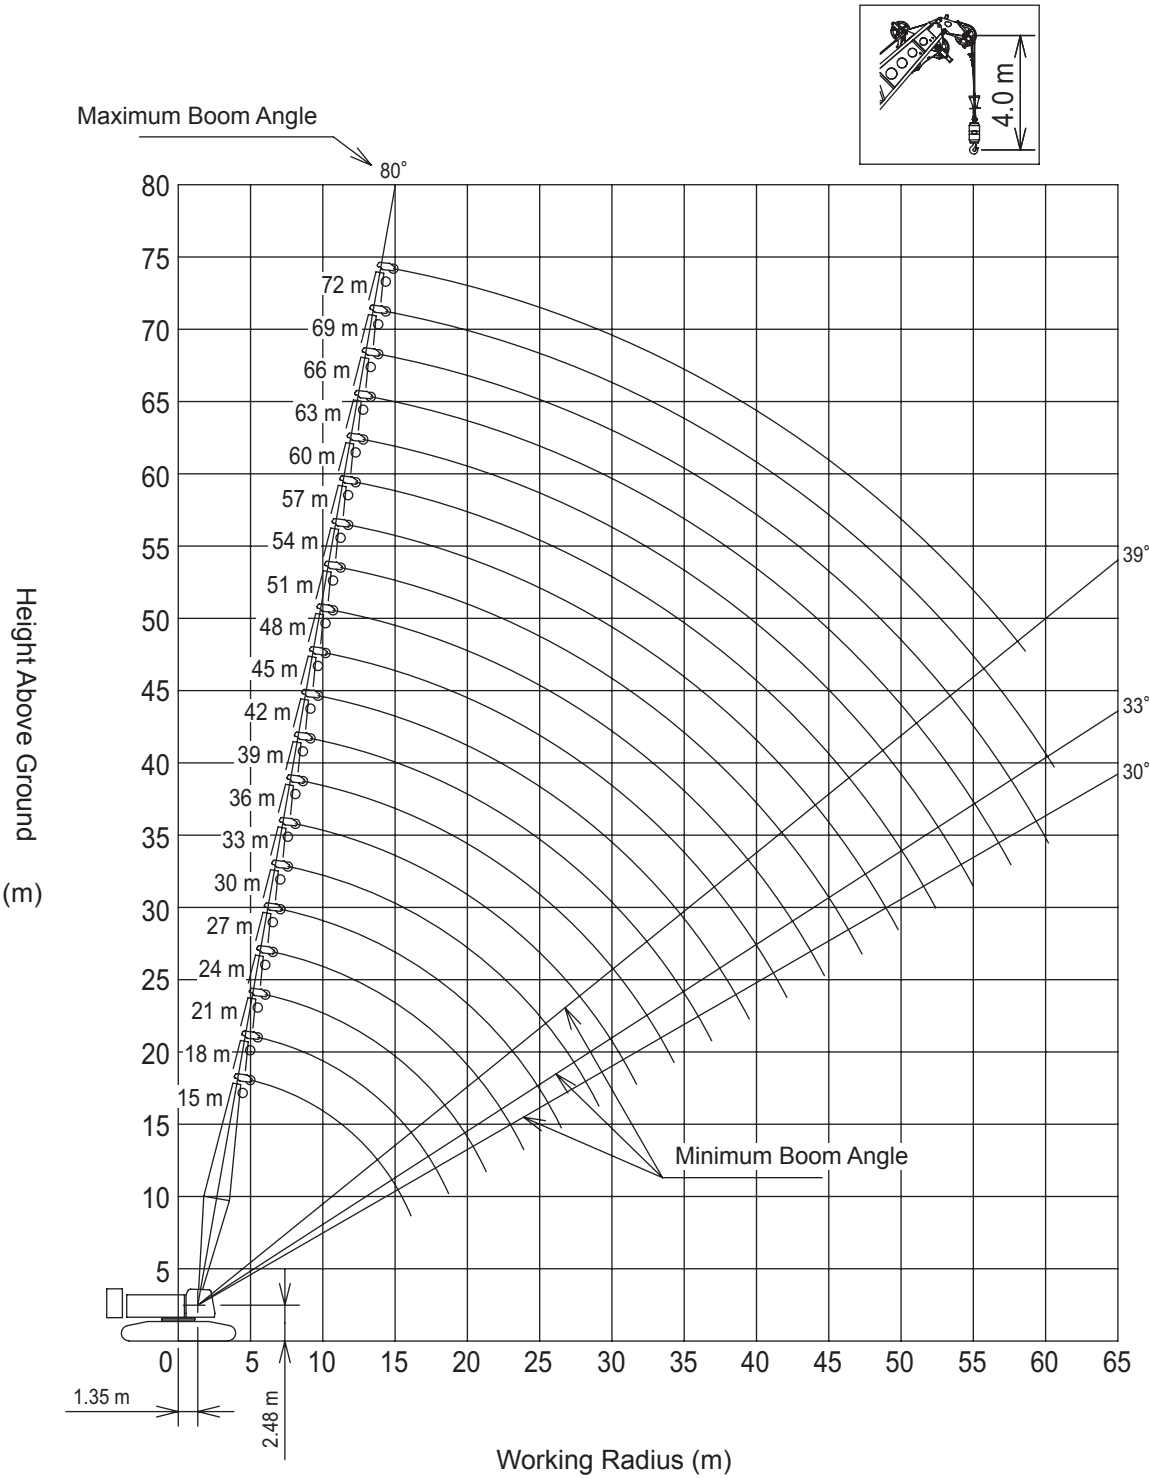


SCX1500A-3

SPECIFICATIONS

Specifications
Working Ranges

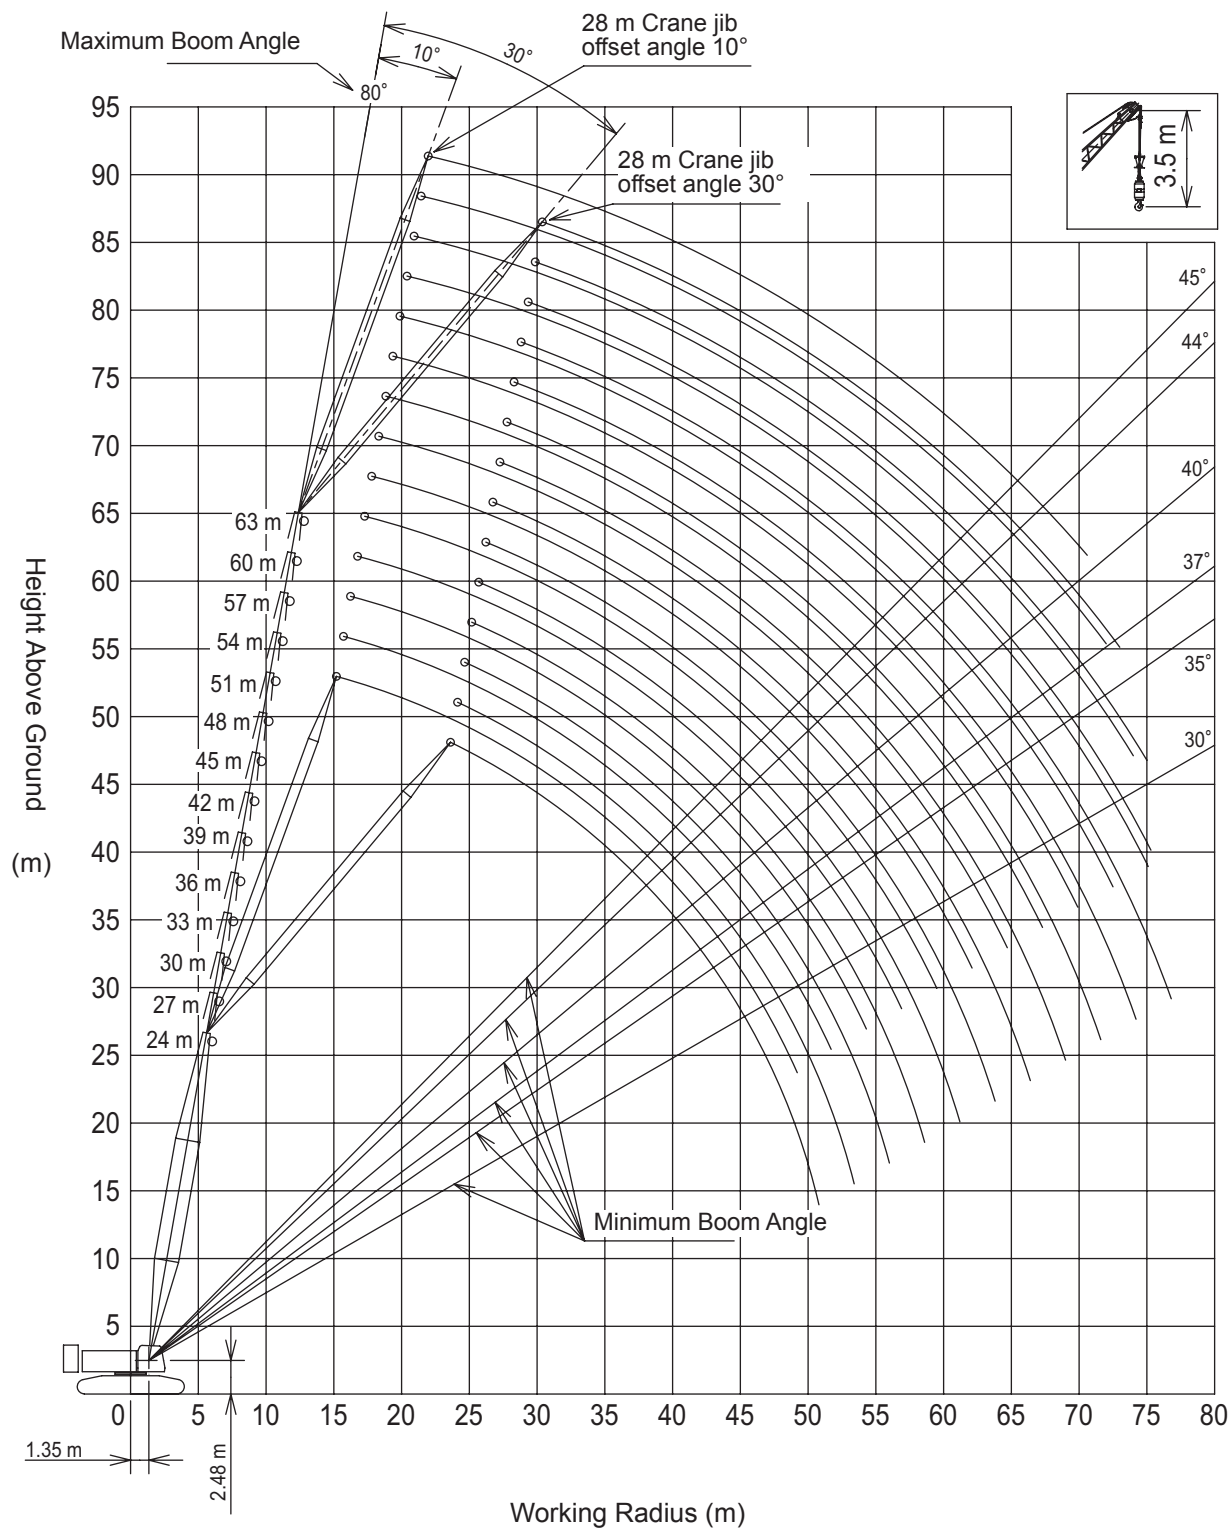■ Main Boom with 28 m Crane Jib





Gross Rated Load Table

Main Boom



Working Radius(m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius(m)
4.5	150.0											4.5
5.0	135.2	132.0 /5.2										5.0
5.5	123.4	123.3	108.0 /5.7									5.5
6.0	113.5	113.4	108.0	96.0 /6.3	84.0 /6.8							6.0
7.0	97.7	97.6	97.8	96.0	84.0	72.0 /7.4	72.0 /7.9					7.0
8.0	85.6	85.5	85.7	85.6	84.0	72.0	72.0	60.0 /8.5				8.0
9.0	73.4	73.5	73.9	73.9	73.9	72.0	72.0	60.0	60.0	48.0 /9.6		9.0
10.0	62.8	62.9	63.3	63.3	63.2	63.2	63.1	60.0	60.0	48.0	48.0 /10.1	10.0
12.0	48.4	48.5	48.8	48.8	48.7	48.7	48.6	48.5	48.4	48.0	47.7	12.0
14.0	39.1	39.2	39.5	39.5	39.4	39.4	39.2	39.1	39.0	39.0	38.8	14.0
16.0	37.3 /14.5	32.6	33.0	33.0	32.8	32.8	32.7	32.6	32.4	32.4	32.2	16.0
18.0		29.8 /17.1	28.1	28.1	28.0	28.0	27.8	27.7	27.6	27.5	27.3	18.0
20.0			24.9 /19.7	24.4	24.3	24.2	24.1	24.0	23.8	23.8	23.6	20.0
22.0				21.5	21.3	21.3	21.2	21.0	20.9	20.8	20.6	22.0
24.0				21.1 /22.3	19.0	18.9	18.8	18.6	18.5	18.4	18.2	24.0
26.0					18.0 /24.9	16.9	16.8	16.6	16.5	16.4	16.2	26.0
28.0						15.6 /27.5	15.1	15.0	14.8	14.7	14.5	28.0
30.0							13.7	13.5	13.4	13.3	13.1	30.0
32.0							13.6 /30.1	12.3	12.2	12.1	11.8	32.0
34.0								11.9 /32.7	11.1	11.0	10.8	34.0
36.0									10.5 /35.3	10.0	9.8	36.0
38.0										9.2 /37.9	9.0	38.0
40.0											8.2	40.0
42.0											8.1 /40.5	42.0

Working Radius(m)	Boom length (m)										Working Radius(m)
	48	51	54	57	60	63	66	69	72	75	
10.0	36.0 /10.6	36.0 /11.2	36.0 /11.7								10.0
12.0	36.0	36.0	36.0	36.0 /12.3	24.0 /12.9	24.0 /13.5					12.0
14.0	36.0	36.0	36.0	35.7	24.0	24.0	24.0	24.0 /14.5	23.6 /15.1	21.0 /15.6	14.0
16.0	32.2	32.0	31.8	31.5	24.0	24.0	24.0	24.0	23.2	20.9	16.0
18.0	27.3	27.1	26.9	26.8	24.0	24.0	24.0	24.0	22.3	20.1	18.0
20.0	23.5	23.4	23.2	23.0	23.0	22.7	22.4	21.9	21.3	19.3	20.0
22.0	20.6	20.4	20.2	20.0	20.0	19.8	19.6	19.3	18.8	18.3	22.0
24.0	18.1	18.0	17.8	17.6	17.6	17.4	17.2	17.0	16.7	16.3	24.0
26.0	16.1	16.0	15.8	15.6	15.5	15.3	15.2	15.0	14.8	14.5	26.0
28.0	14.4	14.3	14.1	13.9	13.9	13.6	13.5	13.3	13.1	12.9	28.0
30.0	13.0	12.8	12.6	12.5	12.4	12.2	12.0	11.9	11.6	11.5	30.0
32.0	11.8	11.6	11.4	11.2	11.2	10.9	10.8	10.6	10.4	10.2	32.0
34.0	10.7	10.5	10.3	10.1	10.1	9.9	9.7	9.5	9.3	9.1	34.0
36.0	9.7	9.6	9.4	9.2	9.1	8.9	8.7	8.5	8.3	8.2	36.0
38.0	8.9	8.7	8.5	8.3	8.3	8.0	7.9	7.7	7.5	7.3	38.0
40.0	8.1	8.0	7.8	7.6	7.5	7.3	7.1	6.9	6.7	6.5	40.0
42.0	7.5	7.3	7.1	6.9	6.8	6.6	6.4	6.3	6.0	5.9	42.0
44.0	7.1 /43.1	6.7	6.5	6.3	6.2	6.0	5.8	5.6	5.4	5.2	44.0
46.0		6.2 /45.7	5.9	5.8	5.6	5.4	5.3	5.1	4.9	4.7	46.0
48.0			5.4	5.3	5.1	4.9	4.8	4.6	4.4	4.2	48.0
50.0			5.4 /48.3	4.8	4.7	4.5	4.3	4.1	3.9	3.7	50.0
52.0				4.6 /50.9	4.2	4.0	3.9	3.7	3.5	3.3	52.0
54.0					4.0 /53.2	3.6	3.5	3.3	3.1	2.9	54.0
56.0						3.3 /55.8	3.1	2.9	2.7	2.5	56.0
58.0							2.8	2.6	2.4	2.2	58.0
60.0							2.7 /58.4	2.3	2.1	1.9	60.0
62.0								2.1 /61.0	1.8	1.6	62.0
64.0									1.6 /63.6	1.4 /63.3	64.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.

2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.

3. Be sure to attach the hanger sheaves block to the top boom when boom length is 15m and 18m.
5. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

6. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.

7. The counterweight is 65.4ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)

8. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)													
		13falls	12falls	11falls	10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls	
150	2.59	150	144	132	120	108	96	84	72	60	48	36	24		
120	2.35				120	108	96	84	72	60	48	36	24		
80	1.35							80	72	60	48	36	24		
35	0.90											35	24		
12	0.51													12	



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Aux. Sheave



Radius (m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Radius (m)
5.6	12.0											5.6
6.0	12.0	12.0 / 6.3	12.0 / 6.9									6.0
7.0	12.0	12.0	12.0	12.0 / 7.4								7.0
8.0	12.0	12.0	12.0	12.0	12.0	12.0 / 8.5						8.0
9.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 9.6				9.0
10.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 10.1	12.0 / 10.7	12.0 / 11.2	10.0
12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	16.0
18.0	12.0 / 16.1	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0		12.0 / 18.7	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0			12.0 / 21.3	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0				12.0 / 23.9	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0					12.0	12.0	12.0	12.0	12.0	12.0	12.0	26.0
28.0					12.0 / 26.5	12.0	12.0	12.0	12.0	12.0	12.0	28.0
30.0						12.0 / 29.1	12.0	12.0	12.0	12.0	12.0	30.0
32.0							12.0 / 31.7	12.0	12.0	11.9	11.6	32.0
34.0								11.0	10.9	10.8	10.5	34.0
36.0								10.9 / 34.3	9.9	9.8	9.6	36.0
38.0									9.6 / 36.9	9.0	8.8	38.0
40.0										8.4 / 39.5	8.0	40.0
42.0											7.3	42.0
44.0											7.3 / 42.1	44.0

Radius (m)	Boom length (m)									Unit: ton
	48	51	54	57	60	63	66	69	72	Radius (m)
10.0	12.0 / 11.8									10.0
12.0	12.0	12.0 / 12.3	12.0 / 12.9	12.0 / 13.4						12.0
14.0	12.0	12.0	12.0	12.0	12.0	12.0 / 14.5	12.0 / 15.1	12.0 / 15.6		14.0
16.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0 / 16.2	16.0
18.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	18.0
20.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	20.0
22.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	22.0
24.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	24.0
26.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	26.0
28.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	28.0
30.0	12.0	12.0	12.0	12.0	12.0	12.0	11.8	11.6	11.4	30.0
32.0	11.6	11.4	11.2	11.0	10.9	10.7	10.5	10.4	10.1	32.0
34.0	10.5	10.3	10.1	9.9	9.8	9.6	9.4	9.2	9.0	34.0
36.0	9.5	9.3	9.1	8.9	8.9	8.6	8.5	8.3	8.1	36.0
38.0	8.7	8.5	8.3	8.1	8.0	7.8	7.6	7.4	7.2	38.0
40.0	7.9	7.7	7.5	7.3	7.2	7.0	6.8	6.7	6.4	40.0
42.0	7.2	7.0	6.8	6.6	6.6	6.3	6.2	6.0	5.7	42.0
44.0	6.6	6.4	6.2	6.0	5.9	5.7	5.5	5.3	5.1	44.0
46.0	6.4 / 44.7	5.9	5.6	5.5	5.4	5.1	5.0	4.8	4.6	46.0
48.0		5.6 / 47.3	5.1	5.0	4.9	4.6	4.5	4.3	4.0	48.0
50.0			4.7 / 49.8	4.5	4.4	4.2	4.0	3.8	3.6	50.0
52.0				4.1	4.0	3.7	3.6	3.4	3.1	52.0
54.0				4.0 / 52.4	3.6	3.4	3.2	3.0	2.7	54.0
56.0					3.4 / 55.0	3.0	2.8	2.6	2.4	56.0
58.0						2.7 / 57.6	2.5	2.3	2.0	58.0
60.0							2.2	2.0	1.9 / 58.6	60.0
62.0							2.1 / 60.2	1.9 / 60.6		62.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. Be sure to attach the hanger sheaves block to the top boom when boom length is 15m and 18m.
4. Be sure to remove the hanger sheaves block from the top boom when boom length is 21m or more.
5. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
150	2.59
120	2.35
80	1.35
35	0.90
12	0.51

6. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
7. The counterweight is 65.4ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)



Main Boom with Aux. Sheave



Radius (m)	Boom length (m)											Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
4.5	148.5											4.5
5.0	134.3	132.0 /5.2										5.0
5.5	122.6	122.4	108.0 /5.7									5.5
6.0	112.7	112.5	108.0	96.0 /6.3	84.0 /6.8							6.0
7.0	96.8	96.7	96.9	96.0	84.0	72.0 /7.4	72.0 /7.9					7.0
8.0	84.8	84.6	84.9	84.8	84.0	72.0	72.0	60.0 /8.5				8.0
9.0	73.0	73.1	73.5	73.5	73.4	72.0	72.0	60.0	60.0	48.0 /9.6		9.0
10.0	62.4	62.5	62.9	62.9	62.8	62.8	62.7	60.0	60.0	48.0	48.0 /10.1	10.0
12.0	48.1	48.1	48.4	48.4	48.3	48.3	48.2	48.1	48.0	47.9	47.0	12.0
14.0	38.8	38.8	39.1	39.1	39.0	39.0	38.8	38.7	38.6	38.5	38.3	14.0
16.0	36.9 /14.5	32.3	32.6	32.6	32.5	32.4	32.3	32.2	32.0	32.0	31.8	16.0
18.0		29.5 /17.1	27.8	27.8	27.6	27.6	27.4	27.3	27.2	27.1	26.9	18.0
20.0			24.6 /19.7	24.1	23.9	23.9	23.7	23.6	23.4	23.4	23.1	20.0
22.0				21.1	21.0	20.9	20.8	20.6	20.5	20.4	20.2	22.0
24.0				20.8 /22.3	18.6	18.5	18.4	18.2	18.1	18.0	17.8	24.0
26.0					17.7 /24.9	16.6	16.4	16.3	16.1	16.0	15.8	26.0
28.0						15.3 /27.5	14.8	14.6	14.4	14.3	14.1	28.0
30.0							13.4	13.2	13.0	12.9	12.7	30.0
32.0							13.3 /30.1	12.0	11.8	11.7	11.4	32.0
34.0								11.6 /32.7	10.7	10.6	10.4	34.0
36.0									10.1 /35.3	9.7	9.4	36.0
38.0										8.9 /37.9	8.6	38.0
40.0											7.9	40.0
42.0											7.7 /40.5	42.0

Radius (m)	Boom length (m)									Radius (m)
	48	51	54	57	60	63	66	69	72	
10.0	36.0 / 10.6	36.0 / 11.2	36.0 / 11.7							10.0
12.0	36.0	36.0	36.0	36.0 / 12.3	24.0 / 12.9	24.0 / 13.5				12.0
14.0	36.0	36.0	36.0	34.6	24.0	24.0	24.0	24.0 / 14.5	22.5 / 15.1	14.0
16.0	31.7	31.5	31.3	30.8	24.0	24.0	24.0	24.0	22.0	16.0
18.0	26.8	26.7	26.5	26.3	24.0	23.9	24.0	22.9	21.2	18.0
20.0	23.1	22.9	22.7	22.5	22.5	21.7	21.7	21.1	20.3	20.0
22.0	20.1	19.9	19.7	19.6	19.5	19.3	19.1	18.6	18.1	22.0
24.0	17.7	17.5	17.3	17.1	17.1	16.9	16.7	16.5	16.0	24.0
26.0	15.7	15.5	15.3	15.1	15.1	14.9	14.7	14.5	14.2	26.0
28.0	14.0	13.9	13.6	13.5	13.4	13.2	13.0	12.8	12.6	28.0
30.0	12.6	12.4	12.2	12.0	11.9	11.7	11.5	11.4	11.1	30.0
32.0	11.4	11.2	11.0	10.8	10.7	10.5	10.3	10.1	9.9	32.0
34.0	10.3	10.1	9.9	9.7	9.6	9.4	9.2	9.0	8.8	34.0
36.0	9.3	9.2	8.9	8.7	8.7	8.4	8.3	8.1	7.8	36.0
38.0	8.5	8.3	8.1	7.9	7.8	7.6	7.4	7.2	7.0	38.0
40.0	7.8	7.6	7.3	7.2	7.1	6.8	6.6	6.5	6.2	40.0
42.0	7.1	6.9	6.7	6.5	6.4	6.2	6.0	5.8	5.5	42.0
44.0	6.8 / 43.1	6.3	6.1	5.9	5.8	5.5	5.4	5.2	4.9	44.0
46.0		5.9 / 45.7	5.5	5.3	5.2	5.0	4.8	4.6	4.4	46.0
48.0			5.0	4.9	4.7	4.5	4.3	4.1	3.9	48.0
50.0			5.0 / 48.3	4.4	4.3	4.0	3.8	3.6	3.4	50.0
52.0				4.2 / 50.9	3.8	3.6	3.4	3.2	3.0	52.0
54.0					3.6 / 53.2	3.2	3.0	2.8	2.6	54.0
56.0						2.9 / 55.8	2.7	2.5	2.3	56.0
58.0							2.4	2.2	1.9	58.0
60.0							2.3 / 58.4	1.9		60.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. Be sure to attach the hanger sheaves block to the top boom when boom length is 15m and 18m.
4. Be sure to remove the hanger sheaves block from the top boom when boom length is 21m or more.
5. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
6. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
7. The counterweight is 65.4ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)
8. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)										
		13falls	12falls	11falls	10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls
150	2.59	150	144	132	120	108	96	84	72	60	48	36
120	2.35				120	108	96	84	72	60	48	36
80	1.35							80	72	60	48	36
35	0.90											35
12	0.51											12



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Crane Jib



Unit: ton								
Boom length (m)	24							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
9.7	12.0							9.7
10.0	12.0		12.0 / 11.8					10.0
12.0	12.0	12.0 / 12.6	12.0		8.8 / 13.9			12.0
14.0	12.0	12.0	12.0		8.8			14.0
16.0	12.0	12.0	12.0	9.0 / 16.5	8.8		5.4	16.0
18.0	12.0	12.0	12.0	9.0	8.6		5.1	18.0
20.0	12.0	12.0	12.0	9.0	8.3	6.4 / 20.4	4.8	20.0
22.0	12.0	11.7	12.0	9.0	7.9	6.4	4.5	22.0
24.0	12.0	11.2	12.0	9.0	7.6	6.4	4.3	24.0
26.0	12.0	10.8	12.0	8.7	7.3	6.4	4.1	26.0
28.0	12.0	10.4	11.9	8.3	7.0	6.4	3.9	28.0
30.0	12.0	10.2	11.1	8.0	6.8	6.2	3.7	30.0
32.0	12.0	10.0	10.4	7.7	6.6	5.9	3.6	32.0
34.0	12.0 / 32.2	9.9 / 32.8	9.8	7.5	6.4	5.7	3.4	34.0
36.0			9.3	7.3	6.2	5.4	3.3	36.0
38.0			8.9 / 37.9	7.2	6.1	5.3	3.2	38.0
40.0				7.2 / 38.8	5.9	5.1	3.1	40.0
42.0					5.8	5.0	3.0	42.0
44.0					5.8 / 43.5	4.9	2.9	44.0
46.0						4.9 / 44.8	2.8	46.0
48.0							2.7	48.0
50.0							2.7 / 49.2	50.0
52.0								2.6 / 50.8

Unit: ton								
Boom length (m)	27							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.0	12.0 / 10.2							10.0
12.0	12.0	12.0 / 13.2	12.0 / 12.3					12.0
14.0	12.0	12.0	12.0		8.8 / 14.4			14.0
16.0	12.0	12.0	12.0	9.0 / 17.1	8.8		5.4 / 16.5	16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2	18.0
20.0	12.0	12.0	12.0	9.0	8.4	6.4 / 21.0	4.9	20.0
22.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	22.0
24.0	12.0	11.5	12.0	9.0	7.8	6.4	4.4	24.0
26.0	12.0	11.1	12.0	8.9	7.5	6.4	4.2	26.0
28.0	12.0	10.7	12.0	8.5	7.2	6.4	4.0	28.0
30.0	12.0	10.4	11.8	8.2	7.0	6.3	3.8	30.0
32.0	12.0	10.2	11.1	7.9	6.7	6.1	3.7	32.0
34.0	12.0	10.0	10.4	7.7	6.5	5.8	3.5	34.0
36.0	11.6 / 34.8	9.9 / 35.4	9.9	7.5	6.4	5.6	3.4	36.0
38.0			9.4	7.3	6.2	5.4	3.3	38.0
40.0			9.0	7.2	6.1	5.2	3.2	40.0
42.0			8.9 / 40.5	7.2 / 41.4	5.9	5.1	3.1	42.0
44.0					5.9	5.0	3.0	44.0
46.0					5.8	4.9	2.9	46.0
48.0					5.8 / 46.1	4.8 / 47.4	2.8	48.0
50.0							2.8	50.0
52.0							2.7 / 51.7	52.0
54.0								2.6 / 53.4

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.

Hook Capacity (t)	Hook Weight (t)
150	2.59
120	2.35
80	1.35
35	0.90
12	0.51

4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The offset angles shown are of jib boom offset angle against the main boom, under load.
6. The counterweight is 65.4ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1500A-3

Crane Jib



Unit: ton								
Boom length (m)	30							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.7	12.0							10.7
12.0	12.0	12.0 /13.7	12.0 /12.8					12.0
14.0	12.0	12.0	12.0		8.8 /15.0			14.0
16.0	12.0	12.0	12.0	9.0 /17.6	8.8		5.4 /17.1	16.0
18.0	12.0	12.0	12.0	9.0	8.8		5.2	18.0
20.0	12.0	12.0	12.0	9.0	8.6	6.4 /21.5	5.0	20.0
22.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7	22.0
24.0	12.0	11.8	12.0	9.0	7.9	6.4	4.5	24.0
26.0	12.0	11.4	12.0	9.0	7.6	6.4	4.3	26.0
28.0	12.0	11.0	12.0	8.7	7.4	6.4	4.1	28.0
30.0	12.0	10.7	12.0	8.4	7.1	6.4	3.9	30.0
32.0	12.0	10.4	11.7	8.1	6.9	6.2	3.8	32.0
34.0	11.9	10.2	11.0	7.9	6.7	6.0	3.6	34.0
36.0	10.9	10.0	10.5	7.7	6.5	5.8	3.5	36.0
38.0	10.3 /37.4	9.9	9.9	7.5	6.3	5.6	3.4	38.0
40.0			9.5	7.3	6.2	5.4	3.2	40.0
42.0			9.0	7.2	6.1	5.2	3.1	42.0
44.0			8.6 /43.1	7.1	6.0	5.1	3.0	44.0
46.0					5.9	5.0	3.0	46.0
48.0					5.8	4.9	2.9	48.0
50.0					5.8 /48.7	4.8	2.8	50.0
52.0							2.8	52.0
54.0							2.7	54.0
56.0							2.7 /54.3	56.0

Unit: ton								
Boom length (m)	33							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
10.7	12.0 /11.3							10.7
12.0	12.0		12.0 /13.4					12.0
14.0	12.0	12.0 /14.3	12.0		8.8 /15.5			14.0
16.0	12.0	12.0	12.0		8.8		5.4 /17.6	16.0
18.0	12.0	12.0	12.0	9.0 /18.2	8.8		5.3	18.0
20.0	12.0	12.0	12.0	9.0	8.7		5.0	20.0
22.0	12.0	12.0	12.0	9.0	8.4	6.4 /22.1	4.8	22.0
24.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	24.0
26.0	12.0	11.7	12.0	9.0	7.8	6.4	4.4	26.0
28.0	12.0	11.3	12.0	8.9	7.5	6.4	4.2	28.0
30.0	12.0	11.0	12.0	8.6	7.3	6.4	4.0	30.0
32.0	12.0	10.7	12.0	8.3	7.0	6.4	3.9	32.0
34.0	11.7	10.4	11.6	8.1	6.8	6.1	3.7	34.0
36.0	10.7	10.2	11.0	7.9	6.7	5.9	3.6	36.0
38.0	9.9	10.0	10.2	7.7	6.5	5.7	3.5	38.0
40.0	9.1	9.2	9.5	7.5	6.3	5.5	3.3	40.0
42.0		9.0 /40.6	8.8	7.3	6.2	5.3	3.2	42.0
44.0			8.1	7.2	6.1	5.2	3.1	44.0
46.0			7.7 /45.7	7.1	6.0	5.1	3.0	46.0
48.0				7.1 /46.6	5.9	5.0	3.0	48.0
50.0					5.8	4.9	2.9	50.0
52.0					5.8 /51.3	4.8	2.8	52.0
54.0						4.8 /52.6	2.8	54.0
56.0							2.7	56.0
58.0							2.7 /56.9	58.0
60.0							2.6 /58.6	60.0



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Crane Jib



Unit: ton								
Boom length (m)	36							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
11.8	12.0							
12.0	12.0		12.0 /13.9					
14.0	12.0	12.0 /14.8	12.0					
16.0	12.0	12.0	12.0		8.8			
18.0	12.0	12.0	12.0	9.0 /18.7	8.8		5.4 /18.1	
20.0	12.0	12.0	12.0	9.0	8.8		5.1	
22.0	12.0	12.0	12.0	9.0	8.5	6.4 /22.6	4.9	
24.0	12.0	12.0	12.0	9.0	8.2	6.4	4.7	
26.0	12.0	11.9	12.0	9.0	7.9	6.4	4.5	3.4 /26.5
28.0	12.0	11.5	12.0	9.0	7.7	6.4	4.3	3.4
30.0	12.0	11.2	12.0	8.8	7.4	6.4	4.1	3.3
32.0	12.0	10.9	12.0	8.5	7.2	6.4	4.0	3.2
34.0	11.5	10.6	11.9	8.3	7.0	6.2	3.8	3.1
36.0	10.5	10.4	10.9	8.0	6.8	6.0	3.7	3.0
38.0	9.7	9.8	10.0	7.8	6.6	5.8	3.5	2.9
40.0	8.9	9.0	9.3	7.6	6.5	5.6	3.4	2.9
42.0	8.2	8.3	8.6	7.5	6.3	5.5	3.3	2.8
44.0	8.0 /42.6	7.9 /43.2	7.9	7.3	6.2	5.3	3.2	2.8
46.0			7.4	7.2	6.1	5.2	3.1	2.7
48.0			6.9	7.0	6.0	5.1	3.0	2.7
50.0			6.8 /48.3	6.7 /49.2	5.9	5.0	3.0	2.6
52.0					5.8	4.9	2.9	2.6
54.0					5.8 /53.9	4.8	2.8	2.6
56.0						4.8 /55.2	2.8	2.6
58.0							2.7	2.6
60.0							2.7 /59.5	2.6
62.0								2.6 /61.2

Unit: ton								
Boom length (m)	39							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.0	12.0 /12.4							
14.0	12.0	12.0 /15.4	12.0 /14.5					
16.0	12.0	12.0	12.0		8.8 /16.6			
18.0	12.0	12.0	12.0	9.0 /19.3	8.8		5.3 /18.7	
20.0	12.0	12.0	12.0	9.0	8.8		5.2	
22.0	12.0	12.0	12.0	9.0	8.6	6.4 /23.2	5.0	
24.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	
26.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 /27.1
28.0	12.0	11.8	12.0	9.0	7.8	6.4	4.4	3.4
30.0	12.0	11.4	12.0	8.9	7.6	6.4	4.2	3.3
32.0	12.0	11.1	12.0	8.7	7.3	6.4	4.0	3.2
34.0	11.3	10.8	11.7	8.4	7.1	6.4	3.9	3.1
36.0	10.3	10.6	10.7	8.2	6.9	6.1	3.8	3.0
38.0	9.5	9.7	9.8	8.0	6.8	5.9	3.6	3.0
40.0	8.7	8.9	9.1	7.8	6.6	5.8	3.5	2.9
42.0	8.1	8.2	8.4	7.6	6.4	5.6	3.4	2.8
44.0	7.4	7.5	7.8	7.5	6.3	5.4	3.3	2.8
46.0	7.1 /45.2	7.0 /45.8	7.2	7.3	6.2	5.3	3.2	2.7
48.0			6.7	6.8	6.1	5.2	3.1	2.7
50.0			6.2	6.3	6.0	5.1	3.0	2.7
52.0			6.0 /50.9	5.9 /51.8	5.9	5.0	3.0	2.6
54.0					5.6	4.9	2.9	2.6
56.0					5.2	4.8	2.8	2.6
58.0					5.2 /56.5	4.8 /57.8	2.8	2.6
60.0							2.7	2.6
62.0							2.7	2.6
64.0							2.7 /62.1	2.6 /63.8



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1500A-3

Crane Jib



Unit: ton

Boom length (m)	42								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.9	12.0								12.9
14.0	12.0	12.0 /15.9	12.0 /15.0						14.0
16.0	12.0	12.0	12.0		8.8 /17.1				16.0
18.0	12.0	12.0	12.0	9.0 /19.8	8.8		5.3 /19.2		18.0
20.0	12.0	12.0	12.0	9.0	8.8		5.2		20.0
22.0	12.0	12.0	12.0	9.0	8.7	6.4 /23.7	5.0		22.0
24.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8		24.0
26.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 /27.6	26.0
28.0	12.0	12.0	12.0	9.0	7.9	6.4	4.4	3.4	28.0
30.0	12.0	11.6	12.0	9.0	7.7	6.4	4.3	3.3	30.0
32.0	12.0	11.3	12.0	8.8	7.5	6.4	4.1	3.2	32.0
34.0	11.2	11.1	11.6	8.6	7.3	6.4	4.0	3.1	34.0
36.0	10.2	10.5	10.6	8.3	7.1	6.3	3.8	3.1	36.0
38.0	9.4	9.6	9.7	8.1	6.9	6.1	3.7	3.0	38.0
40.0	8.6	8.8	8.9	7.9	6.7	5.9	3.6	2.9	40.0
42.0	7.9	8.1	8.2	7.8	6.6	5.7	3.5	2.9	42.0
44.0	7.3	7.4	7.6	7.6	6.4	5.5	3.4	2.8	44.0
46.0	6.7	6.8	7.0	7.3	6.3	5.4	3.3	2.8	46.0
48.0	6.3 /47.8	6.3	6.5	6.7	6.2	5.3	3.2	2.7	48.0
50.0		6.2 /48.4	6.1	6.2	6.1	5.2	3.1	2.7	50.0
52.0			5.6	5.7	5.9	5.1	3.0	2.6	52.0
54.0			5.3 /53.5	5.3	5.5	5.0	2.9	2.6	54.0
56.0				5.2 /54.4	5.1	4.9	2.9	2.6	56.0
58.0					4.7	4.8	2.8	2.6	58.0
60.0					4.6 /59.1	4.5	2.8	2.6	60.0
62.0						4.4 /60.4	2.7	2.6	62.0
64.0							2.7	2.6	64.0
66.0							2.7 /64.7	2.6	66.0
68.0								2.6 /66.4	68.0

Unit: ton

Boom length (m)	45								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.9	12.0 /13.5								12.9
14.0	12.0		12.0 /15.6						14.0
16.0	12.0	12.0 /16.5	12.0		8.8 /17.7				16.0
18.0	12.0	12.0	12.0		8.8		5.3 /19.8		18.0
20.0	12.0	12.0	12.0	9.0 /20.4	8.8		5.3		20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.1		22.0
24.0	12.0	12.0	12.0	9.0	8.5	6.4 /24.3	4.9		24.0
26.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7		26.0
28.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4 /28.2	28.0
30.0	12.0	11.8	12.0	9.0	7.8	6.4	4.3	3.3	30.0
32.0	12.0	11.5	12.0	9.0	7.6	6.4	4.2	3.3	32.0
34.0	11.0	11.3	11.3	8.7	7.4	6.4	4.0	3.2	34.0
36.0	10.0	10.3	10.4	8.5	7.2	6.4	3.9	3.1	36.0
38.0	9.1	9.4	9.5	8.3	7.0	6.2	3.8	3.0	38.0
40.0	8.4	8.6	8.7	8.1	6.8	6.0	3.7	3.0	40.0
42.0	7.7	7.9	8.0	7.9	6.7	5.8	3.5	2.9	42.0
44.0	7.1	7.2	7.4	7.7	6.5	5.7	3.4	2.8	44.0
46.0	6.5	6.6	6.8	7.1	6.4	5.5	3.3	2.8	46.0
48.0	6.0	6.1	6.3	6.5	6.3	5.4	3.3	2.7	48.0
50.0	5.5	5.6	5.8	6.0	6.1	5.3	3.2	2.7	50.0
52.0	5.4 /50.4	5.4 /51.0	5.4	5.6	5.6	5.1	3.1	2.7	52.0
54.0			5.0	5.1	5.2	5.1	3.0	2.6	54.0
56.0			4.6	4.7	4.9	5.0	2.9	2.6	56.0
58.0			4.6 /56.1	4.5 /57.0	4.5	4.7	2.9	2.6	58.0
60.0					4.2	4.3	2.8	2.6	60.0
62.0					3.9 /61.7	4.0	2.8	2.6	62.0
64.0						3.8 /63.0	2.7	2.6	64.0
66.0							2.7	2.6	66.0
68.0							2.7 /67.3	2.6	68.0
70.0								2.6 /69.0	70.0



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Crane Jib



Unit: ton								
Boom length (m)	48							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0							14.0
16.0	12.0	12.0 / 17.0	12.0 / 16.1					16.0
18.0	12.0	12.0	12.0		8.8 / 18.2			18.0
20.0	12.0	12.0	12.0	9.0 / 20.9	8.8		5.3 / 20.3	20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.1	22.0
24.0	12.0	12.0	12.0	9.0	8.6	6.4 / 24.8	4.9	24.0
26.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	26.0
28.0	12.0	12.0	12.0	9.0	8.1	6.4	4.6	3.4 / 28.7
30.0	12.0	12.0	12.0	9.0	7.9	6.4	4.4	3.4
32.0	11.9	11.7	12.0	9.0	7.7	6.4	4.3	3.3
34.0	10.8	11.2	11.2	8.8	7.5	6.4	4.1	3.2
36.0	9.9	10.2	10.2	8.6	7.3	6.4	4.0	3.1
38.0	9.0	9.3	9.4	8.4	7.1	6.3	3.9	3.1
40.0	8.2	8.5	8.6	8.2	7.0	6.1	3.7	3.0
42.0	7.6	7.8	7.9	8.0	6.8	5.9	3.6	2.9
44.0	6.9	7.1	7.3	7.6	6.7	5.8	3.5	2.9
46.0	6.4	6.5	6.7	7.0	6.5	5.6	3.4	2.8
48.0	5.9	6.0	6.2	6.4	6.4	5.5	3.3	2.8
50.0	5.4	5.5	5.7	5.9	5.9	5.4	3.2	2.7
52.0	5.0	5.0	5.3	5.5	5.5	5.2	3.2	2.7
54.0	4.8 / 53.0	4.7 / 53.6	4.9	5.0	5.1	5.1	3.1	2.7
56.0			4.5	4.6	4.7	5.0	3.0	2.6
58.0			4.1	4.2	4.4	4.6	2.9	2.6
60.0			4.0 / 58.7	4.0 / 59.6	4.0	4.2	2.9	2.6
62.0					3.7	3.9	2.8	2.6
64.0					3.5	3.6	2.8	2.6
66.0					3.4 / 64.3	3.3 / 65.6	2.7	2.6
68.0							2.7	2.6
70.0							2.7 / 69.9	2.6
72.0								2.6 / 71.6

Unit: ton								
Boom length (m)	51							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
14.0	12.0 / 14.6							14.0
16.0	12.0	12.0 / 17.6	12.0 / 16.7					16.0
18.0	12.0	12.0	12.0		8.8 / 18.8			18.0
20.0	12.0	12.0	12.0	9.0 / 21.5	8.8		5.3 / 20.9	20.0
22.0	12.0	12.0	12.0	9.0	8.8		5.2	22.0
24.0	12.0	12.0	12.0	9.0	8.7	6.4 / 25.4	5.0	24.0
26.0	12.0	12.0	12.0	9.0	8.5	6.4	4.8	26.0
28.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 29.3
30.0	12.0	12.0	12.0	9.0	8.0	6.4	4.5	3.4
32.0	11.8	11.9	12.0	9.0	7.8	6.4	4.3	3.3
34.0	10.7	11.0	11.0	9.0	7.6	6.4	4.2	3.2
36.0	9.7	10.0	10.1	8.7	7.4	6.4	4.0	3.1
38.0	8.8	9.1	9.2	8.5	7.2	6.4	3.9	3.1
40.0	8.1	8.3	8.4	8.3	7.1	6.2	3.8	3.0
42.0	7.4	7.6	7.7	8.1	6.9	6.0	3.7	2.9
44.0	6.7	6.9	7.1	7.4	6.8	5.9	3.6	2.9
46.0	6.2	6.3	6.5	6.8	6.6	5.7	3.5	2.8
48.0	5.7	5.8	6.0	6.3	6.2	5.6	3.4	2.8
50.0	5.2	5.3	5.5	5.8	5.8	5.4	3.3	2.7
52.0	4.8	4.9	5.1	5.3	5.3	5.3	3.2	2.7
54.0	4.4	4.4	4.7	4.9	4.9	5.2	3.1	2.7
56.0	4.1 / 55.6	4.1	4.3	4.5	4.5	4.8	3.1	2.6
58.0		4.0 / 56.2	4.0	4.1	4.2	4.5	3.0	2.6
60.0			3.6	3.7	3.9	4.1	2.9	2.6
62.0			3.4 / 61.3	3.4	3.6	3.8	2.9	2.6
64.0				3.4 / 62.2	3.3	3.4	2.8	2.6
66.0					3.0	3.1	2.8	2.6
68.0					2.9 / 66.9	2.9	2.7	2.6
70.0						2.8 / 68.2	2.7	2.6
72.0							2.5	2.6
74.0							2.4 / 72.5	2.4
76.0								2.4 / 74.2



Crane Jib



Unit: ton								
Boom length (m)	54							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0							
16.0	12.0		12.0 / 17.2					
18.0	12.0	12.0 / 18.1	12.0		8.8 / 19.3			
20.0	12.0	12.0	12.0		8.8		5.3 / 21.4	
22.0	12.0	12.0	12.0	9.0	8.8		5.2	
24.0	12.0	12.0	12.0	9.0	8.8	6.4 / 25.9	5.0	
26.0	12.0	12.0	12.0	9.0	8.6	6.4	4.9	
28.0	12.0	12.0	12.0	9.0	8.3	6.4	4.7	3.4 / 29.8
30.0	12.0	12.0	12.0	9.0	8.1	6.4	4.5	3.4
32.0	11.5	12.0	11.9	9.0	7.9	6.4	4.4	3.3
34.0	10.4	10.8	10.8	9.0	7.7	6.4	4.2	3.2
36.0	9.5	9.8	9.8	8.9	7.5	6.4	4.1	3.2
38.0	8.6	8.9	9.0	8.7	7.3	6.4	4.0	3.1
40.0	7.8	8.1	8.2	8.5	7.2	6.3	3.9	3.0
42.0	7.1	7.4	7.5	7.9	7.0	6.1	3.8	3.0
44.0	6.5	6.7	6.9	7.3	6.9	5.9	3.6	2.9
46.0	5.9	6.1	6.3	6.6	6.6	5.8	3.5	2.9
48.0	5.4	5.6	5.8	6.1	6.0	5.7	3.5	2.8
50.0	5.0	5.1	5.3	5.6	5.5	5.5	3.4	2.8
52.0	4.5	4.7	4.8	5.1	5.1	5.4	3.3	2.7
54.0	4.1	4.2	4.4	4.7	4.7	5.1	3.2	2.7
56.0	3.8	3.8	4.1	4.3	4.3	4.7	3.1	2.7
58.0	3.4	3.5	3.7	3.9	4.0	4.3	3.1	2.6
60.0	3.4 / 58.2	3.3 / 58.8	3.4	3.5	3.6	3.9	3.0	2.6
62.0			3.1	3.2	3.3	3.6	2.9	2.6
64.0			2.8 / 63.9	2.9	3.1	3.3	2.9	2.6
66.0				2.8 / 64.8	2.8	3.0	2.8	2.6
68.0					2.5	2.7	2.7	2.6
70.0					2.4 / 69.5	2.4	2.5	2.6
72.0						2.3 / 70.8	2.3	2.5
74.0							2.1	2.2
76.0							2.0 / 75.1	2.0
78.0								1.9 / 76.8

Unit: ton								
Boom length (m)	57							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
15.1	12.0 / 15.7							
16.0	12.0		12.0 / 17.8					
18.0	12.0	12.0 / 18.7	12.0		8.8 / 19.9			
20.0	12.0	12.0	12.0		8.8			
22.0	12.0	12.0	12.0	9.0 / 22.6	8.8		5.3	
24.0	12.0	12.0	12.0	9.0	8.8		5.1	
26.0	12.0	12.0	12.0	9.0	8.7	6.4 / 26.5	4.9	
28.0	12.0	12.0	12.0	9.0	8.4	6.4	4.8	
30.0	12.0	12.0	12.0	9.0	8.2	6.4	4.6	3.4 / 30.4
32.0	11.4	11.8	11.8	9.0	8.0	6.4	4.4	3.3
34.0	10.3	10.7	10.6	9.0	7.8	6.4	4.3	3.3
36.0	9.3	9.7	9.7	9.0	7.6	6.4	4.2	3.2
38.0	8.4	8.7	8.8	8.8	7.4	6.4	4.0	3.1
40.0	7.6	7.9	8.0	8.5	7.3	6.4	3.9	3.1
42.0	6.9	7.2	7.3	7.8	7.1	6.2	3.8	3.0
44.0	6.3	6.6	6.7	7.1	6.9	6.0	3.7	2.9
46.0	5.8	6.0	6.1	6.5	6.4	5.9	3.6	2.9
48.0	5.2	5.4	5.6	5.9	5.8	5.7	3.5	2.8
50.0	4.8	4.9	5.1	5.4	5.4	5.6	3.4	2.8
52.0	4.3	4.5	4.6	4.9	4.9	5.4	3.3	2.7
54.0	3.9	4.1	4.2	4.5	4.5	4.9	3.3	2.7
56.0	3.6	3.7	3.9	4.1	4.1	4.5	3.2	2.7
58.0	3.2	3.3	3.5	3.7	3.8	4.1	3.1	2.6
60.0	2.9	3.0	3.2	3.4	3.4	3.8	3.0	2.6
62.0	2.8 / 60.8	2.8 / 61.4	2.9	3.1	3.1	3.4	3.0	2.6
64.0			2.6	2.8	2.9	3.1	2.9	2.6
66.0			2.4	2.5	2.6	2.8	2.8	2.6
68.0			2.3 / 66.5	2.3 / 67.4	2.4	2.5	2.5	2.6
70.0					2.1	2.3	2.3	2.6
72.0					1.9	2.0	2.1	2.3
74.0					1.9 / 72.1	1.9 / 72.7	1.9	2.1
76.0								1.9 / 75.3



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Crane Jib



Unit: ton								
Boom length (m)	60							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0							16.2
18.0	12.0	12.0 / 19.2	12.0 / 18.3					18.0
20.0	12.0	12.0	12.0		8.8 / 20.4			20.0
22.0	12.0	12.0	12.0	9.0 / 23.1	8.8		5.3 / 22.5	22.0
24.0	12.0	12.0	12.0	9.0	8.8		5.1	24.0
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.0	5.0	26.0
28.0	12.0	12.0	12.0	9.0	8.5	6.4	4.8	28.0
30.0	12.0	12.0	12.0	9.0	8.3	6.4	4.6	3.4 / 30.9
32.0	11.3	11.8	11.7	9.0	8.1	6.4	4.5	3.3
34.0	10.2	10.6	10.6	9.0	7.9	6.4	4.4	3.3
36.0	9.2	9.6	9.6	9.0	7.7	6.4	4.2	3.2
38.0	8.3	8.7	8.7	8.9	7.5	6.4	4.1	3.1
40.0	7.5	7.9	7.9	8.5	7.4	6.4	4.0	3.1
42.0	6.9	7.1	7.2	7.7	7.2	6.3	3.9	3.0
44.0	6.2	6.5	6.6	7.0	6.8	6.1	3.8	3.0
46.0	5.7	5.9	6.0	6.4	6.3	6.0	3.7	2.9
48.0	5.1	5.3	5.5	5.8	5.7	5.8	3.6	2.9
50.0	4.7	4.9	5.0	5.3	5.2	5.7	3.5	2.8
52.0	4.2	4.4	4.5	4.9	4.8	5.3	3.4	2.8
54.0	3.8	4.0	4.1	4.4	4.4	4.8	3.3	2.7
56.0	3.5	3.6	3.8	4.0	4.0	4.4	3.2	2.7
58.0	3.1	3.2	3.4	3.6	3.7	4.0	3.2	2.7
60.0	2.8	2.9	3.1	3.3	3.3	3.7	3.1	2.6
62.0	2.5	2.6	2.8	3.0	3.0	3.3	3.0	2.6
64.0	2.3 / 63.4	2.3	2.5	2.7	2.7	3.0	2.9	2.6
66.0			2.2	2.4	2.5	2.7	2.7	2.6
68.0			2.0	2.1	2.2	2.4	2.4	2.6
70.0			1.9 / 69.1	1.9 / 69.3	2.0	2.2	2.2	2.5
72.0					1.9 / 71.0	1.9	1.9	2.2
74.0								2.0
76.0							1.9 / 75.0	76.0

Unit: ton								
Boom length (m)	63							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
16.2	12.0 / 16.8							16.2
18.0	12.0	12.0 / 19.8	12.0 / 18.9					18.0
20.0	12.0	12.0	12.0		8.8 / 21.0			20.0
22.0	12.0	12.0	12.0	9.0 / 23.7	8.8		5.3 / 23.1	22.0
24.0	12.0	12.0	12.0	9.0	8.8		5.2	24.0
26.0	12.0	12.0	12.0	9.0	8.8	6.4 / 27.5	5.0	26.0
28.0	12.0	12.0	12.0	9.0	8.6	6.4	4.9	28.0
30.0	12.0	12.0	12.0	9.0	8.4	6.4	4.7	3.4 / 31.4
32.0	11.1	11.6	11.5	9.0	8.2	6.4	4.6	3.4
34.0	10.0	10.4	10.3	9.0	8.0	6.4	4.4	3.3
36.0	9.0	9.4	9.4	9.0	7.8	6.4	4.3	3.2
38.0	8.1	8.5	8.5	9.0	7.6	6.4	4.2	3.2
40.0	7.3	7.7	7.7	8.3	7.5	6.4	4.0	3.1
42.0	6.6	6.9	7.0	7.5	7.3	6.4	3.9	3.0
44.0	6.0	6.3	6.3	6.8	6.6	6.2	3.8	3.0
46.0	5.4	5.7	5.8	6.2	6.1	6.1	3.7	2.9
48.0	4.9	5.1	5.2	5.7	5.5	5.9	3.6	2.9
50.0	4.4	4.6	4.8	5.1	5.0	5.6	3.5	2.8
52.0	4.0	4.2	4.3	4.7	4.6	5.1	3.5	2.8
54.0	3.6	3.8	3.9	4.2	4.2	4.7	3.4	2.7
56.0	3.2	3.4	3.5	3.8	3.8	4.2	3.3	2.7
58.0	2.9	3.0	3.2	3.4	3.4	3.8	3.2	2.7
60.0	2.6	2.7	2.9	3.1	3.1	3.5	3.2	2.7
62.0	2.3	2.4	2.6	2.8	2.8	3.1	3.0	2.6
64.0	2.0	2.1	2.3	2.5	2.5	2.8	2.7	2.6
66.0	1.9 / 64.6	1.9 / 65.3	2.0	2.2	2.2	2.5	2.4	2.6
68.0			1.9 / 67.0	1.9	2.0	2.3	2.2	2.6
70.0					1.9 / 69.0	2.0	2.0	2.3
72.0						1.9 / 70.6	1.9 / 70.6	2.0
74.0							1.9 / 73.0	74.0



Specifications
Gross Rated Load Table

SPECIFICATIONS

SCX1500A-3

■ Main Boom with Crane Jib



Unit: ton									
Boom length (m)	24								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	8.0
9.0	72.6	72.2	71.9	71.2	71.1	70.1	70.2	68.8	9.0
10.0	62.0	61.6	61.3	60.7	60.5	59.7	59.7	58.5	10.0
12.0	47.5	47.3	46.9	46.5	46.2	45.5	45.4	44.5	12.0
14.0	38.2	38.0	37.6	37.3	36.9	36.4	36.1	35.5	14.0
16.0	31.6	31.5	31.0	30.8	30.4	30.0	29.6	29.2	16.0
18.0	26.8	26.7	26.2	26.1	25.6	25.4	24.9	24.6	18.0
20.0	23.1	23.0	22.5	22.4	21.9	21.8	21.2	21.0	20.0
22.0	20.2	20.1	19.6	19.6	19.0	18.9	18.4	18.3	22.0
24.0	19.8 /22.3	19.7 /22.3	19.2 /22.3	19.2 /22.3	18.6 /22.3	18.6 /22.3	18.0 /22.3	17.9 /22.3	24.0

Unit: ton									
Boom length (m)	27								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
6.3	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	80.0 /6.8	6.3
7.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	7.0
8.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	80.0	8.0
9.0	72.6	72.2	71.9	71.2	71.2	70.1	70.3	68.8	9.0
10.0	61.9	61.6	61.3	60.7	60.6	59.7	59.7	58.5	10.0
12.0	47.5	47.2	46.9	46.4	46.2	45.5	45.4	44.5	12.0
14.0	38.1	37.9	37.5	37.2	36.9	36.4	36.1	35.4	14.0
16.0	31.5	31.4	31.0	30.7	30.4	30.0	29.7	29.1	16.0
18.0	26.7	26.6	26.2	26.0	25.5	25.3	24.9	24.5	18.0
20.0	23.0	22.9	22.5	22.3	21.9	21.6	21.2	20.9	20.0
22.0	20.0	20.0	19.5	19.4	18.9	18.8	18.3	18.1	22.0
24.0	17.7	17.6	17.2	17.1	16.6	16.5	16.0	15.9	24.0
24.9	16.7 /24.9	16.7 /24.9	16.2 /24.9	16.2 /24.9	15.7 /24.9	15.6 /24.9	15.1 /24.9	15.0 /24.9	24.9

1. The rated loads determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
4. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
5. The offset angles shown are of jib boom offset angle against the main boom, under load.
6. The counterweight is 65.4 ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)												
		13falls	12falls	11falls	10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls	1falls
150	2.59	150	144	132	120	108	96	84	72	60	48	36	24	
120	2.35				120	108	96	84	72	60	48	36	24	
80	1.35							80	72	60	48	36	24	
35	0.90											35	24	
12	0.51													12



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Crane Jib



Unit: ton								
Boom length (m)	30							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)								
7.4	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
8.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
9.0	72.0	72.0	72.0	71.3	71.2	70.1	70.3	68.9
10.0	61.9	61.6	61.3	60.7	60.6	59.7	59.8	58.5
12.0	47.5	47.2	46.9	46.4	46.2	45.5	45.5	44.5
14.0	38.1	37.9	37.5	37.2	36.9	36.4	36.2	35.5
16.0	31.5	31.4	31.0	30.7	30.4	30.0	29.7	29.1
18.0	26.7	26.6	26.2	25.9	25.6	25.2	24.9	24.5
20.0	23.0	22.9	22.4	22.3	21.9	21.6	21.2	20.9
22.0	20.0	19.9	19.5	19.4	19.0	18.8	18.3	18.1
24.0	17.6	17.6	17.1	17.0	16.6	16.4	16.0	15.8
26.0	15.6	15.6	15.2	15.1	14.6	14.5	14.0	13.9
28.0	14.4 /27.5	14.3 /27.5	13.9 /27.5	13.9 /27.5	13.4 /27.5	13.3 /27.5	12.8 /27.5	12.7 /27.5

Unit: ton								
Boom length (m)	33							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)								
7.4	72.0 /7.9	72.0 /7.9	72.0 /7.9	72.0 /7.9	72.0 /7.9	72.0 /7.9	72.0 /7.9	72.0 /7.9
8.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0	72.0
9.0	71.5	71.1	70.7	70.1	69.9	68.9	68.9	67.6
10.0	61.9	61.5	61.3	60.6	60.6	59.6	59.8	58.5
12.0	47.4	47.1	46.8	46.3	46.2	45.5	45.5	44.5
14.0	38.0	37.8	37.4	37.1	36.8	36.3	36.2	35.4
16.0	31.4	31.2	30.9	30.6	30.3	29.9	29.7	29.1
18.0	26.6	26.4	26.1	25.8	25.5	25.1	24.9	24.4
20.0	22.8	22.7	22.4	22.2	21.8	21.5	21.2	20.8
22.0	19.9	19.8	19.4	19.3	18.9	18.6	18.3	18.0
24.0	17.5	17.4	17.0	16.9	16.5	16.3	15.9	15.7
26.0	15.5	15.5	15.1	15.0	14.5	14.4	14.0	13.8
28.0	13.9	13.8	13.4	13.3	12.9	12.8	12.3	12.2
30.0	12.5	12.4	12.0	12.0	11.5	11.5	11.0	10.9
30.1	12.4 /30.1	12.4 /30.1	12.0 /30.1	11.9 /30.1	11.5 /30.1	11.4 /30.1	10.9 /30.1	10.8 /30.1



■ Main Boom with Crane Jib



Unit: ton									
Boom length (m)	36								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
8.5	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	8.5
9.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	9.0
10.0	60.0	60.0	60.0	60.0	60.0	59.2	59.2	58.0	10.0
12.0	47.3	47.0	46.7	46.3	46.1	45.4	45.4	44.4	12.0
14.0	37.9	37.7	37.4	37.0	36.8	36.2	36.1	35.3	14.0
16.0	31.3	31.1	30.8	30.5	30.2	29.8	29.6	29.0	16.0
18.0	26.5	26.3	26.0	25.7	25.4	25.0	24.8	24.3	18.0
20.0	22.7	22.6	22.2	22.0	21.7	21.4	21.1	20.7	20.0
22.0	19.8	19.7	19.3	19.1	18.8	18.5	18.2	17.9	22.0
24.0	17.4	17.3	16.9	16.8	16.4	16.2	15.8	15.5	24.0
26.0	15.4	15.3	14.9	14.8	14.4	14.3	13.9	13.7	26.0
28.0	13.7	13.7	13.3	13.2	12.8	12.6	12.2	12.1	28.0
30.0	12.3	12.2	11.9	11.8	11.4	11.3	10.8	10.7	30.0
32.0	11.1	11.0	10.6	10.6	10.2	10.1	9.6	9.6	32.0
34.0	10.7 / 32.7	10.7 / 32.7	10.3 / 32.7	10.2 / 32.7	9.8 / 32.7	9.7 / 32.7	9.3 / 32.7	9.2 / 32.7	34.0

Unit: ton									
Boom length (m)	39								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
9.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	9.0
10.0	60.0	60.0	59.7	59.1	58.9	58.1	58.1	56.9	10.0
12.0	47.2	46.9	46.6	46.2	46.0	45.3	45.4	44.3	12.0
14.0	37.8	37.5	37.3	36.9	36.7	36.1	36.1	35.2	14.0
16.0	31.2	31.0	30.7	30.4	30.2	29.7	29.5	28.9	16.0
18.0	26.3	26.2	25.9	25.6	25.3	24.9	24.7	24.2	18.0
20.0	22.6	22.5	22.1	21.9	21.6	21.3	21.0	20.6	20.0
22.0	19.6	19.5	19.2	19.0	18.7	18.4	18.1	17.7	22.0
24.0	17.2	17.1	16.8	16.6	16.3	16.1	15.7	15.4	24.0
26.0	15.2	15.2	14.8	14.7	14.3	14.1	13.8	13.5	26.0
28.0	13.6	13.5	13.1	13.0	12.7	12.5	12.1	11.9	28.0
30.0	12.2	12.1	11.7	11.6	11.2	11.1	10.7	10.6	30.0
32.0	10.9	10.9	10.5	10.4	10.0	9.9	9.5	9.4	32.0
34.0	9.9	9.8	9.5	9.4	9.0	8.9	8.5	8.4	34.0
35.3	9.3 /35.3	9.2 /35.3	8.8 /35.3	8.8 /35.3	8.4 /35.3	8.3 /35.3	7.9 /35.3	7.8 /35.3	35.3



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Crane Jib



Unit: ton									
Boom length (m)	42								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
9.6	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	9.6
10.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	48.0	10.0
12.0	47.1	46.9	46.6	46.1	46.0	45.3	45.4	44.3	12.0
14.0	37.7	37.5	37.2	36.8	36.7	36.1	36.1	35.2	14.0
16.0	31.1	31.0	30.7	30.3	30.1	29.6	29.5	28.9	16.0
18.0	26.3	26.1	25.8	25.5	25.3	24.9	24.7	24.1	18.0
20.0	22.5	22.4	22.1	21.8	21.6	21.2	21.0	20.5	20.0
22.0	19.6	19.4	19.1	18.9	18.6	18.3	18.1	17.7	22.0
24.0	17.2	17.1	16.7	16.5	16.2	16.0	15.7	15.4	24.0
26.0	15.2	15.1	14.7	14.6	14.3	14.0	13.7	13.4	26.0
28.0	13.5	13.4	13.1	12.9	12.6	12.4	12.1	11.8	28.0
30.0	12.1	12.0	11.6	11.5	11.2	11.0	10.7	10.5	30.0
32.0	10.8	10.8	10.4	10.3	10.0	9.8	9.5	9.3	32.0
34.0	9.8	9.7	9.4	9.3	8.9	8.8	8.4	8.3	34.0
36.0	8.8	8.8	8.4	8.4	8.0	7.9	7.5	7.4	36.0
38.0	8.0 /37.9	8.0 /37.9	7.6 /37.9	7.6 /37.9	7.2 /37.9	7.2 /37.9	6.7 /37.9	6.7 /37.9	38.0

Unit: ton									
Boom length (m)	45								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.0	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	48.0 /10.1	10.0
12.0	46.7	46.4	46.1	45.6	45.4	44.7	44.6	43.7	12.0
14.0	37.6	37.3	37.1	36.7	36.5	35.9	35.9	35.1	14.0
16.0	31.0	30.8	30.5	30.1	30.0	29.5	29.4	28.7	16.0
18.0	26.1	25.9	25.6	25.3	25.1	24.7	24.6	24.0	18.0
20.0	22.3	22.2	21.9	21.6	21.4	21.0	20.8	20.4	20.0
22.0	19.4	19.2	18.9	18.7	18.4	18.1	17.9	17.5	22.0
24.0	17.0	16.8	16.5	16.3	16.0	15.8	15.5	15.2	24.0
26.0	15.0	14.9	14.5	14.4	14.1	13.8	13.5	13.2	26.0
28.0	13.3	13.2	12.9	12.7	12.4	12.2	11.9	11.6	28.0
30.0	11.8	11.8	11.4	11.3	11.0	10.8	10.5	10.3	30.0
32.0	10.6	10.6	10.2	10.1	9.8	9.6	9.3	9.1	32.0
34.0	9.5	9.5	9.1	9.1	8.7	8.6	8.2	8.1	34.0
36.0	8.6	8.6	8.2	8.1	7.8	7.7	7.3	7.2	36.0
38.0	7.8	7.7	7.4	7.3	7.0	6.9	6.5	6.4	38.0
40.0	7.0	7.0	6.7	6.6	6.2	6.2	5.8	5.7	40.0
40.5	6.9 /40.5	6.8 /40.5	6.5 /40.5	6.5 /40.5	6.1 /40.5	6.0 /40.5	5.6 /40.5	5.6 /40.5	40.5



■ Main Boom with Crane Jib



Unit: ton									
Boom length (m)	48								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.6	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	36.0	36.0	36.0	36.0	36.0	35.9	35.9	35.0	14.0
16.0	30.9	30.7	30.5	30.1	29.9	29.4	29.4	28.7	16.0
18.0	26.0	25.9	25.6	25.3	25.1	24.7	24.5	23.9	18.0
20.0	22.3	22.1	21.8	21.6	21.4	21.0	20.8	20.3	20.0
22.0	19.3	19.2	18.9	18.7	18.4	18.1	17.9	17.4	22.0
24.0	16.9	16.8	16.5	16.3	16.0	15.7	15.5	15.1	24.0
26.0	14.9	14.8	14.5	14.3	14.0	13.8	13.5	13.2	26.0
28.0	13.2	13.1	12.8	12.7	12.3	12.1	11.9	11.6	28.0
30.0	11.8	11.7	11.4	11.2	10.9	10.7	10.4	10.2	30.0
32.0	10.5	10.5	10.1	10.0	9.7	9.5	9.2	9.0	32.0
34.0	9.5	9.4	9.1	9.0	8.6	8.5	8.2	8.0	34.0
36.0	8.5	8.5	8.1	8.0	7.7	7.6	7.2	7.1	36.0
38.0	7.7	7.6	7.3	7.2	6.9	6.8	6.4	6.3	38.0
40.0	6.9	6.9	6.6	6.5	6.1	6.1	5.7	5.6	40.0
42.0	6.3	6.2	5.9	5.9	5.5	5.4	5.0	5.0	42.0
44.0	5.9 /43.1	5.9 /43.1	5.6 /43.1	5.5 /43.1	5.1 /43.1	5.1 /43.1	4.7 /43.1	4.7 /43.1	44.0

Unit: ton									
Boom length (m)	48								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
10.6	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	36.0 /11.2	10.6
12.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	36.0	12.0
14.0	36.0	36.0	36.0	36.0	36.0	35.6	35.5	34.7	14.0
16.0	30.8	30.6	30.3	30.0	29.8	29.3	29.3	28.5	16.0
18.0	25.9	25.7	25.4	25.1	25.0	24.5	24.4	23.8	18.0
20.0	22.1	22.0	21.7	21.4	21.2	20.8	20.7	20.2	20.0
22.0	19.2	19.0	18.7	18.5	18.3	17.9	17.8	17.3	22.0
24.0	16.7	16.6	16.3	16.1	15.9	15.6	15.4	15.0	24.0
26.0	14.7	14.6	14.3	14.1	13.9	13.6	13.4	13.0	26.0
28.0	13.0	13.0	12.6	12.5	12.2	12.0	11.7	11.4	28.0
30.0	11.6	11.5	11.2	11.1	10.8	10.6	10.3	10.0	30.0
32.0	10.4	10.3	10.0	9.9	9.5	9.4	9.1	8.9	32.0
34.0	9.3	9.2	8.9	8.8	8.5	8.3	8.0	7.8	34.0
36.0	8.3	8.3	8.0	7.9	7.5	7.4	7.1	6.9	36.0
38.0	7.5	7.5	7.1	7.1	6.7	6.6	6.3	6.1	38.0
40.0	6.8	6.7	6.4	6.3	6.0	5.9	5.5	5.4	40.0
42.0	6.1	6.1	5.7	5.7	5.3	5.2	4.9	4.8	42.0
44.0	5.5	5.5	5.1	5.1	4.7	4.7	4.3	4.2	44.0
45.7	5.0 /45.7	5.0 /45.7	4.7 /45.7	4.6 /45.7	4.3 /45.7	4.2 /45.7	3.8 /45.7	3.8 /45.7	45.7



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

■ Main Boom with Crane Jib



Unit: ton									
Boom length (m)	54								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
11.7	36.0	36.0	36.0	36.0	36.0	36.0	35.9	35.6	11.7
12.0	36.0	36.0	36.0	36.0	36.0	36.0	35.5	35.3	12.0
14.0	36.0	36.0	35.2	35.2	34.1	34.1	32.9	32.9	14.0
16.0	30.6	30.4	30.1	29.8	29.6	29.1	29.1	28.3	16.0
18.0	25.7	25.5	25.3	24.9	24.8	24.3	24.2	23.6	18.0
20.0	21.9	21.8	21.5	21.2	21.0	20.6	20.5	20.0	20.0
22.0	18.9	18.8	18.5	18.3	18.1	17.7	17.6	17.1	22.0
24.0	16.5	16.4	16.1	15.9	15.7	15.4	15.2	14.8	24.0
26.0	14.5	14.4	14.1	13.9	13.7	13.4	13.2	12.8	26.0
28.0	12.8	12.7	12.4	12.3	12.0	11.8	11.5	11.2	28.0
30.0	11.4	11.3	11.0	10.9	10.6	10.4	10.1	9.8	30.0
32.0	10.2	10.1	9.8	9.6	9.3	9.2	8.9	8.6	32.0
34.0	9.1	9.0	8.7	8.6	8.3	8.1	7.8	7.6	34.0
36.0	8.1	8.1	7.7	7.6	7.3	7.2	6.9	6.7	36.0
38.0	7.3	7.2	6.9	6.8	6.5	6.4	6.0	5.9	38.0
40.0	6.5	6.5	6.2	6.1	5.8	5.7	5.3	5.2	40.0
42.0	5.9	5.8	5.5	5.4	5.1	5.0	4.7	4.6	42.0
44.0	5.3	5.2	4.9	4.8	4.5	4.4	4.1	4.0	44.0
46.0	4.7	4.7	4.4	4.3	4.0	3.9	3.5	3.5	46.0
48.0	4.2	4.2	3.9	3.8	3.5	3.4	3.1	3.0	48.0
50.0	4.2 /48.3	4.1 /48.3	3.8 /48.3	3.8 /48.3	3.4 /48.3	3.4 /48.3	3.0 /48.3	3.0 /48.3	50.0

Unit: ton									
Boom length (m)	57								Boom length (m)
Jib length (m)	10		16		22		28		Jib length (m)
Offset angle (deg)	10	30	10	30	10	30	10	30	Offset angle (deg)
Radius (m)									Radius (m)
12.0	35.2 /12.3	35.1 /12.3	34.1 /12.3	34.1 /12.3	33.0 /12.3	32.8 /12.3	31.7 /12.3	31.4 /12.3	12.0
14.0	33.0	32.9	32.0	32.0	30.9	30.9	29.7	29.6	14.0
16.0	30.4	30.2	29.6	29.6	28.6	28.6	27.5	27.5	16.0
18.0	25.5	25.4	25.1	24.8	24.6	24.2	24.1	23.5	18.0
20.0	21.8	21.6	21.3	21.1	20.9	20.5	20.4	19.8	20.0
22.0	18.8	18.6	18.4	18.1	17.9	17.6	17.4	16.9	22.0
24.0	16.4	16.2	16.0	15.7	15.5	15.2	15.0	14.6	24.0
26.0	14.4	14.2	14.0	13.8	13.5	13.2	13.0	12.7	26.0
28.0	12.7	12.6	12.3	12.1	11.8	11.6	11.4	11.0	28.0
30.0	11.2	11.1	10.8	10.7	10.4	10.2	9.9	9.7	30.0
32.0	10.0	9.9	9.6	9.5	9.2	9.0	8.7	8.5	32.0
34.0	8.9	8.8	8.5	8.4	8.1	7.9	7.7	7.4	34.0
36.0	8.0	7.9	7.6	7.5	7.2	7.0	6.7	6.5	36.0
38.0	7.1	7.1	6.7	6.6	6.3	6.2	5.9	5.7	38.0
40.0	6.4	6.3	6.0	5.9	5.6	5.5	5.1	5.0	40.0
42.0	5.7	5.6	5.3	5.3	4.9	4.8	4.5	4.4	42.0
44.0	5.1	5.0	4.7	4.7	4.3	4.2	3.9	3.8	44.0
46.0	4.5	4.5	4.2	4.1	3.8	3.7	3.4	3.3	46.0
48.0	4.1	4.0	3.7	3.7	3.3	3.3	2.9	2.8	48.0
50.0	3.6	3.6	3.3	3.2	2.9	2.8	2.5	2.4	50.0
50.9	3.4 /50.9	3.4 /50.9	3.1 /50.9	3.0 /50.9	2.7 /50.9	2.7 /50.9	2.3 /50.9	2.2 /50.9	50.9



■ Main Boom with Crane Jib



Unit: ton								
Boom length (m)	60							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.9	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
14.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
16.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0	24.0
18.0	24.0	24.0	24.0	24.0	23.3	23.3	22.3	22.4
20.0	21.7	21.6	21.3	21.1	20.9	20.5	20.4	19.8
22.0	18.7	18.6	18.3	18.1	17.9	17.5	17.4	16.9
24.0	16.3	16.2	15.9	15.7	15.5	15.2	15.0	14.6
26.0	14.3	14.2	13.9	13.7	13.5	13.2	13.0	12.6
28.0	12.6	12.5	12.2	12.0	11.8	11.5	11.3	11.0
30.0	11.2	11.1	10.8	10.6	10.3	10.1	9.9	9.6
32.0	9.9	9.8	9.5	9.4	9.1	8.9	8.7	8.4
34.0	8.8	8.7	8.4	8.3	8.0	7.8	7.6	7.3
36.0	7.9	7.8	7.5	7.4	7.1	6.9	6.6	6.4
38.0	7.0	7.0	6.6	6.5	6.2	6.1	5.8	5.6
40.0	6.3	6.2	5.9	5.8	5.5	5.4	5.1	4.9
42.0	5.6	5.5	5.2	5.1	4.8	4.7	4.4	4.3
44.0	5.0	4.9	4.6	4.5	4.2	4.1	3.8	3.7
46.0	4.4	4.4	4.1	4.0	3.7	3.6	3.3	3.2
48.0	3.9	3.9	3.6	3.5	3.2	3.1	2.8	2.7
50.0	3.5	3.4	3.1	3.1	2.7	2.7	2.3	2.3
52.0	3.0	3.0	2.7	2.7	2.3	2.3	1.9	1.9
54.0	2.8 /53.2	2.8 /53.2	2.5 /53.2	2.4 /53.2	2.1 /53.2	2.1 /53.2		

Unit: ton								
Boom length (m)	63							
Jib length (m)	10		16		22		28	
Offset angle (deg)	10	30	10	30	10	30	10	30
Radius (m)	10	30	10	30	10	30	10	30
12.9	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	24.0 /13.5	23.8 /13.5	23.6 /13.5
14.0	24.0	24.0	24.0	24.0	24.0	24.0	23.3	23.2
16.0	24.0	24.0	23.5	23.5	22.6	22.6	21.6	21.5
18.0	22.5	22.5	21.7	21.7	20.9	20.9	19.9	19.9
20.0	20.7	20.8	20.0	20.1	19.3	19.3	18.3	18.4
22.0	18.5	18.4	18.1	17.9	17.7	17.3	16.9	16.7
24.0	16.1	16.0	15.7	15.5	15.3	15.0	14.8	14.4
26.0	14.1	14.0	13.7	13.5	13.3	13.0	12.8	12.4
28.0	12.4	12.3	12.0	11.8	11.6	11.3	11.1	10.8
30.0	10.9	10.8	10.6	10.4	10.1	9.9	9.7	9.4
32.0	9.7	9.6	9.3	9.2	8.9	8.7	8.5	8.2
34.0	8.6	8.5	8.2	8.1	7.8	7.6	7.4	7.1
36.0	7.6	7.6	7.3	7.2	6.9	6.7	6.4	6.2
38.0	6.8	6.7	6.4	6.3	6.0	5.9	5.6	5.4
40.0	6.0	6.0	5.7	5.6	5.3	5.1	4.8	4.7
42.0	5.4	5.3	5.0	4.9	4.6	4.5	4.2	4.0
44.0	4.8	4.7	4.4	4.3	4.0	3.9	3.6	3.4
46.0	4.2	4.2	3.8	3.8	3.4	3.4	3.0	2.9
48.0	3.7	3.7	3.3	3.3	3.0	2.9	2.5	2.4
50.0	3.2	3.2	2.9	2.8	2.5	2.4	2.1	2.0
52.0	2.8	2.8	2.5	2.4	2.1	2.0	1.9 /51.0	1.9 /50.5
54.0	2.4	2.4	2.1	2.1	1.9 /53.0	1.9 /52.6		
55.8	2.1 /55.8	2.1 /55.8	1.9 /55.2	1.9 /54.9				



SCX1500A-3

SPECIFICATIONS

Specifications

Gross Rated Load Table

Main Boom (Using Third Winch)



Working Radius(m)	Boom length (m)											Unit: ton
	15	18	21	24	27	30	33	36	39	42	45	Working Radius(m)
4.5	150.0											4.5
5.0	135.2	120.0 /5.2										5.0
5.5	123.5	120.0	84.0 /5.7									5.5
6.0	113.6	113.5	84.0	72.0 /6.3	72.0 /6.8							6.0
7.0	97.7	97.6	84.0	72.0	72.0	60.0 /7.4	48.0 /7.9					7.0
8.0	85.6	85.5	84.0	72.0	72.0	60.0	48.0	48.0 /8.5				8.0
9.0	73.4	73.5	74.0	72.0	72.0	60.0	48.0	48.0	48.0	36.0 /9.6		9.0
10.0	62.8	62.9	63.4	63.4	63.3	60.0	48.0	48.0	48.0	36.0	36.0 /10.1	10.0
12.0	48.5	48.5	48.9	48.9	48.8	48.8	48.0	48.0	48.0	36.0	36.0	12.0
14.0	39.1	39.2	39.6	39.6	39.4	39.4	39.4	39.2	39.1	36.0	36.0	14.0
16.0	37.3 /14.5	32.7	33.0	33.0	32.9	32.9	32.8	32.6	32.5	32.5	32.3	16.0
18.0		29.8 /17.1	28.2	28.2	28.1	28.0	28.0	27.8	27.7	27.6	27.4	18.0
20.0			25.0 /19.7	24.5	24.3	24.3	24.2	24.1	23.9	23.9	23.7	20.0
22.0				21.5	21.4	21.3	21.3	21.1	21.0	20.9	20.7	22.0
24.0				21.1 /22.3	19.0	18.9	18.9	18.7	18.5	18.5	18.3	24.0
26.0					18.0 /24.9	16.9	16.9	16.7	16.6	16.5	16.3	26.0
28.0						15.7 /27.5	15.2	15.0	14.9	14.8	14.6	28.0
30.0							13.8	13.6	13.4	13.4	13.2	30.0
32.0							13.7 /30.1	12.3	12.2	12.1	11.9	32.0
34.0								12.0 /32.7	11.1	11.0	10.8	34.0
36.0									10.5 /35.3	10.1	9.9	36.0
38.0										9.3 /37.9	9.0	38.0
40.0											8.3	40.0
42.0											8.1 /40.5	42.0

Working Radius(m)	Boom length (m)						Unit: ton
	48	51	54	57	60	63	Working Radius(m)
10.0	36.0 /10.6	24.0 /11.3	24.0 /11.8				10.0
12.0	36.0	24.0	24.0	24.0 /12.4	24.0 /12.9	24.0 /13.5	12.0
14.0	36.0	24.0	24.0	24.0	24.0	24.0	14.0
16.0	32.2	24.0	24.0	24.0	24.0	24.0	16.0
18.0	27.3	24.0	24.0	24.0	24.0	24.0	18.0
20.0	23.5	23.5	23.3	23.1	23.0	22.8	20.0
22.0	20.5	20.5	20.3	20.2	20.0	19.8	22.0
24.0	18.1	18.1	17.9	17.7	17.6	17.4	24.0
26.0	16.1	16.1	15.9	15.7	15.5	15.3	26.0
28.0	14.4	14.4	14.2	14.0	13.9	13.6	28.0
30.0	13.0	12.9	12.7	12.6	12.4	12.2	30.0
32.0	11.8	11.7	11.5	11.3	11.2	10.9	32.0
34.0	10.7	10.6	10.4	10.2	10.1	9.9	34.0
36.0	9.7	9.6	9.4	9.3	9.1	8.9	36.0
38.0	8.9	8.8	8.6	8.4	8.3	8.0	38.0
40.0	8.1	8.0	7.8	7.7	7.5	7.3	40.0
42.0	7.5	7.3	7.1	7.0	6.8	6.6	42.0
44.0	7.1 /43.1	6.7	6.5	6.4	6.2	6.0	44.0
46.0		6.3 /45.5	6.0	5.8	5.6	5.4	46.0
48.0			5.5	5.3	5.1	4.9	48.0
50.0			5.4 /48.1	4.8	4.7	4.5	50.0
52.0				4.7 /50.6	4.2	4.0	52.0
54.0					4.0 /53.2	3.6	54.0
56.0						3.3 /55.8	56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. Be sure to attach the hanger sheaves block to the top boom when boom length is 15m and 18m
4. Be sure to remove the hanger sheaves block from the top boom when boom length is 21m or more.
5. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
6. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
7. The counterweight is 65.4ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)
8. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
9. Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)											
		13falls	12falls	11falls	10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls
150	2.59	150	144	132	120	108	96	84	72	60	48	36	24
120	2.35				120	108	96	84	72	60	48	36	24
80	1.35							80	72	60	48	36	24
35	0.90											35	24



Main Boom with Aux. Sheave (Using Third Winch)



Radius (m)	Boom length (m)											Radius (m)
	15	18	21	24	27	30	33	36	39	42	45	
4.5	148.5											4.5
5.0	134.4	120.0 / 5.2										5.0
5.5	122.6	120.0	84.0 / 5.7									5.5
6.0	112.7	112.6	84.0	72.0 / 6.3	72.0 / 6.8							6.0
7.0	96.9	96.8	84.0	72.0	72.0	60.0 / 7.4	48.0 / 7.9					7.0
8.0	84.8	84.7	84.0	72.0	72.0	60.0	48.0	48.0 / 8.5				8.0
9.0	73.0	73.1	73.6	72.0	72.0	60.0	48.0	48.0	48.0	36.0 / 9.6		9.0
10.0	62.4	62.5	62.9	63.0	62.8	60.0	48.0	48.0	48.0	36.0	36.0 / 10.1	10.0
12.0	48.1	48.1	48.5	48.5	48.4	48.4	48.0	48.0	48.0	36.0	36.0	12.0
14.0	38.8	38.8	39.2	39.2	39.1	39.0	39.0	38.8	38.7	36.0	36.0	14.0
16.0	37.0 / 14.5	32.3	32.7	32.7	32.5	32.5	32.4	32.2	32.1	32.0	31.9	16.0
18.0		29.5 / 17.1	27.9	27.9	27.7	27.6	27.6	27.4	27.2	27.2	27.0	18.0
20.0			24.6 / 19.7	24.1	24.0	23.9	23.9	23.7	23.5	23.4	23.2	20.0
22.0				21.2	21.0	21.0	20.9	20.7	20.6	20.5	20.3	22.0
24.0				20.8 / 22.3	18.6	18.6	18.5	18.3	18.2	18.1	17.9	24.0
26.0					17.7 / 24.9	16.6	16.5	16.3	16.2	16.1	15.9	26.0
28.0						15.3 / 27.5	14.9	14.6	14.5	14.4	14.2	28.0
30.0							13.4	13.2	13.1	13.0	12.8	30.0
32.0							13.4 / 30.1	12.0	11.8	11.7	11.5	32.0
34.0								11.6 / 32.7	10.8	10.7	10.4	34.0
36.0									10.2 / 35.3	9.7	9.5	36.0
38.0										8.9 / 37.9	8.7	38.0
40.0											7.9	40.0
42.0											7.8 / 40.5	42.0

Radius (m)	Boom length (m)						Radius (m)
	48	51	54	57	60	63	
10.0	36.0 / 10.6	24.0 / 11.3	24.0 / 11.8				10.0
12.0	36.0	24.0	24.0	24.0 / 12.4	24.0 / 12.9	24.0 / 13.5	12.0
14.0	36.0	24.0	24.0	24.0	24.0	24.0	14.0
16.0	31.7	24.0	24.0	24.0	24.0	24.0	16.0
18.0	26.8	24.0	24.0	24.0	24.0	24.0	18.0
20.0	23.1	23.0	22.8	22.7	22.5	22.2	20.0
22.0	20.1	20.0	19.8	19.7	19.5	19.3	22.0
24.0	17.7	17.6	17.4	17.3	17.1	16.9	24.0
26.0	15.7	15.6	15.4	15.2	15.1	14.9	26.0
28.0	14.0	13.9	13.7	13.6	13.4	13.2	28.0
30.0	12.6	12.5	12.3	12.1	11.9	11.7	30.0
32.0	11.4	11.3	11.0	10.9	10.7	10.5	32.0
34.0	10.3	10.2	10.0	9.8	9.6	9.4	34.0
36.0	9.3	9.2	9.0	8.8	8.7	8.4	36.0
38.0	8.5	8.4	8.2	8.0	7.8	7.6	38.0
40.0	7.8	7.6	7.4	7.2	7.1	6.8	40.0
42.0	7.1	7.0	6.7	6.6	6.4	6.2	42.0
44.0	6.8 / 43.1	6.3	6.1	5.9	5.8	5.5	44.0
46.0		5.9 / 45.5	5.6	5.4	5.2	5.0	46.0
48.0			5.1	4.9	4.7	4.5	48.0
50.0			5.0 / 48.1	4.4	4.3	4.0	50.0
52.0				4.3 / 50.6	3.8	3.6	52.0
54.0					3.6 / 53.2	3.2	54.0
56.0						2.9 / 55.8	56.0

1. The rated loads are determined according to EN13000 rating on the condition that the machine is stationed on firm, level ground.
2. The figures surrounded by bold lines are based on factors other than those which would cause a tipping condition.
3. Be sure to attach the hanger sheaves block to the top boom when boom length is 15m and 18m.
4. Be sure to remove the hanger sheaves block from the top boom when boom length is 21m or more.
5. To calculate the maximum load that can actually be lifted, deduct weight of all lifting accessories, such as boom hook and jib hook, from figures shown above.
6. Working radius is the horizontal distance from the slewing center to the center of gravity of a lifted load.
7. The counterweight is 65.4ton. (Superstructure 56.4ton + Undercarriage 9.0 ton)
8. Correlation between the number of reeved lines, maximum rated loads, hook weights are shown in the table below.
9. Cannot be used with 1 fall.

Hook Capacity (t)	Hook Weight (t)	Maximum rated loads (t)											
		13falls	12falls	11falls	10falls	9falls	8falls	7falls	6falls	5falls	4falls	3falls	2falls
150	2.59	150	144	132	120	108	96	84	72	60	48	36	24
120	2.35				120	108	96	84	72	60	48	36	24
80	1.35							80	72	60	48	36	24
35	0.90											35	24




SCX1500A-3

SPECIFICATIONS

Clamshell Specifications
Dimensions and Specifications

Clamshell Specifications

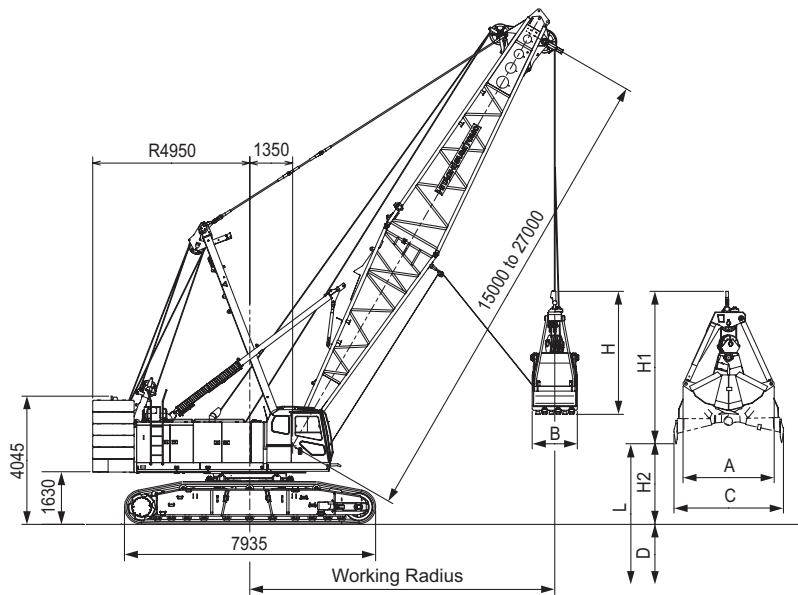Dimensions and Specifications



Working Ranges

Boom Length	m	15				18				21				24				27			
Boom Angle	°	35	45	55	65	35	45	55	65	35	45	55	65	35	45	55	65	35	45	55	65
Working Radius	m	14.2	12.6	11	8.5	16.6	14.7	12.7	9.7	19.1	16.8	14.4	11.0	21.5	19.0	16.1	12.3	24.0	21.0	17.8	13.5
Gross Rated Load	t	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10
Lift L (D + H2)	m	39.4	40.5	41.5	42.3	41.1	42.6	43.9	45	42.8	44.7	45.7	47.7	44.5	46.8	47.4	50.4	46.2	48.9	49.1	53.1
Max. Digging Depth D	m	36																			
Bucket Dumping Height H2	m	3.4	4.5	5.5	6.3	5.1	6.6	7.9	9	6.8	8.7	9.7	11.7	8.5	10.8	11.4	14.4	10.2	12.9	13.1	17.1

Specifications

Clamshell Specifications		
Bucket Capacity	m³	2.5
Allowed Maximum Gross Weight for Clamshell Bucket and Captured Load Combined	t	10
Boom Length	m	15 to 27
Maximum Digging Depth	m	36
Support Wire Rope Speed *	m/min	64
Opening/Closing Wire Rope Speed *	m/min	64
Boom Hoist Drum Wire Rope Speed (Raise) *	m/min	44
Boom Hoist Drum Wire Rope Speed (Lower) *	m/min	44
Ground Contact Pressure	kPa (kgf/cm²)	91 (0.93) (w/ Basic Boom, 2.5 m³ Clamshell Bucket)
Overall Operating Weight	t	Approximately 126 (w/ Basic Boom, 2.5 m³ Clamshell Bucket)

NOTE :

- Speeds marked with "" may vary depending on load applied.
- SI units are used for specifications. In parenthesis, conventional units are also indicated.
- Specifications other than those shown above are the same as those shown in the crane specifications section.

Clamshell Bucket

Capacity (m³)	Weight (t)	A (mm)	B (mm)	C (mm)	H (mm)	H1 (mm)
2.5	5.5	2,880	1,400	3,450	4,180	5,130

Gross Rated Load Table

Working Radius (m)	Boom Length (m)				
	15	18	21	24	27
8.5	10.0				
9.0	10.0	10.0 /9.8			
10.0	10.0	10.0	10.0 /11.1		
12.0	10.0	10.0	10.0	10.0 /12.3	10.0 /13.6
14.0	10.0 /14.2	10.0	10.0	10.0	10.0
16.0		10.0	10.0	10.0	10.0
18.0		10.0 /16.7	10.0	10.0	10.0
20.0			10.0 /19.1	10.0	10.0
22.0				10.0 /21.6	10.0
24.0					10.0

- Max. clamshell rating is 10.0 t.
- Mass of bucket plus load should not exceed clamshell ratings shown above. Following data are for a general digging application buckets.







Bucket capacity	2.0 m³	2.5 m³
Bucket mass	4.5 t	5.5 t
- In case of clamshell application, a 15.0 m boom is recommended as minimum length of boom, and max. boom length shall not exceed 27.0 m.
- Apparent specific gravity of lifting material :
Earth 1.7 to 1.8 t/m³
Gravel 1.8 to 2.0 t/m³
- Use the counterweight in an assembly configuration (49.6 t) that does not include the lower weight or top weight.
- Max. digging depth below ground shall be 36 m.



Weights and Dimensions of Disassembled Units

Weights and Dimensions List

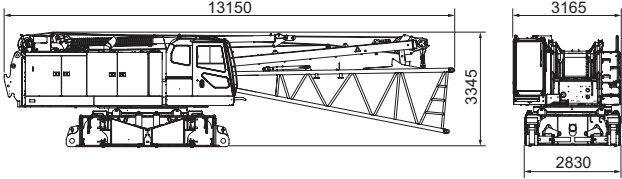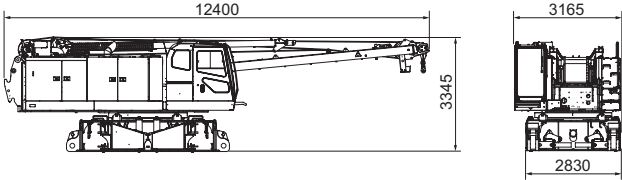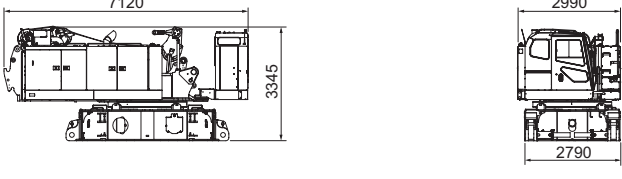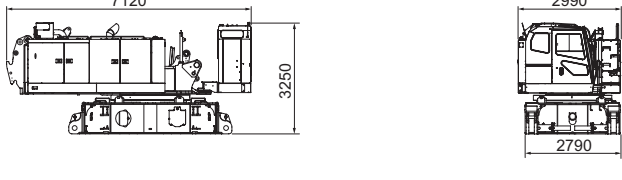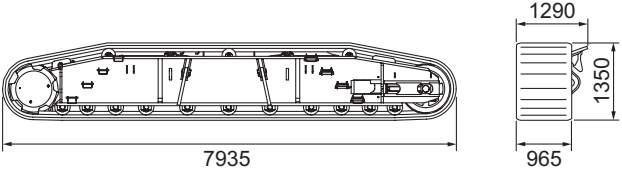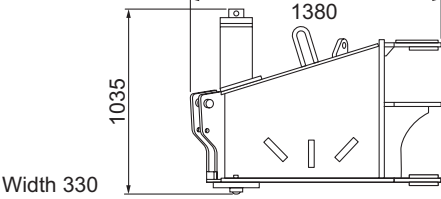Weights and Dimensions of Disassembled Units










Description	Qty	Dimensions (mm)		Weight (kg)
Base Crane with: Backstops Boom Base Mast Front Winch Wire Rope Jacks Upper & Lower Spreader Floats	1			39800
Base Crane with: Backstops Mast Front Winch Wire Rope Jacks Upper & Lower Spreader Floats	1			37600
Base Crane with: Boom Hoist Winch Wire Rope Front Winch Wire Rope Upper & Lower Spreader Without: Mast Jacks Floats	1			33400
Base Crane Without: Mast Wire Rope Jacks Upper & Lower Spreader Floats	1			30300
Crawler (Assembly)	2			14200
Jack Beams	4			420



SCX1500A-3 TECHNICAL DATA

Weights and Dimensions of Disassembled Units
Weights and Dimensions List

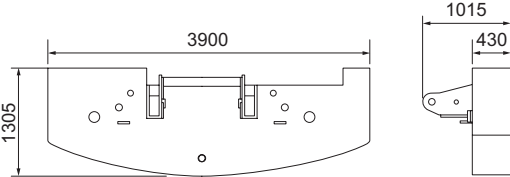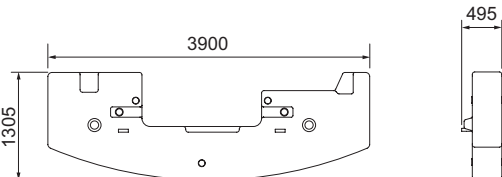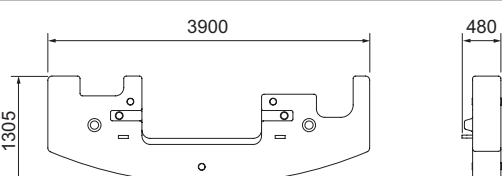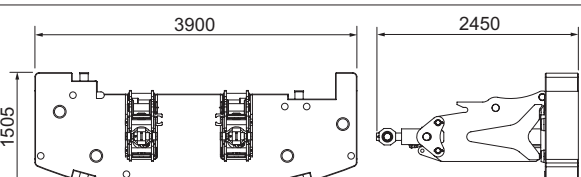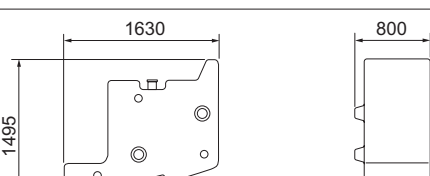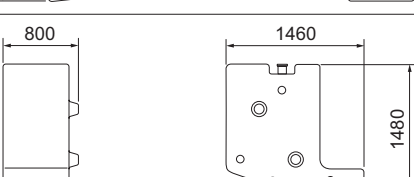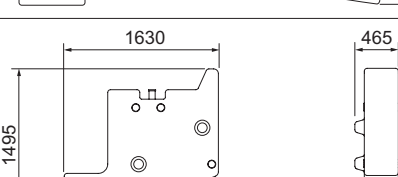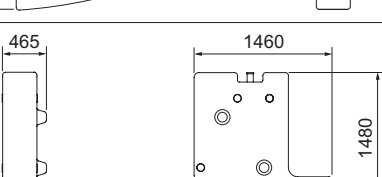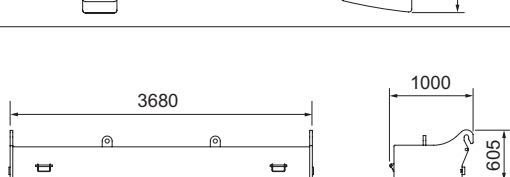Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Counterweight (Base)	1		9100
Counterweight	5		8100
Counterweight (Top Weight)	1		6860
Counterweight with Self Assembly Unit (Base)	1		9220
Counterweight (For Counterweight with Self Assembly Unit)	3		6410
Counterweight (For Counterweight with Self Assembly Unit)	3		6780
Counterweight (Top Weight) (For Counterweight with Self Assembly Unit)	1		3340
Counterweight (Top Weight) (For Counterweight with Self Assembly Unit)	1		3530
Lower Weight	2		4500










Weights and Dimensions of Disassembled Units

Weights and Dimensions List

TECHNICAL DATA

SCX1500A-3

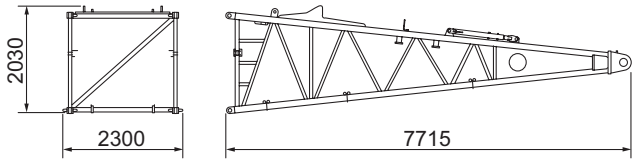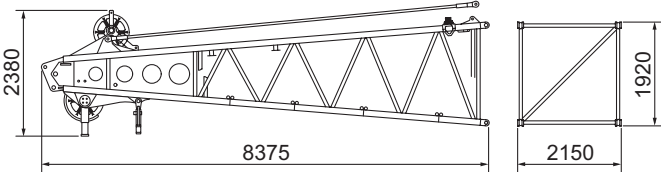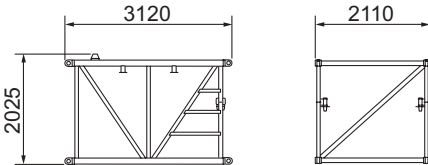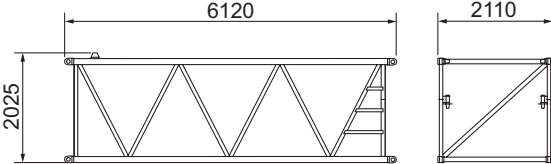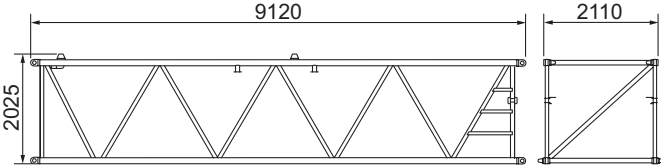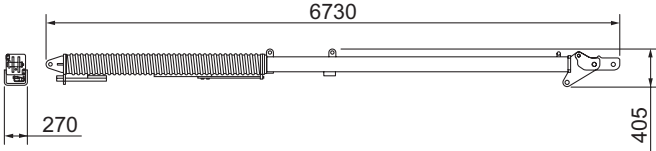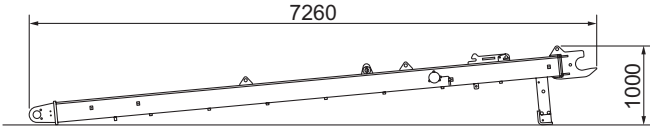Weights and Dimensions of Disassembled Units







Description	Qty	Dimensions (mm)	Weight (kg)
Boom Base	1		2300
Boom Top	1		2400
3 m Boom Insert	1		470
6 m Boom Insert	1		760
9 m Boom Insert	1		1050
Boom Backstops	2		490
Mast	1	 Width 1230	1480



SCX1500A-3 TECHNICAL DATA

Weights and Dimensions of Disassembled Units
Weights and Dimensions List

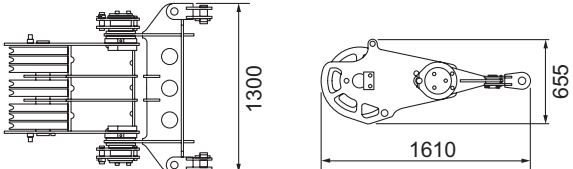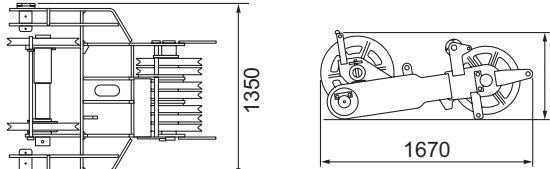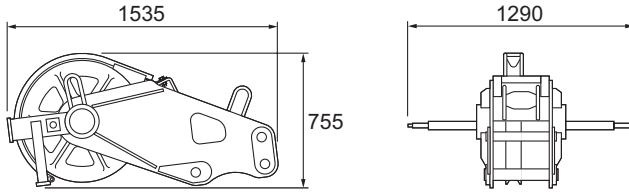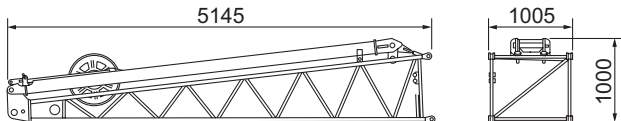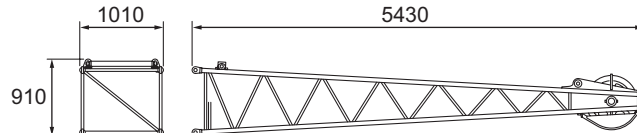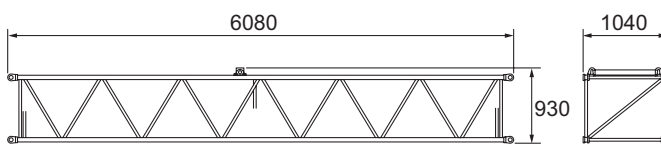Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)	Weight (kg)
Upper Spreader	1		810
Lower Spreader	1		870
Aux. Sheave	1		350
Jib Base (with Jib Strut)	1		580
Jib Top	1		290
6 m Jib Insert	1		190















Weights and Dimensions of Disassembled Units

Weights and Dimensions List

TECHNICAL DATA

SCX1500A-3

Weights and Dimensions of Disassembled Units

Description	Qty	Dimensions (mm)		Weight (kg)
Boom Top Side Spreader	1			430
Hook Side Spreader	1			240
150 t Hook (120 t Hook + Hook Side Spreader)	1			2590
120 t Hook	1			2350
80 t Hook	1			1350
35 t Hook	1			900
12 t Hook	1			510



SCX1500A-3

TECHNICAL DATA

Equipment List
Standard and Optional Equipment

Equipment List

Standard and Optional Equipment

○ : Standard ● : Optional — : No setting

Item		Crane	Clamshell
Lower Structure	965 mm Crawler Shoe	○	○
	Jack Up Unit	○	○
	Crawler Side Frame Connecting Unit	○	○
	Steps	○	○
	Shoe Tension Unit (Hydraulic)	●	●
	Low Wear Shoe (Contiguous surface of roller)	●	●
Upper Structure	Cab Up/Down Catwalk	○	○
	Upper House Handrails (For catwalk)	○	○
	Under Cover (Bed lower surface)	○	○
	Working Light (× 2)	○	○
	Back Mirror (Left and right)	○	○
	Central Lubrication Unit (For turntable bearing)	○	○
	Drum Flange Cover	○	○
	Auto Idle Stop	○	○
	Eco Winch	○	○
	Drum Light (Front winch)	●	●
	Winch Rope Retainer (Front winch)	●	●
	Winch Rope Retainer (Rear winch)	●	●
	Catwalk (Folding type, Left / Right)	●	●
	Electric Fuel Pump	●	●
	Upper House Handrails (Folding type)	●	●
	Winch with Front and Rear Free Mechanism	●	●
Cab	Third Winch (Rope not included) (with Free mechanism)	● ^{*3}	-
	Short Length Bolts For 49.6t Counterweight	-	○
	Air Conditioner	○	○
	Sunvisor	○	○
	Sunshade	○	○
	Wiper with Washer (Front window, Cab roof window)	○	○
	Microphone & Loud-Speaker	●	●
	AM / FM Radio (with Clock)	○	○
	Room Lamp	○	○
	Cup Holder	○	○
	24 V Power Socket (× 2)	○	○
	Floor Mat	○	○
	Floor Carpet	●	●
	Level Gauge (in Cab & lower frame)	○	○
	Accelerator Pedal (Right side)	●	●
	Armchair Lever	○	○
	Cross Operation Lever (Lever lock not attached)	●	●
	Front Operation Lever (with Lever lock)	●	●
	Operator's Seat	○	○
	Operator's Seat with Suspension	●	●
	Travel Operation Pedal (Cannot be installed when winch with free mechanism attached)	●	●
	Boom Hoist Operation Pedal ^{*1}	●	●
	Swing Brake Operation Pedal ^{*1}	●	●
	Fan	●	●
	Front/Rear Operation Lever, Brake Pedal Permutation	●	●
	Fuel Burning Heater	●	●
	Accelerator Grip	○	○
	Drum Rotation Sensor (Front/Rear/Boom Hoist) ^{*2}	○	○
	Speed Control Dial (Front/Rear/Boom Hoist/Swing)	○	○
	Lifehammer	○	○

*1 Cannot be installed at the same time.
*2 Cannot be equipped when the cross operation lever or front operation lever is installed.
*3 The third winch can only be used in the crane specification.



○ : Standard ● : Optional — : No setting

Item			Crane	Clamshell
Attachment	15 m Basic Boom (Boom base: 7.5 m, Top: 7.5 m)		○	○
	3 m Boom Insert		●	●
	6 m Boom Insert		●	●
	9 m Boom Insert		●	●
	Parts Set for 10 m crane jib [10 m Basic jib, Anti-two block, Jib mast]		●	-
	6 m Crane Jib Insert		●	-
	Midpoint Pendant Rope (Required when the boom length is 66 m or longer)		●	-
	Parts Set for Auxiliary Sheave [Auxiliary sheave, Auxiliary sheave anti-two block]		●	-
	Boom Top Side Spreader		●	-
	Hook Side Spreader		●	-
	150 t Hook (6 sheaves) (120 t Hook + Hook Side Spreader)		●	-
	120 t Hook (5 sheaves)		●	-
	80 t Hook (3 sheaves)		●	-
	35 t Hook (1 sheave)		●	-
	12 t Hook		●	-
Wire Rope	Front Winch (φ 26)	Mono Rope EP 3XF (40)	○	-
		P · S (19) + 39XP · 7	●	-
		XP IWRC 6 X WS (31)	-	○ ^{*5}
	Rear Winch (φ 26)	Mono Rope EP 3XF (40)	●	-
		P · S (19) + 39XP · 7	●	-
		XP IWRC 6 X WS (31)	-	○ ^{*6}
	Third Winch (φ 26)	Mono Rope EP 3XF (40)	●	-
Safety Device	Boom Hoist Winch (φ 22.4)		○	○
	Moment Limiter		○	○
	3 Color Percentage Indicator		●	●
	Gate Lock Lever		○	○
	Individual Winch Operation Lever Lock (Front, Rear, Hoist, Travel) ^{*4}		○	○
	Automatic Drum Lock (Boom Hoist)		○	○
	Winch Drum Lock (Front/Rear)		○	○
	Swing Lock		○	○
	Swing Alarm		○	○
	Travel Alarm		○	○
	Auto Slowdown (Slow stop)		○	○
	Boom Hoist Limiting Device		○	○
	Secondary Boom Over Hoist Prevent Device		○	○
	Warning Alarm		○	○
	Monitor Panel (Machine monitoring)		○	○
	Engine Start Interlock System		○	○
	Emergency Engine Stop Switch (In cab)		○	○
	Lifting Height Indication Device		○	○
	Anti-Two Block		○	-
	Moment Limiter (M/L) Mode Selector (In left house)		●	○
	Swing Restriction Unit		●	●
	Lowering Limiter		●	●
	Anemometer		●	-
	Obstacle Lights (Fixed lights)		●	-
	Drum and Rear View Monitor System (3 cameras)		●	●
	Cab Roof Window Guard		●	●

*4 An operation lever lock is not attached to the front, rear or hoist when the cross operation lever is installed.
*5 Used for opening/closing rope. 82m length rope required for 12m diggind depth with 21m boom length.
*6 Used for supporting rope. 70m length rope required for 12m diggind depth with 21m boom length.



SCX1500A-3

TECHNICAL DATA

Equipment List

Standard and Optional Equipment

○ : Standard ● : Optional — : No setting

Item		Crane	Clamshell
Common parts	Boom Foot Pin Removal / Installation Cylinder	●	●
	Boom Back Stop	○	○
	Boom Angle Sensor	○	○
	Boom Lifting Piece	○	○
	Assembly Pad ^{*7}	●	-
	Quick Draw for Side Frame Self Assembly ^{*8}	●	●
	Counterweight with Self Assembly Unit	●	●
	Skywalk (with Stanchion)	●	-
	Skywalk (without Stanchion)	●	-
	Boom Top Under Surface Buffer (Protector)	●	●
	Load Table Sign (Whiteboard, boom base installation)	●	●
	Insertable Company Name Plate (Both side surfaces of the machine)	●	●
	Opening / Closing / Support Rope Stopper	-	○
	Hyd. Tagline (6 × Fi (29) ϕ 10 mm × 55 m)	● ^{*9}	○
	Reeving Winch (4 × F (30) ϕ 8 mm × 250 m)	● ^{*9}	-
	Reeving Winch Cum Hydraulic tagline	For hydraulic tagline (6 × Fi (29) ϕ 10 mm × 55 m)	-
		For reeving (6 × Fi (29) ϕ 10 mm × 220 m)	
	Reduction Counterweight Specification	● ^{*10}	-
	Sling Ropes for Disassembly and Assembly (For counterweights, Crawlers)	●	●
	Air Cleaner Double Element	●	●
Other	Additional Fuel Filter (Triple filter)	●	●
	Additional Spare Parts (Hydraulic oil filter)	●	●
	Additional Tools (Large hammer, Crowbar, Chisel)	●	●
	Standard Supplied Tools	○	○
Standard Spare Parts		○	○

^{*7} The assembly pad is required for the following attachments.

- Crane Boom Longest Length 75m
- Crane Boom Length 72m + Aux. Sheave
- Crane Boom Length 63m + Crane Jib

^{*8} When using the reeving winch or hydraulic tagline, remove the side frame self assembly quick draw.

^{*9} (1) Hydraulic tagline (maximum line pull: 2.9 kN (300 kg))

(2) Reeving winch unit (maximum line pull: 11.8 ZkN (1,200 kg))

(3) Reeving winch and hydraulic tagline

(Line pull: For hydraulic tagline (maximum line pull: 1.5 kN (150 kg)) /for reeving winch (maximum line pull: 2.9 kN (300 kg))

^{*10} The reduction counterweight specification can only be used for the crane specification, with the exception of the crane jib.



[Redacted Title]

M E M O

SCX1500A-3

[Dotted lines for writing content]



MEMO





- We are constantly improving our products and therefore reserve the right to change designs and speafications without notice.
- Units in this specification are shown under International System of Units; the figures in parenthesis are under Gravitational System of Units as old one.

**Hitachi Sumitomo Heavy Industries
Construction Crane Co.,Ltd.**

9-3, Higashi-Ueno 6-chome, Taito-ku, Tokyo 110-0015, Japan
Phone: 81-3-3845-1387 Facsimile: 81-3-3845-1394

<http://www.hsc-crane.com>