



GRUA TORRE / TOWER CRANE
GRUE A TOUR / БАШЕННЫЙ КРАН /
KULE VINÇ / رافعة برجية


J160

10



EN 14439
C25

UNE-EN-ISO 9001

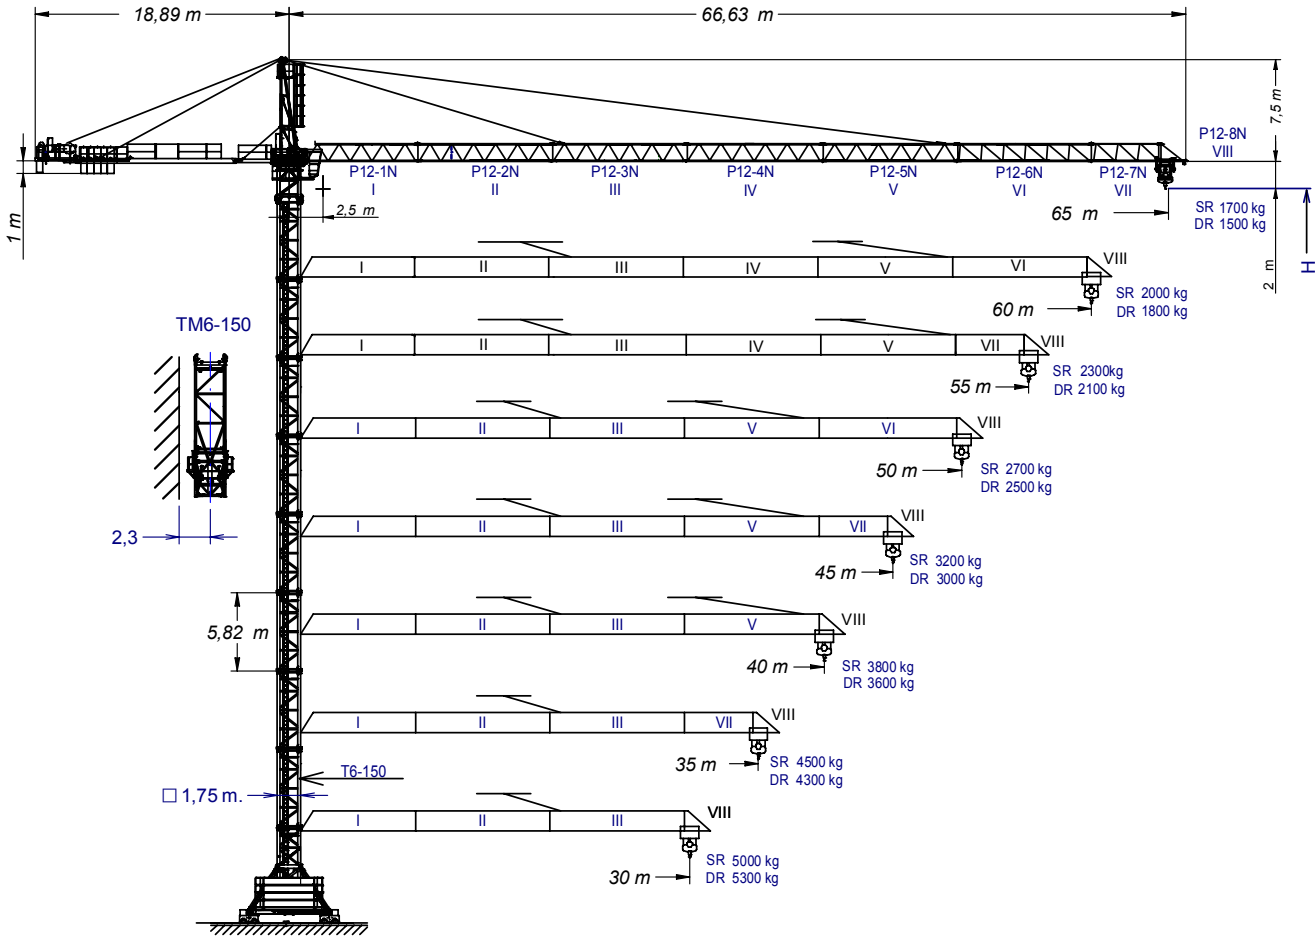


Altura máxima bajo gancho sin arriostrar (m).
Maximum height under hook without fastening (m).
Hauteur maximale sous crochet sans ancrage (m).
Максимальная высота под крюком без крепления (m).
Bağlantısız maksimum kanca altı yüksekliği (m).
أقصى ارتفاع تحت الخطاف بدون ربط (m)

H_{SR} =

P12-1N	167.40.000	TM6-150	161.35.700
P12-2N	167.41.000	T3-150	161.32.000
P12-3N	167.42.000	T6-150	161.31.000
P12-4N	167.43.000	TD6-150	161.31.700
P12-5N	167.44.000	T12-150	161.31.500
P12-6N	167.45.000	AN 150	161.21.000
P12-7N	167.46.000	BNI 45-150	161.20.500
P12-8N	167.47.000	BNI 6-150H	161.20.300
		ABH 100	201.23.000


(H) TRASLACIÓN / TRAVELLING /

TRASLACION / ПЕРЕМЕЩЕНИЕ / RAY YÜRÜYÜŞLÜ / متحركة

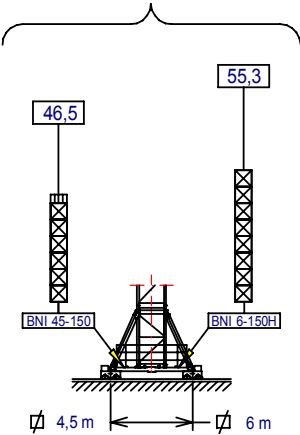

(H) ESTACIONARIA / STATIONARY /






STATIONAIRE / СТАЦИОНАРНОЕ СОСТОЯНИЕ / SABIT / ثابتة

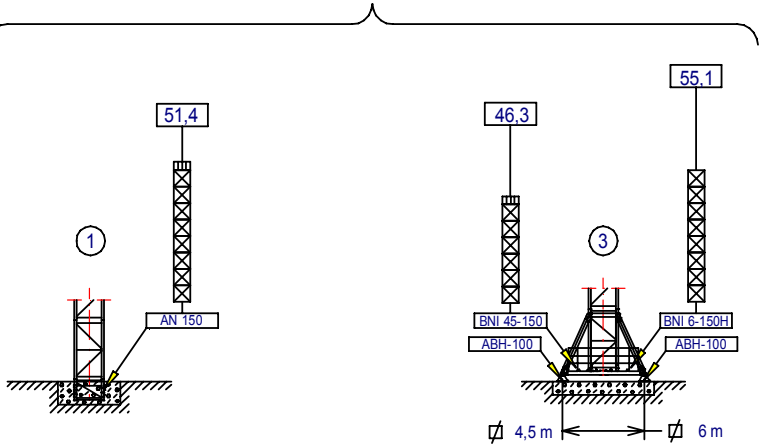

CARGAS / LOADS / CHARGES / НАГРУЗКИ / YÜKLER / الأحمالJ160.10									
	ST-SR (kg)	Cargas máximas / Maximum loads / Charges maximales / Максимальные нагрузки / Maksimum yük / أقصى حمولة SR-5.000 kg							
	Alcance del gancho [m] / Hook reach [m] / Portée du crochet (m) / Радиус действия крюка (m) / Kancanın yüksekliği (m) / مدى الخطاف								
[m]	65	60	55	50	45	40	35	30	5000 kg @ ... (m)
65 m	1700	1898	2133	2414	2758	3188	3740	4477	
60 m	-----	2000	2244	2536	2893	3340	3914	4680	
55 m	-----	-----	2300	2598	2962	3418	4003	4783	
50 m	-----	-----	-----	2700	3076	3545	4149	4953	
45 m	-----	-----	-----	-----	3200	3685	4309	5000	
40 m	-----	-----	-----	-----	-----	3800	4440	5000	
35 m	-----	-----	-----	-----	-----	-----	4500	5000	
30 m	-----	-----	-----	-----	-----	-----	-----	5000	30,0 m

	ST-DR (kg)	Cargas máximas / Maximum loads / Charges maximales / Максимальные нагрузки / Maksimum yük / أقصى حمولة DR - 10.000 kg								
	Alcance del gancho [m] / Hook reach [m] / Portée du crochet (m) / Радиус действия крюка (m) / Kancanın yüksekliği (m) / مدى الخطاف									
[m]	65	60	55	50	45	40	35	30	25	20
65 m	1500	1696	1927	2205	2544	2969	3514	4242	5260	6788
60 m	-----	1800	2041	2330	2683	3125	3693			



LISTA DE EMBARQUE / PACKING LIST / LISTE DE COLISAGE / СПИСОК ПОСТАВКИ / ÇEKİ LİSTESİ / قائمة التحميل					J160.10					
DENOMINACIÓN / DENOMINATION / DÉSIGNATION / НАЗВАНИЕ / AÇIKLAMA / اسم					L [m]	A [m]	H [m]	P / W [kg]		
Torre inferior / Lower tower / Tour inférieure / Нижняя башня / Alt kule / البرج السفلي		TI-6-150			6,175	2,190	2,190	3.535		
Torre / Tower / Tour Башня / Kule / برج	T6-150				6,175	1,870	1,870	2.760		
	TD6-150				6,175	1,870	1,870	2.930		
	TT6-150				6,175	1,870	1,870	2.760		
	T3-150				3,265	1,870	1,870	1.550		
	T12-150				12,000	1,870	1,870	5.180		
Torre asiento pista + base punta de torre + orientación Slewing table + tower head base + slewing mechanism Tour pivot + base du porte-flèche + mécanisme d'orientation Сиденье площадки + основание верхней секции башни + поворотный механизм Göbek +kule kafa bölümü tabanı+mekanizma برج وحدة الدوارن + قاعدة رأس البرج + آلية الدوران					4,530	2,100	2,035	5227		
Punta de torre / Tower head / Porte-flèche верхняя секция башни / kulenin kafa bölümü / رأس البرج					7,661	1,225	1,525	1410		
Conjunto asiento pista, punta de torre, orientación Slewing table assembl +, tower head + slewing Groupe pivot + porte-flèche + mécanisme d'orientation Сиденье площадки + верхняя секция башни + поворотный механизм Göbek +kulenin kafa bölümü+mekanizma مجموعة وحدة الدوارن + رأس البرج + آلية الدوران					11	2,100	2,035	7600		
Tramo de pluma Jib section Tronçon de flèche Секция стрелы Bot bölümü أجزاء الذراع										



COMPOSICIONES DE TORRE / **TOWER COMPOSITIONS**

COMPOSITIONS DE LA TOUR / КОНСТРУКЦИЯ БАШНИ / KULE KOMPOZİSYONLARI / مكونات البرج

J160.10

T

H

1

7,6

T6-150

T3-150 161.32.000

4,7

1

2,91

5,82

T6-150 161.31.000

7,6

1

2

13,4

10,6

2

13,4

2

3

19,2

16,4

3

19,2

3

4

25,1

22,2

4

25,1

4

5

30,9

28,0

5

30,9

5

6

36,7

33,8

6

36,7

6

7

42,5

39,6

7

42,5

7

8

48,4

45,5

8

48,4

8

9

52,3

TL20/TX-150

TL20/TX-150

49,4

9

52,3

9

10

57,9

TL20-5,6

TL20-5,6

55,0

10

57,9

10

AL 20 153.21.800

ALD 20 160.21.250

AS 20 160.21.010

ASD 20/24 160.21.080

ASR 20 160.21.200

ASRD 20/24 156.21.000

AS 20

ASD 20/24

ASR 20

ASRD 20/24


T: Torre / Tower / Tour / Башни / Kuleler / أبراج

H: Altura / Height / Hauteur / Высота / Yükseklik / ارتفاع

i

Otras configuraciones de torre / Other tower configuration / Autres configurations / Прочие конфигурации /
Diğer konfigürasyonlar / مكونات أخرى

Transporte / Transport /
Transport / Транспортировка /
Taşıma / نقل



7x

