



# AXXESSOR™

**DVL SERIES**



**Slide-Rail Platform**



**Molded Platform with Material Tray**



**Extension Platform**





## JLG can put you in a powerful position

Whatever your rental and maintenance needs, from electrical installations, painting, plumbing, or window washing to seasonal decorating, AXXESSOR™ DVL Series lifts can elevate productivity. The DVL Series lifts are ruggedly designed with a duty cycle that will get through the day and more. With two models having working heights of 21' and 26' and driveable at full height, the DVL Series serves a broad range of applications. With a long list of standard features, multiple platform options, and machine accessories, the DVL Series lifts can be configured for your required application.





# PERFORMANCE FEATURES

## Exceptionally Rigid Mast

Large guide-blocks and oversized anodized mast sections provide an exceptionally smooth and rigid mast that requires no scheduled service or lubrication to the guide system.



## Power Management System

Maintenance-free batteries, a fast 5-hour charger and an automatic power-off control provide reliable power for long days of operation. Plus, the battery discharge indicator (BDI) accurately tracks available power.



## Pothole Protection System

JLG's automatic Pothole Protection System (PHP) provides additional support for the lift in the event a wheel or caster drops into a hole. The platform controls are safety-interlocked to the machine's tilt and Pothole Protection System.



## Operator Preferred Controls

JLG's Point-N-Go® control system provides smooth drive and lift operation and allows the operator to drive and steer simultaneously. The operator can precisely position the platform with the variable speed elevate and descent controls.



## Compact and Maneuverable

With large diameter, counter-rotating rear wheels and a small chassis (29.5" W x 51.5" L), the DVL Series is designed for efficient operation in tight spaces and narrow aisles.



## Outstanding Gradeability

With the platform lowered, the DVL Series has a maximum speed of 2.5 MPH and 30% gradeability to maneuver around the jobsite efficiently.



## Reduced Scheduled Maintenance and Service

The DVL Series provides outstanding serviceability, with only two grease points, a maintenance free mast guide system, a removable drive train with a service free sealed gearbox and maintenance free sealed batteries.



# AXXESSOR™

## DVL SERIES


### Standard Features

- Low Maintenance Anodized Aluminum Mast
- Quick-Change Platform Mounting
- Slide-Rail Front Entry Platform
- Safety Interlocked Controls
- Single Joystick Drive & Steer Control
- Variable Speed Elevation Controls
- Automatic Pothole Protection System
- 1-1/2 Degree Tilt Alarm and Control
- Automatic Battery Charger
- Two Sealed 100 Amp Hour Maintenance-Free Batteries
- Key Lock Main Power Switch
- Automatic Power-Off Battery Saver Control
- Battery Discharge Indicators: Platform & Base
- Non-Marking Tires
- Transportation Tie-Downs
- Built-In Fork Truck Pockets
- Lanyard Attachment Anchor
- Hourmeter
- All-Motion Alarm
- 110 Volt Double Receptacle on Platform

### Options & Accessories

- Oversized Gull Wing Front Entry Platform
- Narrow Gull Wing Front Entry Platform
- Molded Swing-Up Gate Side Entry Platform
- Extension Gull Wing Front Entry Platform
- Material Tray: 26" W x 26" L x 6" Deep
- Programmable 4-Digit Security Lock
- Crane Hook: Lifting Eye for a Crane Hook
- Fluorescent Light Tube Caddy
- Tool Tray: 8" W x 18" L x 5" Deep
- Horn
- Flashing Amber Beacon
- 583 Type EE Rating\*

\*Contact VMP Sales for Availability

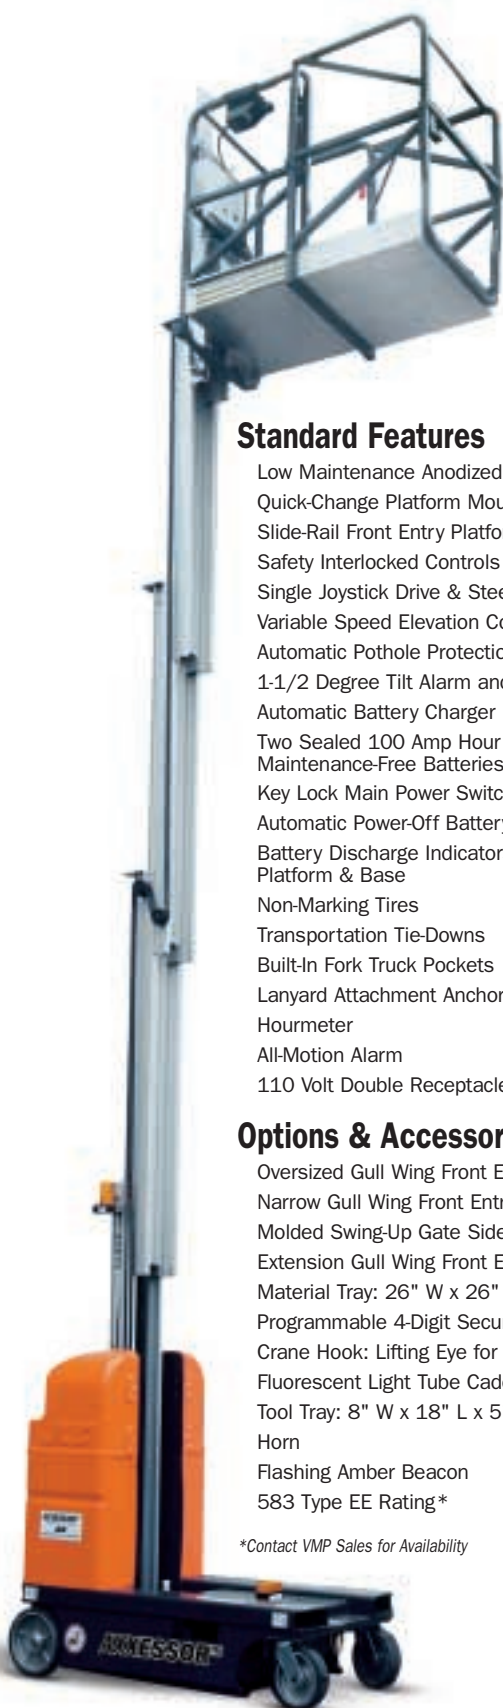

## SPECIFICATIONS

	15DVL	20DVL
Platform Height	15 ft. 4 in. (4.69 m)	19 ft. 6 in. (5.97 m)
Working Height	21 ft. 4 in. (6.52 m)	25 ft. 6 in. (7.80 m)
Drive Height	Max. Platform Height	Max. Platform Height
Stowed Height	78 in. (198 cm)	78 in. (198 cm)
Platform Entry Height	19 in. (48 cm)	19 in. (48 cm)
<b>Platform Capacity:</b>		
Slide-Rail Platform	500 lbs. (227 kg)	350 lbs. (159 kg)
Oversized Platform	500 lbs. (227 kg)	350 lbs. (159 kg)
Narrow Platform	500 lbs. (227 kg)	350 lbs. (159 kg)
Molded Platform	500 lbs. (227 kg)	350 lbs. (159 kg)
Extension Platform	500 lbs. (227 kg)	350 lbs. (159 kg)
<b>Platform Size (W x L):</b>		
Slide-Rail Platform	26 in. x 26 in. (66 cm x 66 cm)	
Oversized Platform	28 in. x 26 in. (71 cm x 66 cm)	
Narrow Platform	22 in. x 24.5 in. (56 cm x 62 cm)	
Molded Platform	26 in. x 26 in. (66 cm x 66 cm)	
Extension Platform	26 in. x 26 in. (66 cm x 66 cm) Extended 26 in. x 49 in. (66 cm x 125 cm)	
<b>Overall Vehicle Length:</b>		
Chassis Length	51.5 in. (131 cm)	51.5 in. (131 cm)
Extension Platform Retracted	53 in. (135 cm)	53 in. (135 cm)
All Other Platforms	51.5 in. (131 cm)	51.5 in. (131 cm)
<b>Overall Vehicle Width:</b>		
Chassis Width	29.5 in. (75 cm)	29.5 in. (75 cm)
Extension Platform	31.5 in. (80 cm)	31.5 in. (80 cm)
All Other Platforms	29.5 in. (75 cm)	29.5 in. (75 cm)
<b>Gross Vehicle Weight:</b>		
Slide-Rail & Gull Wing Platforms	2035 lbs. (923 kg)	2035 lbs. (923 kg)
Molded Platform	2050 lbs. (930 kg)	2050 lbs. (930 kg)
Extension Platform	2105 lbs. (955 kg)	2105 lbs. (955 kg)
<b>Drive Maximum Speed:</b>		
Platform Lowered	2.5 mph (4 kph)	2.5 mph (4 kph)
Platform Elevated	0.6 mph (1 kph)	0.6 mph (1 kph)
Turning Radius	0	0
Gradeability	30%	30%
Underclearance	2 in. (5 cm)	2 in. (5 cm)
<b>Wheel Diameter &amp; Width:</b>		
Rear Drive & Steer Wheels	10 in. x 3 in. (25 cm x 8 cm)	10 in. x 3 in. (25 cm x 8 cm)
Front Caster Wheels	8 in. x 2.5 in. (20 cm x 6 cm)	8 in. x 2.5 in. (20 cm x 6 cm)
Tire Material	Non-Marking Polyurethane	Non-Marking Polyurethane
Batteries	Two Sealed 100 AH 12 Volt	Two Sealed 100 AH 12 Volt
Battery Charger	20 Amp	20 Amp
Drive System	Direct Electric	Direct Electric
Pothole Protection System	Automatic-Mechanical	Automatic-Mechanical

### The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our DVL Series with our exclusive "1 & 5" Warranty. We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. These machines meet or exceed applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.6-1999 and CSA standard CAN3-B354.2-01 as originally manufactured for intended applications. We reserve the right to make price, specification, and/or equipment changes without prior notification. All prices are in U.S. dollars, ex-works Shippensburg, PA.

### JLG Industries, Inc.

1 JLG Drive  
 McConnellsburg, PA 17233-9533  
 Telephone 717-485-5161  
 Toll free in US 877-JLG-LIFT  
 Fax 717-485-6417