




3246E2

ELECTRIC SCISSOR LIFT





JLG MODEL 3246E2

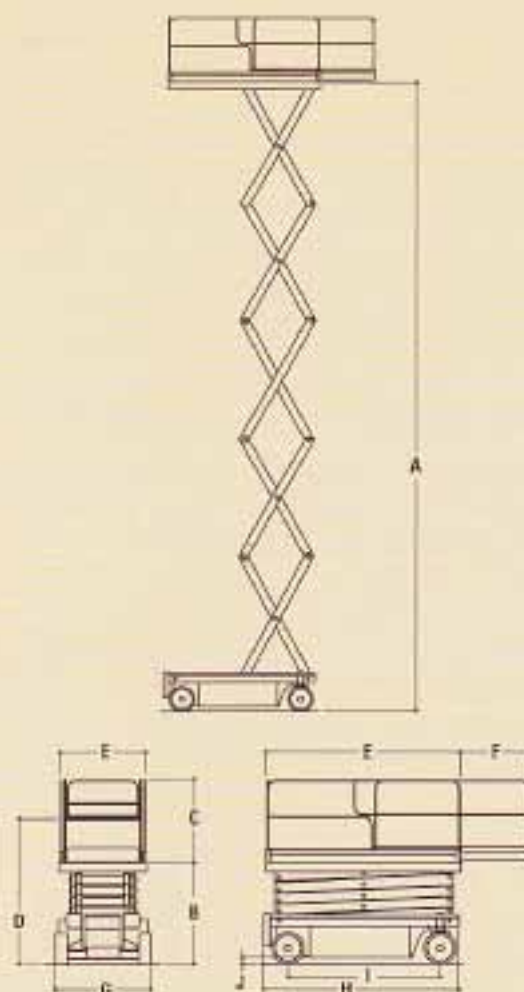

DIMENSIONAL DATA

A. Platform Height - Elevated	32 ft. (9.75 m)
B. Platform Height - Lowered	4 ft. 3 in. (1.30 m)
C. Platform Railing Height*	3 ft. 7.5 in. (1.10 m)
D. Overall Height (Rails Folded)	6 ft. 5 in. (1.96 m)
E. Platform Size	45 x 84 in. (1.14 x 2.13 m)
F. Platform Extension	3 ft. (91 cm)
G. Overall Width	3 ft. 10 in. (1.17 m)
H. Overall Length	7 ft. 5 in. (2.26 m)
I. Wheelbase	5 ft. 8.5 in. (1.74 m)
J. Ground Clearance	3.0 in. (7.62 cm)
Platform Capacity	700 lbs (318 kg)
Capacity on Platform Extension	250 lbs (113 kg)
Lift/Lower Time	60/57 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight**	6,200 lbs. (2,812 kg)

CHASSIS

Drive Speed - Lowered	2.0 mph (3.2 kph)
Drive Speed - Elevated	0.5 mph (0.8 kph)
Gradeability	25%
Turning Radius (Inside)	45 in. (1.14 m)
Turning Radius (Outside)	115 in. (2.92 m)
Tire Size/Type	16 x 5 Non-Marking Solid
Brakes	Automatic Rear Wheel Parking

POWER SOURCE

Batteries	4 x 6V 245 amp-hr
Charger	20 Amp Automatic SCR 120/250V, 50/60HZ
Electric Motor	4.5 hp (3.4 kW)
Pump	Single Section Gear
Hydraulic Reservoir	4 gal. (15.2 L)

*special heights available, consult factory

**certain options or country standards will increase weight