

KATO

KATO WORKS CO.,LTD.

HEAD OFFICE: No. 9-37, 1-chome, Higashi-ohi, Shinagawa-ku,
Tokyo, Japan
Tokyo 471-8111
Tel:
FOREIGN DEPARTMENT: The 17th Mori Bldg., Shiba Nishikubo
Sakuragawa-cho 2, Minato-ku, Tokyo, Japan
Tokyo 591-5111
Tel:
Cable Address: CRANEKATO TOKYO
Telex: 0 222-4519 (CRKATO J)

7303 3000(T) Printed in Japan

KATO

FULLY HYDRAULIC TRUCK CRANE

MODEL

NK-400



KATO WORKS CO.,LTD.

TOKYO

KATO NK-400

FULLY-HYDRAULIC FULL-SLEWING TRUCK CRANE

SINGLE LEVER CONTROL 4 SECTION "FULL POWER" BOOM:

Each section of boom has an independent hydraulic cylinder, permitting the boom length quite free on extension or retraction within the range from minimum 11 m to maximum 35 m in length. Controlled by only one lever.

NEW CONTROLLED FREE FALL "FREOMATIC" WINCHES ENSURE SPEEDY OPERATION:

Tandem-drive two speed main and auxiliary winches are driven by high-torque hydraulic motor, having automatic brakes and clutches. This mechanism enables the safe operation of "Free Fall" or "Power Lowering" of the hook.

"GLIDE-MASTER" PLANETARY SLEWING:


"Glide-Master" planetary slewing system enables smooth, precise slewing operation, and in addition a hydrostatic controlled disk brake is provided.

FULL VISION SUPERSTRUCTURE CAB:


Provided with safety glass in all windows and all necessary control levers, gauges, instruments, etc. are well arranged at convenient location for the operator. A comfortable reclining seat gives no fatigue to the operator.

AUTOMATIC SAFETY CUT-OUT: (A.S.L.I.)

Automatic Safety Load Indicator shows continuously both the rated allowable load and the actual lifting status along the boom length and working radius. For a safe operation, a buzzer warns of the danger as soon as the crane operation reaches any overload condition and then the hydraulic power is cut off automatically in the event of dangerous excess. (optional)

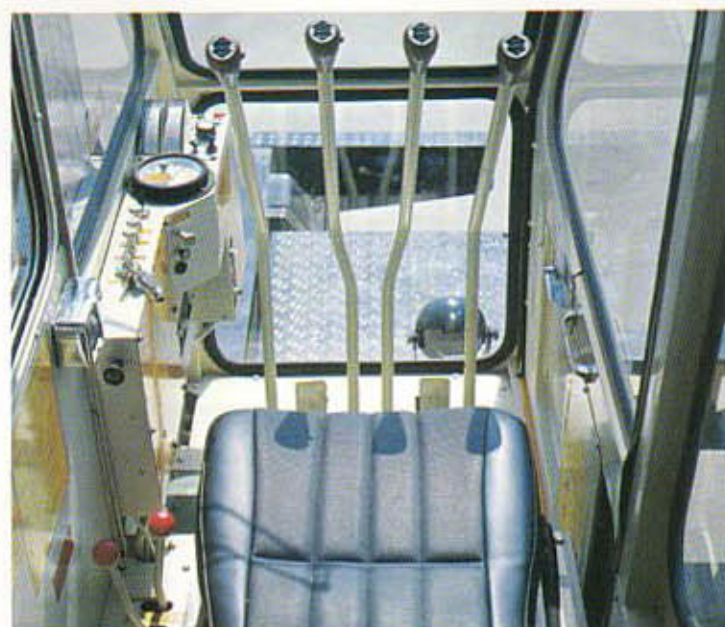

WORKING RANGES

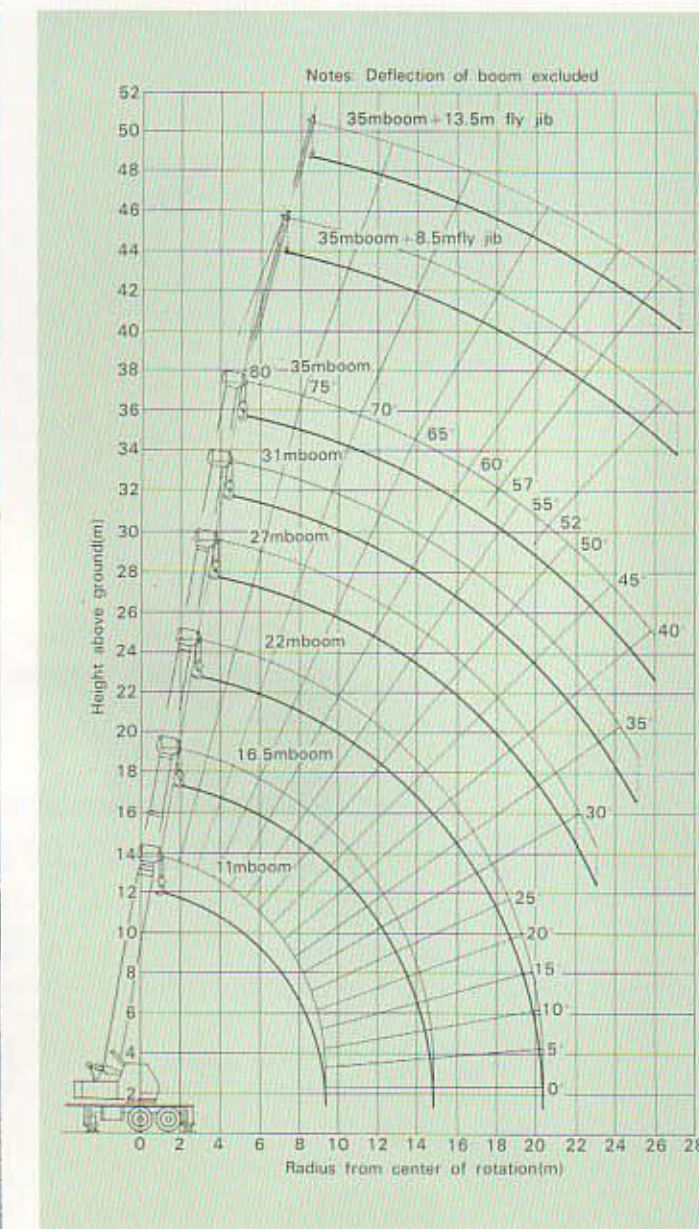

SUPERSTRUCTURE CRANE PERFORMANCE


Boom length	
(Full power 4 section):	11m ~ 35m
Fly jib length:	8.5m ~ 13.5m
Boom derricking angle:	-2.5° ~ 80°
Boom telescoping speed	
Extension:	0.16m/sec.
Hoist and lower rope speed	
Main winch:	High-91.5m/min. (Mean) Low-41.7m/min. (Mean)
Auxiliary winch:	High-91.5m/min. (Mean) Low-41.7m/min. (Mean)
Hoist and lower hook speed	
Main winch:	High-9.15m/min. (Mean) Low-4.17m/min. (Mean)
Auxiliary winch:	High-91.5m/min. (Mean) Low-41.7m/min. (Mean)
Slewing speed:	1.64 rpm.

WIRE ROPE FOR HOISTING

Main winch	Type:	6 x Fi (29) I.W.R.C.
	Parts of line:	10
	Length:	160m x 18mm dia.
Auxiliary winch	Type:	6 x Fi (29) I.W.R.C.
	Parts of line:	1
	Length:	110m x 18mm dia.

HYDRAULIC SYSTEM

Oil pump:	3 section gear type
Hoist motor:	Radial piston type
Slewing motor:	Radial piston type
Control valve	3 position 4 way double-acting type with integral check, and relief valves.
Cylinder:	Double acting type with safety check valve or balancing valve.

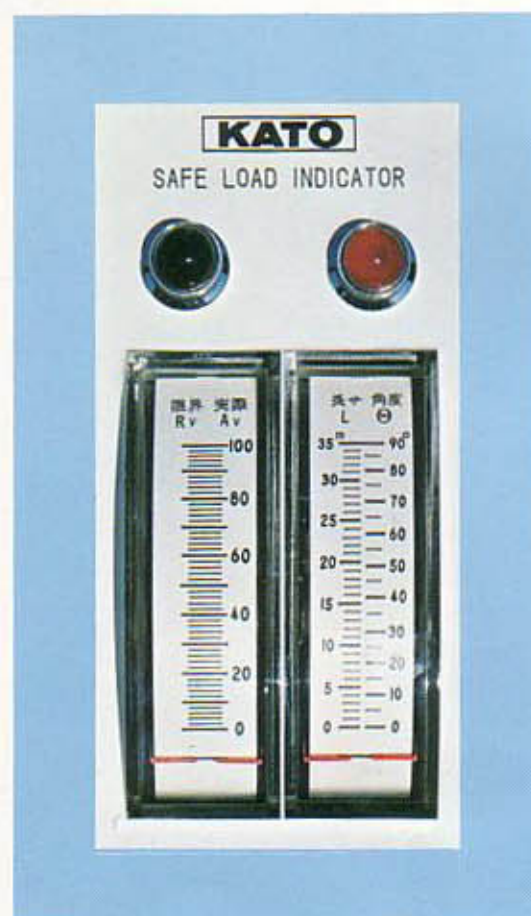


NOTES

1. The rated lifting capacities are the maximum loads guaranteed on a firm level ground and include the weight of hook block and other lifting equipments.

Hook	for 40 ton	for 12 ton	for 4 ton
Weight (kg)	450	250	120

The capacities in the blue area are based on the structural strength and other capacities do not exceed 75% of tipping loads, which is specified in DIN 15019 Sheet 2.

2. The working radii are the actual values including the deflection of the booms and jibs.
3. The rated lifting capacities for operation without outriggers are based on best conditions of tyre pressure and ground surface.
4. The capacities are based on use of outriggers fully extended. Any operation is prohibited unless the outriggers are fully extended even if in no load condition except the shortest boom 11 m.
5. When the boom length exceeds the rated one, operation must be carried out under the lifting capacities rated for the longer rated boom length.
6. When using boom with jib extended, 1,600 kgs should be subtracted from rated lifting capacities.



7. Minimum number of parts line must be calculated considering single line pull has 4,000 kgs lifting capacity. Standard number of parts line for each boom length is as follows.

Boom length	11m	11m~16.5m	16.5m~22m	22m~27m	27m~35m
Parts line	10	6	5	4	3

RATED LIFTING CAPACITIES

Working radius (m)	With Outriggers (over side and over rear)						Without outriggers (over side and over rear)
	11.0m boom	16.5m boom	22.0m boom	27.0m boom	31.0m boom	35.0m boom	11.0m boom
3.0	40.00						8.00
3.5	40.00	24.00					6.40
4.0	36.40	24.00	20.00				5.10
4.5	33.30	24.00	20.00				4.20
5.0	29.50	24.00	20.00	16.00			3.40
5.8	24.00	24.00	20.00	16.00	12.00		2.50
6.0	22.50	22.50	20.00	16.00	12.00		2.30
6.4	20.00	20.00	20.00	16.00	12.00	8.00	1.90
7.0	16.70	16.70	16.70	16.00	12.00	8.00	1.60
7.2	16.00	16.00	16.00	16.00	12.00	8.00	1.45
8.0	13.55	13.55	13.55	13.55	12.00	8.00	1.00
8.2	13.00	13.00	13.00	13.00	12.00	8.00	
9.0	11.00	11.00	11.00	11.00	10.55	8.00	
10.0		9.00	9.00	9.00	8.90	8.00	
10.6		8.00	8.00	8.00	8.00	8.00	
11.0		7.45	7.45	7.45	7.50	7.55	
12.0		6.25	6.25	6.25	6.50	6.70	
13.0		5.20	5.20	5.20	5.65	5.85	
14.0		4.40	4.40	4.40	4.85	5.10	
16.0			3.15	3.15	3.60	3.95	
18.0			2.20	2.20	2.60	2.95	
20.0			1.40	1.40	1.88	2.18	
22.0				0.80	1.25	1.55	
23.0				0.55	0.95	1.25	
24.0					0.70	1.00	
25.0					0.50	0.80	
26.0						0.65	

Boom Angle	Working radius (m)	With Outriggers over side & over rear 8.5m Jib Offset 5°
80°	8.4	4.00
77°	11.0	4.00
76°	11.5	3.90
74°	12.4	3.65
72°	14.4	3.05
70°	15.8	2.65
68°	17.1	2.30
66°	18.3	2.00
64°	19.7	1.65
62°	21.0	1.35
60°	22.3	1.15
58°	23.4	0.95
57°	23.9	0.85
56°	24.5	0.80
54°	25.7	0.70
52°	27.0	0.55

Boom Angle	Working radius (m)	With Outriggers over side & over rear 13.5m Jib Offset 5°
80°	9.6	2.50
76°	13.0	2.50
75°	13.8	2.40
74°	14.7	2.30
72°	15.3	2.20
70°	17.8	1.90
68°	19.4	1.70
66°	20.9	1.55
64°	22.5	1.35
62°	24.0	1.15
60°	25.3	1.00
58°	26.7	0.85
57°	27.2	0.70

GENERAL DATA

MODEL
CARRIER MODEL
TOTAL LENGTH mm
TOTAL WIDTH mm
TOTAL HEIGHT mm
ENGINE
Model
Max. Output PS/rpm
Max. Torque kg-m/rpm
GROSS WEIGHT Kg
FRONT Kg
REAR Kg
WHEEL BASE mm
TREAD FRONT mm
TREAD REAR mm
MAX. SPEED Km/h
MIN. SPEED
(at max. engine torque) Km/h
TURNING RADIUS m
GRADEABILITY (%)
DRIVE SYSTEM
CLUTCH TYPE
TRANSMISSION SYSTEM
TIRE FRONT
TIRE REAR
FUEL TANK CAPACITY
STEERING TYPE
ELECTRICAL SYSTEM

NK-400
MITSUBISHI K352L
13050
2750
3800

MITSUBISHI 8DC20A
265/2500
89/1200
37850
14900
22950

1450 + 3850 + 1350
2240
2055
70

2.4

11.5

25.7

8x4

Dry single disc

Synchromesh

1200-20-18PRx4

1200-20-18PRx8

300 Lt.

Ball nut with power assist

24V starting, lighting, instrumental light, beam headlight, tail and stop-light, windshield wiper, horn and turn signal.

- MACHINE is subject to the user's specifications and any chassis having proper capacity and dimension are applicable.
- We reserve the right to make specification or equipment changes without notice.

