




SL-600II

【主要諸元】

49133001





View thousands of Crane Specifications

■ 定格総荷重表

10.0m～43.0m ブーム

作業 半径 (m)	 (7.6m)						 (6.5m)						 (5.4m)					
	アウトリガ最大張出(全周)						アウトリガ中間張出(側方)						アウトリガ中間張出(側方)					
	10.0m ブーム	16.6m ブーム	23.2m ブーム	29.8m ブーム	36.4m ブーム	39.0m ブーム	10.0m ブーム	16.6m ブーム	23.2m ブーム	29.8m ブーム	36.4m ブーム	39.0m ブーム	10.0m ブーム	16.6m ブーム	23.2m ブーム	29.8m ブーム	36.4m ブーム	39.0m ブーム
2.9	51.00	30.00	20.00	12.00			51.00	30.00	20.00	12.00			45.00	30.00	20.00	12.00		
3.0	50.00	30.00	20.00	12.00			49.00	30.00	20.00	12.00			45.00	30.00	20.00	12.00		
3.5	44.50	30.00	20.00	12.00			41.00	30.00	20.00	12.00			41.00	30.00	20.00	12.00		
4.0	39.50	30.00	20.00	12.00			37.00	30.00	20.00	12.00			37.00	30.00	20.00	12.00		
4.5	35.50	30.00	20.00	12.00	11.00		33.50	30.00	20.00	12.00	11.00		33.50	30.00	20.00	12.00	11.00	
5.0	32.00	29.00	20.00	12.00	11.00	9.00	30.20	29.00	20.00	12.00	11.00	9.00	30.20	29.00	20.00	12.00	11.00	9.00
5.5	29.00	27.00	20.00	12.00	11.00	9.00	27.50	27.00	20.00	12.00	11.00	9.00	25.80	25.00	20.00	12.00	11.00	9.00
6.0	26.50	24.70	20.00	12.00	11.00	9.00	25.00	24.70	20.00	12.00	11.00	9.00	22.00	21.30	18.20	12.00	11.00	9.00
6.5	24.00	23.20	18.90	12.00	11.00	9.00	22.70	23.20	18.90	12.00	11.00	9.00	18.80	18.10	16.40	12.00	11.00	9.00
7.0	22.00	21.30	17.90	12.00	11.00	9.00	20.70	21.30	17.90	12.00	11.00	9.00	16.00	15.40	14.60	12.00	11.00	9.00
7.5		19.60	16.90	12.00	11.00	9.00	18.60	16.90	12.00	11.00	9.00	7.00		13.30	13.10	12.00	11.00	9.00
8.0		18.20	16.00	12.00	11.00	9.00	16.50	16.00	12.00	11.00	9.00	7.00		11.70	11.50	12.00	11.00	9.00
8.5		16.80	15.10	12.00	11.00	9.00	14.70	14.30	12.00	11.00	9.00	7.00		10.30	10.10	10.90	11.00	9.00
9.0		15.50	14.30	12.00	11.00	9.00	13.10	13.00	12.00	11.00	9.00	7.00		9.20	9.00	10.00	10.20	9.00
10.0		13.50	13.00	11.10	9.90	9.00	10.60	10.40	11.10	9.90	9.00	7.00		7.40	7.20	8.30	8.80	8.00
11.0		11.50	11.20	10.20	9.00	8.40	8.60	8.50	9.50	9.00	8.40	7.00		6.00	5.90	6.80	7.50	7.00
12.0		9.70	9.50	9.40	8.20	7.80	7.10	7.00	8.10	8.20	7.80	6.50		4.90	4.85	5.70	6.35	6.20
13.0		8.20	8.10	8.70	7.50	7.20	6.00	5.90	6.90	7.50	7.20	6.10		4.05	3.95	4.80	5.40	5.70
14.0			6.90	7.70	7.00	6.60	5.70	4.95	5.90	6.45	6.40	5.70			3.10	4.00	4.60	4.70
15.0			5.90	6.80	6.50	6.10	5.30	4.15	5.10	5.60	5.70	5.30			2.40	3.40	3.90	4.05
16.0			5.00	6.00	6.10	5.70	5.00	3.40	4.40	4.90	5.10	5.00			1.80	2.80	3.40	3.50
17.0			4.25	5.25	5.70	5.30	4.70	2.75	3.80	4.30	4.50	4.70			1.30	2.30	2.90	3.06
18.0			3.60	4.60	5.10	5.00	4.45	2.20	3.20	3.80	3.95	4.15		0.85	1.80	2.40	2.65	2.85
19.0			3.00	4.00	4.60	4.50	4.20	1.70	2.70	3.35	3.50	3.70			1.40	2.00	2.25	2.50
20.0			2.50	3.45	4.10	4.10	3.95	1.30	2.25	2.90	3.05	3.30			1.00	1.65	1.85	2.10
21.0				3.00	3.65	3.70	3.70		1.85	2.45	2.65	2.90			0.70	1.30	1.50	1.80
22.0				2.55	3.20	3.30	3.50		1.50	2.10	2.25	2.55			1.00	1.20	1.50	
24.0				1.80	2.40	2.60	2.80		0.90	1.45	1.65	1.90				0.70	0.95	
26.0				1.25	1.80	2.00	2.25			0.95	1.15	1.35						
28.0					1.30	1.50	1.70											
30.0					0.90	1.05	1.30											
31.0					0.70	0.85	1.10											
32.0						0.55	0.90											
33.0						0.55	0.75											
34.0							0.60											
危険角度	20° 25° 32°						20° 35° 37° 43°						23° 37° 48° 49° 54°					
標準フック	511フック						511フック						511フック					
フック質量	420kg						420kg						420kg					
巻掛本数	12	7	5	4	4	4	12	7	5	4	4	4	12	7	5	4	4	4

(単位: ton)

作業 半径 (m)	 (4.3m)						 (2.69m)		
	アウトリガ中間張出(側方)						アウトリガ最終小張出(側方)		
	10.0m ブーム	16.6m ブーム	23.2m ブーム	29.8m ブーム	36.4m ブーム	39.0m ブーム	10.0m ブーム	16.6m ブーム	23.2m ブーム
2.9	33.00	28.00	20.00	12.00			16.00	12.00	11.00
3.0	33.00	28.00	20.00	12.00			16.00	12.00	11.00
3.5	33.00	28.00	20.00	12.00			16.00	12.00	11.00
4.0	27.50	28.00	20.00	12.00			13.60	12.00	11.00
4.5	23.50	23.00	20.00	12.00	11.00		11.60	10.30	9.50
5.0	20.00	19.00	17.00	12.00	11.00	9.00	9.70	8.80	8.20
5.5	16.80	16.00	14.90	12.00	11.00	9.00	8.20	7.80	7.10
6.0	14.20	13.50	12.90	12.00	11.00	9.00	7.00	6.40	6.10
6.5	12.10	11.50	11.30	12.00	11.00	9.00	6.00	5.40	5.20
7.0	10.60	10.00	9.80	10.70	10.20	9.00	5.10	4.60	4.40
7.5		8.70	8.50	9.50	9.40	9.00		3.90	3.70
8.0		7.65	7.50	8.50	8.60	8.30		3.30	3.10
8.5		6.70	6.60	7.60	7.90	7.70		2.70	2.50
9.0		5.95	5.80	6.80	7.20	7.10		2.30	2.10
10.0		4.70	4.60	5.50	6.00	6.10		1.50	
11.0		3.75	3.60	4.50	5.00	5.20		0.80	
12.0		2.90	2.70	3.60	4.20	4.30			
13.0		2.15	1.90	2.80	3.50	3.60			
14.0			1.25	2.30	2.90	3.10			
15.0			0.75	1.75	2.40	2.60			
16.0				1.25	1.90	2.15			
17.0				0.85	1.50	1.70			
18.0					1.10	1.35			
19.0						1.00			
危険角度	41° 50° 58° 59° 62°						35° 61°		
標準フック	511フック						511フック		
フック質量	420kg						420kg		
巻掛本数	12	7	5	4	4	4	12	7	5

(単位: ton)




■アウトリガ不使用時

作業 半径 (m)	走 行 つ り (2km/h未満)					
	10.0m プーム		16.6m プーム		23.2m プーム	
	前 方	全 周	前 方	全 周	前 方	全 周
3.5	14.50	8.00	10.50	6.50	7.50	3.30
4.0	14.50	7.00	10.50	6.50	7.50	3.30
4.5	12.50	6.00	10.50	5.40	7.50	3.30
5.0	11.00	5.10	10.50	4.50	7.60	3.40
5.5	10.00	4.30	10.50	3.75	7.50	3.30
6.0	9.10	3.60	9.50	3.15	7.50	2.90
6.5	8.40	3.00	8.60	2.70	7.00	2.50
7.0	7.80	2.50	7.80	2.25	6.55	2.10
7.5			7.10	1.85	6.10	1.75
8.0			6.50	1.50	5.70	1.40
8.5			5.85	1.20	5.35	1.05
9.0			5.30	0.90	5.00	0.75
10.0			4.30		4.10	
11.0			3.50		3.35	
12.0			2.90		2.65	
13.0			2.45		2.00	
14.0					1.50	
15.0					1.00	
自前向き	—	—	—	42°	—	61°

(單位: ton)



■作業半径揚程図

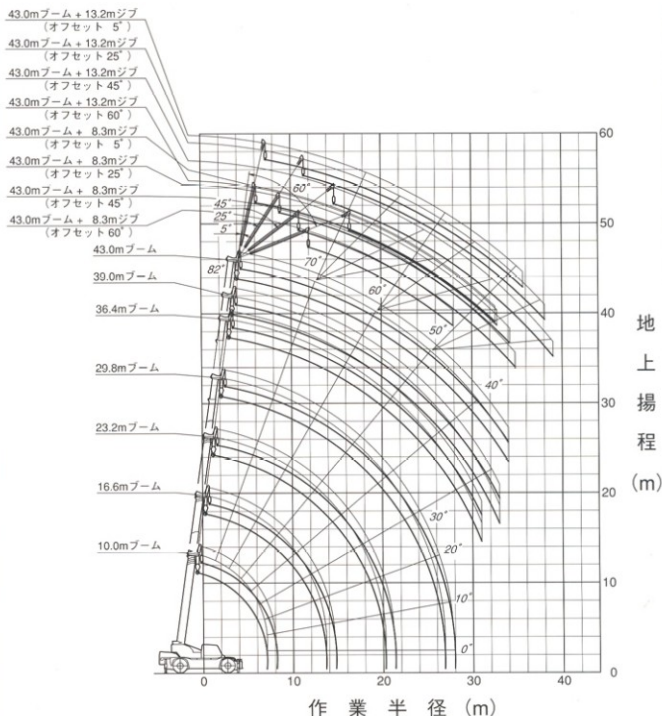


注意事項

- 1) 本図はブーム、ジブのたわみを含んでいません。
- 2) 本図はアウトリガ最大張出 (全周) のものです。



View thousands of Crane Specifications on

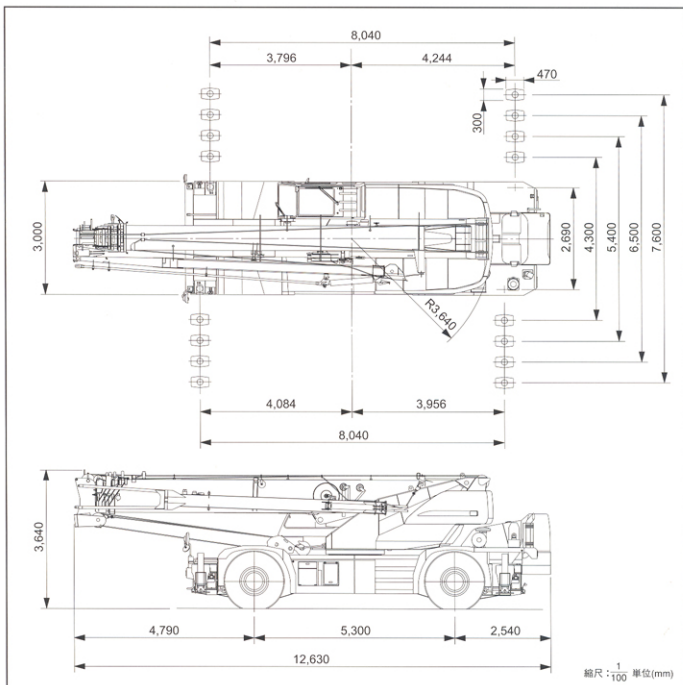

※本カタログに記載されております性能ならびに仕様は、改良などによりお届けいたします製品と異なる場合がありますので、あらかじめご了承ください。

お問い合わせは…



品質保証の国際規格「ISO 9001」の認証を取得しています。

KATO

株式会社 加藤製作所

本社/〒140-0011 東京都品川区東大井1丁目9番37号

☎ 03(3458)1111 番(大代表)

ホームページアドレス <http://www.kato-works.co.jp>

C01411

5.2002-3000(TT)1

6.2006-500(TT)1-4-1