



# HEAVY DUTY BASE MACHINE FOR FOUNDATION WORK BM800

**KOBELCO**

Max. Lifting Capacity: 90 Metric Tons at 3.7 Meters


Max. Boom Length: 57.91 Meters

## Specifications

- A mega-powered crane equipped with precision control capability.
- A mechatronic-micro control system allows precise diaphragm wall construction with a multi-axle rotary excavator.
- Automatic constant speed mode lowers excavator at constant speed regardless of changes in ground resistance. (opt.)
- Automatic constant load mode prevents damage to cutters in hard ground. (opt.)
- Powerful winch first layer maximum line pull of 25 tons, and wide, large-diameter drum with maximum rope capacity of 37 m at first layer.
- Maximum line speed of 100 m/min for main and auxiliary winches.
- Extra hydraulic outlets provided to power additional foundation construction machinery.

## General Dimensions

Unit: mm

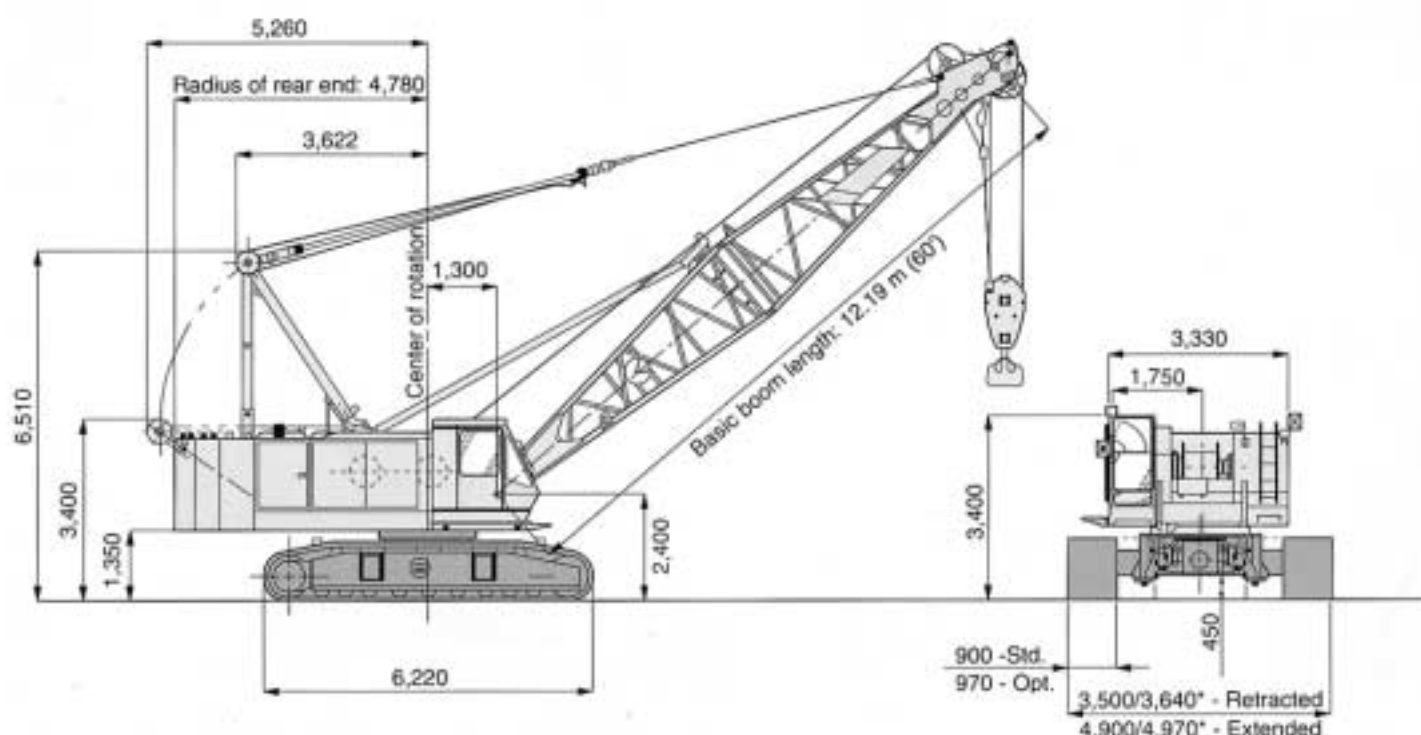



# Specifications

## Upper machinery



### Power plant (Standard)

**Model** ..... Cummins NTA855-C450

**Type** ..... Water-cooled, direct fuel injection, aftercooled turbo

**No. of cylinder** ..... 6

**Bore and stroke** ..... 140 mm x 152 mm (5.5" x 6.0")

**Displacement** ..... 14.0 liters

**Rated power** ..... 420 PS (309 kW) at 2,000 rpm (SAE J1349)

**Max. torque** ..... 187 kg-m at 1,400 rpm (SAE J1349)

**Cooling system** ..... Liquid, recirculating bypass

**Starter** ..... 24 V, 7.2 kW

**Generator** ..... 24 V, 1.7 kW

**Cycles** ..... 4

**Radiator** ..... Plate fin type core, thermostatically controlled

**Air cleaner** ..... Dry type with replaceable paper element

**Fuel tank capacity** ..... 600 liters

**Batteries** ..... Two 12V, 200A-hr capacity batteries, series connected

**Fuel consumption (at 1,700 rpm)** ..... 152 g/PS-h

### Power plant (Optional)

**Model** ..... Mitsubishi 6D22-TC

**Type** ..... Water-cooled, direct fuel injection, intercooled turbo

**No. of cylinder** ..... 6

**Bore and stroke** ..... 130 mm x 140 mm (5.1" x 5.5")

**Displacement** ..... 11.149 liters

**Rated power** ..... 294 PS (216 kW) at 2,000 rpm (JIS D1005)

**Max. torque** ..... 117 kg-m at 1,400 rpm (JIS D1005)

**Cooling system** ..... Liquid, recirculating bypass

**Starter** ..... 24 V, 5.5kW

**Generator** ..... 24 V, 1.5kW

**Cycles** ..... 4

**Radiator** ..... Plate fin type core, thermostatically controlled

**Air cleaner** ..... Dry type with replaceable paper element

**Fuel tank capacity** ..... 600 liters

**Batteries** ..... Two 12V, 200A-hr capacity batteries, series connected

**Fuel consumption (at 1,500 rpm)** ..... 154 g/PS-h



### Hydraulic system

**Pumps:** All four variable displacement pumps are driven by heavy-duty pump drive. One of these pumps is used in the right propel circuit and hook, boom hoist circuit. Another is used in the left propel circuit and hook hoist circuit, and can accommodate an optional third hoist circuit. The third variable displacement pump is used in the swing circuit, and can accommodate the hydraulic outlet circuit. The fourth variable displacement pump is used in the hydraulic

outlet circuit. In addition, one gear pumps are used in the control system and auxiliary equipment. One of these serves the clutch and brakes.

**Control:** Full-flow hydraulic control system for infinitely variable pressure to front and rear drums, boom hoist brakes and clutches. Controls respond instantly to the touch, delivering smooth function operation.

**Max. relief valve pressure:**

**Load hoist, boom hoist and propel system** ..... 280 kg/cm<sup>2</sup> (4,000 psi)

**Swing system** ..... 280 kg/cm<sup>2</sup> (4,000 psi)

**Control system** ..... 60 kg/cm<sup>2</sup> (850 psi)

**Reservoir capacity:** 600 liters

**Cooling:** Oil-to-air heat exchanger

**Filtration:** Full-flow and bypass type with replaceable

**Hydraulic outlet:** Hydraulic power outlet system is provided for foundation work, such as diaphragm wall bucket, oscillation works, and etc.

| No. of outlet | Max. oil flow  | Max. hydraulic pressure |
|---------------|----------------|-------------------------|
| 1             | 320 liters/min | 280 kg/cm <sup>2</sup>  |
| 2             | 420 liters/min | 280 kg/cm <sup>2</sup>  |
| 3             | 31 liters/min  | 175 kg/cm <sup>2</sup>  |

**Electrical system:** All wiring corded for easy servicing, individual fused branch circuits.



### Boom hoisting system

Powered by a hydraulic axial piston motor through a planetary reducer.

**Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve. Safety pawls (external ratchet) are fitted for locking the drum.

**Drum:** Single drum, grooved for 18 mm dia. wire rope.

**Line speed:** Single line on first drum layer

Hoisting (max.) ..... 50m/min

Lowering (max.) ..... 50m/min



### Load hoist system

Powered by a hydraulic axial piston motor, driven through a planetary reducer.

**Clutches:** Internally expanding band clutches.

950 mm dia. x 125 mm wide

**Brakes:** Externally contracting band brakes, each using positive and negative actuation. 1,150 mm dia. x 150 mm wide with additional spring set hydraulically released brake.

Safety pawls (external ratchet) are fitted for locking the drums. Both positive and negative brake systems are available. Air cooling fins mounted on brake drum.

**Drums:** (front and rear): 594 mm P.C.D. x 606 mm wide drums, each grooved for 28 mm wire rope.

Rope capacity of 205 m working length and 324 m storage length.

**Line pull:** Single line pull at the first drum layer



**BM800****Standard winch;**

Max. line pull ..... 25 tons

Rated line pull ..... 12.5 tons

**High-speed winch;**

Max. line pull ..... 20 tons

Rated line pull ..... 12.5 tons

**Line speed:** Single line on the first drum layer**Standard winch;**

Hoisting ..... 80/50, 40/25 m/min

Lowering ..... 80/60, 40/25 m/min

**High-speed winch;**

Hoisting ..... 100/60, 50/30 m/min

Lowering ..... 100/60, 50/30 m/min

**Swing system****Swing unit:** Powered by hydraulic axial piston motor driving spur gears through planetary reducers, the swing system provides 360°

rotation.

**Swing speed** ..... 2.7 rpm**Swing brakes:** A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.**Swing circle:** Single-row ball bearing with an integral internally cut swing gear.**Swing lock:** Four position pin-hole lock (manually engaged)**Operator's cab**

Totally enclosed, full-vision cab fitted with safety glass and a sliding front window. A fully adjustable, high-backed seat permits operators to set their ideal working position. A signal horn, cigarette lighter, and windshield wiper are standard features.

**Controls**

In front of the operator are foot pedals for front and rear drum brakes. At the operator's right are console-mounted adjustable short levers for front and rear drum control, boom hoist control lever and positive/negative break select switch for front and rear drum brakes, and creep speed control for hoist and propel. Beside the operator's seat on the right are two short levers for propel control. At the operator's left are: a console-mounted swing lever, an optional third drum control lever, and front and rear drum pawl control switches; switches for ignition, engine stop, low and high speed control for front drum, rear drum and propel. A swing brake switch and a signal horn button are on the swing lever.

**Lights:** Two front flood lights, one cab inside light, three machinery cab inside lights, and one trouble light.**Gauges:** Fuel, water temperature for engine, hydraulic oil temperature, hour meter and tachometer.**Warning lamps:** Engine oil pressure, hydraulic oil pressure, battery charge, air cleaner and engine oil filter.**Safety devices:** Hook over-hoist alarm and shut-off

switch, boom over-hoist limit switch, boom angle indicator, signal horn, boom hoist and front and rear drum locks, swing lock, boom back stop, hook safety latch on hook blocks and optional load moment limiters (overload protection device) are provided.

**Gantry**

Folding type, fitted with sheave frame for boom hoist reeving, lowers toward rear onto cab roof. Hydraulic lift is standard. Full up, full down positions with linkage.

**Counterweight**Two-piece, mounted behind the machinery compartment  
Total weight ..... 26,700 kg**Tools**

Tool set and accessories for routine machine maintenance are provided.

**Lower machinery****Carbody:** Steel-welded carbody with an integral seat for axles.**Crawler:** Crawler assemblies designed with a quick disconnect feature that allows complete individual removal from the axles. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.**Crawler drive:** Independent hydraulic propel drive is built into each side frame, each with a hydraulic motor propelling a driving tumbler through a planetary gear box.**Crawler brakes:** Spring-set, hydraulically released multiple-disc parking brakes are built into each propel drive.**Steering mechanism:** A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving tracks in opposite directions).**Track rollers:** 9 lower rollers and 2 upper rollers are fitted to each side frame, sealed and maintenance-free.**Shoes:**

Number ..... 58 each side

Standard flat shoe width ..... 900 mm

Optional wide shoe width ..... 970 mm

**Max. travel speed:**

High range ..... 1.4 km/h

Low range ..... 0.9 km/h

**Max. gradeability:** 30%**Trans-Lifter :** Trans-Lifter system allows quick and easy crawler side frame removal and replacement. 4 vertical cylinders lift the basic machine. 2 horizontal cylinders facilitate side frames for removal or replacement.



# Specifications

**BM800**

## Crane attachment

**Boom:**

Welded lattice construction using tubular, high-tensile steel cords with pin connections between sections.

|                       |                |
|-----------------------|----------------|
| Max. lifting capacity | 90,000 kg      |
| Basic boom length     | 12.19 m (40')  |
| Max. boom length      | 57.91 m (190') |

**Hook blocks**

A range of hook blocks can be specified, each with a safety latch.

| Lifting capacity | 90 tons | 50 tons | 30 tons | 12.5 tons ball hook |
|------------------|---------|---------|---------|---------------------|
| No. of sheaves   | 4       | 3       | 1       | 0                   |
| Weight (kg)      | 1,150   | 850     | 700     | 300                 |

**Diameter of wire ropes****Standard:**

Hook hoist ..... 28 mm

Boom hoist (12-part line) ..... 18 mm

Boom pendants (2-part line) ..... 32 mm

**Optional:**

Aux. hoist ..... 28 mm

**Boom hoist reeving:** 12 parts of 18 mm dia. wire rope**Boom backstops:** recommended for all boom lengths**Line pull**

(for crane, clamshell, diaphragm wall bucket)

|               | Max. permissible | Max. available |            |
|---------------|------------------|----------------|------------|
|               |                  | Standard       | High-speed |
| <b>Front:</b> | 12,500 kg        | 25,000 kg      | 20,000 kg  |
| <b>Rear:</b>  | 12,500 kg        | 25,000 kg      | 20,000 kg  |


**Weight****Operating weight:**

Approx. 86,000 kg

(including 12.19 m (40 ft) boom and 90 ton hook block with standard engine)

**Ground pressure:** 0.84 kg/cm<sup>2</sup> with 900 mm shoes

## A Versatile Base Machine for a Wide Range of Applications!

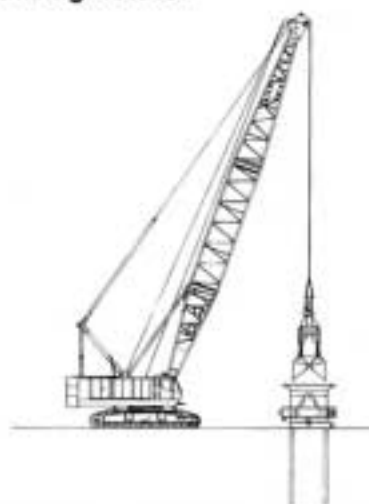**Hydraulic Diaphragm Wall Bucket****Casing Oscillator Casing Rotator****Trenching mill**

For specific information on the use of diaphragm wall bucket, casing oscillator, casing rotator and trenching mill, please contact your nearest KOBELCO distributor.





# Lifting Capacities


**BM800**
**Notes:**

- Working radius is the horizontal from the center of rotation through the center of gravity of load.
- Ratings do not exceed 78% of tipping load on the hard horizontal ground and includes weight of hook block, slings and all other load handling accessories from main boom rating shown.
- Ratings shown are based on freely suspended load and make no allowance for such factors as wind effect on lifted load, out-of-level ground conditions, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.
- No operation is possible in the range indicated by blank spaces in the chart.
- The actual hoistable loads using main boom must be calculated by deducting the weight of main hook, slings and all other load handling accessories etc. from the ratings shown.
- Configurations of main boom and guy cables installations must be arranged as per the instruction of the owner and operator's manual, to be provided with machine.
- Hook block weight and capacity (metric ton).
- Max. hoisting load
- Auxiliary sheave rating is determined by deducting weight of auxiliary sheave (260kg) and weight of main hook from main boom rating. It must not exceed 12.5 tons.
- Actual hoistable loads using auxiliary sheave can be calculated by deducting weight of 12.5 ton ball-hook and weight of slings and other loads handling accessories from auxiliary sheave rating.
- Main boom rating when it is equipped with auxiliary sheave is determined by deducting the weight of the auxiliary sheave (260kg) from the rating for main boom without auxiliary sheave. When using main boom equipped with a ball-hook, weight of ball-hook (300kg) must also be deducted.
- Actual hoistable load with main boom being equipped with auxiliary sheave can be calculated by deducting weight of hook, and any other slings and accessories from the main boom rating with auxiliary sheave.
- Auxiliary sheave can be attached to boom between 12.19 m and 54.86 m in length.
- Maximum working radius with auxiliary sheave attached must not exceed maximum working radius of main boom. Minimum working radius is working radius of auxiliary sheave at boom angle for minimum working radius of boom.
- Do not use hook on main boom and hook on auxiliary sheave simultaneously.
- Boom should in principle be erected over front of crawlers. For boom lengths shown in following table, steel plates must be used under front end of crawlers when erecting/lowering boom.

| Capacity of hook    | 90 ton | 50 ton | 30 ton | 12.5 ton (ball-hook) |
|---------------------|--------|--------|--------|----------------------|
| Weight (metric ton) | 1.15   | 0.85   | 0.7    | 0.3                  |

| No. of parts of line   | 1    | 2    | 3    | 4    | 5    |
|------------------------|------|------|------|------|------|
| Max. load (metric ton) | 12.5 | 24.0 | 36.0 | 48.0 | 60.0 |
| No. of parts of line   | 6    | 7    | 8    |      |      |
| Max. load (metric ton) | 71.0 | 82.0 | 90.0 |      |      |

| Equipment | Boom length |
|-----------|-------------|
| Boom only | 57.91 m     |

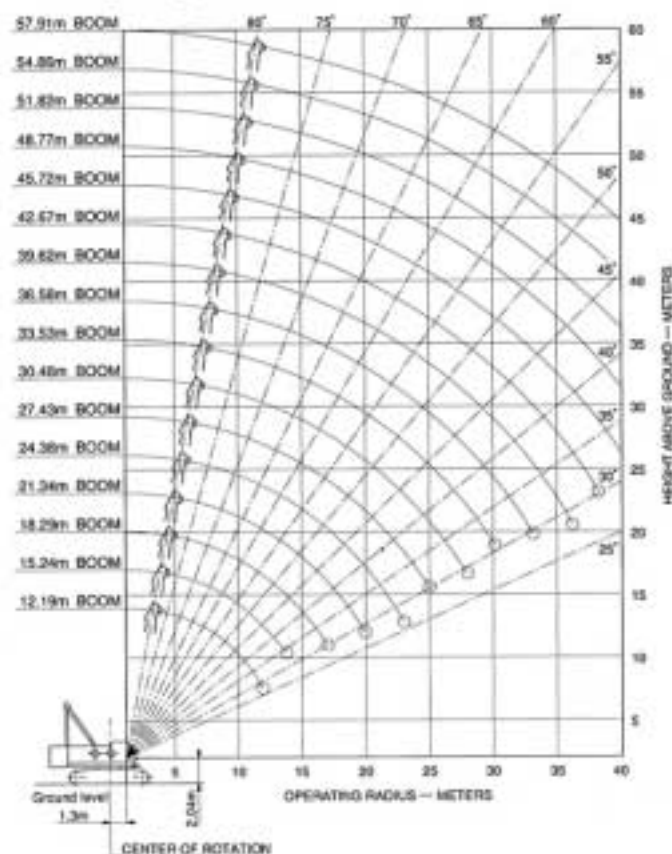**Working Ranges**




# Boom Lifting Capacities

**BM800**

Unit: metric ton

**Rated loads in metric tons for 360° working area**

Crawler fully extended

| Boom length<br>m (ft)<br>Working<br>radius m | 12.19<br>(40) | 15.24<br>(50) | 18.29<br>(60) | 21.34<br>(70) | 24.38<br>(80) | 27.43<br>(90)  | 30.48<br>(100) | 33.53<br>(110) | 36.58<br>(120) | 39.62<br>(130) | 42.67<br>(140) | 45.72<br>(150) | 48.77<br>(160)  | 51.82<br>(170)  | 54.86<br>(180) | 57.91<br>(190) | Boom length<br>m (ft)<br>Working<br>radius m |
|--|---------------|---------------|---------------|---------------|---------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|----------------|----------------|--|
| 3.7  | 90.0          |               |               |               |               |                |                |                |                |                |                |                |                 |                 |                |                | 3.7  |
| 5  | 64.7          | 64.5          | 64.3          |               |               |                |                |                |                |                |                |                |                 |                 |                |                | 5  |
| 6  | 52.9          | 52.8          | 52.5          | 52.5          | 52.3          | 6.3m<br>(20.7) |                |                |                |                |                |                |                 |                 |                |                | 6  |
| 7  | 41.9          | 41.7          | 41.5          | 41.4          | 41.2          | 41.2           | 41.0           | 7.5m<br>(24.6) |                |                |                |                |                 |                 |                |                | 7  |
| 8  | 34.5          | 34.4          | 34.1          | 34.1          | 33.9          | 33.8           | 33.6           | 33.6           | 33.5           | 8.5m<br>(27.9) |                |                |                 |                 |                |                | 8  |
| 9  | 29.3          | 29.2          | 28.9          | 28.8          | 28.7          | 28.6           | 28.4           | 28.3           | 28.3           | 28.1           | 28.1           | 9.6m<br>(31.5) |                 |                 |                |                | 9  |
| 10   | 25.5          | 25.3          | 25.0          | 24.9          | 24.7          | 24.7           | 24.5           | 24.4           | 24.3           | 24.2           | 24.1           | 24.0           | 10.1m<br>(33.1) | 10.6m<br>(34.8) |                |                | 10   |
| 12   | 18.5          | 19.8          | 19.6          | 19.5          | 19.3          | 19.2           | 19.0           | 18.9           | 18.9           | 18.7           | 18.6           | 18.5           | 18.4            | 18.2            | 18.2           | 17.3           | 12   |
| 14   |               | 16.3          | 16.0          | 15.9          | 15.7          | 15.6           | 15.4           | 15.3           | 15.2           | 15.1           | 15.0           | 14.8           | 14.7            | 14.5            | 14.5           | 14.3           | 14   |
| 16   |               |               | 13.4          | 13.3          | 13.1          | 13.0           | 12.8           | 12.7           | 12.6           | 12.5           | 12.4           | 12.3           | 12.1            | 11.9            | 11.9           | 11.7           | 16   |
| 18   |               |               | 17m<br>(55.8) | 11.4          | 11.2          | 11.1           | 10.9           | 10.8           | 10.7           | 10.6           | 10.5           | 10.3           | 10.2            | 10.0            | 10.0           | 9.8            | 18   |
| 20   |               |               |               | 10.0          | 9.7           | 9.6            | 9.4            | 9.3            | 9.2            | 9.1            | 9.0            | 8.8            | 8.7             | 8.5             | 8.4            | 8.3            | 20   |
| 22   |               |               |               |               | 8.5           | 8.5            | 8.2            | 8.1            | 8.0            | 7.9            | 7.8            | 7.6            | 7.5             | 7.3             | 7.2            | 7.1            | 22   |
| 24   |               |               |               |               | 23m<br>(75.6) | 7.5            | 7.2            | 7.1            | 7.0            | 6.9            | 6.8            | 6.6            | 6.5             | 6.3             | 6.3            | 6.1            | 24   |
| 26   |               |               |               |               |               | 25m<br>(82.0)  | 6.4            | 6.3            | 6.2            | 6.1            | 6.0            | 5.8            | 5.7             | 5.5             | 5.4            | 5.3            | 26   |
| 28   |               |               |               |               |               |                | 5.8            | 5.7            | 5.6            | 5.4            | 5.3            | 5.1            | 5.0             | 4.8             | 4.7            | 4.6            | 28   |
| 30   |               |               |               |               |               |                |                | 5.1            | 5.0            | 4.8            | 4.7            | 4.5            | 4.4             | 4.2             | 4.1            | 4.0            | 30   |
| 32   |               |               |               |               |               |                |                |                | 4.5            | 4.3            | 4.2            | 4.0            | 3.9             | 3.7             | 3.6            | 3.4            | 32   |
| 34   |               |               |               |               |               |                |                |                | 33m<br>(108.3) | 3.9            | 3.8            | 3.6            | 3.5             | 3.2             | 3.1            | 2.9            | 34   |
| 36   |               |               |               |               |               |                |                |                |                | 3.6            | 3.4            | 3.2            | 3.0             | 2.7             | 2.6            | 2.4            | 36   |
| 38   |               |               |               |               |               |                |                |                |                |                | 3.0            | 2.8            | 2.6             | 2.3             | 2.2            | 2.0            | 38   |
| 40   |               |               |               |               |               |                |                |                |                |                |                | 2.5            | 2.3             | 2.0             | 1.9            | 1.8            | 40   |

Note: Ratings inside shown in ☐ are determined by the strength of the boom or other structural components.**Boom Component Chart**

| Boom length<br>m (ft) | Boom arrangement   |
|-----------------------|--|
| 12.19 (40)            | Base-Tip   |
| 15.24 (50)            | Base-A-Tip   |
| 18.29 (60)            | Base-B-Tip, Base-A-A-Tip   |
| 21.34 (70)            | Base-A-B-Tip, Base-C-Tip   |
| 24.38 (80)            | Base-A-C-Tip, Base-B-B-Tip, Base-A-A-B-Tip                         |
| 27.43 (90)            | Base-B-C-Tip, Base-A-B-B-Tip, Base-A-A-C-Tip                       |
| 30.48 (100)           | Base-A-B-C-Tip, Base-B-B-B-Tip, Base-A-A-B-B-Tip                   |
| 33.53 (110)           | Base-B-B-C-Tip, Base-A-C-C-Tip, Base-B-B-A-B-Tip, Base-A-A-B-C-Tip |

| Boom length<br>m (ft) | Boom arrangement                                       |
|-----------------------|--|
| 36.58 (120)           | Base-B-C-C-Tip, Base-A-B-B-C-Tip                       |
| 39.62 (130)           | Base-A-B-C-C-Tip, Base-C-C-C-Tip                       |
| 42.67 (140)           | Base-B-B-C-C-Tip, Base-A-A-B-C-C-Tip, Base-A-C-C-C-Tip |
| 45.72 (150)           | Base-B-C-C-C-Tip, Base-A-B-B-C-C-Tip                   |
| 48.77 (160)           | Base-A-B-C-C-C-Tip                                     |
| 51.82 (170)           | Base-A-B-C-A-C-C-Tip, Base-C-C-B-B-C-Tip               |
| 54.86 (180)           | Base-A-B-C-B-C-C-Tip                                   |
| 57.91 (190)           | Base-A-A-B-B-C-C-C-Tip                                 |

Base = 7.62m (25'), Tip = 10.67m (35')

Inserts: A = 3.05 m (10'), B = 6.10 m (20'), C = 9.14m (30')



# Clamshell

**BM800**

## Clamshell ratings in metric tons for 360° working area


Crawler fully extended

| Working radius m | Boom length m (ft) | 12.2 (40) | 15.2 (50) | 18.3 (60) | 21.3 (70) |
|------------------|--------------------|-----------|-----------|-----------|-----------|
| 6.0              |                    | 12.5      |           |           |           |
| 7.0              |                    | 12.5      | 12.5      |           |           |
| 8.0              |                    | 12.5      | 12.5      | 12.5      |           |
| 9.0              |                    | 12.5      | 12.5      | 12.5      | 12.5      |
| 10.0             |                    | 12.5      | 12.5      | 12.5      | 12.5      |
| 12.0             |                    | 12.5      | 12.5      | 12.5      | 12.5      |
| 14.0             |                    |           | 12.5      | 12.5      | 12.5      |
| 16.0             |                    |           |           | 11.5      | 11.3      |
| 18.0             |                    |           |           |           | 9.7       |

**Note:**

- Working radius is the horizontal distance between the center of rotation and the bucket's center of gravity.
- Total weight of bucket and materials must not exceed rated load.  
Bucket capacity (m³) × specific gravity of material (ton/m³) + bucket weight (ton) ≤ rated load
- Rated load must not be exceeded, even when using bucket of different capacity for separate task.
- When 28 mm dia. wire rope is used, Bucket unit weight must not exceed 6.0 tons (when the 28 mm dia. wire rope is used). Bucket weight must also be decreased according to operating cycle and bucket lowering height.
- Rated loads are determined by degree of stability. During simultaneous operations of boom and swing, rapid acceleration or deceleration must be avoided. Particular care is required with long boom lengths.
- Maximum working depth is 10 meters below the water level. However, it is necessary to reduce the working depth according to the bucket weight and working cycle.

## Working Range

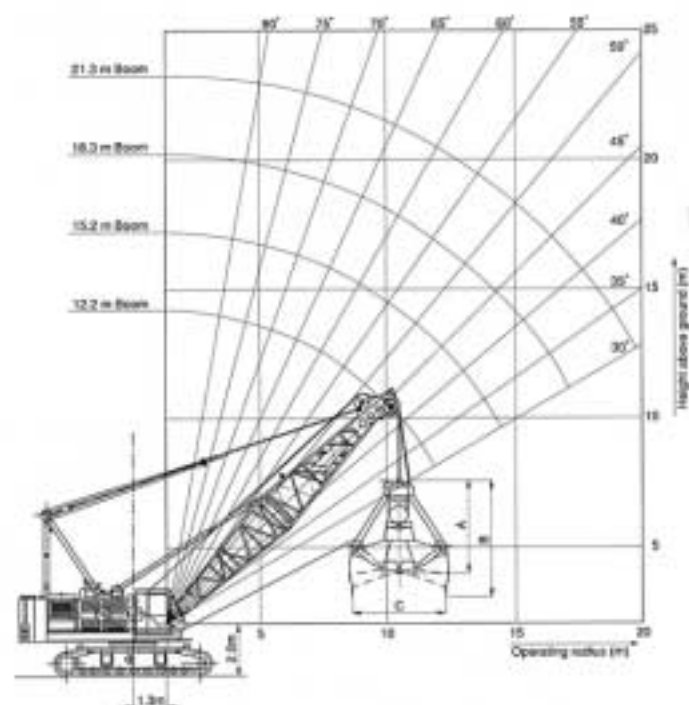

## Clamshell Bucket

| Bucket capacity (m³) | Approximate bucket weight (ton) | Bucket dimensions (m) |     |     | Application |
|----------------------|---------------------------------|-----------------------|-----|-----|-------------|
|                      |                                 | A                     | B   | C   |             |
| 2.0                  | 4.5                             | 3.7                   | 4.5 | 3.2 | Digging     |
| 2.5                  | 5.0                             | 3.4                   | 4.2 | 3.6 | Digging     |
| 3.0                  | 6.0                             | 3.6                   | 4.8 | 3.7 | Digging     |





# KOBELCO

**HEAVY DUTY BASE MACHINE  
FOR FOUNDATION WORK  
BM800**

Address inquiries to:

NOTE: Due to our policy of continual product improvement, all designs and specifications are subject to change without advance notice.

**KOBELCO CONSTRUCTION MACHINERY CO., LTD.**

3-13, Nihonbashi 1-chome, Chuo-ku, Tokyo, 103-8246 JAPAN  
Tel: (03) 3278-7080 / Fax: (03) 3278-7138