



Hydraulic Crawler Crane


BME

800G

Max. Lifting Capacity : **80 t x 3.6 m**

Max. Crane Boom Length : **54.9 m**

Model : BME800G

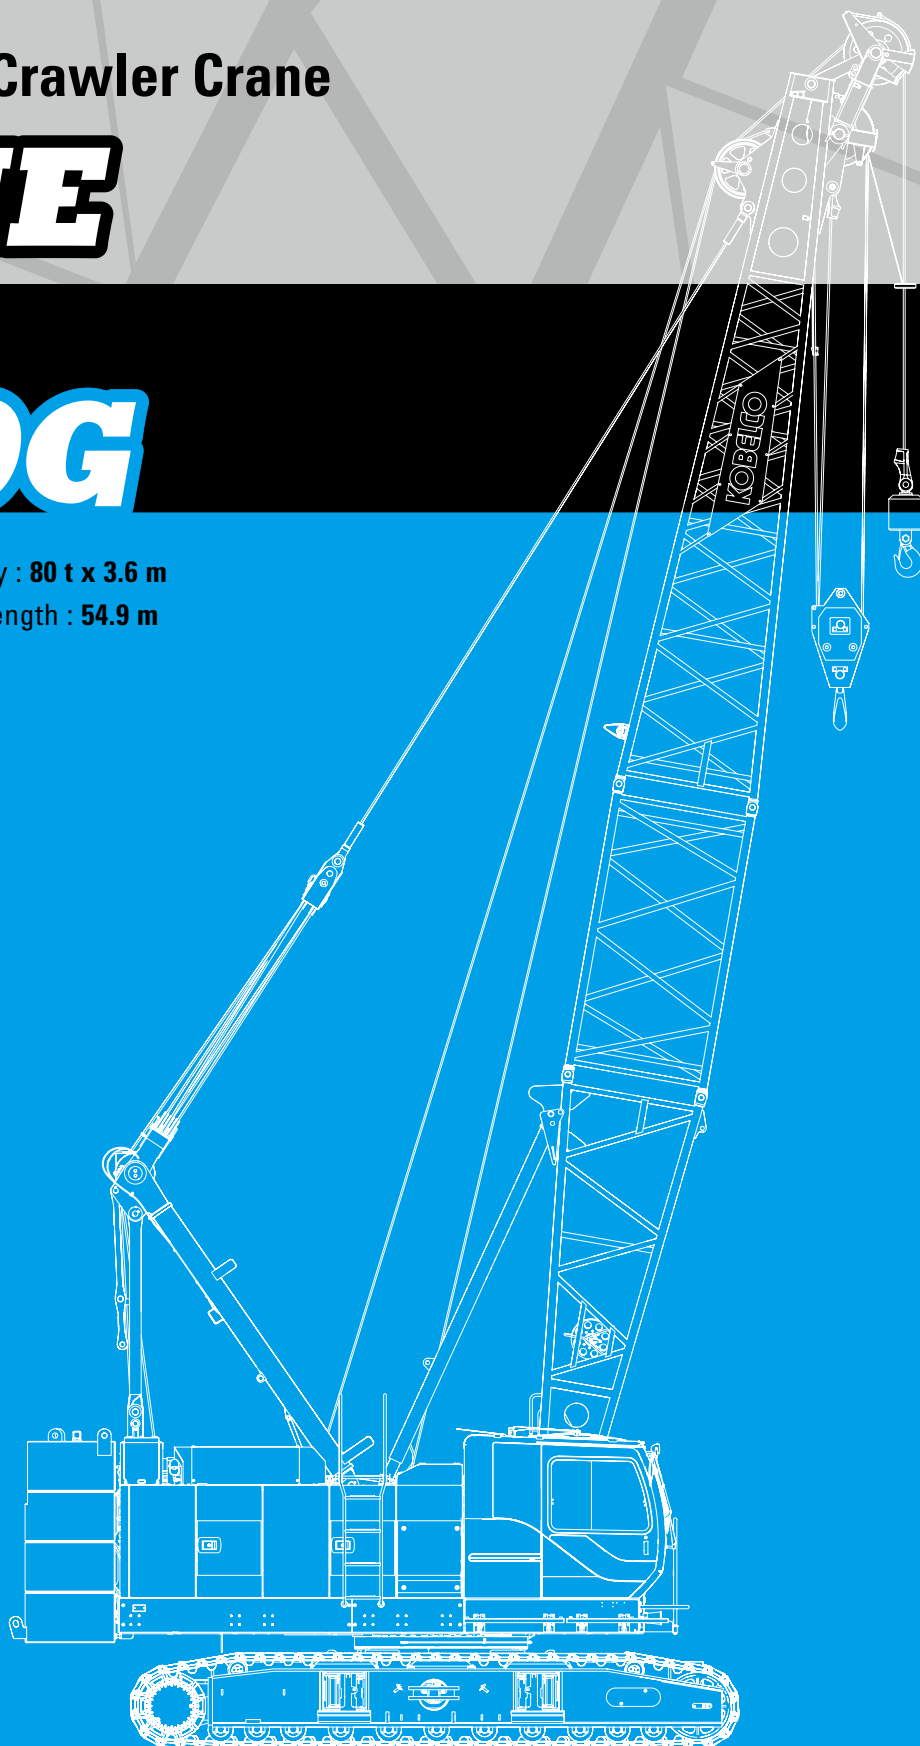

KOBELCO





BME800G

CONTENTS

3	SPECIFICATIONS
5	GENERAL DIMENSIONS
6	BOOM AND JIB ARRANGEMENTS
7	WORKING RANGES
8	SUPPLEMENTAL DATA
9	LIFTING CAPACITIES
10	SUPPLEMENTAL DATA FOR CLAMSHELL
11	LIFTING CAPACITIES
12	SUPPLEMENTAL DATA FOR REDUCED WEIGHTS
13	LIFTING CAPACITIES
14	TRANSPORTATION PLAN
17	PARTS AND ATTACHMENTS



SPECIFICATIONS



Power Plant

Model: HINO P11C-VC
Type: 4 cycle, water-cooled, vertical in-line 6, direct injection, turbo-charger, intercooler Complies with NRMM (Europe) Stage IIIB and US EPA Interim Tier 4
Displacement: 10.520 liters
Rated power: 271 kW / 1,850 min⁻¹
Max. Torque: 1,470 N·m / 1,400 min⁻¹
Cooling System: Water-cooled
Starter: 24 V- 6 kW
Radiator: Corrugated type core, thermostatically controlled
Air cleaner: Dry type with replaceable paper element
Throttle: Twist grip type hand throttle, electrically actuated
Fuel filter: Replaceable paper element
Batteries: Two 12 V x 136 Ah/5HR capacity batteries, series connected
Fuel tank capacity: 400 liters



Hydraulic System

Main pumps: 3 variable displacement piston pumps
Control: Full-flow hydraulic control system for infinitely variable pressure to all winches, propel and swing. Controls respond instantly to the touch, delivering smooth function operation.
Cooling: Oil-to-air heat exchanger (plate-fin type)
Filtration: Full-flow and bypass type with replaceable element
Max. relief valve pressure:
Load hoist, boom hoist and propel system: 31.9 Mpa
Swing system: 27.5 MPa
Control system: 5.4 MPa
Hydraulic Tank Capacity: 440 liters



Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.
Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.
Drum Lock: External ratchet for locking drum
Drum: Single drum, grooved for 18mm dia. wire rope
Line Speed: Single line on first drum layer
Hoisting/Lowering: 70 to 2 m/min
Boom hoisting/lowering: 18 mm x 143 m
Boom guy line: 30 mm
Boom backstops: Required for all boom length



Load Hoisting System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.
Positive Brake: A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through

a counter-balance valve.
Drum Lock: External ratchet for locking drum
Drums:

Front Drums: 614 mm P.C.D x 617 mm wide drum, grooved for 26 mm wire rope. Rope capacity is 175 m working length and 361 m storage length.
Rear Drum: 614 mm P.C.D x 617 mm grooved for 26 mm wire rope. Rope capacity is 130 m working length and 361 m storage length.

Diameter of wire rope
Main winch: 26 mm x 175 m
Aux. winch: 26 mm x 130 m
Third winch: 26 mm x 145 m
Line Speed*:
Hoisting/lowering: 120 to 3 m/min
Line Pull:
Max. Line Pull* : 208 kN {21.2 tf}
(Referential Performance)
Rated Line Pull: 108 kN {11.0 tf}

*Single line on first drum layer



Swing System

Swing unit is powered by hydraulic motor driving spur gears through planetary reducer, the swing system provides 360° rotation.
Swing parking brakes: A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.
Swing circle: Single-row ball bearing with an integral internally cut swing gear.
Swing lock: Manually, four position lock for transportation
Swing Speed: 4.0 min⁻¹



Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine will with low noise level.
Counter weight: 25.4 ton



Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a headrest and armrests, and intermittent wiper and window washer (skylight and front window).
Cab fittings:
Air conditioner, convenient compartment (for tool), cup holder, ashtray, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, footrest, and shoe tray



Lower Structure

Steel-welded carbody with axles. Crawler assemblies can be hydraulically extended for wide-track operation or retracted for transportation. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

Carbodyweight: 6.5 ton

Crawler drive: Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

Crawler brakes: Spring-set, hydraulically released parking brakes are built into each propel drive.

Steering mechanism: A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

Track rollers: Sealed track rollers for maintenance-free operation.

Shoe (flat): 800 mm wide each crawler

Max. gradeability: 30 %



Weight

Including upper and lower machine, 25.4 ton counterweight and 6.5 ton carbody weight, basic boom hook, and other accessories.

Weight: 77.0 ton

Ground pressure: 86.9 kPa



Attachment

Boom & Jib:

Welded lattice construction using tubular, high-tensile steel chords with pin connection between sections.

Boom and Jib length

	Min. Length (Min. combination)	Max. Length (Max. combination)
Crane Boom	12.2 m	54.9 m

Main Specifications (Model: BME800G)			
Crane Boom		Hydraulic System	
Max. Lifting Capacity	80 t x 3.6 m	Main Pumps	3 variable displacement
Max. Length	54.9 m	Max. Pressure	31.9 Mpa {325 kg/cm ² }
Main & Aux. Winch		Hydraulic Tank Capacity	440 liters
Max. Line Speed (1st layer)	120 m/min	Self-Removal Device	
Rated Line Pull (Single line)	108 kN {11.0 tf}		Counterweight/crawler self-removal device
Wire Rope Diameter	26 mm	Weight	
Wire Rope Length	175 m (Main), 130 m (Aux.)	Operating Weight	77.0 t ^{*1}
Brake Type (Free fall)	Wet-type multiple disc brake (Standard)	Ground Pressure	86.9 kPa
Working Speed		Counterweight	25,400 kg
Swing Speed	4.0 min ⁻¹ {rpm}	Transport Weight	43,210 kg ^{*2}
Travel Speed	1.7/1.2 km/h		
Power Plant			
Model	HINO P11C-VC		
Engine Output	271 kW / 1,850 min ⁻¹		
Fuel Tank	400 liters		

Units are SI units. { } indicates conventional units.
Line speeds in table are for light loads. Line speed varies with load.


^{*1} Including upper and lower machine, 25.4 ton counterweight, 6.5 ton carbody weight, basic boom, hook, and other accessories.

^{*2} Base machine with boom base, gantry, crawlers, and wire ropes (front/rear/boom hoist)




GENERAL DIMENSIONS

(Unit: mm)

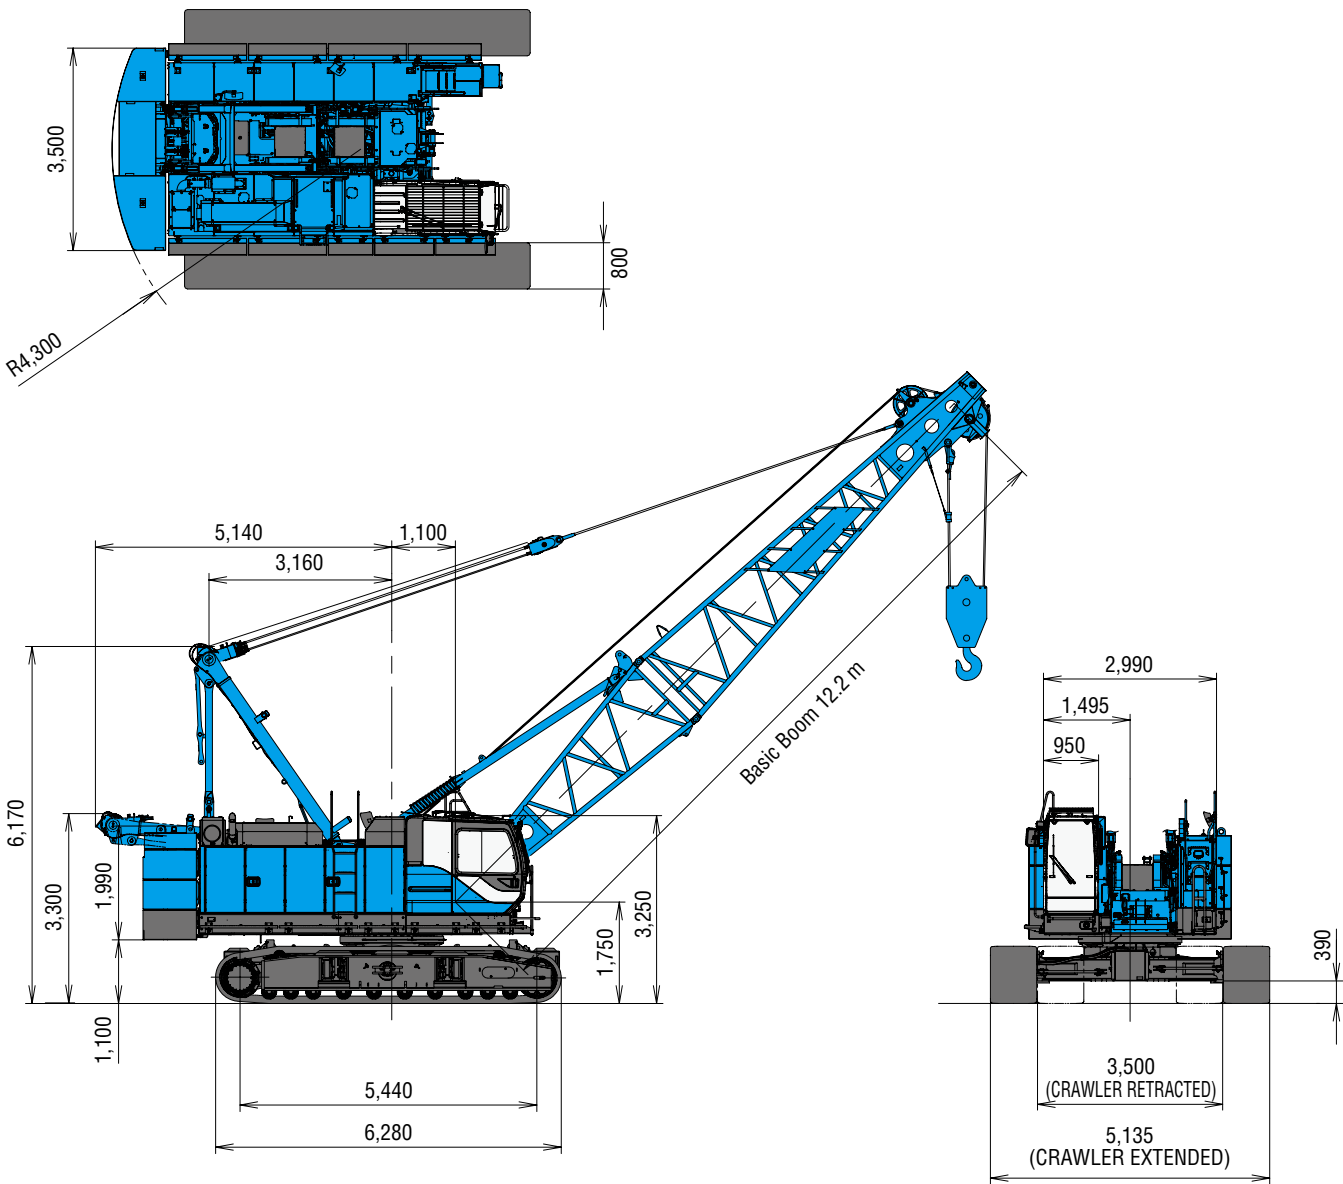


This catalog may contain photographs of machines with specifications, attachments and optional equipment.

Limit of Hook Lifting

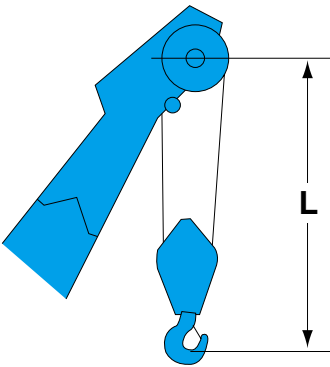

Hook	L
80 t hook	4.3 m
50 t hook	4.1 m
32 t hook	4.1 m

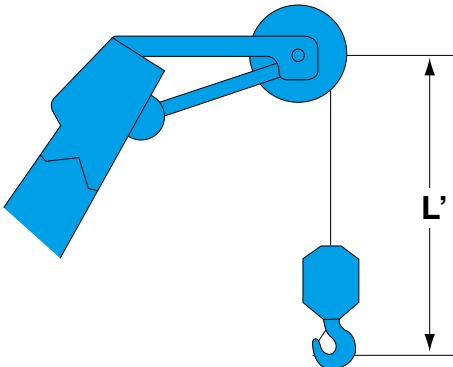

Hook	L'
Ball hook	4.2 m



BOOM AND JIB ARRANGEMENTS

Crane Boom Arrangements

Boom length m (ft)	Boom arrangement
12.2 (40)	※ ◁B T▷
15.2 (50)	※ ◁B 10 T▷
18.3 (60)	◁B 20 T▷ ※ ◁B 10 10 T▷
21.3 (70)	※ ◁B 10 20 T▷ ◁B 30 T▷
24.4 (80)	◁B 20 20 T▷ ◁B 10 30 T▷ ※ ◁B 10 10 20 T▷
27.4 (90)	※ ◁B 10 20 20 T▷ ◁B 20 30 T▷ ◁B 10 10 30 T▷
30.5 (100)	※ ◁B 10 20 30 T▷ ◁B 30 30 T▷
33.5 (110)	◁B 20 20 30 T▷ ◁B 10 30 30 T▷ ※ ◁B 10 10 20 30 T▷

Boom length m (ft)	Boom arrangement
36.6 (120)	◁B 20 30 30 T▷ ◁B 10 10 30 30 T▷ ※ ◁B 10 20 20 30 T▷
39.6 (130)	※ ◁B 10 20 30 30 T▷ ◁B 30 30 30 T▷
42.7 (140)	◁B 20 20 30 30 T▷ ※ ◁B 10 10 20 30 30 T▷ ◁B 10 30 30 30 T▷
45.7 (150)	◁B 20 30 30 30 T▷ ◁B 10 10 30 30 30 T▷ ※ ◁B 10 20 20 30 30 T▷
48.8 (160)	※ ◁B 10 20 30 30 30 T▷
51.8 (170)	◁B 20 20 30 30 30 T▷ ※ ◁B 10 10 20 30 30 30 T▷
54.9 (180)	※ ◁B 10 20 20 30 30 30 T▷


Symbol	Boom Length	Remarks
◁B	5.2 m	Boom Base
T▷	7.0 m	Boom Top
10	3.0 m	Insert Boom
20	6.1 m	Insert Boom
30	9.1 m	Insert Boom

※ indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.

WORKING RANGES

Crane Boom

Unit : m

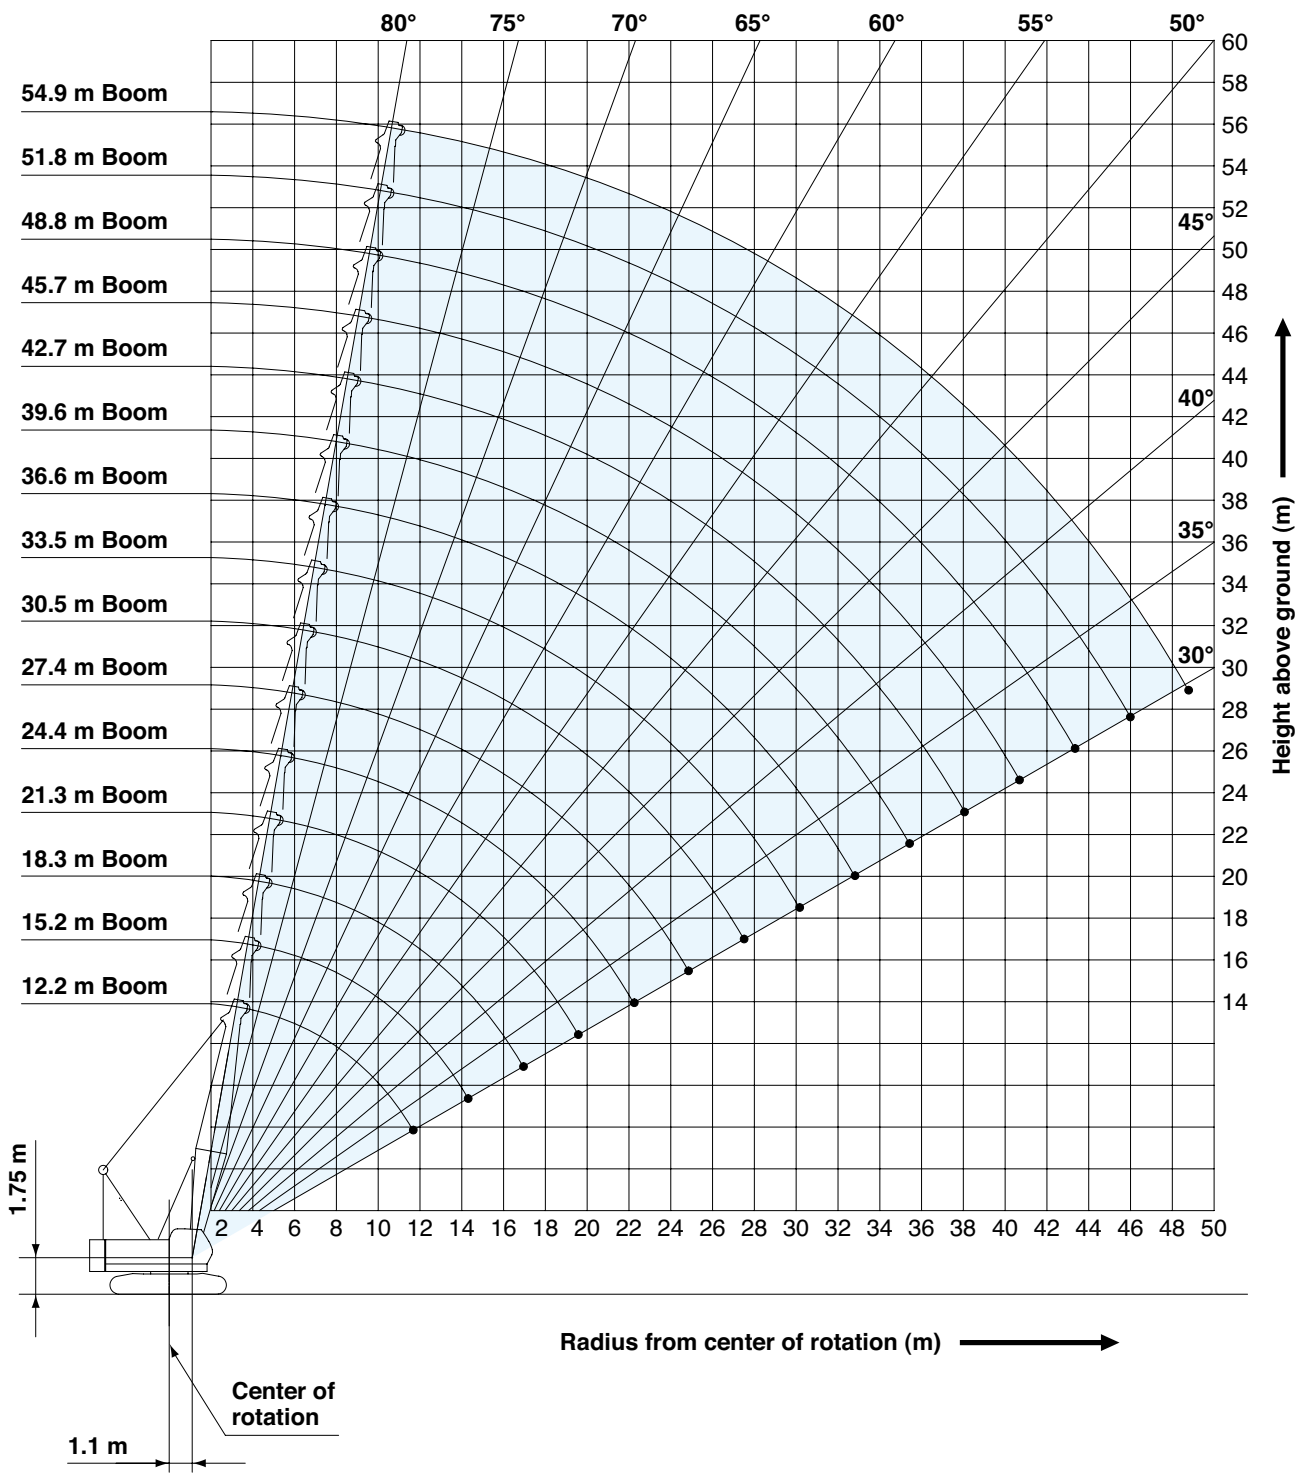



SUPPLEMENTAL DATA

- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block (s), slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.
The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1 % gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 12 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes  are limited by strength of materials.
- The minimum rated load is 1.1 (ton).
- Crawler frames must be fully extended for all crane operations.

(Crane boom lifting)

- The total load that can be lifted is the value for weight of main hook block, slings, and all other load handling accessories deducted from crane boom ratings shown.

<Reference Information>

Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	108	216	324	431	539
Maximum Loads (t)	11.0	22.0	33.0	44.0	55.0

No. of Parts of Line	6	7	8
Maximum Loads (kN)	647	755	785
Maximum Loads (t)	66.0	77.0	80.0

Auxiliary hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	108
Maximum Loads (t)	11.0

Weight of hook block				
Hook Block	80 t	50 t	32 t	Ball Hook
Weight (t)	0.95	0.7	0.55	0.3

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.

Assembling the counterweight

25.4 ton counterweight
6.5 ton carbody weight

No.4		No.5
No.3		
No.2		
No.1		

Counterweights



Carbody weights

Assembling the counterweight

(Equipped with self removal device)
26.1 ton counterweight
6.5 ton carbody weight

No.4		No.5
No.2		No.3
No.1		

Counterweights



Carbody weights

- The lifting capacity does not change due to the type of counterweights.



LIFTING CAPACITIES

 Crane Boom Lifting Capacities										Counterweight: 25.4 t Carbody Weight: 6.5 t	
Unit: metric ton											
Working Radius (m)	Boom Length (m)	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	Boom Length (m)	Working Radius (m)
	3.0	3.6m/80.0									3.0
4.0	69.5	4.3m/63.2	4.8m/56.0								4.0
5.0	56.2	56.4	53.4	5.3m/47.3	5.9m/40.2						5.0
6.0	44.7	45.4	43.2	41.4	39.6	6.4m/35.4	6.9m/31.5				6.0
7.0	36.0	37.8	36.2	34.8	33.5	32.3	31.1	7.5m/27.9			7.0
8.0	29.8	31.8	31.1	30.0	28.9	28.0	27.0	26.2			8.0
9.0	25.3	27.0	26.8	26.3	25.4	24.6	23.9	23.2			9.0
10.0	22.0	23.4	23.2	23.2	22.6	22.0	21.3	20.7			10.0
12.0	11.8m/17.4	18.4	18.2	18.1	18.0	17.9	17.4	17.0			12.0
14.0		15.1	14.9	14.8	14.7	14.6	14.5	14.3			14.0
16.0		14.5m/14.4	12.5	12.4	12.3	12.2	12.1	12.0			16.0
18.0			17.1m/11.5	10.6	10.5	10.4	10.3	10.2			18.0
20.0				19.8m/9.4	9.1	9.0	8.9	8.8			20.0
22.0					8.0	7.9	7.8	7.7			22.0
24.0					22.4m/7.8	7.0	6.9	6.8			24.0
26.0						25.0m/6.6	6.1	6.0			26.0
28.0							27.7m/5.6	5.4			28.0
30.0								4.8			30.0
32.0								30.3m/4.8			32.0
Reeves	8	6	6	5	4	4	3	3			Reeves

Working Radius (m)	Boom Length (m)	36.6	39.6	42.7	45.7	48.8	51.8	54.9	Boom Length (m)	Working Radius (m)
8.0	8.0m/25.3	8.5m/23.1								8.0
9.0	22.4	21.8	9.0m/21.2	9.6m/19.2						9.0
10.0	20.1	19.5	19.0	18.4	10.1m/17.7	10.6m/16.3	11.2m/15.0			10.0
12.0	16.5	16.0	15.6	15.2	14.8	14.3	13.9			12.0
14.0	13.9	13.5	13.2	12.8	12.5	12.1	11.7			14.0
16.0	11.9	11.6	11.3	11.0	10.7	10.3	10.0			16.0
18.0	10.1	9.9	9.8	9.5	9.2	8.9	8.6			18.0
20.0	8.7	8.5	8.5	8.3	8.1	7.8	7.5			20.0
22.0	7.5	7.4	7.4	7.2	7.1	6.8	6.6			22.0
24.0	6.6	6.5	6.4	6.3	6.2	6.1	5.8			24.0
26.0	5.9	5.8	5.7	5.6	5.4	5.3	5.2			26.0
28.0	5.2	5.1	5.0	4.9	4.8	4.6	4.5			28.0
30.0	4.7	4.6	4.5	4.4	4.2	4.1	4.0			30.0
32.0	4.2	4.1	4.0	3.9	3.8	3.6	3.5			32.0
34.0	33.0m/4.0	3.7	3.6	3.5	3.3	3.2	3.1			34.0
36.0		35.6m/3.4	3.2	3.1	3.0	2.8	2.7			36.0
38.0			2.9	2.8	2.7	2.5	2.4			38.0
40.0			38.2m/2.9	2.5	2.4	2.2	2.1			40.0
42.0				40.9m/2.4	2.1	2.0	1.8			42.0
44.0					43.5m/1.9	1.7	1.6			44.0
46.0						1.5	1.4			46.0
48.0						46.2m/1.5	1.2			48.0
50.0							48.8/1.1			50.0
Reeves	3	3	2	2	2	2	2			Reeves

Note:
Ratings according to EN13000.
Ratings shown in are determined by the strength of the boom or other structural components.
Lifting capacities may vary depending on hook used or with/without auxilliary sheave.
Please refer rated chart in operator's cabin.



SUPPLEMENTAL DATA FOR CLAMSHELL RATING CHART

- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of bucket, slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment.
The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Rated loads do not exceed 66 % of minimum tipping loads.
- Ratings are for operation on a firm and level surface, up to 1 % gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 12 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Crawler frames must be fully extended for all crane operations.

(Clamshell bucket lifting)

- The total load that can be lifted is the value for weight of bucket, slings, and all other load handling accessories deducted from main boom ratings shown.
- The weight of bucket and materials must not exceed rated load.
- Optimum bucket should be required according to material.
- $\text{Bucket capacity (m}^3\text{)} \times \text{specified gravity of material (ton/m}^3\text{)} + \text{bucket weight (ton)} = \text{rated load.}$
- Bucket weight must also be decreased according to operating cycle and bucket lowering height.


- Rated loads are determined by stability and boom strength. During simultaneous operations of boom and swing, rapid acceleration or deceleration must be avoided.
- Do not attempt to cast the bucket while swinging or diagonal draw-cutting.

Main hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	74
Maximum Loads (t)	7.5


Assembling the counterweight

22.8 ton counterweight
without carbody weight



Assembling the counterweight

(Equipped with self removal device)
17.7 ton counterweight
without carbody weight



- The lifting capacity does not change due to the type of counterweights.

Operation of this equipment in excess of rated loads
or disregard of instruction voids the warranty.



LIFTING CAPACITIES

 Clamshell Rating Charts Crane Boom Capacities Counterweight: 22.8 t Without Carbody Weight									
Unit: metric ton									
Working Radius (m) \ Boom Length (m)	12.2	15.2	18.3	21.3	24.4				Boom Length (m) \ Working Radius (m)
5.0	7.5								5.0
5.5	7.5	7.5							5.5
6.0	7.5	7.5							6.0
7.0	7.5	7.5	7.5						7.0
8.0	7.5	7.5	7.5	7.5	7.2				8.0
9.0	7.5	7.5	7.5	7.5	7.2				9.0
10.0	7.5	7.5	7.5	7.5	7.2				10.0
11.0		7.5	7.5	7.5	7.2				11.0
12.0		7.5	7.5	7.5	7.2				12.0
13.0		7.5	7.5	7.5	7.2				13.0
14.0			7.5	7.5	7.2				14.0
15.0			7.5	7.5	7.1				15.0
16.0			7.5	7.5	6.9				16.0
17.0				7.1	6.7				17.0
18.0				6.6	6.5				18.0
19.0					6.0				19.0
20.0					5.6				20.0
21.0					5.2				21.0
Reeves	1	1	1	1	1				Reeves

Note:
Please refer rated chart in operator's cabin.



SUPPLEMENTAL DATA FOR REDUCED WEIGHTS RATING CHART


- Ratings according to EN13000.
- Operating radius is the horizontal distance from centerline of rotation to a vertical line through the center of gravity of the load.
- Deduct weight of hook block(s) ,slings and all other load handling accessories from main boom ratings shown.
- Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions, out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. The operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
- Ratings are for operation on a firm and level surface, up to 1% gradient.
- At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
- Boom inserts and guy lines must be arranged as shown in the "operator's manual".
- Boom hoist reeving is 12 part line.
- Gantry must be in raised position for all conditions.
- Boom backstops are required for all boom lengths.
- The boom should be erected over the front of the crawlers, not laterally.
- Ratings inside of boxes are limited by strength of materials.
- The minimum rated load is 1.1(ton).
- Crawler frames must be fully extended for all crane operations.

(Crane boom lifting)


- The total load that can be lifted is the value for weight of hook block, slings, and all other load handling accessories deducted from main boom ratings shown.

Counterweight	Carbody Weight	Boom Length	
		Without Aux.	With Aux.
22.8 ton	without	12.2m~51.8m	12.2m~48.8m
17.7 ton	without	12.2m~51.8m	12.2m~48.8m

Assembling the counterweight

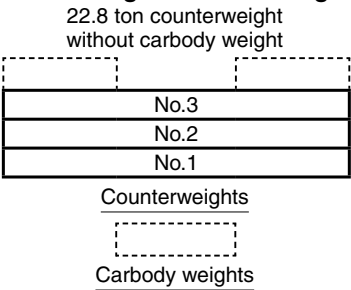

Assembling the counterweight

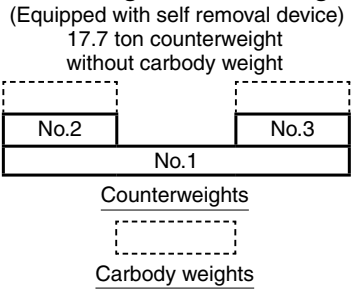

- The lifting capacity does not change due to the type of counterweights.

<Reference Information>

Main hoist loads

No. of Parts of Line	1	2	3	4	5
Maximum Loads (kN)	108	216	324	431	539
Maximum Loads (t)	11.0	22.0	33.0	44.0	55.0

No. of Parts of Line	6	7	8
Maximum Loads (kN)	647	755	785
Maximum Loads (t)	66.0	77.0	80.0

Auxiliary hoist loads

No. of Parts of Line	1
Maximum Loads (kN)	108
Maximum Loads (t)	11.0

Weight of hook block				
Hook Block	80 t	50 t	32 t	Ball Hook
Weight (t)	0.95	0.7	0.55	0.3

Operation of this equipment in excess of rated loads or disregard of instruction voids the warranty.








LIFTING CAPACITIES

Reduced Weights Rating Charts																Counterweight: 22.8 t Without Carbody Weight Crawler Fully Extended Unit: metric ton		
Load radius (m)		Boom length (m)	12.2	15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	51.8	Boom length (m)	Load radius (m)
3.5		3.6m/72.0																3.5
4.0		64.0	4.3m/58.4															4.0
4.5		55.0	55.0	4.8m/47.6														4.5
5.0		47.2	47.2	45.3	5.3m/40.1													5.0
5.5		40.3	40.2	40.1	38.4	5.9m/33.8												5.5
6.0		35.0	35.0	34.9	34.7	33.2	6.4m/29.6	6.9m/26.2										6.0
7.0		27.8	27.7	27.6	27.6	27.4	26.8	25.8	7.5m/23.1									7.0
8.0		22.9	22.8	22.7	22.7	22.6	22.5	22.3	21.6	8.0m/20.8	8.5m/18.8							8.0
9.0		19.5	19.4	19.3	19.2	19.1	19.1	18.9	18.8	18.3	17.7	17.1	9.6m/15.4					9.0
10.0		16.9	16.8	16.7	16.6	16.5	16.4	16.3	16.2	16.2	15.8	15.3	14.8	10.1m/14.1	10.6m/12.9			10.0
12.0		11.8m/13.6	13.1	13.0	13.0	12.8	12.8	12.7	12.6	12.5	12.4	12.3	12.0	11.6	11.2			12.0
14.0			10.7	10.6	10.5	10.4	10.4	10.2	10.1	10.1	10.0	9.8	9.7	9.6	9.3			14.0
16.0			14.5m/10.3	8.9	8.8	8.7	8.6	8.5	8.4	8.3	8.2	8.1	8.0	7.9	7.8			16.0
18.0				17.1m/8.2	7.5	7.4	7.3	7.2	7.1	7.0	6.9	6.8	6.7	6.6	6.4			18.0
20.0					19.8m/6.6	6.4	6.3	6.2	6.1	6.0	5.9	5.8	5.7	5.5	5.4			20.0
22.0						5.6	5.5	5.4	5.3	5.2	5.1	5.0	4.8	4.7	4.6			22.0
24.0						22.4m/5.5	4.9	4.7	4.6	4.5	4.4	4.3	4.2	4.1	3.9			24.0
26.0							25.0m/4.6	4.2	4.1	4.0	3.9	3.7	3.6	3.5	3.4			26.0
28.0								27.7m/3.7	3.6	3.5	3.4	3.3	3.2	3.0	2.9			28.0
30.0									3.2	3.1	3.0	2.9	2.7	2.6	2.5			30.0
32.0									30.3m/3.2	2.8	2.7	2.5	2.4	2.2	2.1			32.0
34.0										33.0m/2.5	2.3	2.2	2.0	1.9	1.7			34.0
36.0											35.6m/2.1	1.9	1.7	1.6	1.5			36.0
38.0												1.6	1.5	1.3	1.2			38.0
40.0												38.2m/1.6	1.3	1.1				40.0
42.0													40.9m/1.1					42.0
44.0																		44.0
46.0																		46.0
48.0																		48.0
50.0																		50.0
52.0																		52.0
54.0																		54.0
Reeves		7	6	5	4	4	3	3	3	2	2	2	2	2	2			Reeves

Note:
Ratings according to EN13000.
Ratings shown in are determined by the strength of the boom or other structural components.
Lifting capacities may vary depending on hook used or with/without auxiliary sheave.
Please refer rated chart in operator's cabin.



TRANSPORTATION PLAN

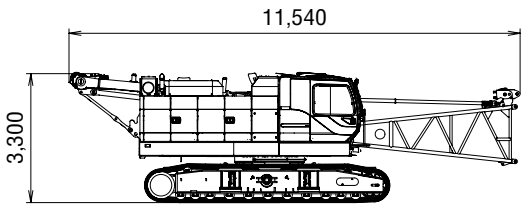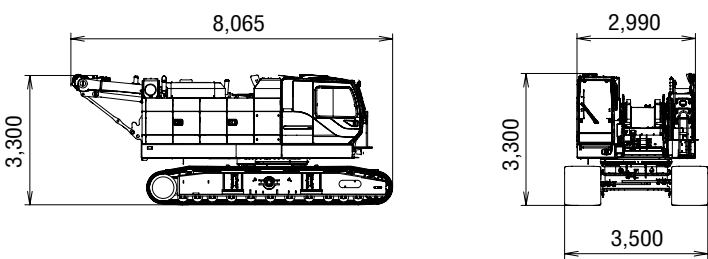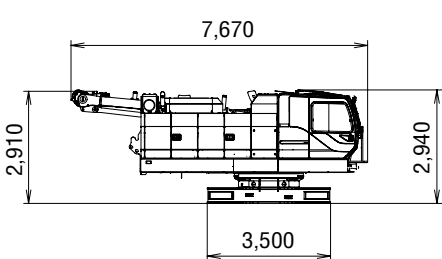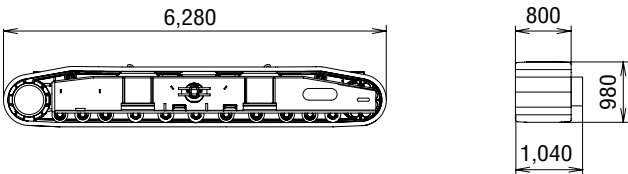Name	Dimension	Weight (kg)
Base Machine • Boom base • Gantry • Crawler • Wire rope (Front / rear / boom hoist)		43,210
Base Machine • Gantry • Crawler • Wire rope (Front / rear / boom hoist)		41,250
Base Machine • Boom base • Wire rope (Front / rear / boom hoist)		39,900
Base Machine • Gantry • Wire rope (Front / rear / boom hoist) • Without crawler		26,890
Crawler		7,180

[illegible]


[illegible]



PARTS AND ATTACHMENTS


Base Machine

Boom base, Gantry, Crawler,
Wire rope (Front/rear/boom hoist),
Weight: 43,210 kg Width: 3,500mm

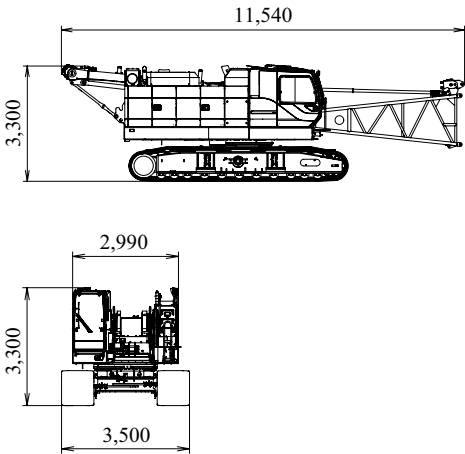


Crawler

Weight: 7,180 kg

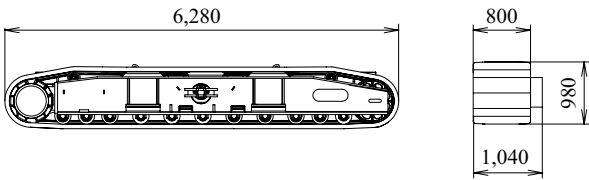


Counterweight No.1

Weight: 8,520 kg

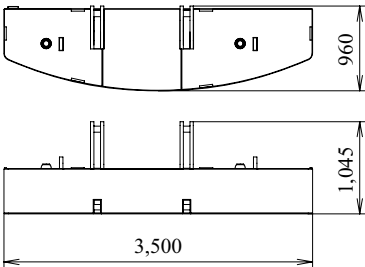


Counterweight No.2

Weight: 7,850 kg

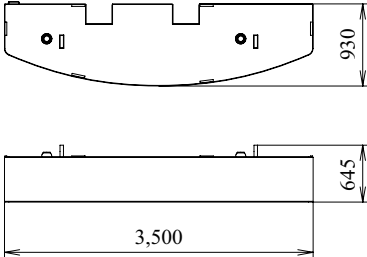


Counterweight No.3

Weight: 6,405 kg

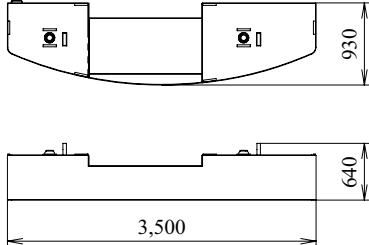


Counterweight No.4 (L)

Weight: 1,000 kg




Counterweight No.5 (R)

Weight: 1,555 kg



Carbody weight


Weight: 3,270 kg






Boom Tip

Weight: 1,390 kg

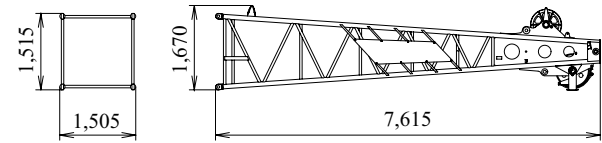

Boom Base


Weight: 1,130 kg

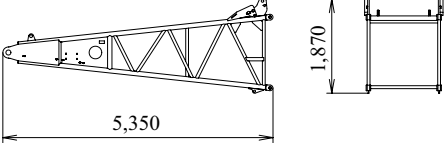

3.0 m

Boom Insert


Weight: 310 kg



6.1 m

Boom Insert


Weight: 522 kg

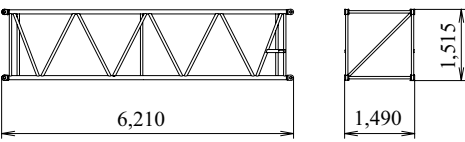

6.1 m

Boom Insert with Lug


Weight: 545 kg

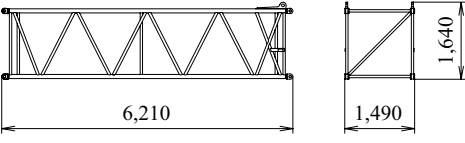

9.1 m

Boom Insert


Weight: 745 kg

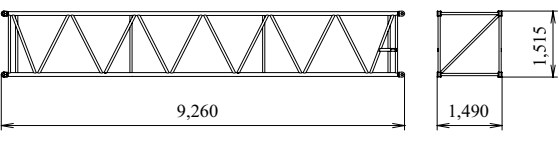

9.1 m


Boom Insert with Lug

Weight: 765 kg

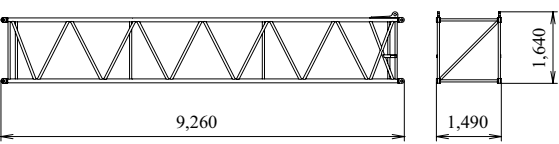


Auxiliary Sheave

Weight: 330 kg

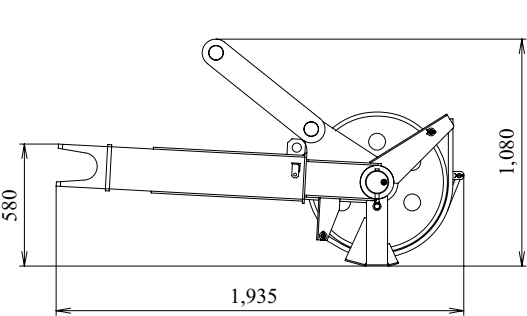


Upper Spreader

Weight: 280 kg

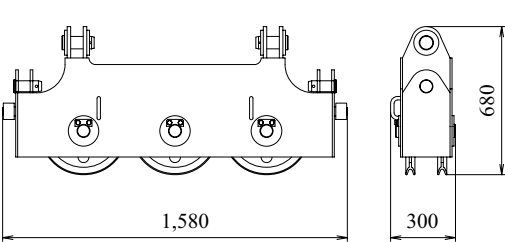


Ball Hook

Weight: 300 kg




32 t Hook

Weight: 400 kg




50 t Hook



Weight: 500 kg



80 t Hook

Weight: 650 kg



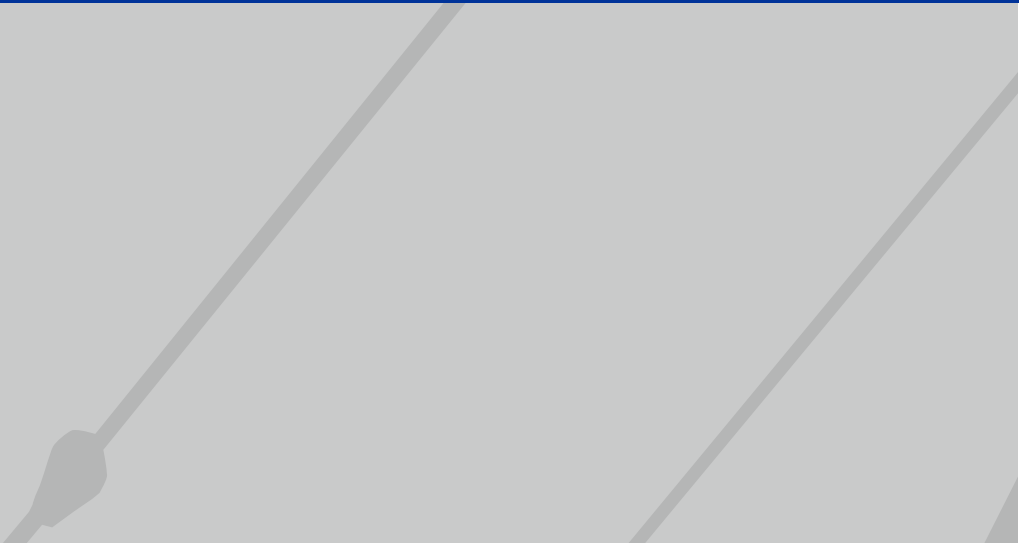

Note: This catalog may contain photographs of machines with specifications, attachments and optional equipment not certified for operation in your country. Please consult KOBELCO for those items you may require. Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.

Copyright by KOBELCO CRANES CO., LTD. No part of this catalog may be reproduced in any manner without notice.



KOBELCO CRANES CO., LTD.

17-1, Higashigotanda 2-chome, Shinagawa-ku, Tokyo 141-8626 JAPAN
Tel: +81-3-5789-2130 Fax: +81-3-5789-3372
URL: <http://www.kobelco-cranes.com/>

Inquiries To: