



HYDRAULIC CRAWLER CRANE

CKE1350

KOBELCO

Max. Lifting Capacity: 135 t
Max. Boom Length: 76.2 m
Max. Fixed Jib Combination:
61.0 + 30.5 m


S P E C I F I C A T I O N S

Main Boom	
Max. Lifting Capacity	135 t/4.5 m
Max. Length	76.2 m
Fixed Jib	
Max. Lifting Capacity	26.8 t
Max. Length	30.5 m
Max. Combination	61.0 + 30.5 m
Main & Aux. Winch	
Max. Line Speed	120 m/min (1st layer)
Rated Line Pull	132 kN (13.5 tf)
Max. Line Pull (Approx.)	235 kN (24 tf)
Wire Rope	26 mm
Wire Rope Length	270 m (Main), 250 m (Aux.)
Brake Type	Spring set hydraulically released
Free-Fall	Option
Working Speed	
Swing Speed	2.1 min ⁻¹ (rpm)
Travel Speed	1.3/0.9 km/h

Power Plant	
Model	Mitsubishi 6D24-TLU2H
Engine Output	247 kW/2,000 min ⁻¹ (rpm)
Fuel Tank Capacity	400 liters
Hydraulic System	
Main Pumps	4 variable displacement
Max. Pressure	32 MPa (325 kgf/cm ²)
Hydraulic Tank Capacity	535 liters
Self Erection Device	
Standard counterweight removal	
Weight	
Operating Weight	Approx. 143 t
Counterweight	53.0t (upper), 10.0 t (lower)
Transport Weight	39.7 t (Main machine with carbody)
Ground Pressure	112kPa (1.14 kgf/cm ²)

GENERAL DIMENSIONS

Unit: mm

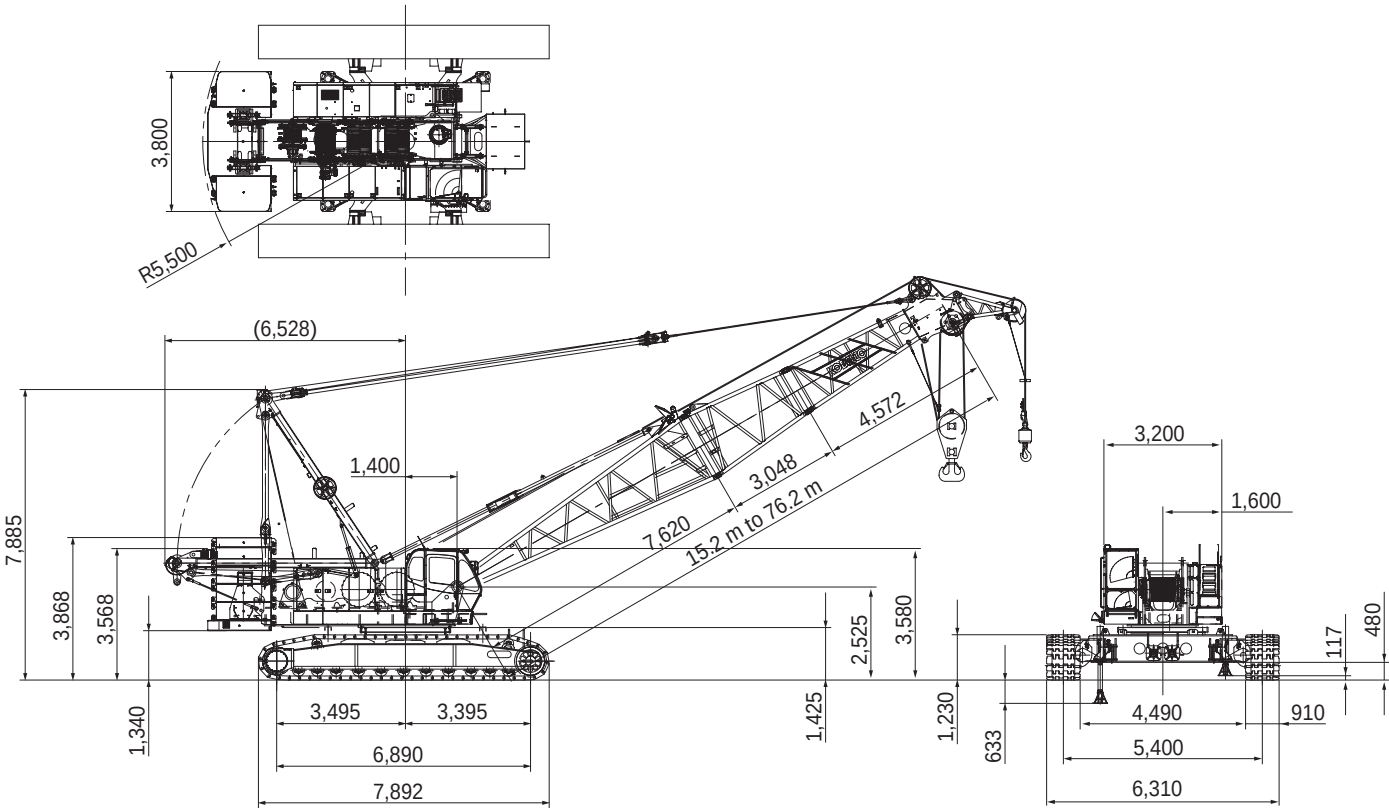

KOBELCO CRANES CO., LTD.

MAIN BOOM LIFTING CAPACITY

(Counterweight: 48.0 t, Without Carbody Weight)

Unit: Metric tons

Boom length m (ft)		15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	51.8	54.9	57.9	61.0	64.0	67.1	70.1	73.2	76.2
Working radius (m)	4.5	4.5 m/135.0																				
	5.0	121.0	5.1 m/120.5	5.6 m/114.7																		
	6.0	106.4	107.7	105.3	6.1 m/97.8	6.7 m/84.9																
	7.0	91.9	90.6	86.9	83.3	80.1	7.2 m/74.9	7.7 m/66.9														
	8.0	73.8	73.7	73.7	71.1	68.6	66.4	64.3	8.2 m/60.2	8.8 m/54.7												
	9.0	61.6	61.4	61.4	61.2	59.9	58.1	56.5	54.7	53.2	9.3 m/49.9	9.8 m/45.8										
	10.0	52.7	52.6	52.5	52.3	52.2	51.6	50.3	48.8	47.5	46.2	45.0	10.4 m/42.2	10.9 m/39.0	11.4 m/36.3	11.9 m/33.8						
	12.0	40.8	40.6	40.5	40.3	40.2	40.1	40.0	39.8	38.9	37.9	37.0	36.1	35.2	34.4	33.6	12.5 m/31.4	13.0 m/29.2	13.5 m/26.7			
	14.0	33.1	32.9	32.8	32.6	32.4	32.4	32.3	32.1	32.0	31.9	31.3	30.5	29.8	29.1	28.4	27.7	27.0	26.5	14.1 m/25.8	14.6 m/24.1	15.1 m/20.4
	16.0	14.8 m/29.3	27.6	27.5	27.3	27.1	27.0	26.9	26.7	26.6	26.5	26.4	26.2	25.6	25.1	24.5	23.9	23.2	22.9	22.3	21.7	19.4
	18.0		17.5 m/24.6	23.5	23.3	23.1	23.0	22.9	22.7	22.6	22.5	22.4	22.2	22.1	21.9	21.3	20.8	20.2	19.9	19.4	18.9	17.5
	20.0			20.6	20.3	20.1	20.0	19.9	19.7	19.6	19.4	19.3	19.2	19.0	18.9	18.8	18.3	17.8	17.5	17.1	16.6	15.8
	22.0			20.1 m/20.4	17.9	17.7	17.6	17.5	17.3	17.2	17.0	16.9	16.7	16.6	16.5	16.3	16.2	15.8	15.5	15.1	14.6	14.2
	24.0				22.8 m/17.2	15.8	15.7	15.5	15.3	15.2	15.1	14.9	14.8	14.6	14.5	14.4	14.2	14.0	13.8	13.4	13.0	12.6
	26.0					25.4 m/14.7	14.1	13.9	13.7	13.6	13.5	13.3	13.2	13.0	12.9	12.7	12.6	12.4	12.4	12.0	11.6	11.2
	28.0						12.8	12.6	12.4	12.2	12.1	12.0	11.8	11.6	11.5	11.4	11.2	11.0	11.0	10.8	10.4	10.0
	30.0						28.1 m/12.7	11.5	11.2	11.1	10.9	10.8	10.6	10.5	10.4	10.2	10.0	9.8	9.8	9.6	9.3	9.0
	32.0							30.7 m/11.1	10.2	10.1	10.0	9.8	9.6	9.5	9.4	9.2	9.0	8.8	8.8	8.6	8.3	8.0
	34.0								33.3 m/9.7	9.3	9.1	8.9	8.8	8.6	8.5	8.3	8.1	8.0	7.9	7.7	7.5	7.2
	36.0									8.5	8.3	8.2	8.0	7.8	7.7	7.5	7.4	7.2	7.1	7.0	6.7	6.4
	38.0										7.7	7.5	7.3	7.2	7.0	6.9	6.7	6.5	6.5	6.3	6.0	5.8
	40.0										38.6 m/7.5	6.9	6.7	6.6	6.4	6.3	6.1	5.9	5.8	5.6	5.4	5.2
	42.0											41.2 m/6.6	6.2	6.0	5.9	5.7	5.5	5.3	5.2	5.0	4.8	4.6
	44.0												43.9 m/5.8	5.6	5.4	5.2	5.0	4.7	4.7	4.5	4.2	4.0
	46.0													5.1	4.9	4.7	4.5	4.2	4.2	4.0	3.7	3.6
	48.0													46.5 m/5.0	4.5	4.3	4.1	3.8	3.7	3.5	3.3	3.1
	50.0														49.2 m/4.2	3.9	3.7	3.4	3.3	3.1	2.9	2.7
	52.0															51.8 m/3.5	3.3	3.1	3.0	2.8	2.5	2.3
	54.0																3.0	2.7	2.6	2.4	2.2	
	56.0																54.4 m/2.9	2.4	2.3	2.1		
	58.0																	57.1 m/2.3	2.0			
	reeves	10	9	9	8	7	6	5	5	5	4	4	4	3	3	3	3	3	2	2	2	2

Note: Ratings according to DIN 15018/3 and prEN 13000.
Ratings shown in are determined by the strength of the boom or other structural components.

MAIN BOOM LIFTING CAPACITY

(Counterweight: 53.0 t, Carbody Weight: 10.0 t)

Unit: Metric tons

Boom length m (ft)		15.2	18.3	21.3	24.4	27.4	30.5	33.5	36.6	39.6	42.7	45.7	48.8	51.8	54.9	57.9	61.0	64.0	67.1	70.1	73.2	76.2
Working radius (m)	4.5	4.5 m/135.0																				
	5.0	131.1	5.1 m/128.4	5.6 m/117.2																		
	6.0	110.4	110.1	109.6	6.1 m/107.8	6.7 m/95.1																
	7.0	95.1	94.8	93.3	91.1	89.3	7.2 m/84.2	7.7 m/75.3														
	8.0	79.5	79.9	79.1	77.4	75.9	74.6	72.4	8.2 m/67.8	8.8 m/61.7												
	9.0	67.7	68.8	68.5	67.2	66.0	64.9	62.5	61.5	60.0	9.3 m/56.3	9.8 m/51.8										
	10.0	58.4	59.0	59.0	58.8	58.3	57.4	56.5	55.0	53.6	52.2	50.9	10.4 m/47.8	10.9 m/44.2	11.4 m/40.1	11.9 m/38.4						
	12.0	44.3	45.7	45.6	45.4	45.2	45.2	45.1	44.9	44.1	43.0	42.0	41.0	40.0	39.1	38.2	12.5 m/35.8	13.0 m/33.4	13.5 m/26.7			
	14.0	33.5	37.1	37.0	36.8	36.6	36.5	36.5	36.3	36.2	36.1	35.6	34.7	33.9	33.2	32.5	31.7	30.9	26.7	14.1 m/26.7	14.6 m/24.4	15.1 m/20.4
	16.0	14.8 m/29.3	30.0	31.0	30.8	30.6	30.5	30.4	30.2	30.1	30.0	29.9	29.8	29.3	28.7	28.1	27.4	26.7	26.3	25.7	22.7	19.4
	18.0		17.5 m/24.8	26.6	26.4	26.2	26.1	26.0	25.8	25.7	25.6	25.4	25.3	25.2	25.1	24.6	24.0	23.4	23.0	22.5	20.6	17.5
	20.0			21.7	23.0	22.8	22.7	22.6	22.4	22.3	22.2	22.0	21.9	21.7	21.6	21.5	21.2	20.7	20.4	19.9	18.8	15.8
	22.0			20.1 m/21.3	19.9	20.1	20.0	19.9	19.7	19.6	19.5	19.3	19.2	19.0	18.9	18.8	18.6	18.4	18.1	17.7	17.1	14.3
	24.0				22.8 m/18.5	18.0	17.9	17.7	17.5	17.4	17.3	17.1	17.0	16.8	16.7	16.6	16.4	16.2	16.2	15.8	15.4	13.0
	26.0					25.4 m/16.0	16.1	16.0	15.7	15.6	15.5	15.3	15.2	15.0	14.9	14.7	14.6	14.4	14.4	14.2	13.8	11.8
	28.0						14.2	14.5	14.2	14.1	13.9	13.8	13.6	13.5	13.4	13.2	13.1	12.9	12.8	12.7	12.4	10.7
	30.0						28.1 m/14.1	13.2	12.9	12.8	12.7	12.5	12.3	12.2	12.1	11.9	11.7	11.6	11.5	11.4	11.2	9.7
	32.0							30.7 m/12.5	11.8	11.7	11.5	11.4	11.2	11.1	10.9	10.8	10.6	10.4	10.4	10.2	10.0	8.8
	34.0								33.3 m/10.9	10.6	10.4	10.3	10.1	10.0	9.8	9.6	9.4	9.4	9.4	9.2	9.1	8.0
	36.0									9.7	9.8	9.6	9.4	9.2	9.1	8.9	8.8	8.6	8.5	8.4	8.2	7.2
	38.0										8.9	8.8	8.7	8.5	8.4	8.2	8.0	7.8	7.8	7.6	7.4	6.5
	40.0										38.6 m/8.6	8.1	8.0	7.8	7.7	7.5	7.3	7.1	7.1	6.9	6.7	5.8
	42.0											41.2 m/7.5	7.4	7.2	7.1	6.9	6.7	6.5	6.5	6.3	6.1	5.2
	44.0												43.9 m/6.5	6.7	6.5	6.4	6.2	6.0	5.9	5.7	5.5	4.6
	46.0													5.9	6.0	5.9	5.7	5.4	5.3	5.2	4.9	4.0
	48.0													46.5 m/5.7	5.3	5.4	5.2	4.9	4.9	4.7	4.4	3.5
	50.0														49.2 m/4.8	4.7	4.7	4.5	4.4	4.2	4.0	2.9
	52.0															51.8 m/4.1	4.2	4.1	4.0	3.8	3.6	2.4
	54.0																3.6	3.6	3.5	3.4	3.2	
	56.0																54.4 m/3.4	3.0	3.1	3.0	2.8	
	58.0																	57.1 m/2.8	2.6	2.5	2.4	
	60.0																		59.7 m/2.2	2.1		
	reeves	10	10	9	8	8	7	6	6	5	5	4	4	4	3	3	3	3	2	2	2	2

Note: Ratings according to DIN 15018/3 and prEN 13000.
Ratings shown in are determined by the strength of the boom or other structural components.




CKE1350

WORKING RADIUS & BOOM ARRANGEMENT

WORKING RADIUS

(Counterweight: 53.0 t, Carbody Weight: 10.0 t)

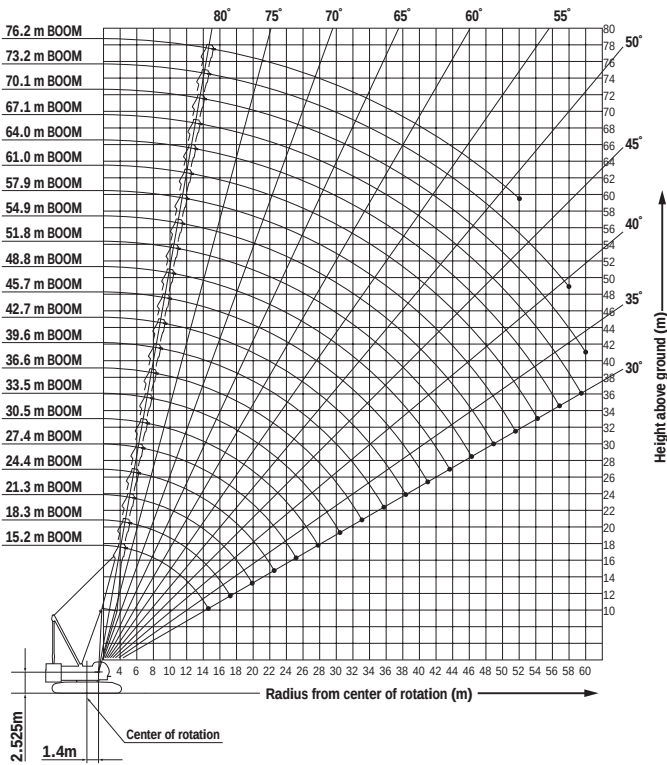


BOOM ARRANGEMENT CHART


Boom length (m)	Boom arrangement
15.2	Base-Tip
18.3	Base-A-Tip
21.3	Base-B-Tip
24.4	Base-A-B-Tip
27.4	Base-A-A-B-Tip
30.5	Base-A-A-C-Tip
33.5	Base-A-B-C-Tip
36.6	Base-A-A-B-C-Tip
39.6	Base-A-B-B-C-Tip
42.7	Base-A-B-C-C-Tip
45.7	Base-A-A-B-C-C-Tip
48.8	Base-A-B-B-C-C-Tip
51.8	Base-A-B-C-C-C-Tip
54.9	Base-A-A-B-C-C-C-Tip
57.9	Base-A-B-B-C-C-C-Tip
61.0	Base-A-B-C-C-C-C-Tip
64.0	Base-A-A-B-C-C-C-C-Tip
67.0	Base-A-B-B-C-C-C-C-Tip
70.1	Base-A-B-C-C-C-C-C-Tip
73.2	Base-A-A-B-C-C-C-C-C-Tip
76.2	Base-A-B-B-C-C-C-C-C-Tip

Base = 7.6 m, Tip Section = 4.6 m Boom tip + 3.0 m tapered boom
Inserts: A = 3.0 m, B = 6.1 m, C = 9.1 m

WORKING RADIUS (Jib Offset Angle: 10°)

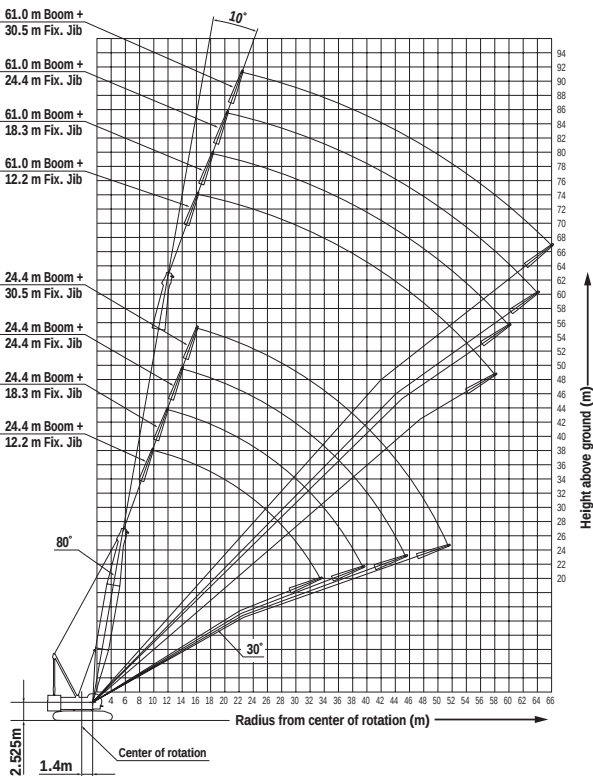

WORKING RADIUS (Jib Offset Angle: 30°)

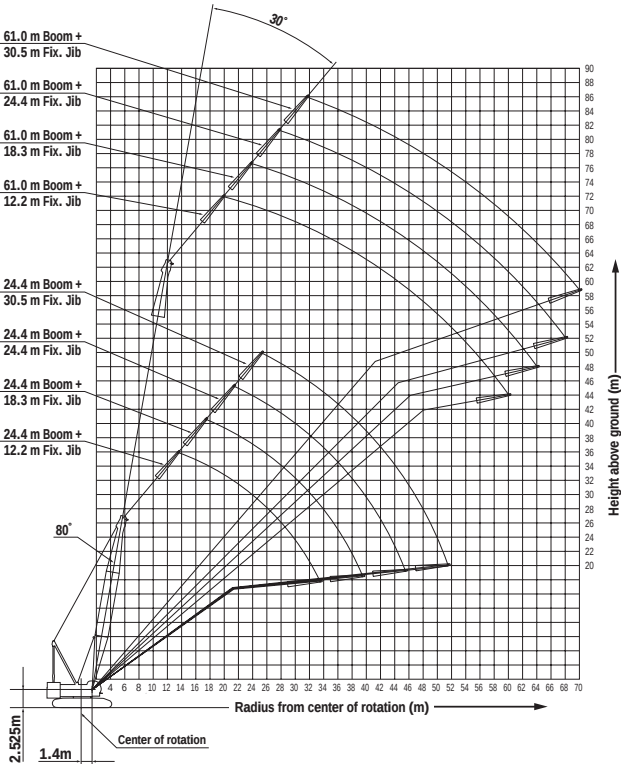

FIXED JIB ARRANGEMENT

Jib length (m)	Jib arrangement
12.2	Base-A-Jib Tip
18.3	Base-A-B-Jib Tip
24.4	Base-A-B-B-Jib Tip
30.5	Base-A-B-B-B-Jib Tip

Base = 4.6 m, Jib Tip Section = 4.6 m
Jib Insert: A = 3.0 m, B = 6.1 m

FIXED JIB LIFTING CAPACITY

(Counterweight: 53.0 t, Carbody Weight: 10.0 t, without main hook)

Jib Offset Angle: 10°

Unit: Metric tons

Boom length		24.4 m				33.5 m				39.6 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	9.0 m	9.9/26.8											
	10.0 m	26.8				11.5/26.8							
	12.0 m	26.7	19.2			26.8	13.5/19.2			12.5/26.8			
	14.0 m	25.8	18.9	14.3/9.9		26.8	19.1	15.9/9.9		26.8	14.6/19.2		
	16.0 m	24.9	18.3	9.7	16.4/5.9	26.0	18.8	9.9	6.0	26.5	19.0	17.0/9.9	
	18.0 m	24.1	17.7	9.5	5.8	25.3	18.4	9.7	5.9	25.8	18.7	9.8	19.1/5.9
	20.0 m	22.9	16.8	9.2	5.6	23.0	17.9	9.5	5.7	22.7	18.3	9.6	5.8
	22.0 m	20.8	15.2	8.8	5.3	20.3	17.4	9.3	5.6	20.0	17.8	9.5	5.7
	24.0 m	18.6	13.9	8.4	5.0	18.1	16.4	9.0	5.4	17.7	17.4	9.3	5.6
	26.0 m	16.8	12.8	8.0	4.8	16.2	15.1	8.6	5.1	15.9	16.1	9.0	5.4
	28.0 m	15.2	11.9	7.7	4.5	14.7	14.0	8.3	4.9	14.3	14.6	8.7	5.1
	30.0 m	13.9	11.1	7.4	4.3	13.4	13.1	8.0	4.7	13.0	13.2	8.4	4.9
	32.0 m	12.8	10.4	7.2	4.2	12.3	12.3	7.7	4.5	11.9	12.1	8.1	4.7
	34.0 m	11.2	9.7	6.9	4.0	11.3	11.5	7.5	4.3	10.9	11.1	7.8	4.6
	36.0 m		9.2	6.7	3.8	10.4	10.6	7.3	4.2	10.0	10.2	7.6	4.4
	38.0 m		8.7	6.5	3.7	9.7	9.8	7.1	4.0	9.3	9.5	7.4	4.2
	40.0 m		8.3	6.3	3.5	8.9	9.1	6.9	3.9	8.6	8.8	7.2	4.1
	42.0 m			6.2	3.4	7.8	8.5	6.7	3.8	8.0	8.1	7.0	4.0
	44.0 m			6.1	3.3		8.0	6.5	3.6	7.4	7.6	6.8	3.8
	46.0 m			6.0	3.2		7.3	6.4	3.5	6.5	7.1	6.7	3.7
	48.0 m				3.1		6.4	6.3	3.4		6.6	6.5	3.6
	50.0 m				3.1			6.1	3.3		6.0	6.4	3.5
	52.0 m							6.0	3.2		5.4	6.0	3.4
	54.0 m							5.4	3.2			5.7	3.3
	56.0 m								3.1			5.1	3.3
	58.0 m								3.0			4.5	3.2
	60.0 m								2.9				3.1
	62.0 m												3.1
	64.0 m												3.0

Boom length		45.7 m				51.8 m				61.0 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	12.0 m	13.6/26.8											
	14.0 m	26.8	15.7/19.1			14.6/26.8							
	16.0 m	26.8	19.1			26.8	16.7/19.1			16.2/21.2			
	18.0 m	25.8	18.9	9.9		25.6	19.0	19.1/9.9		20.7	18.3/19.1		
	20.0 m	22.4	18.6	9.7	20.1/5.9	22.1	18.8	9.8	21.2/5.9	20.3	18.9	20.7/9.9	
	22.0 m	19.6	18.1	9.6	5.8	19.3	18.4	9.6	5.8	18.7	18.7	9.8	22.8/5.9
	24.0 m	17.4	17.6	9.4	5.7	17.1	17.4	9.5	5.7	16.6	16.7	9.6	5.8
	26.0 m	15.5	15.8	9.3	5.5	15.2	15.5	9.4	5.6	14.8	14.9	9.5	5.7
	28.0 m	14.0	14.2	9.0	5.3	13.7	13.9	9.2	5.5	13.2	13.4	9.4	5.6
	30.0 m	12.7	12.9	8.7	5.1	12.4	12.6	8.9	5.3	11.9	12.1	9.3	5.5
	32.0 m	11.5	11.7	8.4	4.9	11.2	11.5	8.7	5.1	10.7	11.0	9.1	5.3
	34.0 m	10.5	10.7	8.1	4.7	10.2	10.4	8.4	4.9	9.7	10.0	8.8	5.2
	36.0 m	9.7	9.9	7.9	4.6	9.3	9.6	8.2	4.8	8.8	9.1	8.6	5.0
	38.0 m	8.9	9.1	7.7	4.4	8.6	8.8	8.0	4.6	8.1	8.3	8.4	4.9
	40.0 m	8.2	8.4	7.5	4.3	7.9	8.1	7.8	4.5	7.4	7.6	7.9	4.7
	42.0 m	7.6	7.8	7.3	4.2	7.3	7.5	7.6	4.3	6.7	7.0	7.3	4.6
	44.0 m	7.0	7.2	7.1	4.0	6.7	6.9	7.2	4.2	6.2	6.4	6.7	4.4
	46.0 m	6.5	6.7	7.0	3.9	6.2	6.4	6.7	4.1	5.6	5.9	6.2	4.3
	48.0 m	5.9	6.2	6.5	3.8	5.7	5.9	6.2	4.0	5.1	5.3	5.7	4.2
	50.0 m	5.3	5.8	6.1	3.7	5.2	5.5	5.8	3.9	4.6	4.9	5.3	4.1
	52.0 m	4.6	5.3	5.7	3.6	4.7	5.1	5.4	3.8	4.1	4.4	4.9	4.0
	54.0 m		4.8	5.3	3.5	4.1	4.6	5.0	3.7	3.7	4.0	4.5	3.9
	56.0 m		4.3	5.0	3.4	3.6	4.2	4.7	3.6	3.3	3.6	4.1	3.8
	58.0 m		3.7	4.5	3.3	3.1	3.7	4.3	3.5	2.8	3.2	3.7	3.7
	60.0 m			4.1	3.3		3.3	3.9	3.4		2.8	3.3	3.5
	62.0 m			3.6	3.2		2.9	3.5	3.3			3.0	3.1
	64.0 m			3.2	3.1		2.4	3.1	3.3			2.7	2.8
	66.0 m				3.1			2.8	3.1				2.5
	68.0 m				2.9			2.4	2.8				
	70.0 m				2.5				2.4				

Note: 1. Rating according to DIN 15018/3 and prEN 13000.
2. Rating shown in are determined by the strength of the boom or other structural components.
3. The own weight of all load carrying devices of main boom tackle must be subtracted from the capacity of the offset jib at radius.



FIXED JIB LIFTING CAPACITY

CKE1350

(Counterweight: 48.0 t, without Carbody Weight, without main hook)

Jib Offset Angle: 10°

Unit: Metric tons

Boom length		24.4 m				33.5 m				39.6 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	9.0 m	9.9/26.8											
	10.0 m	26.8				11.5/26.8							
	12.0 m	26.7	19.2			26.8	13.5/19.2			12.5/26.8			
	14.0 m	25.8	18.9	14.3/9.9		26.8	19.1	15.9/9.9		26.8	14.6/19.2		
	16.0 m	24.9	18.3	9.7	16.4/5.9	26.0	18.8	9.9	6.0	26.5	19.0	17.0/9.9	
	18.0 m	23.9	17.7	9.5	5.8	23.4	18.4	9.7	5.9	23.1	18.7	9.8	19.1/5.9
	20.0 m	20.8	16.8	9.2	5.6	20.3	17.9	9.5	5.7	20.0	18.3	9.6	5.8
	22.0 m	18.4	15.2	8.8	5.3	17.9	17.4	9.3	5.6	17.5	17.8	9.5	5.7
	24.0 m	16.4	13.9	8.4	5.0	15.9	16.1	9.0	5.4	15.5	15.8	9.3	5.6
	26.0 m	14.8	12.8	8.0	4.8	14.2	14.5	8.6	5.1	13.9	14.1	9.0	5.4
	28.0 m	13.4	11.9	7.7	4.5	12.9	13.1	8.3	4.9	12.5	12.7	8.7	5.1
	30.0 m	12.2	11.1	7.4	4.3	11.7	11.9	8.0	4.7	11.3	11.5	8.4	4.9
	32.0 m	11.2	10.4	7.2	4.2	10.7	10.9	7.7	4.5	10.3	10.5	8.1	4.7
	34.0 m	10.3	9.7	6.9	4.0	9.8	10.0	7.5	4.3	9.4	9.6	7.8	4.6
	36.0 m		9.2	6.7	3.8	9.0	9.2	7.3	4.2	8.6	8.8	7.6	4.4
	38.0 m		8.7	6.5	3.7	8.3	8.5	7.1	4.0	7.9	8.1	7.4	4.2
	40.0 m		8.3	6.3	3.5	7.7	7.9	6.9	3.9	7.3	7.5	7.2	4.1
	42.0 m			6.2	3.4	7.2	7.3	6.7	3.8	6.8	7.0	7.0	4.0
	44.0 m			6.1	3.3		6.8	6.5	3.6	6.3	6.5	6.7	3.8
	46.0 m			6.0	3.2		6.4	6.4	3.5	5.8	6.0	6.2	3.7
	48.0 m				3.1		6.0	6.2	3.4		5.6	5.8	3.6
	50.0 m				3.0			5.8	3.3		5.2	5.4	3.5
	52.0 m							5.4	3.2		4.9	5.1	3.4
	54.0 m							5.1	3.2			4.8	3.3
	56.0 m								3.1			4.5	3.3
	58.0 m								3.0			4.2	3.2
	60.0 m												3.1
	62.0 m												3.1
	64.0 m												3.0

Boom length		45.7 m				51.8 m				61.0 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	12.0 m	13.6/26.8											
	14.0 m	26.8	15.7/19.1			14.6/26.8							
	16.0 m	26.8	19.1			26.6	16.7/19.1			16.2/21.2			
	18.0 m	22.8	18.9	9.9		22.5	19.0	19.1/9.9		20.7	18.3/19.1		
	20.0 m	19.6	18.6	9.7	20.1/5.9	19.4	18.8	9.8	21.2/5.9	18.9	18.9	20.7/9.9	
	22.0 m	17.2	17.5	9.6	5.8	16.9	17.2	9.6	5.8	16.4	16.8	9.8	22.8/5.9
	24.0 m	15.2	15.5	9.4	5.7	14.9	15.2	9.5	5.7	14.4	14.7	9.6	5.8
	26.0 m	13.5	13.8	9.3	5.5	13.2	13.5	9.4	5.6	12.7	13.0	9.5	5.7
	28.0 m	12.1	12.4	9.0	5.3	11.8	12.1	9.2	5.5	11.3	11.6	9.4	5.6
	30.0 m	10.9	11.2	8.7	5.1	10.6	10.9	8.9	5.3	10.1	10.4	9.3	5.5
	32.0 m	9.9	10.2	8.4	4.9	9.6	9.9	8.7	5.1	9.1	9.4	9.1	5.3
	34.0 m	9.0	9.3	8.1	4.7	8.7	9.0	8.4	4.9	8.2	8.5	8.8	5.2
	36.0 m	8.2	8.5	7.9	4.6	7.9	8.2	8.2	4.8	7.4	7.7	8.0	5.0
	38.0 m	7.6	7.8	7.7	4.4	7.2	7.5	7.8	4.6	6.7	7.0	7.3	4.9
	40.0 m	6.9	7.1	7.4	4.3	6.6	6.8	7.1	4.5	6.1	6.3	6.7	4.7
	42.0 m	6.4	6.6	6.9	4.2	6.1	6.3	6.6	4.3	5.5	5.8	6.1	4.6
	44.0 m	5.9	6.1	6.3	4.0	5.6	5.8	6.1	4.2	5.0	5.3	5.6	4.4
	46.0 m	5.4	5.6	5.9	3.9	5.1	5.3	5.6	4.1	4.6	4.8	5.1	4.3
	48.0 m	5.0	5.2	5.5	3.8	4.7	4.9	5.2	4.0	4.1	4.4	4.7	4.2
	50.0 m	4.7	4.8	5.1	3.7	4.3	4.5	4.8	3.9	3.7	3.9	4.3	4.1
	52.0 m	4.3	4.5	4.7	3.6	4.0	4.2	4.4	3.8	3.3	3.5	3.9	4.0
	54.0 m		4.2	4.4	3.5	3.7	3.9	4.1	3.7	2.9	3.1	3.5	3.7
	56.0 m		3.9	4.1	3.4	3.3	3.5	3.8	3.6	2.5	2.8	3.2	3.3
	58.0 m		3.6	3.8	3.3	3.0	3.2	3.5	3.5	2.2	2.5	2.8	3.0
	60.0 m			3.6	3.3		2.9	3.2	3.3		2.2	2.5	2.6
	62.0 m			3.3	3.2		2.6	2.9	3.0			2.2	2.4
	64.0 m			3.1	3.1		2.4	2.7	2.8			2.0	2.1
	66.0 m				2.9			2.4	2.5				
	68.0 m				2.7			2.2	2.3				
	70.0 m				2.5				2.1				

Note: 1. Rating according to DIN 15018/3 and prEN 13000.
2. Rating shown in are determined by the strength of the boom or other structural components.
3. The own weight of all load carrying devices of main boom tackle must be subtracted from the capacity of the offset jib at radius.

FIXED JIB LIFTING CAPACITY

(Counterweight: 53.0 t, Carbody Weight: 10.0 t, without main hook)

Jib Offset Angle: 30°

Unit: Metric tons

Boom length		24.4 m				33.5 m				39.6 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	10.0 m												
	12.0 m	13.5/18.2											
	14.0 m	17.8				15.1/18.2							
	16.0 m	16.4	17.5/12.4			17.7				16.2/18.3			
	18.0 m	15.2	12.1			16.5	19.0/12.5			17.2			
	20.0 m	14.3	11.2	21.4/7.4		15.6	12.1			16.3	20.1/12.5		
	22.0 m	13.4	10.5	7.4		14.7	11.3	23.0/7.5		15.5	11.8		
	24.0 m	12.7	9.8	7.2	25.3/4.1	14.0	10.7	7.4		14.7	11.2	7.5	
	26.0 m	12.1	9.2	7.0	4.0	13.4	10.1	7.2	26.9/4.1	14.1	10.6	7.3	27.9/4.0
	28.0 m	11.6	8.8	6.8	3.8	12.8	9.6	7.0	4.0	13.5	10.1	7.1	4.0
	30.0 m	11.1	8.3	6.5	3.7	12.3	9.2	6.8	3.8	13.0	9.7	7.0	3.9
	32.0 m	10.8	7.9	6.2	3.6	11.9	8.8	6.7	3.7	12.2	9.3	6.8	3.8
	34.0 m	10.5	7.6	5.9	3.5	11.5	8.4	6.4	3.6	11.1	8.9	6.7	3.7
	36.0 m		7.3	5.6	3.4	10.6	8.1	6.1	3.5	10.2	8.6	6.4	3.6
	38.0 m		7.1	5.4	3.3	9.8	7.8	5.9	3.4	9.4	8.3	6.2	3.5
	40.0 m		7.0	5.2	3.2	9.1	7.6	5.7	3.3	8.7	8.0	6.0	3.4
	42.0 m			5.0	3.1	8.2	7.4	5.5	3.3	8.1	7.8	5.8	3.4
	44.0 m			4.9	3.1		7.2	5.3	3.2	7.5	7.6	5.6	3.3
	46.0 m			4.8	3.0		7.0	5.2	3.1	6.8	7.4	5.4	3.2
	48.0 m				3.0		6.9	5.0	3.1	6.0	6.9	5.3	3.2
	50.0 m				2.9			4.9	3.0		6.4	5.1	3.1
	52.0 m				2.9			4.8	3.0		5.9	5.0	3.1
	54.0 m							4.7	2.9		5.1	4.9	3.0
	56.0 m								2.9			4.8	3.0
	58.0 m								2.9			4.8	2.9
	60.0 m								2.9			4.3	2.9
	62.0 m												2.9
	64.0 m												2.9
	66.0 m												2.9

Boom length		45.7 m				51.8 m				61.0 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	14.0 m												
	16.0 m	17.2/18.2											
	18.0 m	17.8				18.3/18.2				19.9/18.1			
	20.0 m	16.9	21.2/12.5			17.4				18.1			
	22.0 m	16.1	12.2			16.7	22.2/12.5			17.3	23.8/12.4		
	24.0 m	15.4	11.6	25.1/7.5		15.9	11.9			16.7	12.4		
	26.0 m	14.7	11.0	7.4		15.3	11.4	26.1/7.5		15.3	11.9	27.7/7.5	
	28.0 m	14.2	10.5	7.3	29.0/4.1	14.2	10.9	7.3		13.8	11.4	7.5	
	30.0 m	13.0	10.1	7.1	4.0	12.8	10.5	7.2	30.1/4.0	12.4	11.0	7.3	31.6/4.0
	32.0 m	11.9	9.7	7.0	3.9	11.6	10.1	7.1	3.9	11.2	10.6	7.2	4.0
	34.0 m	10.8	9.3	6.8	3.8	10.6	9.7	6.9	3.8	10.1	10.2	7.1	3.9
	36.0 m	9.9	9.0	6.7	3.7	9.7	9.4	6.8	3.7	9.2	9.8	6.9	3.8
	38.0 m	9.1	8.7	6.5	3.6	8.9	9.1	6.7	3.7	8.4	9.0	6.8	3.7
	40.0 m	8.4	8.4	6.3	3.5	8.1	8.6	6.5	3.6	7.7	8.2	6.7	3.7
	42.0 m	7.8	8.2	6.1	3.4	7.5	8.0	6.3	3.5	7.0	7.6	6.6	3.6
	44.0 m	7.2	7.6	5.9	3.4	6.9	7.4	6.1	3.4	6.4	7.0	6.4	3.5
	46.0 m	6.7	7.1	5.7	3.3	6.4	6.8	5.9	3.4	5.9	6.4	6.2	3.5
	48.0 m	6.2	6.6	5.5	3.2	5.9	6.3	5.8	3.3	5.4	5.9	6.1	3.4
	50.0 m	5.5	6.1	5.4	3.2	5.5	5.9	5.6	3.2	4.9	5.4	5.8	3.3
	52.0 m	4.8	5.7	5.3	3.1	4.9	5.4	5.5	3.2	4.4	5.0	5.3	3.3
	54.0 m		5.3	5.1	3.1	4.4	5.1	5.3	3.1	3.9	4.6	4.9	3.2
	56.0 m		4.8	5.0	3.0	3.8	4.7	5.0	3.1	3.5	4.2	4.6	3.2
	58.0 m		4.2	4.9	3.0	3.3	4.2	4.6	3.1	3.1	3.8	4.2	3.1
	60.0 m			4.5	3.0		3.8	4.3	3.0	2.7	3.4	3.8	3.1
	62.0 m			4.0	2.9		3.3	3.9	3.0		3.0	3.4	3.1
	64.0 m			3.5	2.9		2.8	3.5	2.9		2.6	3.1	3.0
	66.0 m			3.0	2.9			3.1	2.9			2.7	3.0
	68.0 m				2.9			2.7	2.9			2.4	2.7
	70.0 m				2.9			2.3	2.9				2.4

Note: 1. Rating according to DIN 15018/3 and prEN 13000.
2. Rating shown in are determined by the strength of the boom or other structural components.
3. The own weight of all load carrying devices of main boom tackle must be subtracted from the capacity of the offset jib at radius.

FIXED JIB LIFTING CAPACITY

CKE1350

(Counterweight: 48.0 t, without Carbody Weight, without main hook)

Jib Offset Angle: 30°

Unit: Metric tons

Boom length		24.4 m				33.5 m				39.6 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	10.0 m												
	12.0 m	13.5/18.2											
	14.0 m	17.8				15.1/18.2							
	16.0 m	16.4	17.5/12.4			17.7				16.2/18.3			
	18.0 m	15.2	12.1			16.5	19.0/12.5			17.2			
	20.0 m	14.3	11.2	21.4/7.4		15.6	12.1			16.3	20.1/12.5		
	22.0 m	13.4	10.5	7.4		14.7	11.3	23.0/7.5		15.5	11.8		
	24.0 m	12.7	9.8	7.2	25.3/4.1	14.0	10.7	7.4		14.7	11.2	7.5	
	26.0 m	12.1	9.2	7.0	4.0	13.4	10.1	7.2	26.9/4.1	14.1	10.6	7.3	27.9/4.0
	28.0 m	11.6	8.8	6.8	3.8	12.8	9.6	7.0	4.0	12.9	10.1	7.1	4.0
	30.0 m	11.1	8.3	6.5	3.7	11.9	9.2	6.8	3.8	11.6	9.7	7.0	3.9
	32.0 m	10.8	7.9	6.2	3.6	10.9	8.8	6.7	3.7	10.6	9.3	6.8	3.8
	34.0 m	10.4	7.6	5.9	3.5	10.0	8.4	6.4	3.6	9.7	8.9	6.7	3.7
	36.0 m		7.3	5.6	3.4	9.2	8.1	6.1	3.5	8.8	8.6	6.4	3.6
	38.0 m		7.1	5.4	3.3	8.4	7.8	5.9	3.4	8.1	8.3	6.2	3.5
	40.0 m		7.0	5.2	3.2	7.8	7.6	5.7	3.3	7.5	7.9	6.0	3.4
	42.0 m			5.0	3.1	7.2	7.4	5.5	3.3	6.9	7.3	5.8	3.4
	44.0 m			4.9	3.1		7.1	5.3	3.2	6.4	6.8	5.6	3.3
	46.0 m			4.8	3.0		6.6	5.2	3.1	5.9	6.3	5.4	3.2
	48.0 m				3.0		6.1	5.0	3.1	5.5	5.8	5.3	3.2
	50.0 m				2.9			4.9	3.0		5.4	5.1	3.1
	52.0 m				2.9			4.8	3.0		5.0	5.0	3.1
	54.0 m							4.7	2.9		4.7	4.9	3.0
	56.0 m								2.9			4.6	3.0
	58.0 m								2.9			4.3	2.9
	60.0 m								2.9			4.0	2.9
	62.0 m												2.9
	64.0 m												2.9
	66.0 m												2.9

Boom length		45.7 m				51.8 m				61.0 m			
Jib length		12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m	12.2 m	18.3 m	24.4 m	30.5 m
Working radius	12.0 m												
	14.0 m												
	16.0 m	17.2/18.2											
	18.0 m	17.8				18.3/18.2				19.9/18.1			
	20.0 m	16.9	21.2/12.5			17.4				18.1			
	22.0 m	16.1	12.2			16.7	22.2/12.5			17.2	23.8/12.4		
	24.0 m	15.4	11.6	25.1/7.5		15.5	11.9			15.1	12.4		
	26.0 m	14.0	11.0	7.4		13.8	11.4	26.1/7.5		13.4	11.9	27.7/7.5	
	28.0 m	12.6	10.5	7.3	29.0/4.1	12.3	10.9	7.3		11.9	11.4	7.5	
	30.0 m	11.3	10.1	7.1	4.0	11.1	10.5	7.2	30.1/4.0	10.7	11.0	7.3	31.6/4.0
	32.0 m	10.3	9.7	7.0	3.9	10.0	10.1	7.1	3.9	9.6	10.2	7.2	4.0
	34.0 m	9.3	9.3	6.8	3.8	9.1	9.6	6.9	3.8	8.6	9.3	7.1	3.9
	36.0 m	8.5	9.0	6.7	3.7	8.3	8.8	6.8	3.7	7.8	8.4	6.9	3.8
	38.0 m	7.8	8.3	6.5	3.6	7.5	8.0	6.7	3.7	7.1	7.7	6.8	3.7
	40.0 m	7.2	7.6	6.3	3.5	6.9	7.4	6.5	3.6	6.4	7.0	6.7	3.7
	42.0 m	6.6	7.0	6.1	3.4	6.3	6.8	6.3	3.5	5.8	6.4	6.6	3.6
	44.0 m	6.1	6.5	5.9	3.4	5.8	6.2	6.1	3.4	5.3	5.8	6.2	3.5
	46.0 m	5.6	6.0	5.7	3.3	5.3	5.7	5.9	3.4	4.8	5.3	5.7	3.5
	48.0 m	5.2	5.5	5.5	3.2	4.9	5.3	5.6	3.3	4.4	4.9	5.2	3.4
	50.0 m	4.8	5.1	5.4	3.2	4.5	4.9	5.2	3.2	4.0	4.5	4.8	3.3
	52.0 m	4.4	4.7	5.0	3.1	4.1	4.5	4.8	3.2	3.5	4.1	4.4	3.3
	54.0 m		4.4	4.6	3.1	3.8	4.2	4.4	3.1	3.1	3.7	4.0	3.2
	56.0 m		4.1	4.3	3.0	3.4	3.8	4.1	3.1	2.7	3.3	3.7	3.2
	58.0 m		3.8	4.0	3.0	3.1	3.5	3.8	3.1	2.4	2.9	3.3	3.1
	60.0 m			3.7	3.0		3.2	3.5	3.0	2.1	2.6	3.0	3.1
	62.0 m			3.5	2.9		2.9	3.2	3.0		2.3	2.6	2.9
	64.0 m			3.2	2.9		2.6	2.9	2.9		2.0	2.3	2.6
	66.0 m			2.9	2.9			2.6	2.9			2.0	2.3
	68.0 m				2.9			2.3	2.6				2.0
	70.0 m				2.7			2.1	2.3				

Note:

1. Rating according to DIN 15018/3 and prEN 13000.

2. Rating shown in are determined by the strength of the boom or other structural components.


















3. The own weight of all load carrying devices of main boom tackle must be subtracted from the capacity of the offset jib at radius.



CKE1350

SPECIFICATIONS OF PARTS AND ATTACHMENTS

Dimensions: mm Weight: kg

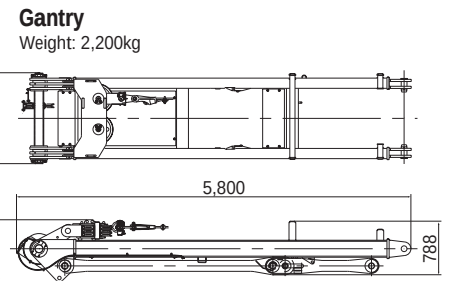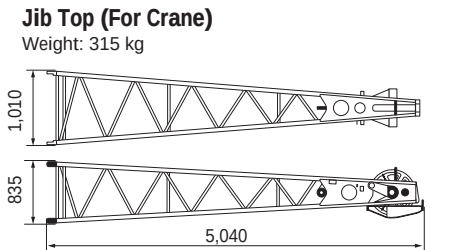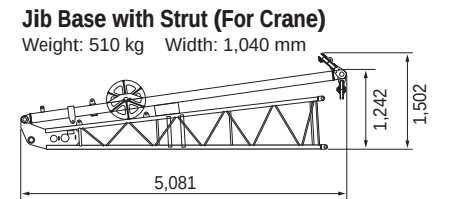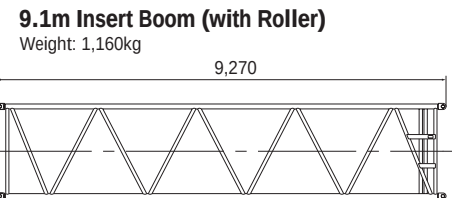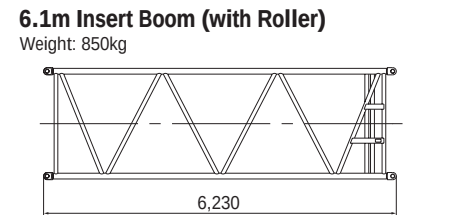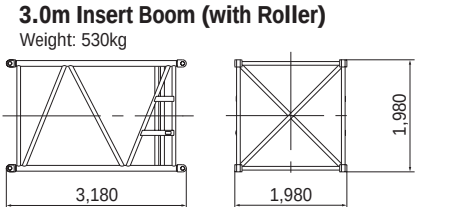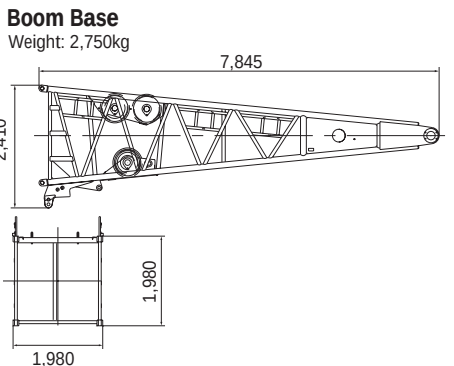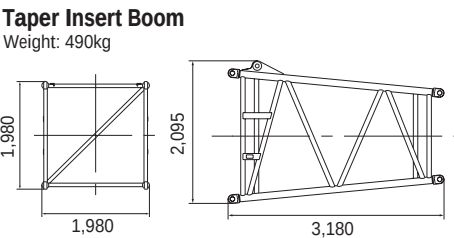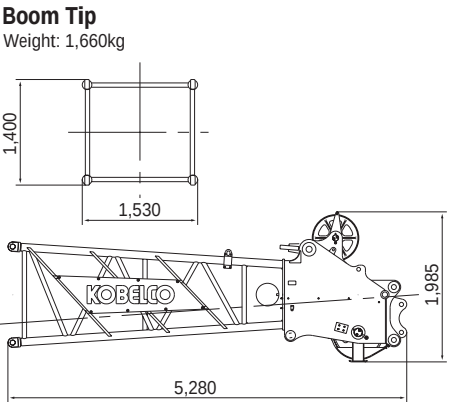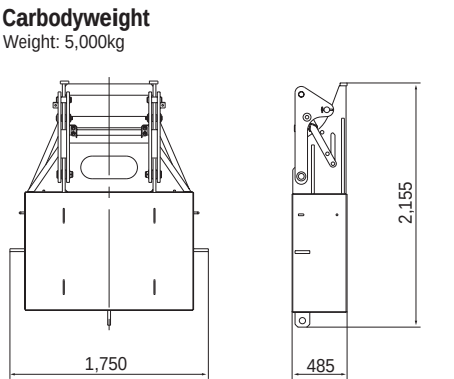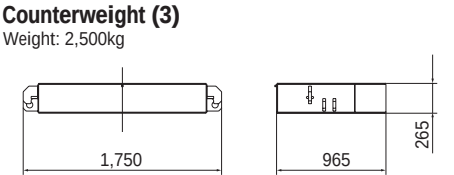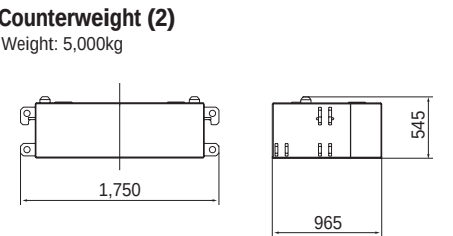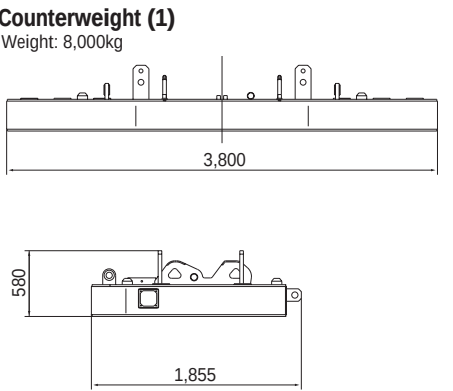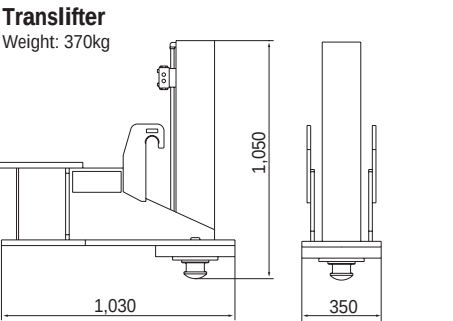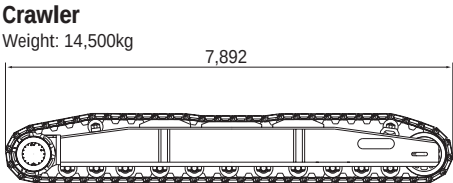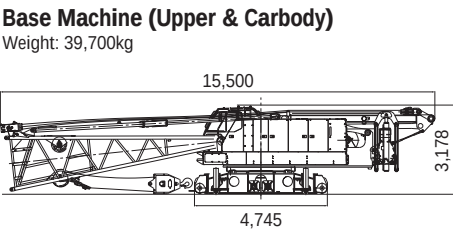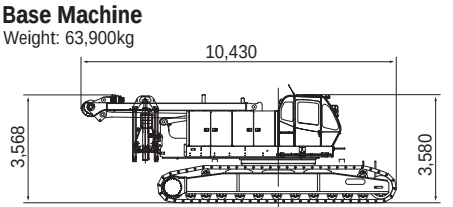

OTHER ATTACHMENTS		
Attachment	Weight	Dimensions (L x W x H)
3.0 m Insert Jib	110 kg	3,130 x 840 x 1,020 mm
6.1 m Insert Jib	190 kg	6,175 x 840 x 1,020 mm
Upper Spreader	485 kg	2,045 x 365 x 880 mm
Lower Spreader	315 kg	1,150 x 300 x 930 mm
Self Removable	1,680 kg	1,015 x 1,760 x 2,180 mm
Backstop	515 kg	6,880 x 285 mm

Note: Due to our policy of continual product improvements all designs and specifications are subject to change without advance notice.



KOBELCO CRANES CO., LTD.

17-1, Higashi-Gotanda 2-chome, Shinagawa-ku, TOKYO, 141-8626 JAPAN
Tel: ++81 (0) 3-5789-2130 Fax: ++81 (0) 3-5789-3372