



# HYDRAULIC CRAWLER CRANE

## ***CKE1800***

**KOBELCO**

Model: CKE1800-1F



**Max. Lifting Capacity: 180 ton x 3.75 m**  
**Max. Crane Boom Length: 85.3 m**  
**Max. Long Boom Length: 85.3 m**  
**Max. Fixed Jib Combination: 73.2 m + 30.5 m**  
**Max. Luffing Jib Combination: 54.9 m + 51.8 m**



**ASIAGROUP LEASING PTE LTD**

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

Email : [asiagroup@asiacranes.com](mailto:asiagroup@asiacranes.com) Website : [www.asiacranes.com](http://www.asiacranes.com)





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Crane Boom

Max. Lifting Capacity:  
160 metric ton x 4.4 m  
Max. Boom Length:  
85.3 m



## Heavy Duty Crane Boom

Max. Lifting Capacity:  
180 metric ton x 3.75 m  
Max. Boom Length:  
12.2 m



## Long Boom

Max. Lifting Capacity:  
40.1 metric ton x 12.0 m  
Max. Boom Length:  
85.3 m



## Luffing Boom

Max. Lifting Capacity:  
110 metric ton x 5.2 m  
Max. Boom Length:  
54.9 m







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Fixed Jib

Max. Lifting Capacity:  
26.8 metric ton x 15.2 m  
Max. Combination:  
73.2 m + 30.5 m



## Luffing Jib

Max. Lifting Capacity:  
48.6 metric ton x 9.14 m  
Max. Combination:  
54.9 m + 51.8 m



## Luffing Boom with Luffing Jib

Max. Lifting Capacity:  
71.5 metric ton x 9.0 m



## CONTENTS

|                                                        |    |
|--------------------------------------------------------|----|
| Configuration .....                                    | 1  |
| Specifications .....                                   | 3  |
| General Dimensions .....                               | 5  |
| <b>Boom and Jib Arrangements</b>                       |    |
| Crane Boom Arrangements .....                          | 7  |
| Fixed Jib Arrangements .....                           | 8  |
| Long Boom Arrangements .....                           | 8  |
| Luffing Boom Arrangements for Luffing .....            | 9  |
| Luffing Boom Arrangements for Crane .....              | 9  |
| Luffing Jib Arrangements .....                         | 10 |
| <b>Working Ranges and Lifting Capacities</b>           |    |
| Crane Boom Working Ranges .....                        | 12 |
| Crane Boom Lifting Capacity .....                      | 13 |
| Luffing Boom Working Ranges .....                      | 14 |
| Luffing Boom Lifting Capacity .....                    | 15 |
| Long Boom Working Ranges .....                         | 16 |
| Long Boom Lifting Capacity .....                       | 17 |
| Fixed Jib Working Ranges .....                         | 18 |
| Fixed Jib Lifting capacities .....                     | 19 |
| Luffing Jib Working Ranges .....                       | 21 |
| Luffing Jib Lifting Capacities .....                   | 23 |
| Luffing Boom Lifting Capacities with Luffing Jib ..... | 30 |
| Parts and Attachments .....                            | 31 |
| Transportation Plan .....                              | 33 |







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



## Power Plant

**Model:** Hino diesel engine P11C-UN**Type:** Water-cooled, direct fuel injection, with turbocharger  
Complies with NRMM (Europe) Tier III and USA EPA Tier III**Displacement:** 10.520 liters**Rated Power:** 247 kW/ 2,000 min<sup>-1</sup> {rpm} (ISO)**Max. torque:** 1,300 N·m/1,500 min<sup>-1</sup>**Cooling system:** Liquid, re-circulating bypass**Starter:** 24V / 6.0 kW**Radiator:** Corrugated type core, thermostatically controlled**Air cleaner:** Dry type with replaceable paper element**Throttle:** Electric throttle control, twist grip type**Fuel filter:** Replaceable paper element.**Batteries:** Two 12 V, 170 Ah/20 HR capacity batteries, series connected.**Fuel tank capacity:** 400 liters

## Hydraulic System

Four variable displacement piston pumps are driven by heavy-duty pump drive. Two of variable displacement pumps are used in the main hook hoist circuit, auxiliary hook hoist circuit, third hoist circuit and each propel circuit. One of the other two pumps is used in the boom hoist circuit, and the other is used in the swing circuit.

**Control:** Full-flow hydraulic control system for infinitely variable pressure to front and rear drums, boom hoist brakes and clutches. Controls respond instantly to the touch, delivering smooth function operation.

**Cooling:** Oil-to-air heat exchanger (plate-fin type)

**Filtration:** Full-flow and bypass type with replaceable element

**Electrical system:** All wiring corded for easy servicing, individual fused branch circuits.

### Max. relief valve pressure:

**Load hoist, boom hoist and propel system:**31.9 MPa {325 kgf/cm<sup>2</sup>}**Swing system:** 27.5 MPa {280 kgf/cm<sup>2</sup>}**Control system:** 7.0 MPa {71.3 kgf/cm<sup>2</sup>}**Reservoir capacity:** 550 liters

## Boom Hoisting System

Powered by a hydraulic motor through a planetary reducer.

**Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the boom hoist motor and operated through a counter-balance valve.

**Drum lock:** External ratchet for locking drum.

**Drum:** Double drum, grooved for 22 mm dia. wire rope.

**Line speed:** Double line on first drum layer

**Hoisting/Lowering:** 54 m/min

### Diameter of wire ropes

**Boom guy line:** 30 mm**Boom hoist reeving:** 16 parts of 22 mm dia. high strength wire rope

**Boom backstops:** Telescopic type with spring bumper  
Required for all boom lengths



## Load Hoist System

Front and rear drums for load hoist powered by a hydraulic variable plunger motors, driven through planetary reducers.

**Negative Brake:** A spring-set, hydraulically released multiple-disc brake is mounted on the hoist motor and operated through a counter-balance valve. (Positive free fall brake is optional item.)

**Drum lock:** External ratchet for locking drum

### Drums:

#### Front drum:

617.4 mm P.C.D. x 833.7 mm Lg. wide drum, grooved for 25 mm wire rope. Rope capacity is 430 m working length and 510 m storage length.

#### Rear drum:

617.1 mm P.C.D. x 833.7 mm Lg. wide drum, grooved for 25 mm wire rope. Rope capacity is 335 m working length and 510 m storage length.

Note: Rope lengths listed above denote drum capacity and may differ from actual rope lengths supplied when machinery is shipped.

**Line speed:** Single line on the first drum layer

**Hoisting/Lowering:** 100 m/min

**Line Pull (Single-line):**

**Rated line pull:** 132 kN {13.5 tf}

## Swing System

Swing unit is powered by hydraulic motor driving spur gears through planetary reducers (2 sets), the swing system provides 360° rotation.

**Swing parking brakes:** A spring-set, hydraulically released multiple-disc brake is mounted on swing motor.

**Swing circle:** Single-row ball bearing with an integral internally cut swing gear.

**Swing lock:** Manually, four position lock for transportation

**Swing speed:** 2.6 min<sup>-1</sup> {rpm}



## Upper Structure

Torsion-free precision machined upper frame. All components are located clearly and service friendly. Engine with low noise level. Complies with European Noise Regulations.

**Counterweight:** 60.0 ton







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



## Cab & Control

Totally enclosed, full vision cab with safety glass, fully adjustable, high backed seat with a head-rest and armrests, and intermittent wiper and window washer (skylight and front window).

### Cab fittings:

Air conditioner, convenient compartment (for tool), cup holder, ashtray, cigarette lighter, sun visor, roof blind, tinted glass, floor mat, foot-rest, shoe tray

### Controls:

Four adjustable levers for front drum, rear drum, boom drum and swing controls, and boom hoist pedal.



## Lower Structure

Steel-welded carbody with axles. Crawler assemblies are designed with quick disconnect feature for individual removal as a unit from axles. Crawler belt tension is maintained by hydraulic jack force on the track-adjusting bearing block.

**Carbody weight:** 20.0 ton

**Crawler drive:** Independent hydraulic propel drive is built into each crawler side frame. Each drive consists of a hydraulic motor propelling a driving tumbler through a planetary gear box. Hydraulic motor and gear box are built into the crawler side frame within the shoe width.

**Crawler brakes:** Spring-set, hydraulically released parking brakes are built into each propel drive.

**Steering mechanism:** A hydraulic propel system provides both skid steering (driving one track only) and counter-rotating steering (driving each track in opposite directions).

**Track rollers:** Sealed track rollers for maintenance-free operation.

**Shoes (flat):** 64 shoes, 1,070 mm wide each crawler

**Max. travel speed:** 1.1/0.7 km/h

**Max. gradeability:** 30%



## Weight

Including upper and lower machine, 60.0 ton counterweight and 20.0 ton carbody weight, basic boom (or basic boom + basic jib), hook, and other accessories.

| Specification      | Weight             | Ground pressure                      |
|--------------------|--------------------|--------------------------------------|
| <b>Crane boom</b>  | Approx. 164 ton,   | 103 kPa {1.06 kgf/cm <sup>2</sup> }  |
| <b>Luffing jib</b> | Approx. 171.0 ton, | 95.0 kPa {0.97 kgf/cm <sup>2</sup> } |



## Attachment

### Boom and Jib:

Welded lattice construction using tubular, high-tensile steel chords with pin connections between sections.

### Boom and Jib Length

|              | Min. Length<br>(Min. Combination) | Max. Length<br>(Max. Combination) |
|--------------|-----------------------------------|-----------------------------------|
| Crane Boom   | 15.2 m                            | 85.3 m                            |
| Luffing Boom | 15.2 m                            | 54.9 m                            |
| Long Boom    | 61.0 m                            | 85.3 m                            |
| Fixed Jib    | 24.4 m + 12.2 m                   | 73.2 m + 30.5 m                   |
| Luffing Jib  | 21.3 m + 21.3 m                   | 54.9 m + 51.8 m                   |



## Main Specifications (Model: CKE 1800-1F)

|                              |                             |
|------------------------------|-----------------------------|
| <b>Heavy Duty Crane Boom</b> |                             |
| Max. Lifting Capacity        | 180 t/3.75 m                |
| Max. Length                  | 12.2 m                      |
| <b>Crane Boom</b>            |                             |
| Max. Lifting Capacity        | 160 t/4.4 m                 |
| Max. Length                  | 85.3 m                      |
| <b>Luffing Boom</b>          |                             |
| Max. Lifting Capacity        | 110 t/5.2 m                 |
| Max. Length                  | 54.9 m                      |
| <b>Long Boom</b>             |                             |
| Max. Lifting Capacity        | 40.1 t/12.0 m               |
| Max. Length                  | 85.3 m                      |
| <b>Fixed Jib</b>             |                             |
| Max. Lifting Capacity        | 26.8 t/15.2 m               |
| Max. Length                  | 30.5 m                      |
| Max. Combination             | 73.2 m + 30.5 m             |
| <b>Luffing Jib</b>           |                             |
| Max. Lifting Capacity        | 48.6 t/9.14 m               |
| Jib Length                   | 21.3 m ~ 51.8 m             |
| Max. Combination             | 54.9 m + 51.8 m             |
| Luffing Angle                | 60° ~ 88°                   |
| <b>Working Speed</b>         |                             |
| Swing Speed                  | 2.6 min <sup>-1</sup> {rpm} |
| Travel Speed                 | 1.1/0.7 km/h                |



|                              |                                              |
|------------------------------|----------------------------------------------|
| <b>Power Plant</b>           |                                              |
| Model                        | Hino P11C-UN                                 |
| Engine Output                | 247 kW/2,000 min <sup>-1</sup> {rpm}         |
| Fuel Tank Capacity           | 400 liters                                   |
| <b>Main &amp; Aux. Winch</b> |                                              |
| Max. Line Speed              | 100 m/min (1st layer)                        |
| Rated Line Pull              | 132 kN {13.5 tf}                             |
| Wire Rope Diameter           | 25 mm                                        |
| Wire Rope Length             | 430 m (Main) 335 m (Aux.)                    |
| Brake Type                   | Spring set hydraulically released (Negative) |
| Free Fall Brake              | Wet-type multiple disc brake (Optional)      |
| <b>Hydraulic System</b>      |                                              |
| Pumps                        | 4 variable displacement                      |
| Max. Pressure                | 31.9 MPa {325 kgf/cm <sup>2</sup> }          |
| Hydraulic Tank Capacity      | 550 liters                                   |
| <b>Self Erection Device</b>  | Standard                                     |
| <b>Weight</b>                |                                              |
| Operating Weight*            | Approx. 164 t                                |
| Ground Pressure*             | 103 kPa {1.06 kgf/cm <sup>2</sup> }          |
| Counterweight                | 60.0 t (Upper), 20.0 t (Lower)               |
| Transportation Weight**      | Approx. 44.0 t                               |

\* Including upper and lower machine, 60.0 ton counterweight, 20.0 ton carbody weight, basic boom, hook, and other accessories.

\*\* Base machine with boom base, trans-lifter, main and aux. winches (non-freefall) including wire rope, self removal device.

Units are SI units. { } indicates conventional units.





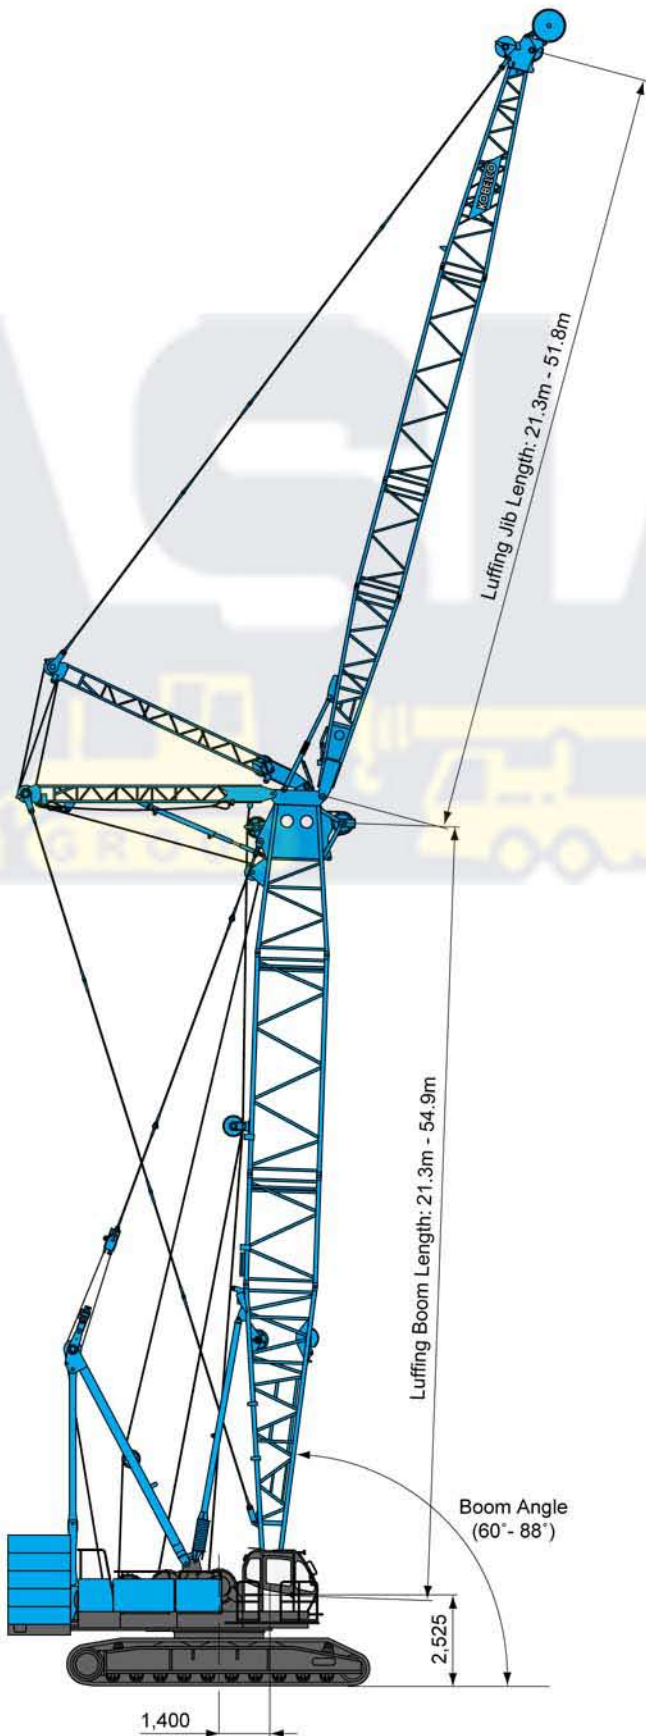


# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Jib

(Unit: mm)







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Crane Boom Arrangements

| Boom length m (ft) | Boom arrangement          |
|--------------------|---------------------------|
| 12.2 (40)          | For Heavy Duty Crane Boom |
| 15.2 (50)          |                           |
| 18.3 (60)          |                           |
| 21.3 (70)          |                           |
| 24.4 (80)          |                           |
| 27.4 (90)          |                           |
| 30.5 (100)         |                           |
| 33.5 (110)         |                           |
| 36.6 (120)         |                           |
| 39.6 (130)         |                           |
| 42.7 (140)         |                           |
| 45.7 (150)         |                           |
| 48.8 (160)         |                           |
| 51.8 (170)         |                           |
| 54.9 (180)         |                           |

| Boom length m (ft) | Boom arrangement |
|--------------------|------------------|
| 57.9 (190)         |                  |
| 61.0 (200)         |                  |
| 64.0 (210)         |                  |
| 67.1 (220)         |                  |
| 70.1 (230)         |                  |
| 73.2 (240)         |                  |
| 76.2 (250)         |                  |
| 79.3 (260)         |                  |
| 82.3 (270)         |                  |
| 85.3 (280)         |                  |

| Symbol | Boom Length | Remarks                   |
|--------|-------------|---------------------------|
|        | 8.5 m       | Boom Base                 |
|        | 3.7 m       | Heavy Duty Crane Boom Top |
|        | 6.7 m       | Boom Top                  |
|        | 3.0 m       | Insert Boom               |
|        | 6.1 m       | Insert Boom               |
|        | 9.1 m       | Insert Boom               |
|        | 12.2 m      | Insert Boom               |

↗ mark shows the guy line installing position when the fixed jib is used.

※ Indicates the most flexible combination of insert booms, which can be modified to form all shorter boom arrangements.



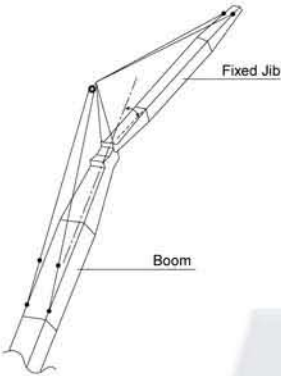




# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Fixed Jib Arrangements



| Crane boom length | Jib length m (ft) | Jib arrangement |
|-------------------|-------------------|-----------------|
| 24.4 m<br>73.2 m  | 12.2 (40)         |                 |
|                   | 18.3 (60)         |                 |
|                   | 24.4 (80)         |                 |
|                   | 30.5 (100)        |                 |



| Symbol | Jib Length | Remarks    |
|--------|------------|------------|
|        | 4.6 m      | Jib Base   |
|        | 4.6 m      | Jib Top    |
|        | 3.0 m      | Insert Jib |
|        | 6.1 m      | Insert Jib |

## Long Boom Arrangements

| Boom length m (ft) | Long Boom arrangement |
|--------------------|-----------------------|
| 61.0 (200)         |                       |
| 64.0 (210)         |                       |
| 67.1 (220)         |                       |
| 70.1 (230)         |                       |
| 73.2 (240)         |                       |
| 76.2 (250)         |                       |
| 79.3 (260)         |                       |
| 82.3 (270)         |                       |
| 85.3 (280)         |                       |



| Symbol | Long Boom Length | Remarks            |
|--------|------------------|--------------------|
|        | 8.5 m            | Boom Base          |
|        | 6.4 m            | Luffing Jib Top    |
|        | 3.0 m            | Insert Boom        |
|        | 6.1 m            | Insert Boom        |
|        | 9.1 m            | Insert Boom        |
|        | 3.6 m            | Tapered Boom       |
|        | 3.0 m            | Luffing Insert Jib |
|        | 6.1 m            | Luffing Insert Jib |
|        | 9.1 m            | Luffing Insert Jib |

※ Indicates the most flexible combination of insert long booms, which can be modified to form all shorter long boom arrangements.





















# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Boom Arrangements for Luffing

| Boom length m (ft) | Boom arrangement                                                                                                                                                           |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 21.3 (70)          |                                                                                           |
| 24.4 (80)          | <br>     |
| 27.4 (90)          | <br>     |
| 30.5 (100)         | <br>     |
| 33.5 (110)         | <br>  |
| 36.6 (120)         | <br> |









| Boom length m (ft) | Boom arrangement                                                                                                                                                             |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 39.6 (130)         | <br>       |
| 42.7 (140)         | <br>     |
| 45.7 (150)         | <br>     |
| 48.8 (160)         | <br>     |
| 51.8 (170)         | <br>  |
| 54.9 (180)         | <br> |








| Symbol                                                                                | Luffing Boom Length | Remarks          |
|---------------------------------------------------------------------------------------|---------------------|------------------|
|    | 8.5 m               | Boom Base        |
|    | 3.7 m               | Luffing Boom Top |
|   | 3.0 m               | Insert Boom      |
|  | 6.1 m               | Insert Boom      |
|  | 9.1 m               | Insert Boom      |

※ Indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.

## Luffing Boom Arrangements for Crane

| Boom length m (ft) | Boom arrangement                                                                                                                                                           |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15.2 (50)          |                                                                                         |
| 18.3 (60)          | <br> |
| 21.3 (70)          | <br> |
| 24.4 (80)          | <br> |
| 27.4 (90)          | <br> |
| 30.5 (100)         | <br> |
| 33.5 (110)         | <br> |

| Boom length m (ft) | Boom arrangement                                                                                                                                                             |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 36.6 (120)         | <br>   |
| 39.6 (130)         | <br>   |
| 42.7 (140)         | <br> |
| 45.7 (150)         | <br> |
| 48.8 (160)         | <br> |
| 51.8 (170)         | <br> |
| 54.9 (180)         | <br> |



| Symbol                                                                                | Luffing Boom Length | Remarks          |
|---------------------------------------------------------------------------------------|---------------------|------------------|
|  | 8.5 m               | Boom Base        |
|  | 3.7 m               | Luffing Boom Top |
|  | 3.0 m               | Insert Boom      |
|  | 6.1 m               | Insert Boom      |
|  | 9.1 m               | Insert Boom      |




※ Indicates the most flexible combination of insert luffing booms, which can be modified to form all shorter luffing boom arrangements.








# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Jib Arrangements

| Jib length m (ft) | Jib arrangement                                                                     |
|-------------------|-------------------------------------------------------------------------------------|
| 21.3 (70)         |    |
| 24.4 (80)         |    |
| 27.4 (90)         |    |
| 30.5 (100)        |    |
| 33.5 (110)        |  |

| Jib length m (ft) | Jib arrangement                                                                      |
|-------------------|--------------------------------------------------------------------------------------|
| 36.6 (120)        |    |
| 39.6 (130)        |    |
| 42.7 (140)        |    |
| 45.7 (150)        |    |
| 48.8 (160)        |  |
| 51.8 (170)        |  |

| Symbol                                                                              | Luffing Jib Length | Remarks            |
|-------------------------------------------------------------------------------------|--------------------|--------------------|
|  | 5.8 m              | Luffing Jib Base   |
|  | 6.4 m              | Luffing Jib Top    |
|  | 3.0 m              | Luffing Insert Jib |
|  | 6.1 m              | Luffing Insert Jib |
|  | 9.1 m              | Luffing Insert Jib |

※ Indicates the most flexible combination of insert luffing jibs, which can be modified to form all shorter luffing jib arrangements.

### Luffing Boom and Jib Combinations.

|                 |      | Jib Length (m) |      |      |      |      |      |      |      |      |      |      |
|-----------------|------|----------------|------|------|------|------|------|------|------|------|------|------|
|                 |      | 21.3           | 24.4 | 27.4 | 30.5 | 33.5 | 36.6 | 39.6 | 42.7 | 45.7 | 48.8 | 51.8 |
| Boom Length (m) | 21.3 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 24.4 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 27.4 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 30.5 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 33.5 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 36.6 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 39.6 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 42.7 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 45.7 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 48.8 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 51.8 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |
|                 | 54.9 | ○              | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    | ○    |

○ : Combinations which is allowed







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



## Hook Blocks

A range of hook blocks can be specified, each with a safety latch.

| Hooks              | Weight (kg) | No. of sheaves | No. of lines and max. rated loads (tons) |      |      |      |      |      |
|--------------------|-------------|----------------|------------------------------------------|------|------|------|------|------|
|                    |             |                | 1                                        | 2    | 3    | 4    | 5    | 6    |
| 180/160-ton        | 2,800       | 8              | -                                        | 26.8 | 40.1 | 53.5 | 66.9 | 80.3 |
| 110-ton            | 1,800       | 4              | -                                        | 26.8 | 40.1 | 53.5 | 66.9 | 80.3 |
| 70-ton             | 1,200       | 3              | -                                        | 26.8 | 40.1 | 53.5 | 66.9 | 70.0 |
| 35-ton             | 900         | 1              | -                                        | 26.8 | 35.0 | -    | -    | -    |
| 13.5-ton ball hook | 460         | 0              | 13.5                                     | -    | -    | -    | -    | -    |

| Hooks              | Weight (kg) | No. of sheaves | No. of lines and max. rated loads (tons) |       |       |       |       |       |
|--------------------|-------------|----------------|------------------------------------------|-------|-------|-------|-------|-------|
|                    |             |                | 7                                        | 8     | 9     | 10    | 12    | 14    |
| 180/160-ton        | 2,800       | 8              | 93.7                                     | 107.0 | 120.4 | 133.8 | 160.0 | 180.0 |
| 110-ton            | 1,800       | 4              | 93.7                                     | 107.0 | 110.0 | -     | -     | -     |
| 70-ton             | 1,200       | 3              | -                                        | -     | -     | -     | -     | -     |
| 35-ton             | 900         | 1              | -                                        | -     | -     | -     | -     | -     |
| 13.5-ton ball hook | 460         | 0              | -                                        | -     | -     | -     | -     | -     |



## Main Hoist Drum Rated Loads in Metric Tons

|                      |      |      |      |      |      |      |
|----------------------|------|------|------|------|------|------|
| No. of Parts of Line | 1    | 2    | 3    | 4    | 5    | 6    |
| Max. Loads (ton)     | 13.5 | 26.8 | 40.1 | 53.5 | 66.9 | 80.3 |

|                      |      |       |       |       |       |       |
|----------------------|------|-------|-------|-------|-------|-------|
| No. of Parts of Line | 7    | 8     | 9     | 10    | 12    | 14    |
| Max. Loads (ton)     | 93.7 | 107.0 | 120.4 | 133.8 | 160.0 | 180.0 |

## Symbols for Attachments:

|            |                                 |              |                              |           |                           |           |             |                               |
|------------|---------------------------------|--------------|------------------------------|-----------|---------------------------|-----------|-------------|-------------------------------|
|            |                                 |              |                              |           |                           |           |             |                               |
| Crane Boom | Auxiliary Sheave for Crane Boom | Luffing Boom | Aux. Sheave for Luffing Boom | Long Boom | Aux. Sheave for Long Boom | Fixed Jib | Luffing Jib | Luffing Boom with Luffing Jib |



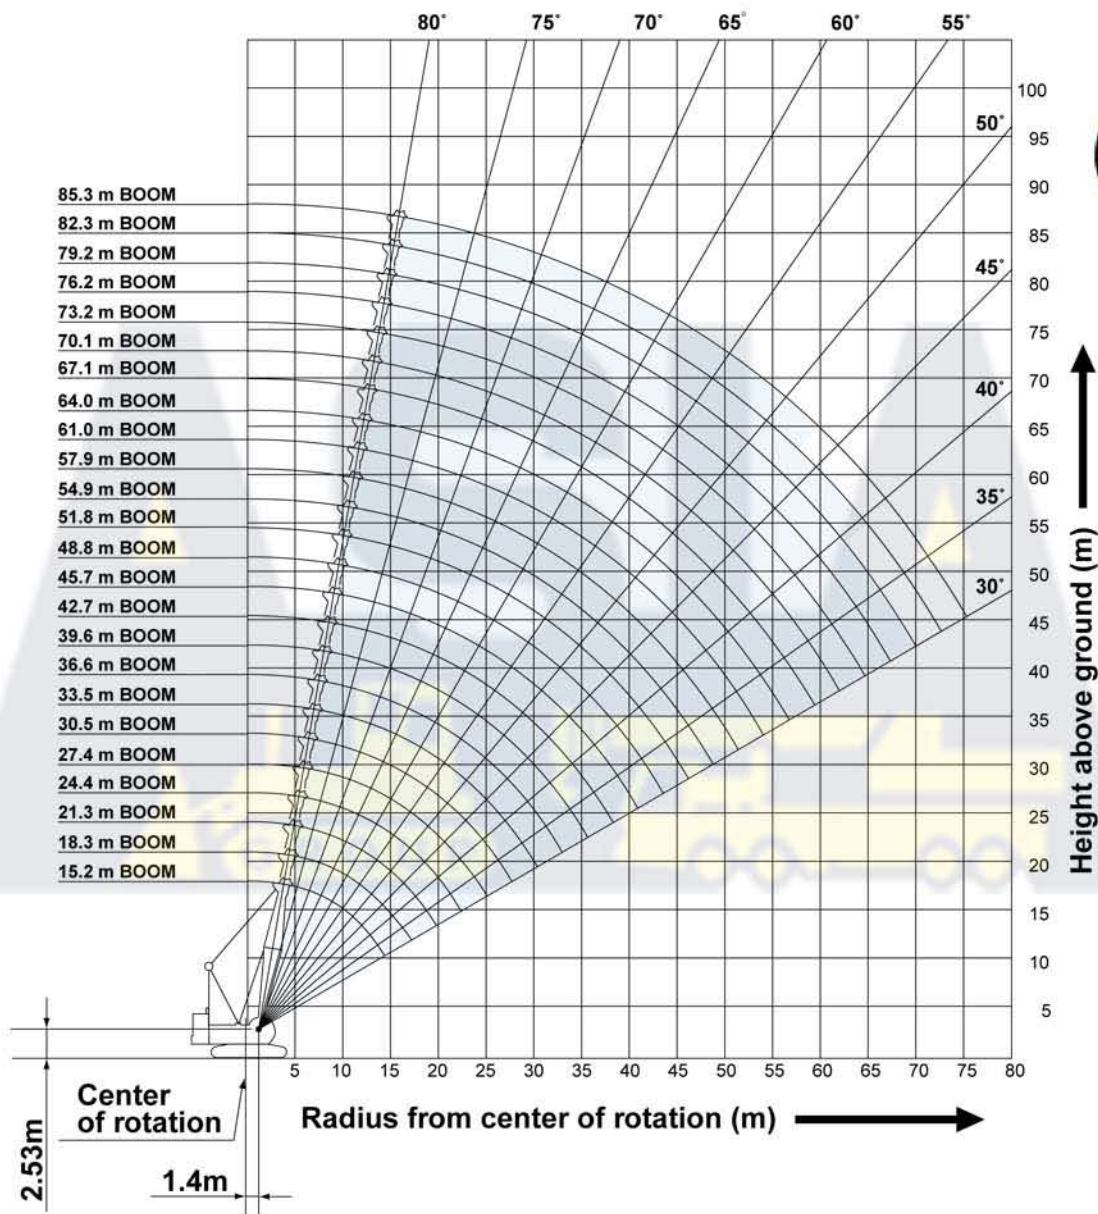




# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Crane Boom Working Ranges



### NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Deduct weight of hook block(s), slings and all other load handling accessories from main boom or auxiliary sheave ratings shown.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom inserts and guy lines must be arranged as shown in the "Operator's Manual".
9. Boom hoist reeving is 16 part line.
10. Gantry must be in raised position for all conditions.
11. Boom backstops are required for all boom lengths.
12. The boom should be erected over the front of crawlers, not laterally.
13. Ratings shown in   are determined by the strength of the boom or other structural component.
14. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
15. Crane boom ratings: Deduct weight of hook block(s), slings, and all other load handling accessories from crane boom ratings shown.
16. Auxiliary sheave ratings: Deduct 0.6 ton (weight of auxiliary sheave frame), weight of hook block(s), slings and all other load handling accessories from crane boom ratings shown, but should not exceed 26.8 tons.  
Crane boom lengths for auxiliary sheave mounting are 15.2 m to 82.3 m.
17. Crane boom ratings with auxiliary sheave: Deduct 0.6 ton, weight of hook block(s), slings and all other load handling accessories from crane boom ratings shown. Minimum ratings is 1.6 tons.
18. Heavy duty crane boom ratings: Deduct weight of hook block(s), slings and all other load handling accessories from crane boom ratings shown.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Crane Boom Lifting Capacity

Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| Working radius (m) | 12.2*       | 15.2       | 18.3       | 21.3       | 24.4       | 27.4       | 30.5       | 33.5       | 36.6       | 39.6       | 42.7       | 45.7      | 48.8       | 51.8       | Working radius (m) |
|--------------------|-------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|------------|------------|--------------------|
| 3.0                | 3.75m/180.0 |            |            |            |            |            |            |            |            |            |            |           |            |            | 3.0                |
| 4.0                | 171.5       | 4.4m/160.0 | 4.9m/144.2 |            |            |            |            |            |            |            |            |           |            |            | 4.0                |
| 5.0                | 140.5       | 141.6      | 141.6      | 5.4m/131.4 | 5.9m/121.3 |            |            |            |            |            |            |           |            |            | 5.0                |
| 6.0                | 119.1       | 119.3      | 119.3      | 119.3      | 119.3      | 6.4m/112.0 | 6.9m/103.9 |            |            |            |            |           |            |            | 6.0                |
| 7.0                | 102.0       | 102.7      | 102.7      | 102.7      | 102.7      | 102.7      | 102.5      | 7.4m/97.1  | 7.9m/90.6  |            |            |           |            |            | 7.0                |
| 8.0                | 88.1        | 89.5       | 89.5       | 89.5       | 89.5       | 89.5       | 89.5       | 89.5       | 89.5       | 8.4m/80.3  | 8.9m/76.8  |           |            |            | 8.0                |
| 9.0                | 76.8        | 79.0       | 79.0       | 79.0       | 79.0       | 79.0       | 79.0       | 79.0       | 79.0       | 78.4       | 76.3       | 9.4m/70.6 |            |            | 9.0                |
| 10.0               | 67.7        | 71.5       | 71.5       | 71.5       | 71.5       | 71.5       | 71.5       | 71.5       | 71.5       | 70.2       | 68.4       | 66.6      | 10.0m/65.4 | 10.5m/60.7 | 10.0               |
| 12.0               | 51.4        | 58.8       | 58.7       | 58.6       | 58.5       | 58.4       | 58.3       | 58.2       | 58.2       | 57.8       | 56.5       | 55.1      | 54.0       | 52.8       | 12.0               |
| 14.0               | 12.4m/50.0  | 47.2       | 47.7       | 47.6       | 47.4       | 47.3       | 47.2       | 47.0       | 47.0       | 46.9       | 46.7       | 46.5      | 46.0       | 45.0       | 14.0               |
| 16.0               |             | 14.8m/41.9 | 40.2       | 40.1       | 39.9       | 39.8       | 39.6       | 39.4       | 39.4       | 39.3       | 39.1       | 38.9      | 38.8       | 38.6       | 16.0               |
| 18.0               |             |            | 17.5m/35.9 | 34.4       | 34.2       | 34.1       | 34.0       | 33.7       | 33.7       | 33.6       | 33.3       | 33.2      | 33.1       | 32.9       | 18.0               |
| 20.0               |             |            |            | 30.1       | 29.8       | 29.6       | 29.5       | 29.3       | 29.2       | 29.1       | 28.9       | 28.7      | 28.6       | 28.4       | 20.0               |
| 22.0               |             |            |            | 20.1m/29.9 | 26.5       | 26.3       | 26.2       | 25.9       | 25.8       | 25.7       | 25.5       | 25.3      | 25.3       | 25.0       | 22.0               |
| 24.0               |             |            |            |            | 22.7m/25.4 | 23.6       | 23.4       | 23.2       | 23.0       | 22.9       | 22.7       | 22.5      | 22.4       | 22.2       | 24.0               |
| 26.0               |             |            |            |            |            | 25.4m/22.0 | 21.1       | 20.9       | 20.7       | 20.6       | 20.4       | 20.2      | 20.1       | 19.9       | 26.0               |
| 28.0               |             |            |            |            |            |            | 28.0m/19.2 | 19.0       | 18.8       | 18.7       | 18.5       | 18.3      | 18.2       | 18.0       | 28.0               |
| 30.0               |             |            |            |            |            |            |            | 17.4       | 17.2       | 17.1       | 16.9       | 16.7      | 16.6       | 16.4       | 30.0               |
| 32.0               |             |            |            |            |            |            |            | 30.7m/16.9 | 15.8       | 15.7       | 15.4       | 15.2      | 15.1       | 14.9       | 32.0               |
| 34.0               |             |            |            |            |            |            |            | 33.3m/15.0 | 14.4       | 14.2       | 14.0       | 13.9      | 13.6       | 13.6       | 34.0               |
| 36.0               |             |            |            |            |            |            |            |            | 35.9m/13.4 | 13.1       | 13.0       | 12.8      | 12.6       | 12.6       | 36.0               |
| 38.0               |             |            |            |            |            |            |            |            |            | 12.2       | 12.1       | 11.8      | 11.7       | 11.7       | 38.0               |
| 40.0               |             |            |            |            |            |            |            |            |            | 38.6m/12.0 | 11.1       | 11.0      | 10.7       | 10.7       | 40.0               |
| 42.0               |             |            |            |            |            |            |            |            |            |            | 41.2m/10.7 | 10.3      | 10.0       | 10.0       | 42.0               |
| 44.0               |             |            |            |            |            |            |            |            |            |            |            | 43.8m/9.7 | 9.4        | 9.4        | 44.0               |
| 46.0               |             |            |            |            |            |            |            |            |            |            |            |           | 8.7        | 8.7        | 46.0               |
| 48.0               |             |            |            |            |            |            |            |            |            |            |            |           |            | 46.5m/8.6  | 48.0               |
| Reeves             | 14          | 12         | 12         | 10         | 10         | 9          | 8          | 8          | 7          | 6          | 6          | 6         | 5          | 5          | Reeves             |

\* Values of 12.2 m boom length are lifting capacities for heavy duty crane boom.

| Working radius (m) | 54.9       | 57.9       | 61.0       | 64.0       | 67.1       | 70.1       | 73.2       | 76.2       | 79.2       | 82.3       | 85.3       | Working radius (m) |
|--------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|--------------------|
| 10.0               | 11.0m/56.4 | 11.5m/52.4 |            |            |            |            |            |            |            |            |            | 10.0               |
| 12.0               | 51.5       | 50.5       | 12.0m/48.3 | 12.5m/44.7 | 13.0m/41.2 | 13.5m/38.0 |            |            |            |            |            | 12.0               |
| 14.0               | 43.9       | 43.2       | 42.3       | 41.5       | 40.1       | 37.5       | 14.0m/34.5 | 14.5m/31.8 | 15.0m/29.0 | 15.5m/25.9 |            | 14.0               |
| 16.0               | 38.1       | 37.5       | 36.7       | 36.1       | 35.3       | 34.8       | 32.2       | 30.1       | 27.9       | 25.3       | 16.1m/21.0 | 16.0               |
| 18.0               | 32.7       | 32.7       | 32.3       | 31.8       | 31.1       | 30.7       | 29.8       | 27.8       | 25.9       | 22.9       | 19.0       | 18.0               |
| 20.0               | 28.3       | 28.2       | 28.0       | 27.9       | 27.7       | 27.3       | 26.7       | 25.8       | 23.9       | 20.9       | 17.2       | 20.0               |
| 22.0               | 24.9       | 24.8       | 24.6       | 24.5       | 24.4       | 24.2       | 24.0       | 23.6       | 22.0       | 19.1       | 15.6       | 22.0               |
| 24.0               | 22.1       | 22.0       | 21.9       | 21.7       | 21.6       | 21.4       | 21.4       | 21.3       | 20.3       | 17.5       | 14.2       | 24.0               |
| 26.0               | 19.7       | 19.7       | 19.4       | 19.4       | 19.2       | 19.0       | 19.0       | 18.9       | 18.7       | 16.0       | 13.0       | 26.0               |
| 28.0               | 17.8       | 17.7       | 17.5       | 17.5       | 17.3       | 17.1       | 17.0       | 17.0       | 16.8       | 14.7       | 11.8       | 28.0               |
| 30.0               | 16.2       | 16.1       | 15.9       | 15.8       | 15.6       | 15.5       | 15.4       | 15.3       | 15.2       | 13.5       | 10.8       | 30.0               |
| 32.0               | 14.7       | 14.6       | 14.4       | 14.3       | 14.2       | 14.0       | 13.9       | 13.8       | 13.7       | 12.4       | 9.9        | 32.0               |
| 34.0               | 13.5       | 13.4       | 13.2       | 13.1       | 12.9       | 12.8       | 12.7       | 12.6       | 12.4       | 11.4       | 9.0        | 34.0               |
| 36.0               | 12.4       | 12.3       | 12.1       | 12.0       | 11.9       | 11.7       | 11.6       | 11.5       | 11.3       | 10.4       | 8.2        | 36.0               |
| 38.0               | 11.4       | 11.3       | 11.2       | 11.1       | 10.9       | 10.8       | 10.7       | 10.5       | 10.3       | 9.6        | 7.4        | 38.0               |
| 40.0               | 10.6       | 10.4       | 10.2       | 10.2       | 10.0       | 9.8        | 9.7        | 9.6        | 9.4        | 8.7        | 6.7        | 40.0               |
| 42.0               | 9.9        | 9.7        | 9.5        | 9.4        | 9.3        | 9.1        | 9.0        | 8.9        | 8.7        | 8.0        | 6.0        | 42.0               |
| 44.0               | 9.2        | 9.0        | 8.9        | 8.8        | 8.5        | 8.4        | 8.3        | 8.2        | 8.0        | 7.3        | 5.4        | 44.0               |
| 46.0               | 8.5        | 8.4        | 8.2        | 8.1        | 7.9        | 7.7        | 7.6        | 7.5        | 7.4        | 6.6        | 4.8        | 46.0               |
| 48.0               | 8.0        | 7.9        | 7.6        | 7.6        | 7.4        | 7.2        | 7.1        | 7.0        | 6.8        | 6.0        | 4.2        | 48.0               |
| 50.0               | 49.1m/7.7  | 7.4        | 7.1        | 7.0        | 6.9        | 6.7        | 6.6        | 6.5        | 6.3        | 5.4        | 3.7        | 50.0               |
| 52.0               |            | 51.8m/6.9  | 6.7        | 6.6        | 6.4        | 6.2        | 6.0        | 5.9        | 5.8        | 4.8        | 3.2        | 52.0               |
| 54.0               |            |            | 6.2        | 6.2        | 6.0        | 5.7        | 5.6        | 5.5        | 5.3        | 4.3        | 2.7        | 54.0               |
| 56.0               |            |            | 54.4m/6.1  | 5.8        | 5.5        | 5.3        | 5.2        | 5.0        | 4.8        | 3.8        | 2.2        | 56.0               |
| 58.0               |            |            |            | 57.0m/5.5  | 5.1        | 4.9        | 4.7        | 4.6        | 4.4        | 3.3        | 1.8        | 58.0               |
| 60.0               |            |            |            |            | 59.7m/4.8  | 4.5        | 4.4        | 4.2        | 4.0        | 2.8        | 59.0m/1.6  | 60.0               |
| 62.0               |            |            |            |            |            | 4.2        | 4.0        | 3.9        | 3.7        | 2.4        |            | 62.0               |
| 64.0               |            |            |            |            |            | 62.3m/4.1  | 3.7        | 3.6        | 3.3        | 1.9        |            | 64.0               |
| 66.0               |            |            |            |            |            |            | 65.0m/3.5  | 3.2        | 2.9        | 65.0m/1.7  |            | 66.0               |
| 68.0               |            |            |            |            |            |            |            | 67.6m/3.0  | 2.4        |            |            | 68.0               |
| 70.0               |            |            |            |            |            |            |            |            | 70.0m/2.0  |            |            | 70.0               |
| reeves             | 5          | 4          | 4          | 4          | 4          | 3          | 3          | 3          | 3          | 2          | 2          | reeves             |

Note: Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.

Refer to notes P12.



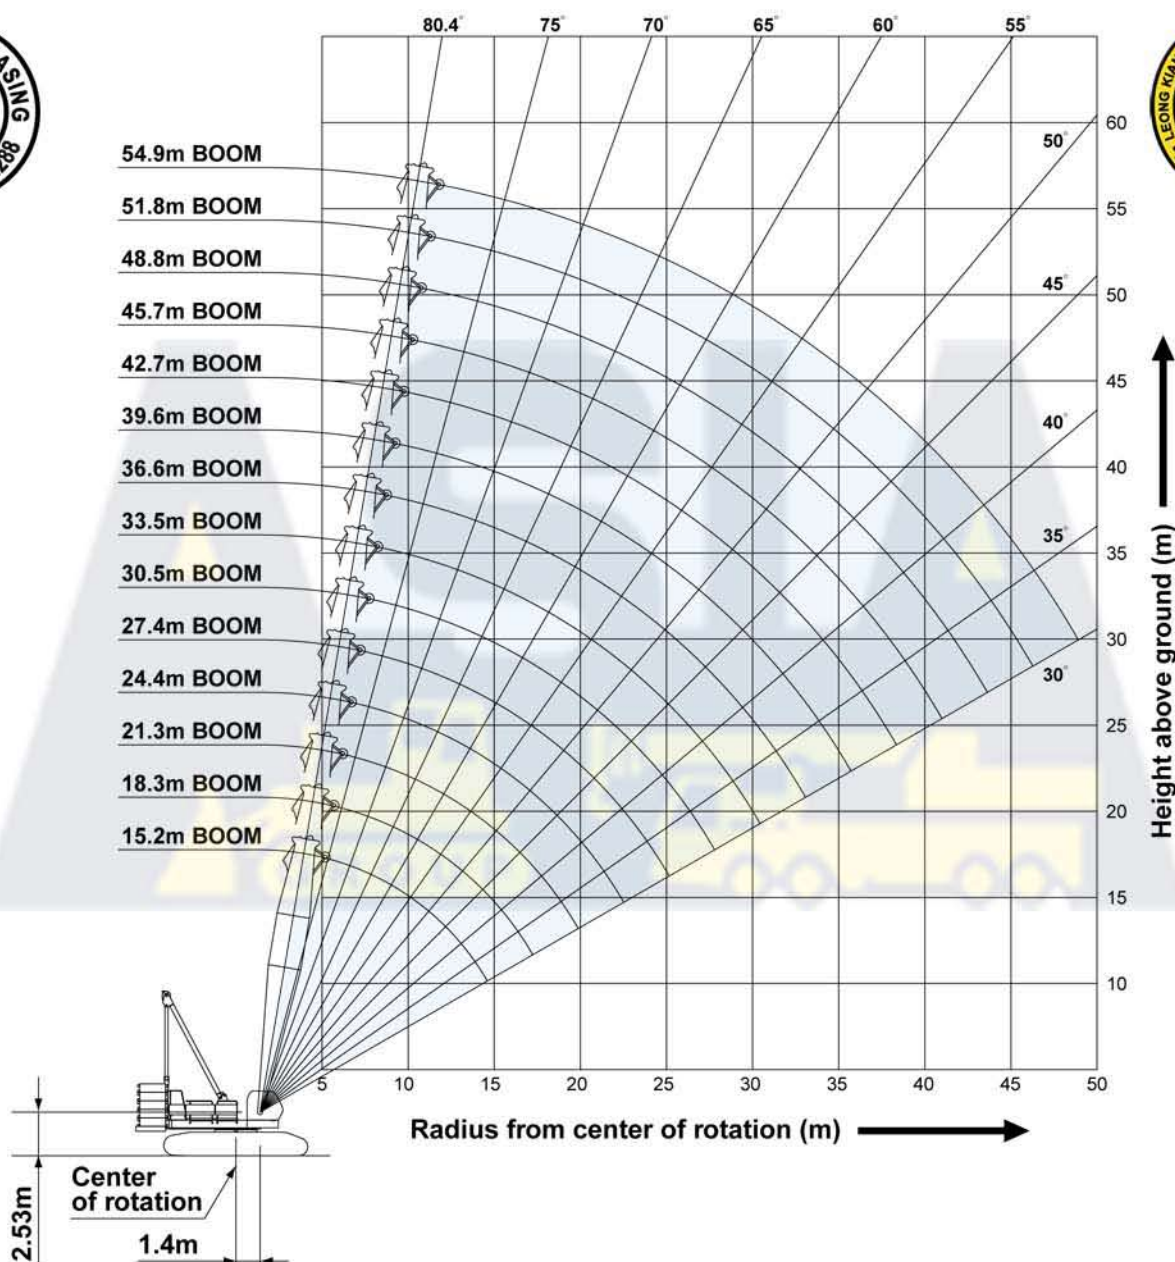




# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Boom Working Ranges



### NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Deduct weight of hook block(s), slings and all other load handling accessories from long boom or jib ratings shown.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom/ jib inserts and guy lines must be arranged as shown in the "Operator's Manual".
9. Boom hoist reeving is 16 part line.

10. Gantry must be in raised position for all conditions.
11. Boom backstops are required for all boom lengths.
12. The boom should be erected over the front of crawlers, not laterally.
13. Ratings shown in   are determined by the strength of the boom or other structural component.
14. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
15. Luffing boom ratings: Deduct weight of hook block(s), slings and all other load handling accessories from luffing boom ratings shown.
16. Auxiliary sheave ratings: Deduct 0.6 ton (weight of auxiliary sheave frame), weight of hook block(s), slings and all other load handling accessories from luffing boom ratings shown, but should not exceed 26.8 tons.  
Luffing boom lengths for auxiliary sheave mounting are 15.2 m to 54.9 m.
17. Luffing boom ratings with auxiliary sheave: Deduct 0.6 ton, weight of hook block(s), slings and all other load handling accessories from luffing boom ratings shown.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Boom Lifting Capacity

Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| Boom Length (m)<br>Working radius (m) | 15.2        | 18.3        | 21.3        | 24.4        | 27.4        | 30.5        | 33.5        | 36.6        | 39.6        | 42.7        | 45.7        | 48.8        | 51.8        | 54.9        | Boom Length (m)<br>Working radius (m) |
|---------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------------------------------|
| 5.0                                   | 5.2m /110.0 | 5.7m /107.0 |             |             |             |             |             |             |             |             |             |             |             |             | 5.0                                   |
| 6.0                                   | 107.0       | 106.7       | 6.2m /106.2 | 6.8m /103.7 |             |             |             |             |             |             |             |             |             |             | 6.0                                   |
| 7.0                                   | 101.3       | 101.2       | 101.1       | 101.0       | 7.3m /96.8  | 7.8m /90.4  |             |             |             |             |             |             |             |             | 7.0                                   |
| 8.0                                   | 89.8        | 89.7        | 89.6        | 89.5        | 89.4        | 89.3        | 8.3m /85.5  | 8.8m /80.3  |             |             |             |             |             |             | 8.0                                   |
| 9.0                                   | 79.4        | 79.3        | 79.3        | 79.1        | 79.0        | 79.0        | 78.8        | 78.7        | 9.3m /75.5  | 9.8m /69.3  |             |             |             |             | 9.0                                   |
| 10.0                                  | 71.2        | 71.1        | 71.0        | 70.9        | 70.8        | 70.7        | 70.6        | 70.5        | 69.4        | 67.5        | 10.3m /64.0 | 10.8m /59.3 | 11.3m /55.1 | 11.8m /51.3 | 10.0                                  |
| 12.0                                  | 57.5        | 57.3        | 57.2        | 57.0        | 56.9        | 56.8        | 56.6        | 56.6        | 56.5        | 55.5        | 54.2        | 52.9        | 51.6        | 50.4        | 12.0                                  |
| 14.0                                  | 46.2        | 46.4        | 46.3        | 46.1        | 46.0        | 45.9        | 45.7        | 45.7        | 45.6        | 45.4        | 45.2        | 44.8        | 43.7        | 42.7        | 14.0                                  |
| 16.0                                  | 15.2m /39.2 | 39.0        | 38.9        | 38.6        | 38.5        | 38.4        | 38.2        | 38.1        | 38.0        | 37.8        | 37.7        | 37.6        | 37.4        | 36.9        | 16.0                                  |
| 18.0                                  |             | 17.8m /33.6 | 33.2        | 32.9        | 32.8        | 32.7        | 32.5        | 32.4        | 32.3        | 32.1        | 32.0        | 31.9        | 31.7        | 31.5        | 18.0                                  |
| 20.0                                  |             |             | 29.2        | 28.7        | 28.6        | 28.4        | 28.2        | 28.1        | 28.0        | 27.8        | 27.7        | 27.6        | 27.4        | 27.2        | 20.0                                  |
| 22.0                                  |             |             | 20.5m /28.0 | 25.3        | 25.2        | 25.1        | 24.8        | 24.7        | 24.6        | 24.4        | 24.2        | 24.2        | 24.0        | 23.8        | 22.0                                  |
| 24.0                                  |             |             |             | 23.1m /23.7 | 22.5        | 22.3        | 22.1        | 22.0        | 21.9        | 21.6        | 21.5        | 21.4        | 21.2        | 21.0        | 24.0                                  |
| 26.0                                  |             |             |             |             | 25.7m /20.4 | 20.1        | 19.8        | 19.7        | 19.6        | 19.3        | 19.2        | 19.1        | 18.9        | 18.7        | 26.0                                  |
| 28.0                                  |             |             |             |             |             | 18.2        | 17.9        | 17.8        | 17.7        | 17.5        | 17.3        | 17.2        | 17.0        | 16.8        | 28.0                                  |
| 30.0                                  |             |             |             |             |             | 28.4m /17.8 | 16.3        | 16.2        | 16.1        | 15.8        | 15.7        | 15.6        | 15.4        | 15.2        | 30.0                                  |
| 32.0                                  |             |             |             |             |             |             | 31.0m /15.6 | 14.8        | 14.7        | 14.4        | 14.3        | 14.2        | 13.9        | 13.8        | 32.0                                  |
| 34.0                                  |             |             |             |             |             |             |             | 33.7m /13.8 | 13.5        | 13.3        | 13.1        | 13.0        | 12.7        | 12.6        | 34.0                                  |
| 36.0                                  |             |             |             |             |             |             |             |             | 12.5        | 12.2        | 12.0        | 11.9        | 11.7        | 11.5        | 36.0                                  |
| 38.0                                  |             |             |             |             |             |             |             |             | 36.3m /12.3 | 11.2        | 11.0        | 10.9        | 10.7        | 10.5        | 38.0                                  |
| 40.0                                  |             |             |             |             |             |             |             |             |             | 38.9m /10.9 | 10.3        | 10.2        | 9.9         | 9.7         | 40.0                                  |
| 42.0                                  |             |             |             |             |             |             |             |             |             |             | 41.6m /9.7  | 9.4         | 9.1         | 9.0         | 42.0                                  |
| 44.0                                  |             |             |             |             |             |             |             |             |             |             |             | 8.8         | 8.5         | 8.3         | 44.0                                  |
| 46.0                                  |             |             |             |             |             |             |             |             |             |             |             | 44.2m /8.6  | 7.8         | 7.7         | 46.0                                  |
| 48.0                                  |             |             |             |             |             |             |             |             |             |             |             |             | 46.9m /7.6  | 7.1         | 48.0                                  |
| 50.0                                  |             |             |             |             |             |             |             |             |             |             |             |             |             | 49.5m /6.7  | 50.0                                  |
| Reeves                                | 8           | 8           | 8           | 8           | 8           | 7           | 7           | 6           | 6           | 6           | 5           | 5           | 5           | 4           | Reeves                                |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Refer to notes P14.



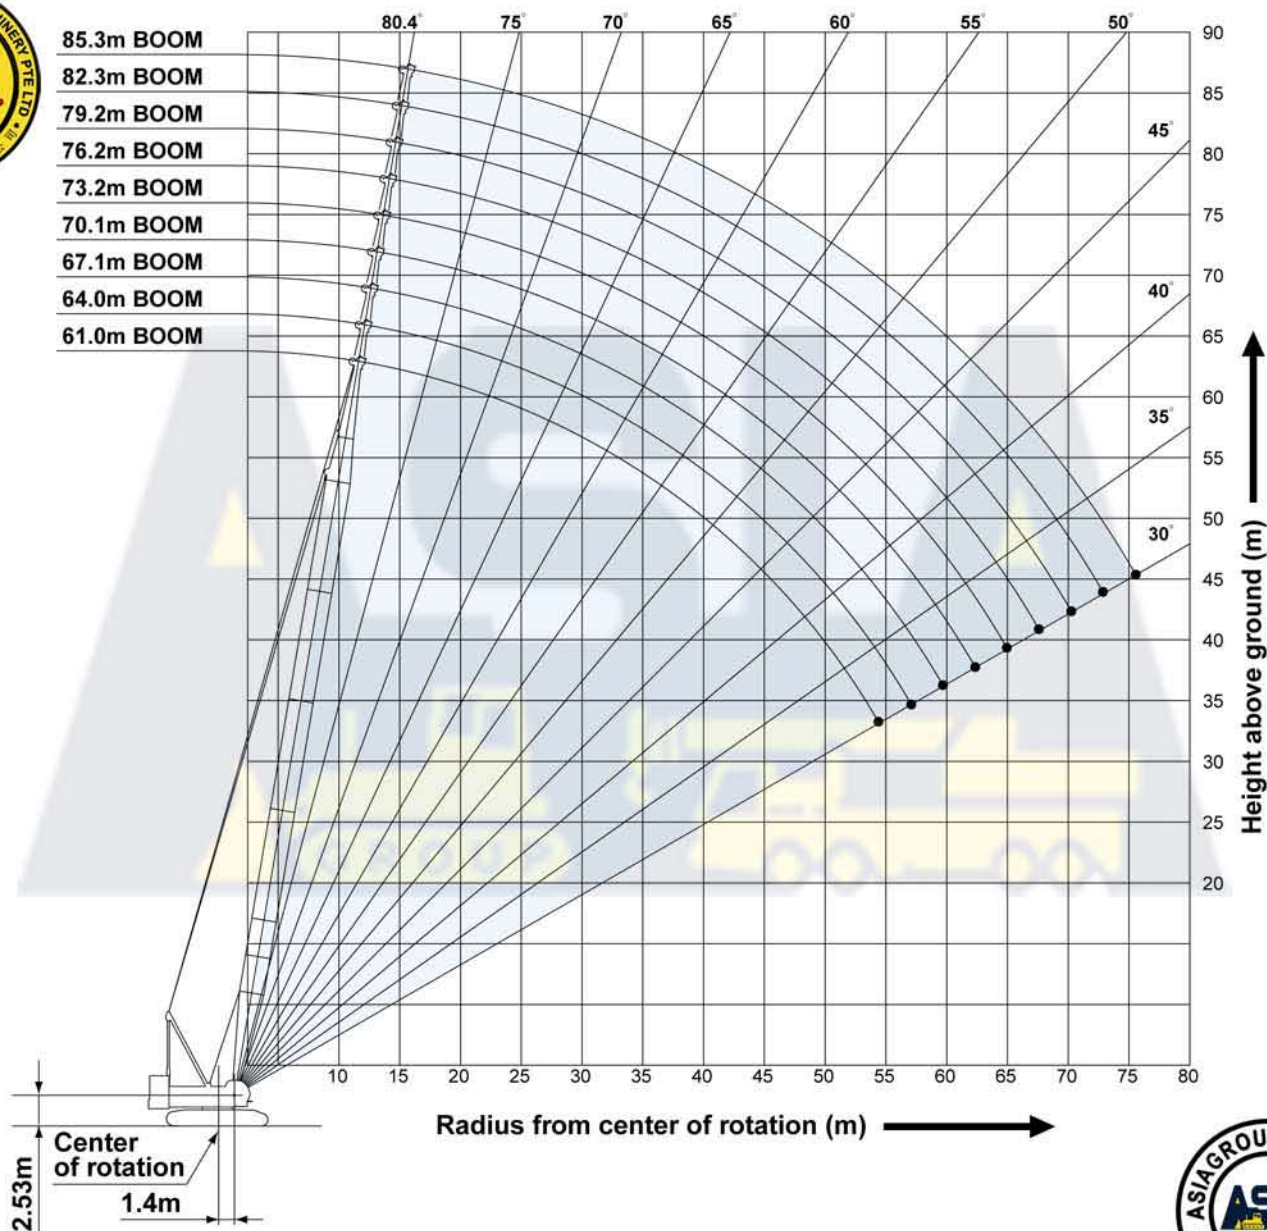




# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Long Boom Working Ranges



### NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Deduct weight of hook block(s), slings and all other load handling accessories from long boom or jib ratings shown.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom/ jib inserts and guy lines must be arranged as shown in the "Operator's Manual".
9. Boom hoist reeving is 16 part line.
10. Gantry must be in raised position for all conditions.
11. Boom backstops are required for all boom lengths.
12. Ratings shown in   are determined by the strength of the boom or other structural component.
13. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
14. Long boom ratings: Deduct weight of hook block(s), slings and all other load handling accessories from long boom ratings shown.
15. Auxiliary sheave ratings: Deduct 0.4 ton (weight of auxiliary sheave frame), weight of hook block(s), slings and all other load handling accessories from long boom ratings shown, but should not exceed 13.5 tons. Long boom length for auxiliary sheave mounting are 61.0 m to 79.2 m.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Long Boom Lifting Capacity

Unit: metric ton

Counterweight: 60.0 t,  
Carbody weight: 20.0 t

| Working radius (m) | 61.0         | 64.0         | 67.1         | 70.1         | 73.2         | 76.2         | 79.2         | 82.3         | 85.3        | Working radius (m) |
|--------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|--------------------|
| 10.0               | 11.9m / 40.1 |              |              |              |              |              |              |              |             | 10.0               |
| 12.0               | 40.1         | 12.4m / 37.8 | 12.9m / 35.0 | 13.4m / 33.2 | 13.9m / 31.6 |              |              |              |             | 12.0               |
| 14.0               | 37.2         | 35.8         | 34.5         | 32.8         | 31.5         | 14.4m / 27.9 | 14.9m / 23.9 | 15.5m / 20.7 |             | 14.0               |
| 16.0               | 34.1         | 33.1         | 32.1         | 30.6         | 29.5         | 26.5         | 23.2         | 20.4         | 20.3        | 16.0               |
| 18.0               | 31.0         | 30.3         | 29.6         | 28.4         | 27.5         | 24.9         | 21.9         | 19.4         | 19.3        | 18.0               |
| 20.0               | 27.9         | 27.4         | 27.1         | 26.2         | 25.5         | 23.3         | 20.6         | 18.4         | 18.3        | 20.0               |
| 22.0               | 24.9         | 24.7         | 24.5         | 24.0         | 23.5         | 21.7         | 19.5         | 17.4         | 17.3        | 22.0               |
| 24.0               | 22.1         | 22.0         | 21.9         | 21.8         | 21.5         | 20.1         | 18.3         | 16.4         | 16.4        | 24.0               |
| 26.0               | 19.8         | 19.7         | 19.6         | 19.6         | 19.5         | 18.5         | 17.1         | 15.5         | 15.5        | 26.0               |
| 28.0               | 17.9         | 17.8         | 17.7         | 17.6         | 17.5         | 17.0         | 16.0         | 14.7         | 14.7        | 28.0               |
| 30.0               | 16.3         | 16.2         | 16.1         | 16.0         | 15.9         | 15.5         | 14.9         | 13.9         | 13.9        | 30.0               |
| 32.0               | 14.9         | 14.8         | 14.6         | 14.6         | 14.5         | 14.1         | 13.7         | 13.0         | 13.0        | 32.0               |
| 34.0               | 13.6         | 13.5         | 13.4         | 13.4         | 13.2         | 12.9         | 12.8         | 12.3         | 12.3        | 34.0               |
| 36.0               | 12.6         | 12.5         | 12.3         | 12.3         | 12.2         | 11.9         | 11.8         | 11.5         | 11.5        | 36.0               |
| 38.0               | 11.6         | 11.5         | 11.4         | 11.3         | 11.2         | 10.9         | 10.9         | 10.8         | 10.8        | 38.0               |
| 40.0               | 10.8         | 10.7         | 10.5         | 10.5         | 10.4         | 10.1         | 10.0         | 10.0         | 10.0        | 40.0               |
| 42.0               | 10.0         | 9.9          | 9.8          | 9.7          | 9.6          | 9.4          | 9.3          | 9.3          | 9.3         | 42.0               |
| 44.0               | 9.3          | 9.2          | 9.1          | 9.0          | 8.9          | 8.7          | 8.6          | 8.6          | 8.6         | 44.0               |
| 46.0               | 8.7          | 8.6          | 8.5          | 8.4          | 8.3          | 8.1          | 8.0          | 8.0          | 8.0         | 46.0               |
| 48.0               | 8.2          | 8.0          | 7.9          | 7.9          | 7.7          | 7.5          | 7.4          | 7.4          | 7.4         | 48.0               |
| 50.0               | 7.7          | 7.5          | 7.4          | 7.3          | 7.2          | 7.0          | 6.9          | 6.9          | 6.9         | 50.0               |
| 52.0               | 7.2          | 7.1          | 6.9          | 6.9          | 6.7          | 6.5          | 6.5          | 6.5          | 6.5         | 52.0               |
| 54.0               | 6.8          | 6.6          | 6.5          | 6.4          | 6.3          | 6.1          | 6.0          | 6.0          | 6.0         | 54.0               |
| 56.0               | 54.5m / 6.7  | 6.3          | 6.1          | 6.1          | 5.9          | 5.7          | 5.7          | 5.7          | 5.6         | 56.0               |
| 58.0               |              | 57.2m / 6.0  | 5.8          | 5.7          | 5.6          | 5.4          | 5.3          | 5.3          | 5.2         | 58.0               |
| 60.0               |              |              | 59.8m / 5.5  | 5.4          | 5.2          | 5.0          | 5.0          | 5.0          | 4.8         | 60.0               |
| 62.0               |              |              |              | 5.0          | 4.9          | 4.7          | 4.6          | 4.6          | 4.4         | 62.0               |
| 64.0               |              |              |              | 62.4m / 5.0  | 4.6          | 4.4          | 4.4          | 4.3          | 4.1         | 64.0               |
| 66.0               |              |              |              |              | 65.1m / 4.5  | 4.2          | 4.1          | 4.0          | 3.8         | 66.0               |
| 68.0               |              |              |              |              |              | 67.7m / 3.9  | 3.8          | 3.7          | 3.5         | 68.0               |
| 70.0               |              |              |              |              |              |              | 3.5          | 3.5          | 3.2         | 70.0               |
| 72.0               |              |              |              |              |              |              | 70.4m / 3.4  | 3.2          | 3.0         | 72.0               |
| 74.0               |              |              |              |              |              |              |              | 73.0m / 3.1  | 2.8         | 74.0               |
| 76.0               |              |              |              |              |              |              |              |              | 75.6m / 2.6 | 76.0               |
| reeves             | 3            | 3            | 3            | 3            | 3            | 3            | 2            | 2            | 2           | reeves             |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Refer to notes P16.





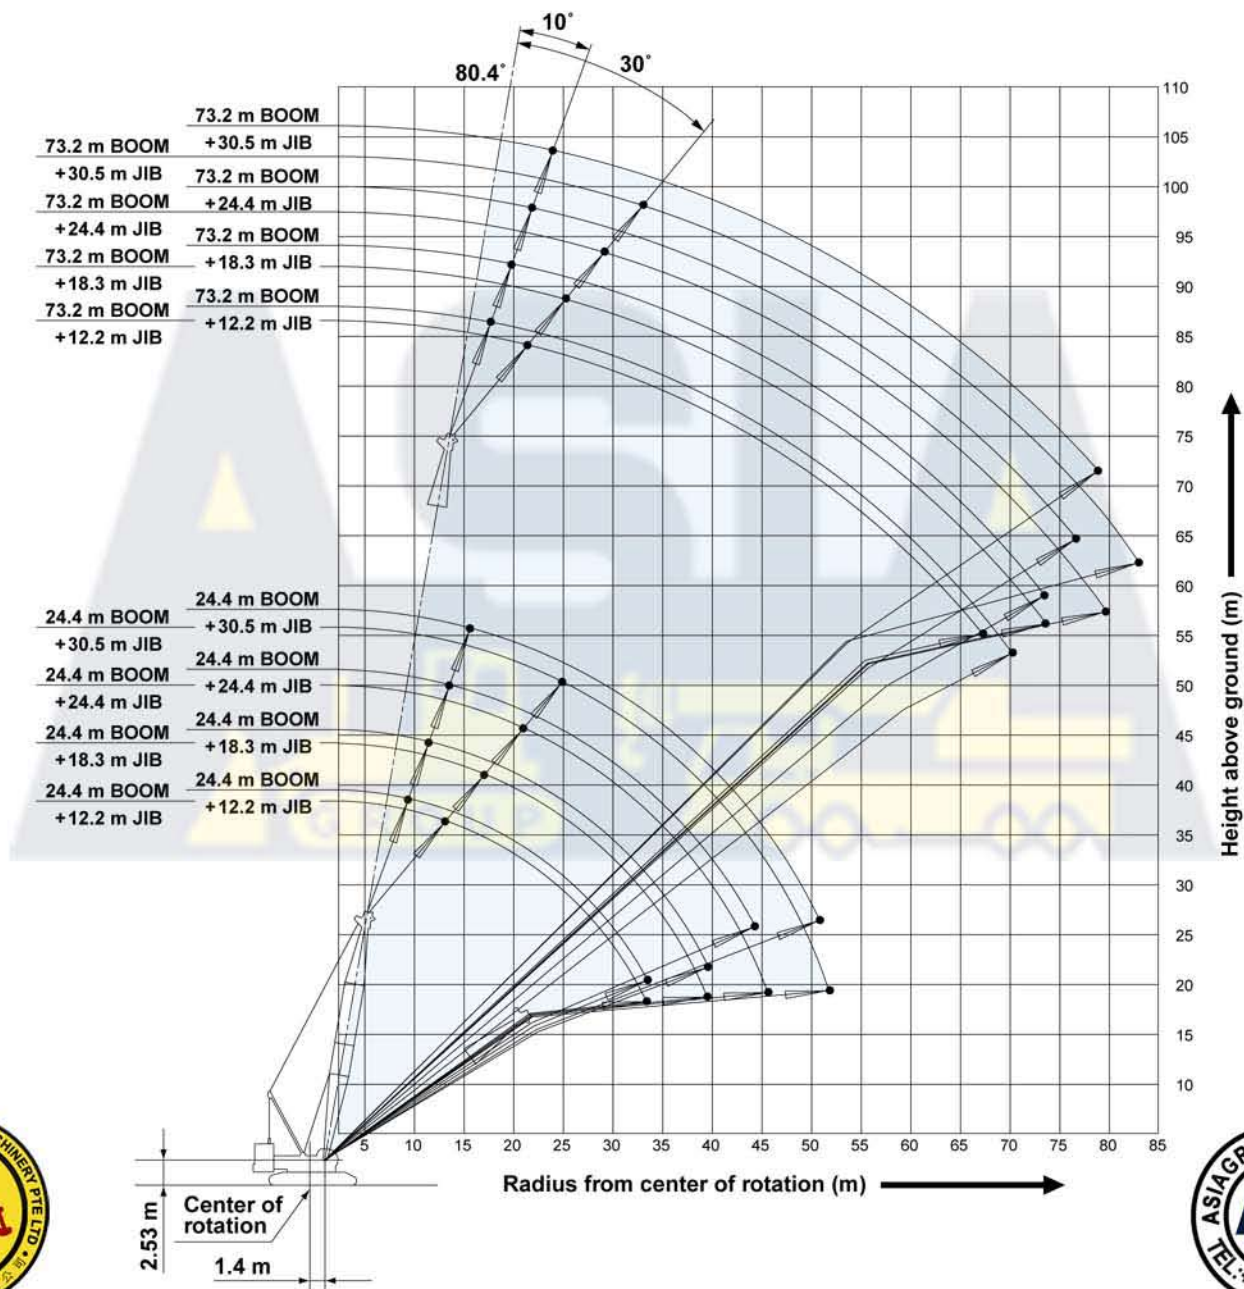


# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Fixed Jib Working Ranges

Jib Offset Angle: 10°, 30°



### NOTES:

1. Ratings according to EN 13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Deduct weight of hook block (s), slings and all other load handling accessories from fixed jib ratings shown.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore, has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.
6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom inserts and guy lines must be arranged as shown in the "Operator's Manual".
9. Boom hoist reeving is 16 part line.
10. Gantry must be in raised position for all conditions.
11. Boom backstops are required for all boom lengths.
12. Ratings shown in   are determined by the strength of the boom or other structural component.
13. The boom should be erected over the front of the crawlers not laterally.
14. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.
15. Fixed jib ratings: Deduct weight of hook block (s), slings, and all other load handling accessories from jib ratings shown.
16. Boom lengths for jib mounting are 24.4 m to 73.2 m.
17. One part of line on hook is not allowed to use for 12.2 m jib length with offset angle 10 degrees.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Fixed Jib Lifting Capacities (Without Main Hook)

Unit: metric ton

Jib Offset Angle: 10°

Counterweight: 60.0 t, Carbody weight: 20.0 t

| Boom length (m)    |      | 24.4       |            |            |           | 33.5       |            |            |           | 42.7       |            |            |           | 51.8       |            |           |           | Boom length (m) |
|--------------------|------|------------|------------|------------|-----------|------------|------------|------------|-----------|------------|------------|------------|-----------|------------|------------|-----------|-----------|-----------------|
| Jib length (m)     |      | 12.2       | 18.3       | 24.4       | 30.5      | 12.2       | 18.3       | 24.4       | 30.5      | 12.2       | 18.3       | 24.4       | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | Jib length (m)  |
| Working radius (m) | 9.0  | 9.8m/26.8  |            |            |           |            |            |            |           |            |            |            |           |            |            |           |           | 9.0             |
|                    | 10.0 | 26.8       | 11.0m/19.5 |            |           | 11.0m/26.8 |            |            |           |            |            |            |           |            |            |           |           | 10.0            |
|                    | 12.0 | 26.5       | 19.3       | 12.8m/10.1 |           | 26.3       | 12.8m/19.4 |            |           | 12.2m/26.8 |            |            |           |            |            |           |           | 12.0            |
|                    | 14.0 | 23.1       | 18.9       | 9.9        | 14.0m/6.1 | 24.3       | 19.1       | 14.6m/10.1 |           | 26.0       | 14.6m/19.3 |            |           | 14.0m/26.8 |            |           |           | 14.0            |
|                    | 16.0 | 20.7       | 18.1       | 9.7        | 5.9       | 22.8       | 18.7       | 9.9        | 16.8m/6.0 | 24.6       | 19.1       | 16.8m/10.0 |           | 26.0       | 16.8m/19.2 |           |           | 16.0            |
|                    | 18.0 | 19.2       | 17.5       | 9.5        | 5.8       | 21.4       | 18.2       | 9.7        | 5.9       | 23.2       | 18.6       | 9.9        | 18.3m/6.0 | 24.6       | 18.9       | 18.3m/9.9 | 19.8m/6.0 | 18.0            |
|                    | 20.0 | 18.0       | 16.2       | 9.3        | 5.6       | 20.1       | 17.6       | 9.5        | 5.8       | 21.9       | 18.1       | 9.7        | 5.9       | 23.4       | 18.5       | 9.8       | 6.0       | 20.0            |
|                    | 22.0 | 16.9       | 14.3       | 8.8        | 5.3       | 19.1       | 16.7       | 9.3        | 5.6       | 20.8       | 17.7       | 9.5        | 5.8       | 22.3       | 18.1       | 9.7       | 5.9       | 22.0            |
|                    | 24.0 | 16.0       | 13.2       | 8.4        | 5.0       | 18.1       | 15.4       | 9.0        | 5.4       | 19.8       | 17.2       | 9.4        | 5.7       | 21.3       | 17.8       | 9.5       | 5.8       | 24.0            |
|                    | 26.0 | 15.2       | 12.2       | 8.1        | 4.8       | 17.1       | 14.3       | 8.7        | 5.2       | 18.9       | 16.1       | 9.2        | 5.5       | 20.0       | 17.4       | 9.4       | 5.6       | 26.0            |
|                    | 28.0 | 14.4       | 11.3       | 7.8        | 4.6       | 16.4       | 13.3       | 8.3        | 4.9       | 18.0       | 15.1       | 8.8        | 5.3       | 18.1       | 16.7       | 9.3       | 5.5       | 28.0            |
|                    | 30.0 | 13.7       | 10.6       | 7.4        | 4.4       | 15.7       | 12.5       | 8.0        | 4.7       | 16.8       | 14.2       | 8.6        | 5.0       | 16.4       | 15.7       | 9.0       | 5.3       | 30.0            |
|                    | 34.0 | 33.5m/12.7 | 9.4        | 6.9        | 4.0       | 14.5       | 11.1       | 7.5        | 4.4       | 14.2       | 12.6       | 8.0        | 4.7       | 13.7       | 13.9       | 8.5       | 4.9       | 34.0            |
|                    | 38.0 |            | 8.4        | 6.5        | 3.7       | 12.7       | 10.0       | 7.1        | 4.0       | 12.2       | 11.4       | 7.6        | 4.4       | 11.6       | 11.8       | 8.0       | 4.6       | 38.0            |
|                    | 42.0 |            | 39.6m/8.2  | 6.2        | 3.4       | 39.6m/12.0 | 9.1        | 6.7        | 3.8       | 10.5       | 10.4       | 7.2        | 4.1       | 9.9        | 10.2       | 7.6       | 4.4       | 42.0            |
|                    | 46.0 |            |            | 44.2m/6.1  | 3.2       |            | 45.7m/8.4  | 6.4        | 3.5       | 9.2        | 9.4        | 6.8        | 3.9       | 8.6        | 8.8        | 7.3       | 4.1       | 46.0            |
|                    | 50.0 |            |            |            | 3.0       |            |            | 6.1        | 3.3       | 48.8m/8.4  | 8.3        | 6.5        | 3.6       | 7.5        | 7.7        | 6.9       | 3.9       | 50.0            |
|                    | 54.0 |            |            |            | 50.3m/3.0 |            |            | 51.8m/6.1  | 3.2       |            | 7.3        | 6.3        | 3.4       | 6.5        | 6.8        | 6.7       | 3.7       | 54.0            |
|                    | 58.0 |            |            |            |           |            |            | 57.9m/3.0  |           |            | 54.9m/7.1  | 6.1        | 3.3       | 57.9m/5.8  | 5.9        | 6.2       | 3.5       | 58.0            |
|                    | 62.0 |            |            |            |           |            |            |            |           |            |            | 61.0m/6.0  | 3.1       |            | 61.0m/5.4  | 5.5       | 3.4       | 62.0            |
|                    | 66.0 |            |            |            |           |            |            |            |           |            |            |            | 3.0       |            |            | 4.9       | 3.2       | 66.0            |
|                    | 70.0 |            |            |            |           |            |            |            |           |            |            |            | 67.1m/3.0 |            |            | 67.1m/4.7 | 3.1       | 70.0            |
|                    | 74.0 |            |            |            |           |            |            |            |           |            |            |            |           |            |            |           | 73.2m/3.0 | 74.0            |
| Reeves             |      | 2          | 2          | 1          | 1         | 2          | 2          | 1          | 1         | 2          | 2          | 1          | 1         | 2          | 2          | 1         | 1         | Reeves          |

| Boom length (m)    |      | 61.0       |            |           |           | 70.1       |            |           |           | 73.2       |            |           |           | Boom length (m) |
|--------------------|------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|-----------------|
| Jib length (m)     |      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | Jib length (m)  |
| Working radius (m) | 16.0 | 16.8m/26.6 |            |           |           | 16.8m/21.7 |            |           |           |            |            |           |           | 16.0            |
|                    | 18.0 | 25.9       | 18.3m/19.1 | 19.8m/9.9 |           | 21.4       | 19.8m/19.1 |           |           | 18.3m/19.1 | 19.8m/18.7 |           |           | 18.0            |
|                    | 20.0 | 24.7       | 18.8       | 9.9       | 21.3m/6.0 | 21.0       | 19.1       | 21.3m/9.9 |           | 18.8       | 18.7       | 21.3m/9.9 |           | 20.0            |
|                    | 22.0 | 23.6       | 18.5       | 9.8       | 5.9       | 20.6       | 18.7       | 9.9       | 22.9m/5.9 | 18.4       | 18.3       | 9.9       | 22.9m/6.0 | 22.0            |
|                    | 24.0 | 21.8       | 18.1       | 9.7       | 5.9       | 20.2       | 18.4       | 9.8       | 5.9       | 18.0       | 17.9       | 9.8       | 5.9       | 24.0            |
|                    | 26.0 | 19.6       | 17.8       | 9.5       | 5.7       | 19.1       | 18.1       | 9.7       | 5.8       | 17.6       | 17.5       | 9.7       | 5.8       | 26.0            |
|                    | 28.0 | 17.6       | 17.3       | 9.4       | 5.6       | 17.1       | 17.4       | 9.5       | 5.7       | 16.9       | 16.9       | 9.5       | 5.7       | 28.0            |
|                    | 30.0 | 15.9       | 16.1       | 9.3       | 5.5       | 15.4       | 15.7       | 9.4       | 5.6       | 15.2       | 15.6       | 9.4       | 5.6       | 30.0            |
|                    | 34.0 | 13.2       | 13.4       | 8.8       | 5.2       | 12.7       | 13.0       | 9.2       | 5.4       | 12.5       | 12.8       | 9.2       | 5.4       | 34.0            |
|                    | 38.0 | 11.1       | 11.3       | 8.4       | 4.9       | 10.6       | 10.9       | 8.7       | 5.1       | 10.4       | 10.7       | 8.8       | 5.2       | 38.0            |
|                    | 42.0 | 9.4        | 9.7        | 8.0       | 4.6       | 8.9        | 9.2        | 8.3       | 4.8       | 8.8        | 9.0        | 8.4       | 4.9       | 42.0            |
|                    | 46.0 | 8.0        | 8.3        | 7.6       | 4.4       | 7.6        | 7.8        | 7.9       | 4.6       | 7.3        | 7.6        | 8.0       | 4.6       | 46.0            |
|                    | 50.0 | 6.9        | 7.2        | 7.3       | 4.1       | 6.5        | 6.7        | 7.1       | 4.3       | 6.3        | 6.5        | 6.8       | 4.4       | 50.0            |
|                    | 54.0 | 6.0        | 6.2        | 6.5       | 3.9       | 5.5        | 5.8        | 6.1       | 4.1       | 5.3        | 5.5        | 5.9       | 4.2       | 54.0            |
|                    | 58.0 | 5.2        | 5.4        | 5.7       | 3.7       | 4.6        | 4.9        | 5.3       | 3.9       | 4.4        | 4.6        | 5.1       | 4.0       | 58.0            |
|                    | 62.0 | 4.4        | 4.7        | 5.0       | 3.5       | 3.8        | 4.1        | 4.5       | 3.8       | 3.5        | 3.8        | 4.2       | 3.8       | 62.0            |
|                    | 66.0 | 64.0m/4.1  | 4.0        | 4.4       | 3.4       | 3.1        | 3.4        | 3.8       | 3.6       | 2.8        | 3.0        | 3.5       | 3.6       | 66.0            |
|                    | 70.0 |            | 3.4        | 3.7       | 3.3       | 2.4        | 2.7        | 3.1       | 3.3       | 2.1        | 2.4        | 2.8       | 2.9       | 70.0            |
|                    | 74.0 |            | 70.1m/3.4  | 3.1       | 3.2       | 73.2m/2.0  | 2.1        | 2.5       | 2.7       | 70.1m/2.1  | 73.2m/2.0  | 2.3       | 2.4       | 74.0            |
|                    | 78.0 |            |            | 76.2m/2.9 | 2.8       |            | 76.2m/1.9  | 2.0       | 2.2       |            |            | 76.2m/2.0 | 77.7m/2.0 | 78.0            |
|                    | 82.0 |            |            |           | 2.3       |            |            | 79.2m/1.9 | 80.8m/1.9 |            |            |           |           | 82.0            |
|                    | 86.0 |            |            |           | 82.3m/2.3 |            |            |           |           |            |            |           |           | 86.0            |
| Reeves             |      | 2          | 2          | 1         | 1         | 2          | 2          | 1         | 1         | 2          | 2          | 1         | 1         | Reeves          |

Note: Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.

Refer to notes P18.

※ One part of line on hook is not allowed to use for 12.2 m jib length with offset angle 10 degrees.







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

Unit: metric ton

Jib Offset Angle: 30°

Counterweight: 60.0 t, Carbody weight: 20.0 t

| Boom length (m)    |      | 24.4       |            |           |           | 33.5       |            |           |           | 42.7       |            |           |           | 51.8       |            |           |           | Boom length (m) |
|--------------------|------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|-----------------|
| Jib length (m)     |      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | Jib length (m)  |
| Working radius (m) | 12.0 | 13.4m/17.2 |            |           |           |            |            |           |           |            |            |           |           |            |            |           |           | 12.0            |
|                    | 14.0 | 17.2       |            |           |           | 14.6m/17.2 |            |           |           |            |            |           |           |            |            |           |           | 14.0            |
|                    | 16.0 | 16.0       | 16.8m/12.8 |           |           | 16.8       |            |           |           | 16.8m/17.1 |            |           |           |            |            |           |           | 16.0            |
|                    | 18.0 | 15.2       | 12.2       |           |           | 16.1       | 18.3m/12.8 |           |           | 16.7       | 19.8m/12.8 |           |           | 18.3m/17.1 |            |           |           | 18.0            |
|                    | 20.0 | 14.3       | 11.2       | 21.3m/7.5 |           | 15.6       | 12.1       |           |           | 16.1       | 12.8       |           |           | 16.6       | 21.3m/12.8 |           |           | 20.0            |
|                    | 22.0 | 13.5       | 10.5       | 7.4       |           | 14.8       | 11.4       | 22.9m/7.5 |           | 15.7       | 12.1       |           |           | 16.2       | 12.6       |           |           | 22.0            |
|                    | 24.0 | 12.7       | 9.8        | 7.2       | 24.4m/4.1 | 14.1       | 10.8       | 7.4       | 25.9m/4.1 | 15.2       | 11.4       | 24.4m/7.5 |           | 15.8       | 12.0       | 25.9m/7.5 |           | 24.0            |
|                    | 26.0 | 12.1       | 9.3        | 7.0       | 4.0       | 13.4       | 10.2       | 7.2       | 4.1       | 14.5       | 10.9       | 7.4       | 27.4m/4.1 | 15.3       | 11.5       | 7.5       |           | 26.0            |
|                    | 28.0 | 11.6       | 8.8        | 6.8       | 3.9       | 12.8       | 9.7        | 7.0       | 4.0       | 13.9       | 10.4       | 7.2       | 4.1       | 14.8       | 11.0       | 7.4       | 29.0m/4.1 | 28.0            |
|                    | 30.0 | 11.2       | 8.3        | 6.5       | 3.7       | 12.3       | 9.2        | 6.8       | 3.9       | 13.4       | 9.9        | 7.1       | 4.0       | 14.2       | 10.5       | 7.2       | 4.0       | 30.0            |
|                    | 34.0 | 33.5m/10.6 | 7.6        | 5.9       | 3.4       | 11.5       | 8.4        | 6.4       | 3.6       | 12.5       | 9.1        | 6.8       | 3.8       | 13.3       | 9.8        | 6.9       | 3.9       | 34.0            |
|                    | 38.0 |            | 7.1        | 5.4       | 3.3       | 36.6m/11.1 | 7.8        | 5.9       | 3.4       | 11.7       | 8.5        | 6.4       | 3.5       | 11.9       | 9.1        | 6.7       | 3.7       | 38.0            |
|                    | 42.0 |            | 39.6m/7.0  | 5.0       | 3.1       |            | 7.4        | 5.5       | 3.3       | 10.7       | 8.0        | 5.9       | 3.4       | 10.2       | 8.6        | 6.3       | 3.5       | 42.0            |
|                    | 46.0 |            |            | 45.7m/4.8 | 3.0       |            | 42.7m/7.3  | 5.2       | 3.1       | 45.7m/9.4  | 7.5        | 5.6       | 3.3       | 8.8        | 8.1        | 5.9       | 3.4       | 46.0            |
|                    | 50.0 |            |            |           | 2.9       |            |            | 48.8m/5.0 | 3.0       |            | 7.2        | 5.3       | 3.1       | 7.6        | 7.7        | 5.6       | 3.2       | 50.0            |
|                    | 54.0 |            |            |           | 51.8m/2.9 |            |            |           | 2.9       |            | 51.8m/7.1  | 5.0       | 3.0       | 51.8m/7.2  | 7.1        | 5.4       | 3.2       | 54.0            |
|                    | 58.0 |            |            |           |           |            |            | 54.9m/2.9 |           |            |            | 57.9m/4.9 | 2.9       |            | 57.9m/6.2  | 5.1       | 3.0       | 58.0            |
|                    | 62.0 |            |            |           |           |            |            |           |           |            |            |           | 2.9       |            |            | 4.9       | 3.0       | 62.0            |
|                    | 66.0 |            |            |           |           |            |            |           |           |            |            |           |           | 64.0m/2.9  |            | 64.0m/4.9 | 2.9       | 66.0            |
|                    | 70.0 |            |            |           |           |            |            |           |           |            |            |           |           |            |            |           | 2.9       | 70.0            |
|                    | 74.0 |            |            |           |           |            |            |           |           |            |            |           |           |            |            |           | 70.1m/2.9 | 74.0            |
| Reeves             |      | 2          | 1          | 1         | 1         | 2          | 1          | 1         | 1         | 2          | 1          | 1         | 1         | 2          | 1          | 1         | 1         | Reeves          |

| Boom length (m)    |      | 61.0       |            |           |           | 70.1       |            |           |           | 73.2       |            |           |           | Boom length (m) |  |
|--------------------|------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|------------|------------|-----------|-----------|-----------------|--|
| Jib length (m)     |      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | 12.2       | 18.3       | 24.4      | 30.5      | Jib length (m)  |  |
| Working radius (m) | 18.0 | 19.8m/17.1 |            |           |           |            |            |           |           |            |            |           |           | 18.0            |  |
|                    | 20.0 | 17.0       |            |           |           | 21.3m/17.1 |            |           |           | 21.3m/17.2 |            |           |           | 20.0            |  |
|                    | 22.0 | 16.6       | 22.9m/12.8 |           |           | 16.9       |            |           |           | 17.1       |            |           |           | 22.0            |  |
|                    | 24.0 | 16.2       | 12.5       |           |           | 16.6       | 24.4m/13.2 |           |           | 16.7       | 25.9m/12.9 |           |           | 24.0            |  |
|                    | 26.0 | 15.9       | 12.0       | 27.4m/7.5 |           | 16.2       | 12.8       |           |           | 16.4       | 12.9       |           |           | 26.0            |  |
|                    | 28.0 | 15.5       | 11.5       | 7.5       |           | 15.9       | 12.3       | 29.0m/7.5 |           | 16.0       | 12.4       | 29.0m/7.6 |           | 28.0            |  |
|                    | 30.0 | 15.0       | 11.0       | 7.3       | 30.5m/4.1 | 15.6       | 11.8       | 7.5       | 32.0m/4.1 | 15.6       | 12.0       | 7.5       | 32.0m/4.1 | 30.0            |  |
|                    | 34.0 | 13.6       | 10.3       | 7.1       | 3.9       | 13.2       | 11.1       | 7.2       | 4.0       | 13.1       | 11.2       | 7.3       | 4.0       | 34.0            |  |
|                    | 38.0 | 11.4       | 9.6        | 6.8       | 3.8       | 11.1       | 10.4       | 7.0       | 3.8       | 10.9       | 10.5       | 7.0       | 3.9       | 38.0            |  |
|                    | 42.0 | 9.7        | 9.1        | 6.6       | 3.6       | 9.3        | 9.8        | 6.8       | 3.7       | 9.1        | 9.8        | 6.8       | 3.7       | 42.0            |  |
|                    | 46.0 | 8.3        | 8.6        | 6.3       | 3.4       | 7.9        | 8.5        | 6.6       | 3.5       | 7.7        | 8.3        | 6.7       | 3.6       | 46.0            |  |
|                    | 50.0 | 7.1        | 7.6        | 5.9       | 3.4       | 6.7        | 7.3        | 6.4       | 3.4       | 6.5        | 7.1        | 6.5       | 3.4       | 50.0            |  |
|                    | 54.0 | 6.2        | 6.6        | 5.7       | 3.3       | 5.8        | 6.3        | 6.1       | 3.4       | 5.6        | 6.1        | 6.2       | 3.4       | 54.0            |  |
|                    | 58.0 | 57.9m/5.3  | 5.8        | 5.4       | 3.1       | 4.9        | 5.4        | 5.7       | 3.2       | 4.6        | 5.2        | 5.6       | 3.3       | 58.0            |  |
|                    | 62.0 |            | 5.0        | 5.2       | 3.0       | 4.0        | 4.6        | 4.9       | 3.1       | 3.7        | 4.4        | 4.8       | 3.2       | 62.0            |  |
|                    | 66.0 |            | 64.0m/4.7  | 4.6       | 3.0       | 3.2        | 3.8        | 4.2       | 3.1       | 2.9        | 3.6        | 4.0       | 3.1       | 66.0            |  |
|                    | 70.0 |            |            | 4.0       | 2.9       | 67.1m/3.0  | 3.1        | 3.5       | 3.0       | 67.1m/2.8  | 2.9        | 3.3       | 3.0       | 70.0            |  |
|                    | 74.0 |            |            | 70.1m/4.0 | 2.9       |            | 73.2m/2.6  | 2.9       | 2.9       |            | 73.2m/2.4  | 2.6       | 2.9       | 74.0            |  |
|                    | 78.0 |            |            |           | 76.2m/2.9 |            |            | 2.3       | 2.6       |            |            | 2.0       | 2.4       | 78.0            |  |
|                    | 82.0 |            |            |           |           |            |            | 79.2m/2.1 | 2.0       |            |            | 79.2m/1.9 | 1.8       | 82.0            |  |
|                    | 84.0 |            |            |           |           |            |            |           | 83.8m/1.8 |            |            |           | 82.3m/1.8 | 84.0            |  |
| Reeves             |      | 2          | 1          | 1         | 1         | 2          | 1          | 1         | 1         | 2          | 1          | 1         | 1         | Reeves          |  |

Note: Ratings according to EN13000.

Ratings shown in  are determined by the strength of the boom or other structural components.

Refer to notes P18.





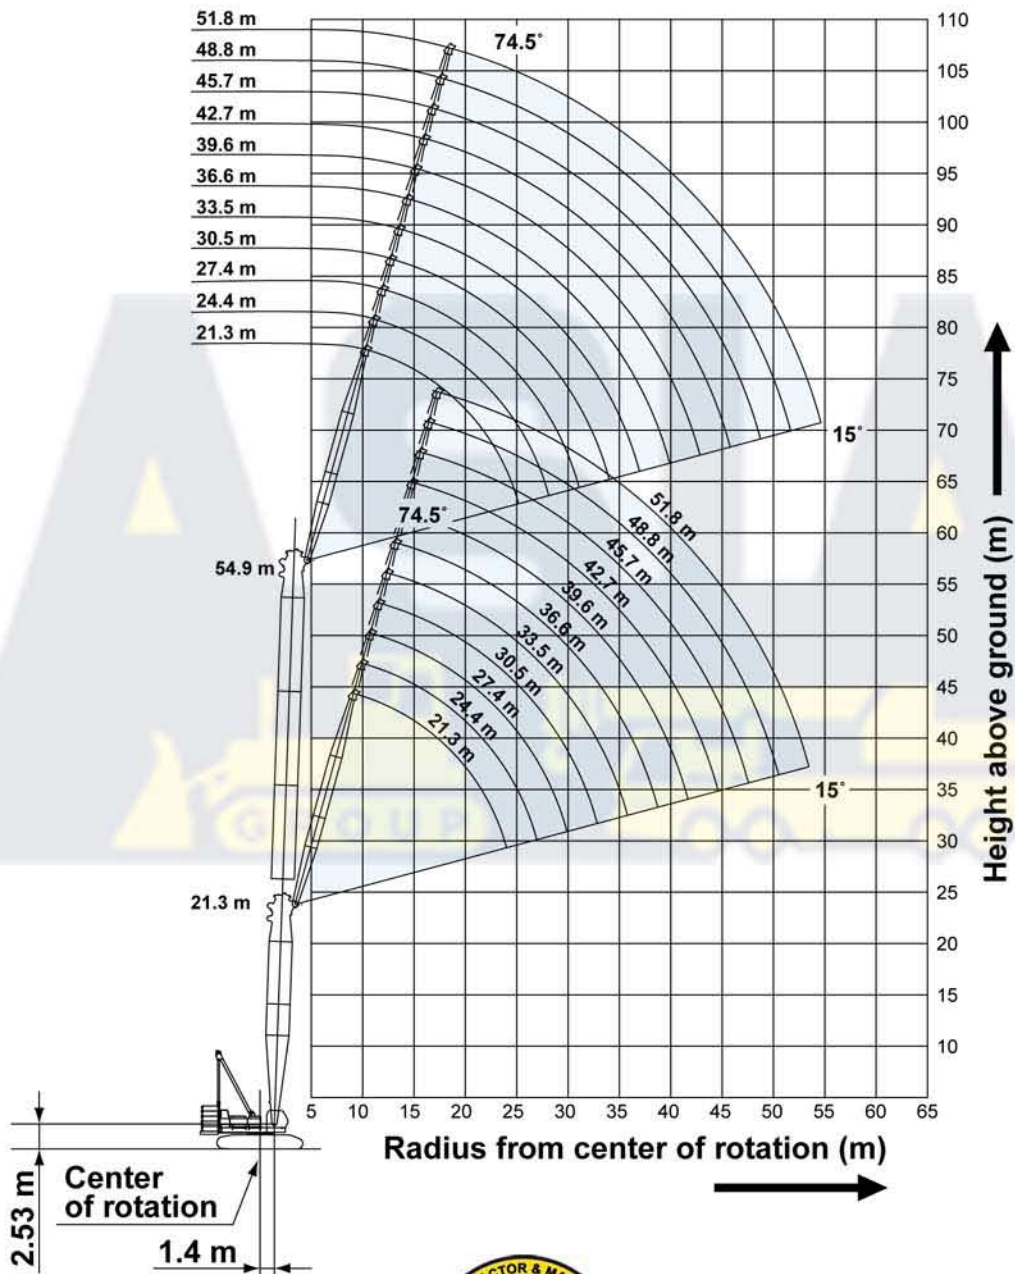


# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Jib Working Ranges

Boom Angle: 88°



### NOTES:

1. Ratings according to EN13000.
2. Ratings in metric tons for 360° working area.
3. Operating radius is the horizontal distance from center of rotation to a vertical line through the center of gravity of the load.
4. Deduct weight of hook block(s), slings and all other load handling accessories from luffing jib ratings or main boom ratings with luffing jib shown.
5. Ratings shown are based on freely suspended loads and make no allowance for such factors as wind effect on lifted load, ground conditions out-of-level, operating speeds or any other condition that could be detrimental to the safe operation of this equipment. Operator, therefore,

has the responsibility to judge the existing conditions and reduce lifted loads and operating speeds accordingly.

6. Ratings are for operation on a firm and level surface, up to 1% gradient.
7. At radii and boom lengths where no ratings are shown on chart, operation is not intended nor approved.
8. Boom/jib inserts and guy lines must be arranged as shown in the "Operator's Manual".
9. Luffing boom hoist reeving is 16 part line.
10. Jib hoist reeving is 8 part line.

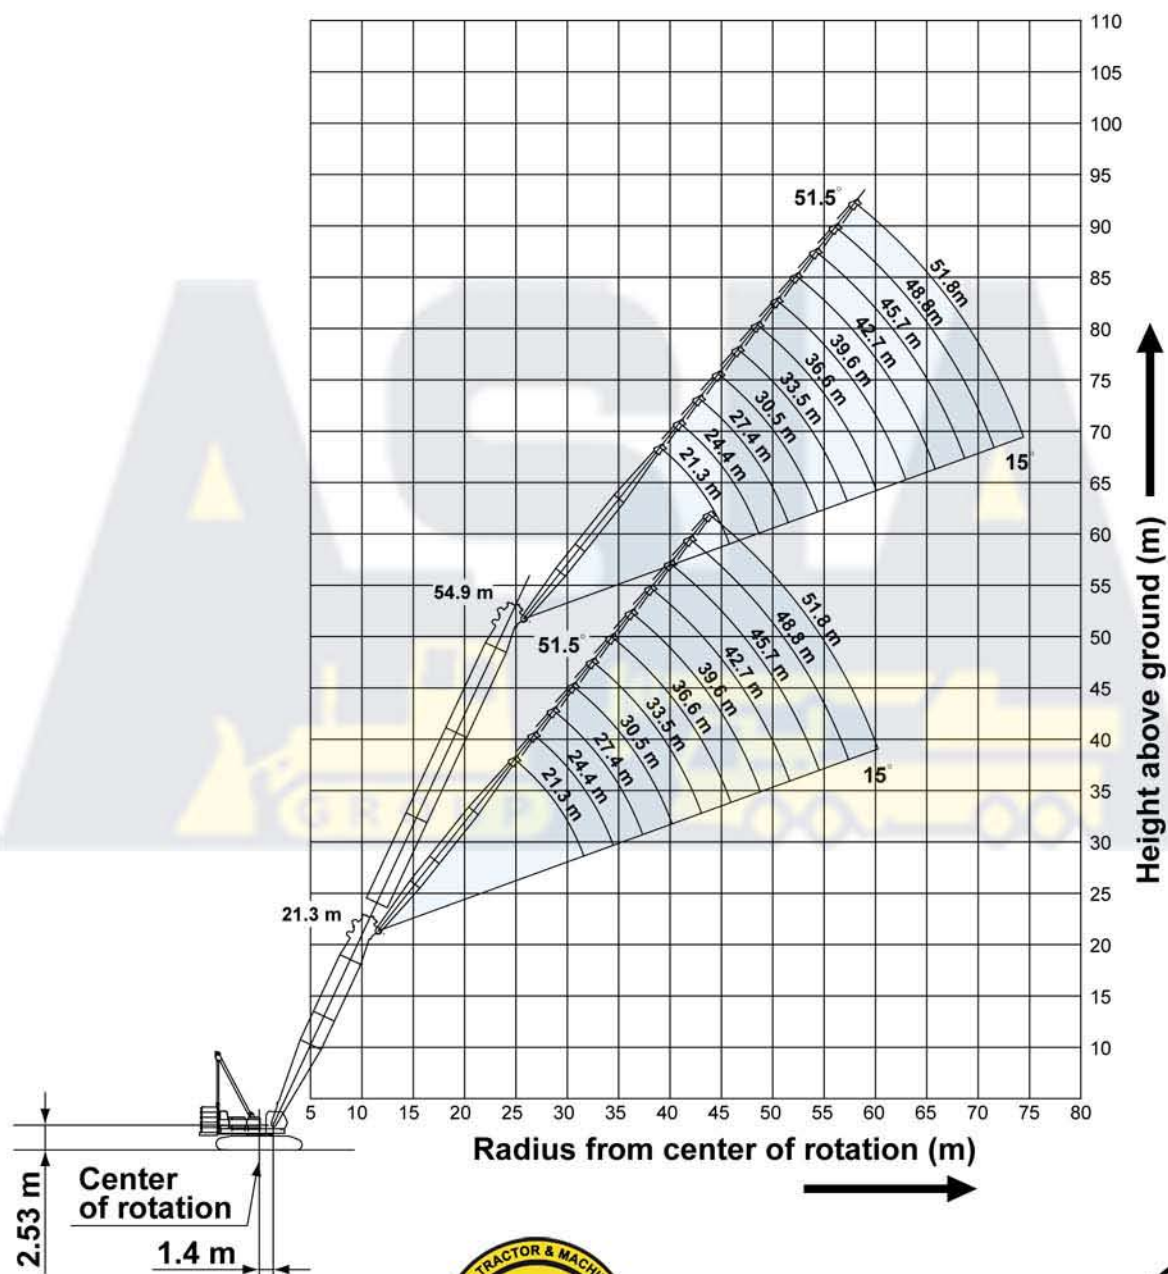




# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

**Boom Angle: 60°**



11. Gantry must be in raised position for all conditions.
12. Boom and jib backstops are required for all boom and jib combinations.
13. Ratings shown in   are determined by the strength of the boom or other structural component.
14. The boom should be erected over the front of crawlers, not laterally.
15. When erecting and lowering the all boom and jib combinations, the pillow plate for erection must be placed at the end of crawlers.
16. Instruction in the "Operator's Manual" must be strictly observed when operating the machine.

17. The minimum rated load is 2.0 tons.
18. Luffing jib ratings: Deduct weight of hook block(s), slings, and all other load handling accessories from luffing jib ratings shown.
19. Main boom ratings with luffing jib: Deduct weight of hook block(s), slings, and all other load handling accessories from main boom ratings with luffing jib shown.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Jib Lifting Capacities (Without Main Hook)

Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| 21.3 m Boom Length | 21.3           |      |      |      |                |      |      |            |                |            |            |      |                |      |      |           |                | Boom length (m) |
|--------------------|----------------|------|------|------|----------------|------|------|------------|----------------|------------|------------|------|----------------|------|------|-----------|----------------|-----------------|
|                    | 21.3           |      |      |      | 27.4           |      |      |            | 33.5           |            |            |      | 39.6           |      |      |           | Jib length (m) |                 |
|                    | Jib length (m) |      |      |      | Jib length (m) |      |      |            | Jib length (m) |            |            |      | Jib length (m) |      |      |           | Boom angle     |                 |
|                    | Boom angle     | 88°  | 83°  | 65°  | 60°            | 88°  | 83°  | 65°        | 60°            | 88°        | 83°        | 65°  | 60°            | 88°  | 83°  | 65°       | 60°            | Boom angle      |
| Working radius (m) | 9.14           | 48.6 |      |      |                |      |      |            |                |            |            |      |                |      |      |           |                | 9.14            |
|                    | 10.0           | 48.3 |      |      |                |      |      |            |                |            |            |      |                |      |      |           |                | 10.0            |
|                    | 12.0           | 47.7 |      |      |                | 47.4 |      |            |                |            |            |      |                |      |      |           |                | 12.0            |
|                    | 14.0           | 43.3 | 47.4 |      |                | 43.2 |      |            |                | 42.9       |            |      |                | 34.6 |      |           |                | 14.0            |
|                    | 16.0           | 35.8 | 40.9 |      |                | 35.7 | 40.7 |            |                | 35.4       |            |      |                | 33.5 |      |           |                | 16.0            |
|                    | 18.0           | 30.4 | 35.1 |      |                | 30.2 | 34.9 |            |                | 30.0       | 34.7       |      |                | 29.7 |      |           |                | 18.0            |
|                    | 20.0           | 26.2 | 30.2 |      |                | 26.2 | 30.1 |            |                | 25.9       | 30.3       |      |                | 25.6 | 30.0 |           |                | 20.0            |
|                    | 22.0           | 23.0 | 26.1 |      |                | 22.9 | 26.0 |            |                | 22.7       | 26.1       |      |                | 22.4 | 25.9 |           |                | 22.0            |
|                    | 24.0           |      | 22.9 |      |                | 20.4 | 22.8 |            |                | 20.1       | 22.9       |      |                | 19.9 | 22.7 |           |                | 24.0            |
|                    | 26.0           |      |      | 20.3 |                | 18.2 | 20.3 |            |                | 18.0       | 20.3       |      |                | 17.7 | 20.1 |           |                | 26.0            |
|                    | 28.0           |      |      | 18.6 |                | 16.5 | 18.2 |            |                | 16.2       | 18.2       |      |                | 16.0 | 17.9 |           |                | 28.0            |
|                    | 30.0           |      |      | 17.1 | 16.7           |      | 16.4 | 16.7       |                | 14.7       | 16.4       |      |                | 14.5 | 16.2 |           |                | 30.0            |
|                    | 34.0           |      |      |      | 32.0m/15.4     |      |      | 14.3       | 13.8           | 32.0m/13.4 | 13.6       | 13.9 |                | 12.1 | 13.4 |           |                | 34.0            |
|                    | 38.0           |      |      |      |                |      |      | 36.0m/13.3 | 12.1           |            | 36.0m/12.5 | 12.2 | 11.7           | 10.3 | 11.2 | 11.8      |                | 38.0            |
|                    | 42.0           |      |      |      |                |      |      |            |                |            |            | 10.7 | 10.5           |      | 9.6  | 10.5      | 10.0           | 42.0            |
|                    | 46.0           |      |      |      |                |      |      |            |                |            |            |      | 44.0m/9.8      |      |      | 9.3       | 9.0            | 46.0            |
|                    | 50.0           |      |      |      |                |      |      |            |                |            |            |      |                |      |      | 48.0m/8.8 | 8.1            | 50.0            |
| Reeves             | 4              |      |      |      | 4              |      |      |            | 4              |            |            |      | 3              |      |      |           | Reeves         |                 |

| 21.3 m Boom Length | 21.3            |           |           |      |                 |      |           |           | Boom length (m) |
|--------------------|-----------------|-----------|-----------|------|-----------------|------|-----------|-----------|-----------------|
|                    | 45.7            |           |           |      | 51.8            |      |           |           | Jib length (m)  |
|                    | 88° 83° 65° 60° |           |           |      | 88° 83° 65° 60° |      |           |           | Boom angle      |
|                    | 18.0            | 22.9      |           |      |                 |      |           |           | 18.0            |
| Working radius (m) | 20.0            | 21.2      |           |      | 16.3            |      |           |           | 20.0            |
|                    | 22.0            | 19.8      | 21.5      |      | 15.1            |      |           |           | 22.0            |
|                    | 24.0            | 18.4      | 19.7      |      | 14.1            |      |           |           | 24.0            |
|                    | 26.0            | 17.3      | 18.4      |      | 13.0            | 14.0 |           |           | 26.0            |
|                    | 28.0            | 15.9      | 17.3      |      | 12.3            | 13.1 |           |           | 28.0            |
|                    | 30.0            | 14.4      | 16.2      |      | 11.5            | 12.3 |           |           | 30.0            |
|                    | 34.0            | 12.0      | 13.3      |      | 10.2            | 10.8 |           |           | 34.0            |
|                    | 38.0            | 10.1      | 11.2      |      | 9.1             | 9.6  |           |           | 38.0            |
|                    | 42.0            | 8.6       | 9.5       | 10.0 | 8.2             | 8.6  |           |           | 42.0            |
|                    | 46.0            | 44.0m/8.0 | 8.2       | 9.1  | 7.3             | 7.7  | 8.7       |           | 46.0            |
|                    | 50.0            |           | 48.0m/7.6 | 8.1  | 6.3             | 6.8  | 7.8       | 52.0m/7.1 | 50.0            |
|                    | 54.0            |           |           | 7.2  | 7.0             |      | 52.0m/6.3 | 6.9       | 54.0            |
|                    | 58.0            |           |           |      |                 |      | 58.0m/6.2 | 6.0       | 58.0            |
|                    | 62.0            |           |           |      |                 |      |           | 5.4       | 62.0            |
|                    | Reeves          |           | 2         |      |                 | 2    |           |           | Reeves          |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components. Refer to notes P21 and P22.







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

27.4 m Boom Length

| Boom length (m)    |        | 27.4 |      |            |            |      |      |      |            |            |            |            |            |      |      |            |           | Boom length (m) |
|--------------------|--------|------|------|------------|------------|------|------|------|------------|------------|------------|------------|------------|------|------|------------|-----------|-----------------|
| Jib length (m)     |        | 21.3 |      |            |            | 27.4 |      |      |            | 33.5       |            |            |            | 39.6 |      |            |           | Jib length (m)  |
| Boom angle         |        | 88°  | 83°  | 65°        | 60°        | 88°  | 83°  | 65°  | 60°        | 88°        | 83°        | 65°        | 60°        | 88°  | 83°  | 65°        | 60°       | Boom angle      |
| Working radius (m) | 10.0   | 47.4 |      |            |            |      |      |      |            |            |            |            |            |      |      |            |           | 10.0            |
|                    | 12.0   | 47.4 |      |            |            | 47.4 |      |      |            |            |            |            |            |      |      |            |           | 12.0            |
|                    | 14.0   | 44.6 | 47.4 |            |            | 44.5 |      |      |            | 44.2       |            |            |            | 34.6 |      |            |           | 14.0            |
|                    | 16.0   | 36.7 | 40.6 |            |            | 36.6 |      |      |            | 36.4       |            |            |            | 33.7 |      |            |           | 16.0            |
|                    | 18.0   | 31.0 | 34.8 |            |            | 30.9 | 34.6 |      |            | 30.7       |            |            |            | 30.5 |      |            |           | 18.0            |
|                    | 20.0   | 26.7 | 30.4 |            |            | 26.7 | 30.2 |      |            | 26.5       | 30.0       |            |            | 26.2 | 29.7 |            |           | 20.0            |
|                    | 22.0   | 23.4 | 26.9 |            |            | 23.4 | 26.7 |      |            | 23.1       | 26.6       |            |            | 22.9 | 26.4 |            |           | 22.0            |
|                    | 24.0   |      | 24.1 |            |            | 20.7 | 23.9 |      |            | 20.5       | 23.8       |            |            | 20.2 | 23.6 |            |           | 24.0            |
|                    | 26.0   |      | 21.2 |            |            | 18.5 | 21.3 |      |            | 18.3       | 21.4       |            |            | 18.0 | 21.1 |            |           | 26.0            |
|                    | 28.0   |      |      |            |            | 16.7 | 19.0 |      |            | 16.5       | 19.1       |            |            | 16.2 | 18.8 |            |           | 28.0            |
|                    | 30.0   |      |      | 16.4       |            |      | 17.1 |      |            | 14.9       | 17.1       |            |            | 14.7 | 16.9 |            |           | 30.0            |
|                    | 34.0   |      |      | 32.0m/15.1 | 13.5       |      |      | 13.7 |            | 32.0m/13.6 | 14.1       | 36.0m/12.2 |            | 12.2 | 13.9 |            |           | 34.0            |
|                    | 38.0   |      |      |            | 36.0m/12.6 |      |      | 11.9 | 11.5       |            | 36.0m/12.9 | 11.7       | 40.0m/10.2 | 10.3 | 11.7 | 40.0m/10.4 |           | 38.0            |
|                    | 42.0   |      |      |            |            |      |      |      | 40.0m/10.8 |            |            | 10.2       | 9.8        |      | 9.9  | 10.0       |           | 42.0            |
|                    | 46.0   |      |      |            |            |      |      |      |            |            |            | 44.0m/9.6  | 8.7        |      |      | 8.8        | 8.5       | 46.0            |
|                    | 50.0   |      |      |            |            |      |      |      |            |            |            |            |            |      |      | 7.9        | 7.5       | 50.0            |
|                    | 54.0   |      |      |            |            |      |      |      |            |            |            |            |            |      |      |            | 52.0m/7.1 | 54.0            |
|                    | Reeves |      | 4    |            |            |      | 4    |      |            |            | 4          |            |            |      | 3    |            |           | Reeves          |

| Boom length (m)    |        | 27.4      |           |           |     |      |      |           |           | Boom length (m) |
|--------------------|--------|-----------|-----------|-----------|-----|------|------|-----------|-----------|-----------------|
| Jib length (m)     |        | 45.7      |           |           |     | 51.8 |      |           |           | Jib length (m)  |
| Boom angle         |        | 88°       | 83°       | 65°       | 60° | 88°  | 83°  | 65°       | 60°       | Boom angle      |
| Working radius (m) | 18.0   | 23.0      |           |           |     |      |      |           |           | 18.0            |
|                    | 20.0   | 21.4      |           |           |     | 16.5 |      |           |           | 20.0            |
|                    | 22.0   | 19.9      |           |           |     | 15.2 |      |           |           | 22.0            |
|                    | 24.0   | 18.5      | 20.2      |           |     | 14.1 |      |           |           | 24.0            |
|                    | 26.0   | 17.4      | 18.9      |           |     | 13.2 | 14.3 |           |           | 26.0            |
|                    | 28.0   | 16.2      | 17.7      |           |     | 12.3 | 13.4 |           |           | 28.0            |
|                    | 30.0   | 14.6      | 16.6      |           |     | 11.5 | 12.5 |           |           | 30.0            |
|                    | 34.0   | 12.1      | 13.9      |           |     | 10.2 | 11.0 |           |           | 34.0            |
|                    | 38.0   | 10.2      | 11.6      |           |     | 9.1  | 9.8  |           |           | 38.0            |
|                    | 42.0   | 8.7       | 9.9       | 44.0m/8.8 |     | 8.2  | 8.8  |           |           | 42.0            |
|                    | 46.0   | 44.0m/8.1 | 8.4       | 8.6       |     | 7.4  | 7.8  | 48.0m/7.6 |           | 46.0            |
|                    | 50.0   |           | 48.0m/7.8 | 7.6       | 7.2 | 4.5  | 6.9  | 7.3       |           | 50.0            |
|                    | 54.0   |           |           | 6.8       | 6.5 |      | 4.4  | 6.5       | 6.2       | 54.0            |
|                    | 58.0   |           |           | 56.0m/6.4 | 5.8 |      |      | 5.8       | 5.5       | 58.0            |
|                    | 62.0   |           |           |           |     |      |      | 5.2       | 4.9       | 62.0            |
|                    | 66.0   |           |           |           |     |      |      |           | 64.0m/4.6 | 66.0            |
|                    | Reeves |           | 2         |           |     |      | 2    |           |           | Reeves          |

Note: Ratings according to EN13000.  
Ratings shown in [ ] are determined by the strength of the boom or other structural components.  
Refer to notes P21 and P22.







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| 33.5 m Boom Length | 33.5            |      |      |            |                 |      |  |            |                 |      |            |      |                 |      |      |           |                | Boom length (m) |
|--------------------|-----------------|------|------|------------|-----------------|------|--|------------|-----------------|------|------------|------|-----------------|------|------|-----------|----------------|-----------------|
|                    | 21.3            |      |      |            | 27.4            |      |  |            | 33.5            |      |            |      | 39.6            |      |      |           | Jib length (m) |                 |
|                    | 88° 83° 65° 60° |      |      |            | 88° 83° 65° 60° |      |  |            | 88° 83° 65° 60° |      |            |      | 88° 83° 65° 60° |      |      |           | Boom angle     |                 |
|                    | 10.0            | 47.4 |      |            |                 |      |  |            |                 |      |            |      |                 |      |      |           | 10.0           |                 |
| Working radius (m) | 12.0            | 47.4 |      |            | 47.4            |      |  |            |                 |      |            |      |                 |      |      |           | 12.0           |                 |
|                    | 14.0            | 45.7 | 47.4 |            | 45.6            |      |  |            | 42.6            |      |            |      |                 |      |      |           | 14.0           |                 |
|                    | 16.0            | 37.5 | 40.2 |            | 37.5            |      |  |            | 37.2            |      |            |      | 33.0            |      |      |           | 16.0           |                 |
|                    | 18.0            | 31.6 | 34.4 |            | 31.6            | 34.2 |  |            | 31.4            |      |            |      | 31.3            |      |      |           | 18.0           |                 |
|                    | 20.0            | 27.2 | 30.1 |            | 27.2            | 30.0 |  |            | 26.9            | 29.6 |            |      | 27.2            |      |      |           | 20.0           |                 |
|                    | 22.0            | 23.7 | 26.6 |            | 23.7            | 26.5 |  |            | 23.5            | 26.3 |            |      | 23.7            | 25.9 |      |           | 22.0           |                 |
|                    | 24.0            |      | 23.9 |            | 21.0            | 23.8 |  |            | 20.8            | 23.5 |            |      | 20.9            | 23.4 |      |           | 24.0           |                 |
|                    | 26.0            |      | 21.5 |            | 18.7            | 21.5 |  |            | 18.5            | 21.2 |            |      | 18.6            | 21.1 |      |           | 26.0           |                 |
|                    | 28.0            |      |      |            | 16.8            | 19.5 |  |            | 16.7            | 19.3 |            |      | 16.7            | 19.2 |      |           | 28.0           |                 |
|                    | 30.0            |      |      | 32.0m/14.4 |                 | 17.9 |  |            | 15.1            | 17.7 |            |      | 15.1            | 17.6 |      |           | 30.0           |                 |
|                    | 34.0            |      |      | 13.3       | 36.0m/11.9      |      |  | 36.0m/12.2 | 32.0m/13.7      | 14.6 |            |      | 12.6            | 14.4 |      |           | 34.0           |                 |
|                    | 38.0            |      |      |            | 11.1            |      |  | 11.3       | 40.0m/9.8       |      | 36.0m/13.3 | 10.7 | 10.6            | 12.1 |      |           | 38.0           |                 |
|                    | 42.0            |      |      |            |                 |      |  | 40.0m/10.6 | 9.5             |      |            | 9.7  | 44.0m/8.3       |      | 10.2 | 44.0m/8.8 | 42.0           |                 |
|                    | 46.0            |      |      |            |                 |      |  |            | 44.0m/8.9       |      |            | 8.5  | 8.1             |      |      | 8.3       | 48.0m/7.0      | 46.0            |
|                    | 50.0            |      |      |            |                 |      |  |            |                 |      |            |      | 7.2             |      |      | 7.4       | 6.9            | 50.0            |
|                    | 54.0            |      |      |            |                 |      |  |            |                 |      |            |      |                 |      |      | 52.0m/7.0 | 6.2            | 54.0            |
|                    | 58.0            |      |      |            |                 |      |  |            |                 |      |            |      |                 |      |      |           | 56.0m/5.9      | 58.0            |
|                    | Reeves          | 4    |      |            |                 | 4    |  |            |                 | 4    |            |      |                 | 3    |      |           |                | Reeves          |

| Boom length (m)    |      | 33.5      |           |     |           |      |           |           |     | Boom length (m) |      |
|--------------------|------|-----------|-----------|-----|-----------|------|-----------|-----------|-----|-----------------|------|
| Jib length (m)     |      | 45.7      |           |     |           | 51.8 |           |           |     | Jib length (m)  |      |
| Boom angle         |      | 88°       | 83°       | 65° | 60°       | 88°  | 83°       | 65°       | 60° | Boom angle      |      |
| Working radius (m) | 18.0 | 23.2      |           |     |           |      |           |           |     |                 | 18.0 |
|                    | 20.0 | 21.5      |           |     |           | 16.6 |           |           |     |                 | 20.0 |
|                    | 22.0 | 20.0      |           |     |           | 15.3 |           |           |     |                 | 22.0 |
|                    | 24.0 | 18.6      | 20.9      |     |           | 14.2 |           |           |     |                 | 24.0 |
|                    | 26.0 | 17.4      | 19.3      |     |           | 13.2 | 14.7      |           |     |                 | 26.0 |
|                    | 28.0 | 16.4      | 18.0      |     |           | 12.3 | 13.7      |           |     |                 | 28.0 |
|                    | 30.0 | 14.8      | 16.9      |     |           | 11.6 | 12.8      |           |     |                 | 30.0 |
|                    | 34.0 | 12.3      | 14.5      |     |           | 10.3 | 11.2      |           |     |                 | 34.0 |
|                    | 38.0 | 10.3      | 12.1      |     |           | 9.1  | 10.0      |           |     |                 | 38.0 |
|                    | 42.0 | 8.8       | 10.2      |     |           | 8.2  | 8.9       |           |     |                 | 42.0 |
|                    | 46.0 | 44.0m/8.1 | 8.7       | 7.6 |           | 6.3  | 7.9       |           |     |                 | 46.0 |
|                    | 50.0 |           | 48.0m/8.1 | 7.1 | 52.0m/5.8 | 4.1  | 6.7       | 52.0m/6.4 |     |                 | 50.0 |
|                    | 54.0 |           |           | 6.3 | 5.8       |      | 4.1       | 6.0       |     |                 | 54.0 |
|                    | 58.0 |           |           | 5.7 | 5.2       |      |           | 5.3       | 4.9 |                 | 58.0 |
| 62.0               |      |           |           | 4.6 |           |      | 4.7       | 4.3       |     | 62.0            |      |
| 66.0               |      |           |           |     |           |      | 64.0m/4.5 | 3.8       |     | 66.0            |      |
| 70.0               |      |           |           |     |           |      |           | 68.0m/3.6 |     | 70.0            |      |
| Reeves             |      | 2         |           |     |           | 2    |           |           |     | Reeves          |      |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components. Refer to notes P21 and P22.







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| 39.6 m Boom Length |      | 39.6 |      |      |      |      |            |           |           |            |      |     |           |      |     |           |      | 39.6 m Boom Length |           |     |     |                |  |
|--------------------|------|------|------|------|------|------|------------|-----------|-----------|------------|------|-----|-----------|------|-----|-----------|------|--------------------|-----------|-----|-----|----------------|--|
| Boom length (m)    |      | 21.3 |      |      |      |      |            |           |           | 27.4       |      |     |           | 33.5 |     |           |      | 39.6               |           |     |     | Jib length (m) |  |
| Jib length (m)     |      |      |      |      |      |      |            |           |           |            |      |     |           |      |     |           |      |                    |           |     |     |                |  |
| Boom angle         |      | 88°  | 83°  | 65°  | 60°  | 88°  | 83°        | 65°       | 60°       | 88°        | 83°  | 65° | 60°       | 88°  | 83° | 65°       | 60°  | 88°                | 83°       | 65° | 60° | Boom angle     |  |
| Working radius (m) | 10.0 | 47.4 |      |      |      |      |            |           |           |            |      |     |           |      |     |           |      |                    |           |     |     | 10.0           |  |
|                    | 12.0 | 47.4 |      |      |      | 47.4 |            |           |           |            |      |     |           |      |     |           |      |                    |           |     |     | 12.0           |  |
|                    | 14.0 | 43.4 |      |      |      | 43.0 |            |           |           | 37.7       |      |     |           |      |     |           |      |                    |           |     |     | 14.0           |  |
|                    | 16.0 | 38.1 | 39.7 |      |      | 37.7 |            |           |           | 37.0       |      |     |           |      |     | 29.8      |      |                    |           |     |     | 16.0           |  |
|                    | 18.0 | 32.2 | 34.2 |      |      | 32.1 |            |           |           | 31.9       |      |     |           |      |     | 29.3      |      |                    |           |     |     | 18.0           |  |
|                    | 20.0 | 27.6 | 29.8 |      |      | 27.6 | 29.6       |           |           | 27.4       | 29.2 |     |           |      |     | 27.6      |      |                    |           |     |     | 20.0           |  |
|                    | 22.0 | 24.0 | 26.4 |      |      | 24.1 | 26.2       |           |           | 23.9       | 25.9 |     |           |      |     | 24.0      | 25.5 |                    |           |     |     | 22.0           |  |
|                    | 24.0 |      | 23.7 |      |      | 21.2 | 23.5       |           |           | 21.0       | 23.2 |     |           |      |     | 21.2      | 23.1 |                    |           |     |     | 24.0           |  |
|                    | 26.0 |      | 21.4 |      |      | 18.9 | 21.2       |           |           | 18.7       | 20.9 |     |           |      |     | 18.8      | 20.9 |                    |           |     |     | 26.0           |  |
|                    | 28.0 |      |      |      |      | 17.0 | 19.3       |           |           | 16.8       | 19.0 |     |           |      |     | 16.9      | 19.0 |                    |           |     |     | 28.0           |  |
|                    | 30.0 |      |      |      |      |      | 17.7       |           |           | 15.2       | 17.4 |     |           |      |     | 15.3      | 17.4 |                    |           |     |     | 30.0           |  |
|                    | 34.0 |      |      | 12.4 |      |      | 32.0m/16.3 |           |           | 32.0m/13.8 | 14.8 |     |           |      |     | 12.7      | 14.7 |                    |           |     |     | 34.0           |  |
|                    | 38.0 |      |      | 11.0 | 10.1 |      |            | 10.4      |           |            | 12.6 |     |           |      |     | 10.7      | 12.4 |                    |           |     |     | 38.0           |  |
|                    | 42.0 |      |      |      | 9.1  |      |            | 9.4       | 44.0m/8.2 |            |      | 8.7 |           |      |     |           | 10.5 |                    |           |     |     | 42.0           |  |
|                    | 46.0 |      |      |      |      |      |            | 44.0m/8.8 | 7.7       |            |      | 8.0 | 7.1       |      |     | 44.0m/9.7 | 7.7  |                    |           |     |     | 46.0           |  |
|                    | 50.0 |      |      |      |      |      |            |           |           |            |      | 7.1 | 6.6       |      |     |           |      | 6.9                | 52.0m/5.9 |     |     | 50.0           |  |
|                    | 54.0 |      |      |      |      |      |            |           |           |            |      |     | 52.0m/6.2 |      |     |           |      | 6.1                | 5.6       |     |     | 54.0           |  |
|                    | 58.0 |      |      |      |      |      |            |           |           |            |      |     |           |      |     |           |      | 56.0m/5.8          | 4.9       |     |     | 58.0           |  |
| Reeves             |      | 4    |      |      |      | 4    |            |           |           | 3          |      |     |           | 3    |     |           |      | Reeves             |           |     |     |                |  |

| 39.6 m Boom Length |      | 39.6      |           |           |           |      |           |           |           | 51.8       |  |  |  | 39.6 m Boom Length |  |
|--------------------|------|-----------|-----------|-----------|-----------|------|-----------|-----------|-----------|------------|--|--|--|--------------------|--|
| Jib length (m)     |      | 45.7      |           |           |           |      |           |           |           | 51.8       |  |  |  | Jib length (m)     |  |
| Boom angle         |      | 88°       | 83°       | 65°       | 60°       | 88°  | 83°       | 65°       | 60°       | Boom angle |  |  |  |                    |  |
| Working radius (m) | 18.0 | 23.3      |           |           |           |      |           |           |           | 18.0       |  |  |  |                    |  |
|                    | 20.0 | 21.6      |           |           |           | 16.7 |           |           |           | 20.0       |  |  |  |                    |  |
|                    | 22.0 | 20.1      |           |           |           | 15.4 |           |           |           | 22.0       |  |  |  |                    |  |
|                    | 24.0 | 18.7      |           |           |           | 14.3 |           |           |           | 24.0       |  |  |  |                    |  |
|                    | 26.0 | 17.6      | 19.8      |           |           | 13.2 | 15.1      |           |           | 26.0       |  |  |  |                    |  |
|                    | 28.0 | 16.5      | 18.5      |           |           | 12.3 | 14.0      |           |           | 28.0       |  |  |  |                    |  |
|                    | 30.0 | 15.0      | 17.1      |           |           | 11.6 | 13.1      |           |           | 30.0       |  |  |  |                    |  |
|                    | 34.0 | 12.4      | 14.5      |           |           | 10.3 | 11.5      |           |           | 34.0       |  |  |  |                    |  |
|                    | 38.0 | 10.4      | 12.5      |           |           | 9.2  | 10.2      |           |           | 38.0       |  |  |  |                    |  |
|                    | 42.0 | 8.8       | 10.5      |           |           | 8.2  | 9.1       |           |           | 42.0       |  |  |  |                    |  |
|                    | 46.0 | 44.0m/8.2 | 8.9       |           |           | 6.0  | 8.1       |           |           | 46.0       |  |  |  |                    |  |
|                    | 50.0 |           | 48.0m/8.3 | 6.5       |           | 3.7  | 6.6       | 52.0m/5.6 |           | 50.0       |  |  |  |                    |  |
|                    | 54.0 |           |           | 5.8       | 56.0m/4.7 |      | 3.9       | 5.4       |           | 54.0       |  |  |  |                    |  |
|                    | 58.0 |           |           | 5.1       | 4.6       |      |           | 4.8       | 60.0m/3.8 | 58.0       |  |  |  |                    |  |
|                    | 62.0 |           |           | 4.6       | 4.0       |      |           | 4.2       | 3.7       | 62.0       |  |  |  |                    |  |
| 66.0               |      |           |           | 64.0m/3.8 |           |      | 3.7       | 3.2       | 66.0      |            |  |  |  |                    |  |
| 70.0               |      |           |           |           |           |      | 68.0m/3.5 | 2.8       | 70.0      |            |  |  |  |                    |  |
| Reeves             |      | 2         |           |           |           | 2    |           |           |           | Reeves     |  |  |  |                    |  |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components  
Refer to notes P21 and P22.

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components. Refer to notes P21 and P22.





**ASIAGROUP LEASING PTE LTD**

**NO.3 PIONEER PLACE SINGAPORE 627804 TEL:+65 67562288 FAX:+65 67568822**



Unit: metric ton

**Counterweight: 60.0 t, Carbody weight: 20.0 t**

| Boom length (m)    |      | 45.7 |      |           |           |      |            |           |     |      |      |           |           |      |      |            |           | Boom length (m) |      |
|--------------------|------|------|------|-----------|-----------|------|------------|-----------|-----|------|------|-----------|-----------|------|------|------------|-----------|-----------------|------|
| Jib length (m)     |      | 21.3 |      |           |           | 27.4 |            |           |     | 33.5 |      |           |           | 39.6 |      |            |           | Jib length (m)  |      |
| Boom angle         |      | 88°  | 83°  | 65°       | 60°       | 88°  | 83°        | 65°       | 60° | 88°  | 83°  | 65°       | 60°       | 88°  | 83°  | 65°        | 60°       | Boom angle      |      |
| 45.7 m Boom Length | 10.0 | 47.4 |      |           |           |      |            |           |     |      |      |           |           |      |      |            |           | 10.0            |      |
|                    | 12.0 | 43.8 |      |           |           | 41.2 |            |           |     |      |      |           |           |      |      |            |           | 12.0            |      |
|                    | 14.0 | 38.3 |      |           |           | 37.5 |            |           |     | 33.0 |      |           |           |      |      |            |           | 14.0            |      |
|                    | 16.0 | 33.9 |      |           |           | 33.2 |            |           |     | 32.2 |      |           |           | 26.6 |      |            |           | 16.0            |      |
|                    | 18.0 | 30.4 | 33.7 |           |           | 29.6 |            |           |     | 28.9 |      |           |           | 26.1 |      |            |           | 18.0            |      |
|                    | 20.0 | 27.5 | 29.5 |           |           | 26.7 | 29.2       |           |     | 26.1 | 28.7 |           |           | 25.5 |      |            |           | 20.0            |      |
|                    | 22.0 | 24.3 | 26.1 |           |           | 24.3 | 25.8       |           |     | 23.7 | 25.6 |           |           | 23.1 |      |            |           | 22.0            |      |
|                    | 24.0 |      | 23.4 |           |           | 21.4 | 23.1       |           |     | 21.3 | 22.9 |           |           | 21.1 | 22.8 |            |           | 24.0            |      |
|                    | 26.0 |      | 21.1 |           |           | 19.1 | 20.9       |           |     | 19.0 | 20.6 |           |           | 19.1 | 20.5 |            |           | 26.0            |      |
|                    | 28.0 |      |      |           |           | 17.1 | 19.0       |           |     | 17.1 | 18.7 |           |           | 17.1 | 18.7 |            |           | 28.0            |      |
|                    | 30.0 |      |      |           |           |      | 17.4       |           |     | 15.4 | 17.2 |           |           | 15.4 | 17.1 |            |           | 30.0            |      |
|                    | 34.0 |      |      |           |           |      | 32.0m/16.0 |           |     | 12.8 | 14.6 |           |           | 12.8 | 14.5 |            |           | 34.0            |      |
|                    | 38.0 |      |      | 10.3      |           |      |            | 40.0m/8.9 |     |      | 12.6 |           |           | 10.7 | 12.5 |            |           | 38.0            |      |
|                    | 42.0 |      |      | 40.0m/9.6 | 8.0       |      |            | 8.7       |     |      |      |           |           |      | 11.0 | 44.0m/10.2 |           | 42.0            |      |
|                    | 46.0 |      |      |           | 44.0m/7.8 |      |            | 7.7       | 6.6 |      |      | 7.4       |           |      |      | 44.0m/10.2 | 48.0m/6.2 | 46.0            |      |
|                    | 50.0 |      |      |           |           |      |            |           | 6.2 |      |      | 6.5       | 5.4       |      |      |            | 6.2       | 50.0            |      |
|                    | 54.0 |      |      |           |           |      |            |           |     |      |      | 52.0m/6.2 | 5.1       |      |      |            | 5.5       | 4.3             | 54.0 |
|                    | 58.0 |      |      |           |           |      |            |           |     |      |      |           | 56.0m/4.8 |      |      |            | 4.9       | 4.2             | 58.0 |
| 62.0               |      |      |      |           |           |      |            |           |     |      |      |           |           |      |      |            | 3.7       | 62.0            |      |
| Reeves             |      | 4    |      |           |           | 4    |            |           |     | 3    |      |           |           | 2    |      |            |           | Reeves          |      |

| Boom length (m)    |      | 45.7      |      |           |     |      |           |           |           | Boom length (m) |
|--------------------|------|-----------|------|-----------|-----|------|-----------|-----------|-----------|-----------------|
| Jib length (m)     |      | 45.7      |      |           |     | 51.8 |           |           |           | Jib length (m)  |
| Boom angle         |      | 88°       | 83°  | 65°       | 60° | 88°  | 83°       | 65°       | 60°       | Boom angle      |
| Working radius (m) | 18.0 | 21.4      |      |           |     |      |           |           |           | 18.0            |
|                    | 20.0 | 21.0      |      |           |     | 16.8 |           |           |           | 20.0            |
|                    | 22.0 | 20.2      |      |           |     | 15.5 |           |           |           | 22.0            |
|                    | 24.0 | 18.8      |      |           |     | 14.3 |           |           |           | 24.0            |
|                    | 26.0 | 17.6      | 20.3 |           |     | 13.3 |           |           |           | 26.0            |
|                    | 28.0 | 16.6      | 18.4 |           |     | 12.5 | 14.4      |           |           | 28.0            |
|                    | 30.0 | 15.1      | 16.8 |           |     | 11.7 | 13.4      |           |           | 30.0            |
|                    | 34.0 | 12.5      | 14.3 |           |     | 10.3 | 11.7      |           |           | 34.0            |
|                    | 38.0 | 10.5      | 12.3 |           |     | 9.2  | 10.4      |           |           | 38.0            |
|                    | 42.0 | 8.9       | 10.7 |           |     | 8.2  | 9.2       |           |           | 42.0            |
|                    | 46.0 | 44.0m/8.2 | 9.2  |           |     | 5.6  | 8.2       |           |           | 46.0            |
|                    | 50.0 |           | 7.9  | 52.0m/5.0 |     | 3.3  | 6.5       |           |           | 50.0            |
|                    | 54.0 |           |      | 5.0       |     |      | 3.7       | 56.0m/4.3 |           | 54.0            |
|                    | 58.0 |           |      | 4.5       | 3.3 |      | 56.0m/2.6 | 4.2       |           | 58.0            |
|                    | 62.0 |           |      | 4.0       | 3.3 |      |           | 3.6       | 64.0m/2.8 | 62.0            |
|                    | 66.0 |           |      | 64.0m/3.8 | 2.9 |      |           | 3.2       | 2.6       | 66.0            |
| 70.0               |      |           |      | 68.0m/2.7 |     |      | 2.8       | 2.2       | 70.0      |                 |
| 74.0               |      |           |      |           |     |      |           | 72.0m/2.0 | 74.0      |                 |
| Reeves             |      | 2         |      |           |     | 2    |           |           |           | Reeves          |

Note: Ratings according to EN13000.

Ratings shown in    are determined by the strength of the boom or other structural components. Refer to notes P21 and P22.







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| 51.8 m Boom Length | 51.8               |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    | Boom length (m)    |
|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|                    | 21.3               |                    |                    |                    | 27.4               |                    |                    |                    | 33.5               |                    |                    |                    | 39.6               |                    |                    |                    | Jib length (m)     |
|                    | 88°                | 83°                | 65°                | 60°                | 88°                | 83°                | 65°                | 60°                | 88°                | 83°                | 65°                | 60°                | 88°                | 83°                | 65°                | 60°                | Boom angle         |
|                    | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) |
| 12.0               | 37.2               |                    |                    |                    | 35.4               |                    |                    |                    | 28.8               |                    |                    |                    | 23.6               |                    |                    |                    | 12.0               |
| 14.0               | 32.7               |                    |                    |                    | 31.6               |                    |                    |                    | 27.2               |                    |                    |                    | 23.1               |                    |                    |                    | 14.0               |
| 16.0               | 29.2               |                    |                    |                    | 28.1               |                    |                    |                    | 24.4               |                    |                    |                    | 21.2               |                    |                    |                    | 16.0               |
| 18.0               | 26.3               | 31.9               |                    |                    | 25.3               |                    |                    |                    | 22.0               |                    |                    |                    | 19.3               |                    |                    |                    | 18.0               |
| 20.0               | 23.9               | 28.6               |                    |                    | 22.9               | 27.5               |                    |                    | 20.1               | 23.5               |                    |                    | 17.7               | 20.6               |                    |                    | 20.0               |
| 22.0               | 21.8               | 25.7               |                    |                    | 20.9               | 24.9               |                    |                    | 18.4               | 21.5               |                    |                    | 16.3               | 19.0               |                    |                    | 22.0               |
| 24.0               | 20.2               | 23.0               |                    |                    | 19.2               | 22.6               |                    |                    | 16.9               | 19.7               |                    |                    | 15.1               | 17.4               |                    |                    | 24.0               |
| 26.0               |                    | 20.8               |                    |                    | 17.8               | 20.6               |                    |                    | 15.7               | 18.1               |                    |                    | 14.0               | 16.0               |                    |                    | 26.0               |
| 28.0               |                    | 18.9               |                    |                    | 16.5               | 18.7               |                    |                    | 14.6               | 16.7               |                    |                    | 12.2               | 13.8               |                    |                    | 28.0               |
| 30.0               |                    |                    |                    |                    |                    | 17.1               |                    |                    | 12.7               | 14.4               |                    |                    | 10.7               | 12.0               |                    |                    | 30.0               |
| 34.0               |                    |                    |                    |                    |                    | 32.0m/15.8         |                    |                    |                    |                    |                    |                    | 40.0m/10.0         | 10.6               |                    |                    | 34.0               |
| 38.0               |                    |                    | 9.2                |                    |                    |                    |                    |                    |                    | 12.5               |                    |                    |                    |                    |                    |                    | 38.0               |
| 42.0               |                    |                    | 8.3                |                    |                    |                    | 44.0m/7.5          |                    |                    |                    |                    |                    |                    |                    |                    |                    | 42.0               |
| 46.0               |                    |                    | 44.0m/7.8          | 6.5                |                    |                    | 7.1                |                    |                    |                    | 6.1                |                    |                    | 44.0m/10.0         |                    |                    | 46.0               |
| 50.0               |                    |                    |                    | 48.0m/6.1          |                    |                    | 6.2                | 5.3                |                    |                    | 5.8                | 52.0m/4.1          |                    |                    | 52.0m/5.0          |                    | 50.0               |
| 54.0               |                    |                    |                    |                    |                    |                    |                    | 52.0m/5.0          |                    |                    | 5.1                | 4.1                |                    |                    | 4.8                |                    | 54.0               |
| 58.0               |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    | 3.8                |                    |                    | 4.3                | 3.2                | 58.0               |
| 62.0               |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    | 60.0m/4.0          | 3.0                | 62.0               |
| 66.0               |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    | 64.0m/2.8          | 66.0               |
| Reeves             |                    |                    | 3                  |                    |                    |                    | 3                  |                    |                    |                    | 3                  |                    |                    |                    | 2                  |                    | Reeves             |

| 51.8 m Boom Length | 51.8               |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    |                    | Boom length (m)    |
|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|                    | 45.7               |                    |                    |                    | 51.8               |                    |                    |                    | 51.8               |                    |                    |                    | 51.8               |                    |                    |                    | Jib length (m)     |
|                    | 88°                | 83°                | 65°                | 60°                | 88°                | 83°                | 65°                | 60°                | 88°                | 83°                | 65°                | 60°                | 88°                | 83°                | 65°                | 60°                | Boom angle         |
|                    | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) | Working radius (m) |
| 18.0               | 19.2               |                    |                    |                    | 15.7               |                    |                    |                    | 18.0               |                    |                    |                    | 18.0               |                    |                    |                    | 18.0               |
| 20.0               | 18.9               |                    |                    |                    | 15.5               |                    |                    |                    | 20.0               |                    |                    |                    | 20.0               |                    |                    |                    | 20.0               |
| 22.0               | 18.5               |                    |                    |                    | 15.5               |                    |                    |                    | 22.0               |                    |                    |                    | 22.0               |                    |                    |                    | 22.0               |
| 24.0               | 17.0               |                    |                    |                    | 14.4               |                    |                    |                    | 24.0               |                    |                    |                    | 24.0               |                    |                    |                    | 24.0               |
| 26.0               | 15.6               | 18.0               |                    |                    | 13.4               |                    |                    |                    | 26.0               |                    |                    |                    | 26.0               |                    |                    |                    | 26.0               |
| 28.0               | 14.3               | 16.6               |                    |                    | 12.5               | 14.8               |                    |                    | 28.0               |                    |                    |                    | 28.0               |                    |                    |                    | 28.0               |
| 30.0               | 13.3               | 15.3               |                    |                    | 11.7               | 13.7               |                    |                    | 30.0               |                    |                    |                    | 30.0               |                    |                    |                    | 30.0               |
| 34.0               | 11.5               | 13.1               |                    |                    | 10.4               | 12.0               |                    |                    | 34.0               |                    |                    |                    | 34.0               |                    |                    |                    | 34.0               |
| 38.0               | 10.0               | 11.3               |                    |                    | 9.2                | 10.6               |                    |                    | 38.0               |                    |                    |                    | 38.0               |                    |                    |                    | 38.0               |
| 42.0               | 8.8                | 9.9                |                    |                    | 8.2                | 9.2                |                    |                    | 42.0               |                    |                    |                    | 42.0               |                    |                    |                    | 42.0               |
| 46.0               | 44.0m/8.3          | 8.8                |                    |                    | 5.3                | 8.1                |                    |                    | 46.0               |                    |                    |                    | 46.0               |                    |                    |                    | 46.0               |
| 50.0               |                    | 7.8                |                    |                    | 3.0                | 6.4                |                    |                    | 50.0               |                    |                    |                    | 50.0               |                    |                    |                    | 50.0               |
| 54.0               |                    |                    | 3.9                |                    |                    | 3.6                |                    |                    | 54.0               |                    |                    |                    | 54.0               |                    |                    |                    | 54.0               |
| 58.0               |                    |                    | 3.9                |                    |                    | 56.0m/2.4          | 3.3                |                    | 58.0               |                    |                    |                    | 58.0               |                    |                    |                    | 58.0               |
| 62.0               |                    |                    | 3.4                |                    |                    |                    | 3.0                |                    | 62.0               |                    |                    |                    | 62.0               |                    |                    |                    | 62.0               |
| 66.0               |                    |                    | 3.0                |                    |                    |                    | 2.6                |                    | 66.0               |                    |                    |                    | 66.0               |                    |                    |                    | 66.0               |
| 70.0               |                    |                    |                    |                    |                    |                    | 2.2                |                    | 70.0               |                    |                    |                    | 70.0               |                    |                    |                    | 70.0               |
| 74.0               |                    |                    |                    |                    |                    |                    | 72.0m/2.0          |                    | 74.0               |                    |                    |                    | 74.0               |                    |                    |                    | 74.0               |
| Reeves             |                    |                    | 2                  |                    |                    |                    | 2                  |                    | Reeves             |                    |                    |                    | Reeves             |                    |                    |                    | Reeves             |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Refer to notes P21 and P22.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



Unit: metric ton

Counterweight: 60.0 t, Carbody weight: 20.0 t

| 54.9 m Boom Length | 54.9           |      |      |           |                |      |  |     |                |      |           |  |                |           |           |  |                | Boom length (m) |
|--------------------|----------------|------|------|-----------|----------------|------|--|-----|----------------|------|-----------|--|----------------|-----------|-----------|--|----------------|-----------------|
|                    | 21.3           |      |      |           | 27.4           |      |  |     | 33.5           |      |           |  | 39.6           |           |           |  | Jib length (m) |                 |
|                    | Jib length (m) |      |      |           | Jib length (m) |      |  |     | Jib length (m) |      |           |  | Jib length (m) |           |           |  | Jib length (m) |                 |
|                    | Boom angle     |      |      |           | Boom angle     |      |  |     | Boom angle     |      |           |  | Boom angle     |           |           |  | Boom angle     |                 |
| Working radius (m) | 12.0           | 33.7 |      |           | 32.6           |      |  |     |                |      |           |  |                |           |           |  | 12.0           |                 |
|                    | 14.0           | 29.8 |      |           | 28.8           |      |  |     | 26.9           |      |           |  |                |           |           |  | 14.0           |                 |
|                    | 16.0           | 26.7 |      |           | 25.6           |      |  |     | 24.7           |      |           |  | 22.2           |           |           |  | 16.0           |                 |
|                    | 18.0           | 24.1 | 29.6 |           | 23.1           |      |  |     | 22.1           |      |           |  | 21.2           |           |           |  | 18.0           |                 |
|                    | 20.0           | 21.9 | 26.5 |           | 21.0           | 24.9 |  |     | 20.0           |      |           |  | 19.2           |           |           |  | 20.0           |                 |
|                    | 22.0           | 20.2 | 24.0 |           | 19.2           | 22.7 |  |     | 18.2           | 21.5 |           |  | 17.5           |           |           |  | 22.0           |                 |
|                    | 24.0           | 18.7 | 21.9 |           | 17.6           | 20.6 |  |     | 16.7           | 19.7 |           |  | 16.0           |           |           |  | 24.0           |                 |
|                    | 26.0           |      | 20.1 |           | 16.3           | 18.9 |  |     | 15.4           | 18.0 |           |  | 14.7           | 17.3      |           |  | 26.0           |                 |
|                    | 28.0           |      | 18.6 |           | 15.2           | 17.5 |  |     | 14.3           | 16.6 |           |  | 13.6           | 15.8      |           |  | 28.0           |                 |
|                    | 30.0           |      |      |           | 14.2           | 16.2 |  |     | 13.3           | 15.3 |           |  | 12.6           | 14.6      |           |  | 30.0           |                 |
|                    | 34.0           |      |      |           | 32.0m/15.1     |      |  |     | 11.6           | 13.2 |           |  | 11.0           | 12.5      |           |  | 34.0           |                 |
|                    | 38.0           |      |      | 40.0m/8.1 |                |      |  |     |                | 11.6 |           |  |                | 9.7       | 10.9      |  |                | 38.0            |
|                    | 42.0           |      |      | 8.0       |                |      |  |     |                |      |           |  | 40.0m/9.1      | 9.6       |           |  | 42.0           |                 |
|                    | 46.0           |      |      | 44.0m/7.5 |                |      |  | 6.6 |                |      | 48.0m/5.3 |  |                | 44.0m/9.1 |           |  | 46.0           |                 |
|                    | 50.0           |      |      |           |                |      |  | 5.9 |                |      | 5.3       |  |                |           | 52.0m/4.2 |  | 50.0           |                 |
|                    | 54.0           |      |      |           |                |      |  |     |                |      | 4.8       |  |                |           | 4.2       |  | 54.0           |                 |
|                    | 58.0           |      |      |           |                |      |  |     |                |      | 56.0m/4.5 |  |                |           | 3.9       |  | 58.0           |                 |
|                    | 62.0           |      |      |           |                |      |  |     |                |      |           |  |                |           | 3.4       |  | 62.0           |                 |
| Reeves             | 3              |      |      |           | 3              |      |  |     | 3              |      |           |  | 2              |           |           |  | Reeves         |                 |

Working radius (m)

| Boom length (m)    |      |           |           |           | 54.9 |      |           |           | Boom length (m) |                |      |  |
|--------------------|------|-----------|-----------|-----------|------|------|-----------|-----------|-----------------|----------------|------|--|
| Jib length (m)     |      | 45.7      |           |           |      | 51.8 |           |           |                 | Jib length (m) |      |  |
| Boom angle         |      | 88°       | 83°       | 65°       | 60°  | 88°  | 83°       | 65°       | 60°             | Boom angle     |      |  |
| Working radius (m) | 18.0 | 18.2      |           |           |      |      |           |           |                 |                | 18.0 |  |
|                    | 20.0 | 17.9      |           |           |      | 14.9 |           |           |                 |                | 20.0 |  |
|                    | 22.0 | 16.7      |           |           |      | 14.6 |           |           |                 |                | 22.0 |  |
|                    | 24.0 | 15.2      |           |           |      | 14.3 |           |           |                 |                | 24.0 |  |
|                    | 26.0 | 14.0      | 16.2      |           |      | 13.2 |           |           |                 |                | 26.0 |  |
|                    | 28.0 | 12.9      | 15.0      |           |      | 12.1 | 14.0      |           |                 |                | 28.0 |  |
|                    | 30.0 | 11.9      | 13.8      |           |      | 11.2 | 13.0      |           |                 |                | 30.0 |  |
|                    | 34.0 | 10.3      | 11.8      |           |      | 9.6  | 11.0      |           |                 |                | 34.0 |  |
|                    | 38.0 | 9.0       | 10.2      |           |      | 8.3  | 9.4       |           |                 |                | 38.0 |  |
|                    | 42.0 | 7.9       | 8.9       |           |      | 7.2  | 8.2       |           |                 |                | 42.0 |  |
|                    | 46.0 | 44.0m/7.4 | 7.8       |           |      | 5.2  | 7.1       |           |                 |                | 46.0 |  |
|                    | 50.0 |           | 7.0       |           |      | 2.8  | 6.3       |           |                 |                | 50.0 |  |
|                    | 54.0 |           |           | 56.0m/3.2 |      |      | 3.5       |           |                 |                | 54.0 |  |
|                    | 58.0 |           |           | 3.2       |      |      | 56.0m/2.3 | 60.0m/2.9 |                 |                | 58.0 |  |
| 62.0               |      |           | 3.1       |           |      |      | 2.7       |           |                 | 62.0           |      |  |
| 66.0               |      |           | 2.7       |           |      |      | 2.3       |           |                 | 66.0           |      |  |
| 70.0               |      |           | 68.0m/2.5 |           |      |      |           |           |                 | 70.0           |      |  |
| Reeves             |      | 2         |           |           |      | 2    |           |           |                 | Reeves         |      |  |

Note: Ratings according to EN13000.  
Ratings shown in   are determined by the strength of the boom or other structural components.  
Refer to notes P21 and P22.







# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Boom Lifting Capacities with Luffing Jib Attached at 23 Degree Boom to Luffing Jib Offset Angle

Unit: metric ton

Counterweight: 60.0 t,  
Carbody weight: 20.0 t

| 21.3 m Boom Length | Boom length (m) | 21.3 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 7.0             | 70.6 | 67.8 | 65.0 | 61.5 | 57.9 | 53.6 |
|                    | 8.0             | 70.6 | 67.8 | 65.0 | 61.5 | 57.9 | 53.6 |
|                    | 9.0             | 70.6 | 67.8 | 65.0 | 61.5 | 57.9 | 53.6 |
|                    | 10.0            | 66.0 | 63.7 | 61.4 | 58.5 | 55.7 | 52.3 |
|                    | 12.0            | 48.7 | 46.6 | 44.5 | 41.8 | 39.2 | 36.1 |
|                    | 14.0            | 37.8 | 35.8 | 33.8 | 31.3 | 28.9 | 25.9 |
|                    | 16.0            | 30.3 | 28.4 | 26.5 | 24.1 | 21.8 | 19.0 |
|                    | 18.0            | 24.7 | 22.8 | 21.0 | 18.7 | 16.6 | 13.9 |
|                    | 20.0            | 20.3 | 18.5 | 16.8 | 14.7 | 12.6 | 10.0 |
|                    | 21.0            | 18.5 | 16.7 | 15.1 | 12.9 | 10.9 | 8.4  |
|                    | Reeves          | 6    | 6    | 5    | 5    | 5    | 5    |

| 27.4 m Boom Length | Boom length (m) | 27.4 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 8.0             | 71.1 | 68.6 | 66.1 | 62.9 | 59.8 | 56.0 |
|                    | 9.0             | 71.1 | 68.6 | 66.1 | 62.9 | 59.8 | 56.0 |
|                    | 10.0            | 66.2 | 64.1 | 62.0 | 59.3 | 56.7 | 53.5 |
|                    | 12.0            | 48.9 | 47.0 | 45.0 | 42.6 | 40.2 | 37.3 |
|                    | 14.0            | 38.0 | 36.2 | 34.4 | 32.1 | 29.8 | 27.1 |
|                    | 16.0            | 30.5 | 28.7 | 27.0 | 24.8 | 22.7 | 20.2 |
|                    | 18.0            | 24.9 | 23.2 | 21.5 | 19.4 | 17.4 | 15.0 |
|                    | 20.0            | 20.5 | 18.9 | 17.3 | 15.3 | 13.4 | 11.0 |
|                    | 22.0            | 17.2 | 15.6 | 14.0 | 12.1 | 10.3 | 8.0  |
|                    | 24.0            | 14.4 | 12.9 | 11.4 | 9.5  | 7.7  | 5.5  |
|                    | 25.0            | 13.2 | 11.7 | 10.2 | 8.4  | 6.7  | 4.5  |
|                    | Reeves          | 6    | 6    | 5    | 5    | 5    | 5    |

| 33.5 m Boom Length | Boom length (m) | 33.5 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 9.0             | 71.5 | 69.3 | 67.2 | 64.4 | 61.7 | 58.4 |
|                    | 10.0            | 64.9 | 62.9 | 60.9 | 58.4 | 55.9 | 52.9 |
|                    | 12.0            | 49.0 | 47.1 | 45.3 | 43.0 | 40.8 | 38.0 |
|                    | 14.0            | 38.0 | 36.2 | 34.5 | 32.4 | 30.3 | 27.8 |
|                    | 16.0            | 30.4 | 28.7 | 27.1 | 25.0 | 23.1 | 20.7 |
|                    | 18.0            | 24.7 | 23.1 | 21.6 | 19.6 | 17.8 | 15.5 |
|                    | 20.0            | 20.5 | 18.9 | 17.4 | 15.5 | 13.8 | 11.6 |
|                    | 22.0            | 17.0 | 15.5 | 14.1 | 12.2 | 10.5 | 8.4  |
|                    | 24.0            | 14.2 | 12.8 | 11.4 | 9.6  | 7.9  | 5.9  |
|                    | 26.0            | 12.0 | 10.5 | 9.2  | 7.5  | 5.8  |      |
|                    | 28.0            | 10.1 | 8.7  | 7.4  | 5.7  | 4.1  |      |
|                    | 30.0            | 8.5  | 7.2  | 5.9  | 4.2  |      |      |
|                    | 32.0            | 7.2  | 5.8  | 4.6  |      |      |      |
|                    | Reeves          | 6    | 6    | 6    | 5    | 5    | 5    |

| 39.6 m Boom Length | Boom length (m) | 39.6 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 10.0            | 61.4 | 59.5 | 57.5 | 55.1 | 52.8 | 49.9 |
|                    | 12.0            | 48.7 | 46.9 | 45.1 | 42.9 | 40.8 | 38.2 |
|                    | 14.0            | 37.9 | 36.2 | 34.6 | 32.5 | 30.5 | 28.1 |
|                    | 16.0            | 30.2 | 28.6 | 27.1 | 25.2 | 23.3 | 21.0 |
|                    | 18.0            | 24.6 | 23.1 | 21.6 | 19.7 | 18.0 | 15.8 |
|                    | 20.0            | 20.2 | 18.8 | 17.3 | 15.6 | 13.9 | 11.8 |
|                    | 22.0            | 16.8 | 15.3 | 14.0 | 12.2 | 10.6 | 8.6  |
|                    | 24.0            | 14.0 | 12.6 | 11.3 | 9.6  | 8.0  | 6.1  |
|                    | 26.0            | 11.8 | 10.4 | 9.1  | 7.4  | 5.9  | 4.0  |
|                    | 28.0            | 9.9  | 8.5  | 7.3  | 5.7  | 4.2  |      |
|                    | 30.0            | 8.3  | 7.0  | 5.7  | 4.2  |      |      |
|                    | 32.0            | 6.9  | 5.6  | 4.4  |      |      |      |
|                    | 35.0            | 5.2  | 3.9  |      |      |      |      |
|                    | 36.0            | 4.7  |      |      |      |      |      |
|                    | 37.0            | 4.2  |      |      |      |      |      |
|                    | Reeves          | 5    | 5    | 5    | 5    | 4    | 4    |

| 45.7 m Boom Length | Boom length (m) | 45.7 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 11.0            | 51.9 | 50.1 | 48.3 | 46.1 | 43.9 | 41.3 |
|                    | 12.0            | 46.6 | 44.8 | 43.2 | 41.0 | 39.0 | 36.4 |
|                    | 14.0            | 37.7 | 36.1 | 34.5 | 32.5 | 30.6 | 28.3 |
|                    | 16.0            | 30.1 | 28.5 | 27.0 | 25.2 | 23.4 | 21.2 |
|                    | 18.0            | 24.4 | 22.9 | 21.5 | 19.7 | 18.0 | 16.0 |
|                    | 20.0            | 20.1 | 18.6 | 17.3 | 15.6 | 13.9 | 11.9 |
|                    | 22.0            | 16.6 | 15.2 | 13.9 | 12.2 | 10.7 | 8.8  |
|                    | 24.0            | 13.8 | 12.5 | 11.2 | 9.6  | 8.1  | 6.2  |
|                    | 26.0            | 11.6 | 10.2 | 9.0  | 7.4  | 6.0  | 4.1  |
|                    | 28.0            | 9.7  | 8.4  | 7.2  | 5.6  | 4.2  |      |
|                    | 30.0            | 8.0  | 6.7  | 5.5  | 4.0  |      |      |
|                    | 32.0            | 6.6  | 5.4  | 4.2  |      |      |      |
|                    | 34.0            | 5.4  | 4.2  |      |      |      |      |
|                    | 36.0            | 4.4  |      |      |      |      |      |
|                    | 37.0            | 3.9  |      |      |      |      |      |
|                    | Reeves          | 4    | 4    | 4    | 4    | 4    | 4    |

| 51.8 m Boom Length | Boom length (m) | 51.8 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 12.0            | 44.5 | 42.8 | 41.1 | 39.0 | 37.0 | 34.6 |
|                    | 14.0            | 36.4 | 34.8 | 33.3 | 31.3 | 29.5 | 27.2 |
|                    | 16.0            | 29.7 | 28.2 | 26.8 | 25.0 | 23.3 | 21.1 |
|                    | 18.0            | 24.1 | 22.7 | 21.3 | 19.6 | 17.9 | 15.9 |
|                    | 20.0            | 19.7 | 18.3 | 17.0 | 15.4 | 13.8 | 11.9 |
|                    | 22.0            | 16.3 | 14.9 | 13.7 | 12.1 | 10.6 | 8.7  |
|                    | 24.0            | 13.5 | 12.2 | 11.0 | 9.4  | 8.0  | 6.2  |
|                    | 26.0            | 11.2 | 10.0 | 8.8  | 7.2  | 5.8  | 4.1  |
|                    | 28.0            | 9.4  | 8.1  | 6.9  | 5.4  | 4.1  |      |
|                    | 30.0            | 7.7  | 6.4  | 5.3  | 3.8  |      |      |
|                    | 32.0            | 6.3  | 5.1  | 4.0  |      |      |      |
|                    | 34.0            | 5.1  | 3.9  |      |      |      |      |
|                    | 36.0            | 4.0  |      |      |      |      |      |
|                    | Reeves          | 4    | 4    | 4    | 3    | 3    | 3    |

| 54.9 m Boom Length | Boom length (m) | 54.9 |      |      |      |      |      |
|--------------------|-----------------|------|------|------|------|------|------|
|                    | Jib length (m)  | 21.3 | 27.4 | 33.5 | 39.6 | 45.7 | 51.8 |
|                    | 13.0            | 39.3 | 37.7 | 36.2 | 34.2 | 32.3 | 30.0 |
|                    | 14.0            | 35.6 | 34.0 | 32.5 | 30.6 | 28.8 | 26.6 |
|                    | 16.0            | 29.4 | 27.9 | 26.5 | 24.7 | 23.0 | 20.9 |
|                    | 18.0            | 23.9 | 22.5 | 21.2 | 19.5 | 17.8 | 15.9 |
|                    | 20.0            | 19.6 | 18.2 | 16.9 | 15.3 | 13.7 | 11.8 |
|                    | 22.0            | 16.1 | 14.8 | 13.5 | 12.0 | 10.5 | 8.6  |
|                    | 24.0            | 13.3 | 12.0 | 10.8 | 9.3  | 7.9  | 6.1  |
|                    | 26.0            | 11.1 | 9.8  | 8.6  | 7.1  | 5.7  | 4.0  |
|                    | 28.0            | 9.1  | 7.9  | 6.7  | 5.2  | 3.9  |      |
|                    | 30.0            | 7.5  | 6.3  | 5.2  | 3.7  |      |      |
|                    | 32.0            | 6.1  | 4.9  | 3.8  |      |      |      |
|                    | 34.0            | 4.9  | 3.7  |      |      |      |      |
|                    | 35.0            | 4.3  |      |      |      |      |      |
|                    | Reeves          | 3    | 3    | 3    | 3    | 3    | 3    |

Note: Ratings according to EN13000.

Ratings shown in   are determined by the strength of the boom or other structural components.

Refer to notes P21 and P22.







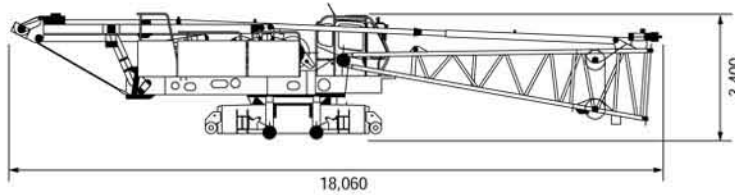
# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822


**Base Machine + Boom Base**

With boom base, trans-lifter, main and aux. winches (non free-fall) including wire rope, self removal device

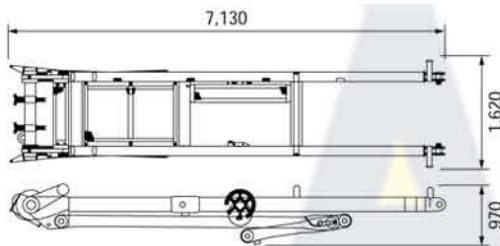
Weight: approx. 44,000 kg\*, Width: 3,500 mm

**Crawler**

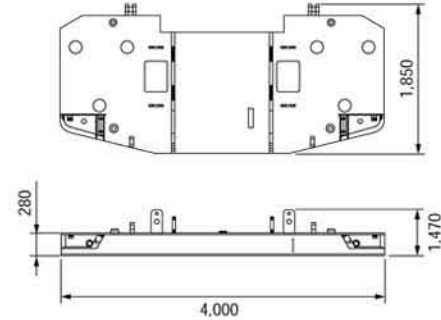
Weight: 17,155 kg, Width: 1,070 mm

**Gantry**


Weight: 2,700 kg

**Counterweight A**


Weight: 10,000 kg

**Counterweight B**


Weight: 5,000 kg x 10 pieces

**Carbody Weight A**

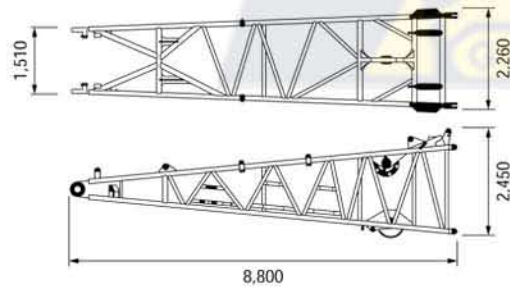
Weight: 5,000 kg x 2 pieces

**Carbody Weight B**

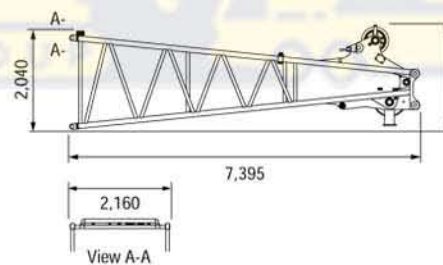
Weight: 5,000 kg x 2 pieces

**Boom Base**


Weight: 2,620 kg

**Boom Top**

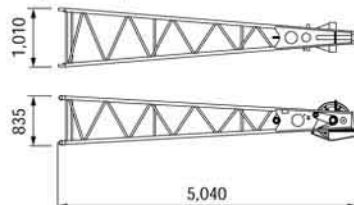

Weight: 2,240 kg (with Guy Cables)

**Jib Base with Strut (For Crane)**

Weight: 510 kg, Width: 1,040 mm

**Jib Top (For Crane)**

Weight: 315 kg

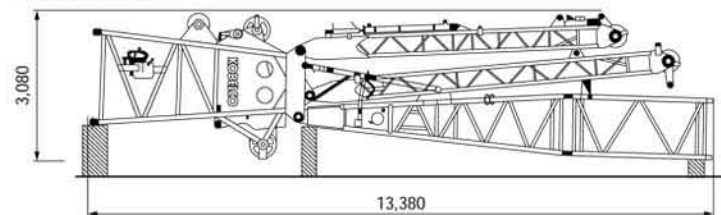
**Insert Boom**

|       | L (mm) | Weight (kg)* |
|-------|--------|--------------|
| 3.0m  | 3,180  | 630          |
| 6.1m  | 6,230  | 1,030        |
| 9.1m  | 9,280  | 1,420        |
| 12.2m | 12,320 | 1,680        |

\*with guy cables

**Travel Kit Assembly**

Weight: 6,600 kg








# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

Dimensions: mm Weight: kg

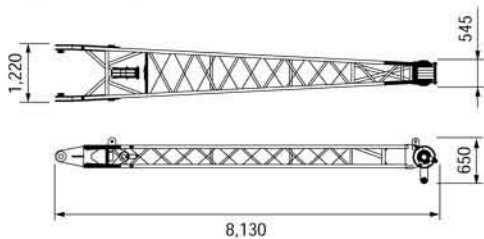
### Luffing Boom Top

Weight: 2,545 kg



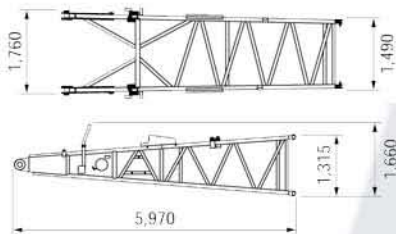
### Front Strut (Luffing Jib)

Weight: 1,000 kg



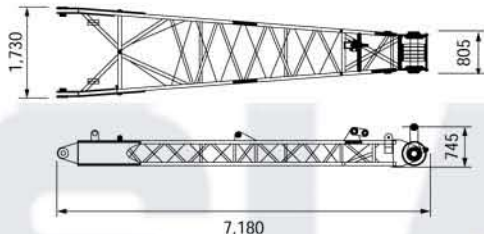
### Luffing Jib Base

Weight: 1,140 kg




### Rear Strut (Luffing Jib)

Weight: 1,090 kg



### Luffing Jib Top

Weight: 1,170 kg



## Other Attachments

| Attachments                      | Weight         | Dimensions (L x W x H)          |
|----------------------------------|----------------|---------------------------------|
| Base machine (without boom base) | 38,150 kg      | 10,700 mm x 3,500 mm x 3,390 mm |
| Trans-lifter                     | 360 kg         | 1,050 mm x 1,030 mm             |
| Boom backstop                    | 740 kg/1 piece | 7,090 mm x 360 mm               |
| 3.0 m Insert jib (for crane)     | 110 kg         | 3,130 mm x 1,020 mm x 840 mm    |
| 6.1 m Insert jib (for crane)     | 190 kg         | 6,175 mm x 1,020 mm x 840 mm    |
| Auxiliary sheave                 | 295 kg         | 2,030 mm x 740 mm x 720 mm      |
| Upper spreader                   | 590 kg         | 2,230 mm x 395 mm x 790 mm      |
| Lower spreader                   | 400 kg         | 1,500 mm x 290 mm x 780 mm      |
| 3.0 m luffing Insert jib         | 310 kg         | 3,165 mm x 1,490 mm x 1,290 mm  |
| 6.1 m luffing Insert jib         | 540 kg         | 6,210 mm x 1,490 mm x 1,290 mm  |
| 9.1 m luffing Insert jib         | 740 kg         | 9,260 mm x 1,490 mm x 1,290 mm  |
| Luffing jib backstop             | 100 kg/1 piece | 2,940 mm x 210 mm x 230 mm      |
| Strut backstop (luffing jib)     | 180 kg/1 piece | 2,890 mm x 270 mm               |
| Auxiliary sheave (luffing jib)   | 380 kg         | 1,010 mm x 890 mm x 910 mm      |
| Luffing jib drum                 | 1,470 kg       | 840 mm x 1,620 mm x 900 mm      |
| 180-ton hook                     | 2,800 kg       | 2,225 mm x 700 mm x 1,000 mm    |
| 110-ton hook                     | 1,730 kg       | 2,140 mm x 540 mm x 700 mm      |
| 70-ton hook                      | 1,200 kg       | 1,825 mm x 470 mm x 700 mm      |
| 35-ton hook                      | 900 kg         | 1,575 mm x 365 mm x 700 mm      |
| Ball hook                        | 460 kg         | 1,200 mm x 380 mm dia.          |

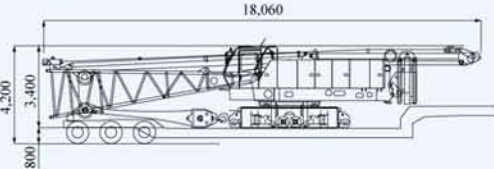

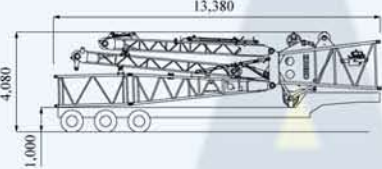




Note: Estimated weights may vary  $\pm$  2%.



# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822

## Luffing Boom 54.9 m + Luffing Jib 51.8 m

| Configuration                                                                                                                                                                                          | Description                                                                                                                                                         | Total Weight                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>No.1 Low Loader</b> <span style="float: right;">Width: 3,500 mm</span><br>                                         | Base Machine =<br>Including 3rd winch<br>Translifter<br>All wire ropes                                                                                              | Approx. 44.00ton                                                        |
| <b>No.2 Semi Loader</b><br>          | Crawler No.1 =<br>Crawler No.2 =<br>Luffing Jib Top =<br>Total =                                                                                                    | 17.16 ton<br>17.16 ton<br>1.17 ton<br>35.49 ton                         |
| <b>No.3 Semi Loader</b><br>                                                                                          | Travel Kit Assembly =                                                                                                                                               | 6.60 ton                                                                |
| <b>No. 4 Tent Side Truck</b><br>                                                                                    | Counterweight B (4 x 5.00 ton) =<br>9.1 m Insert Boom x 1 =<br>9.1 m Luffing Insert Jib x 1 =<br>3.0 m Insert Boom x 1 =<br>Total =                                 | 20.00 ton<br>1.42 ton<br>0.74 ton<br>0.63 ton<br>22.79 ton              |
| <b>No.5 Tent Side Truck</b><br>  | Counterweight B (4 x 5.00 ton) =<br>9.1 m Insert Boom x 1 =<br>9.1 m Luffing Insert Jib x 1 =<br>3.0 m Insert Boom x 1 =<br>Total =                                 | 20.00 ton<br>1.42 ton<br>0.74 ton<br>0.53 ton<br>22.69 ton              |
| <b>No.6 Tent Side Truck</b><br>                                                                                     | Counterweight B (2 x 5.00 ton)<br>Carbody Weight B (2 x 5.00 ton) =<br>9.1 m Insert Boom x 1 =<br>9.1 m Luffing Insert Jib x 1 =<br>Total =                         | 10.00 ton<br>10.00 ton<br>1.42 ton<br>0.74 ton<br>22.16 ton             |
| <b>No.7 Tent Side Truck</b><br>                                                                                     | Counterweight A Base =<br>9.1 m Insert Boom x 1 =<br>6.1 m Luffing Insert Jib x 1 =<br>3.0 m Luffing Insert Jib x 1 =<br>Carbody Weight A (2x5.00 ton) =<br>Total = | 10.00 ton<br>1.42 ton<br>0.54 ton<br>0.31 ton<br>10.00 ton<br>22.27 ton |

Note: Estimated weights may vary  $\pm 2\%$ .

This transport plan depends on specifications of your trailers/trucks and the areas or countries where you transport.





# ASIAGROUP LEASING PTE LTD

NO.3 PIONEER PLACE SINGAPORE 627804 TEL: +65 67562288 FAX: +65 67568822



## Standard Equipment

### Upper structure/Lower structure

Counterweight: 60.0 ton (total weight)  
 Carbody weight: 20.0 ton (total weight)  
 1,070 mm shoe crawlers  
 Batteries (170 Ah/20 HR)  
 Trans-lifter (jack system)  
 Gantry raising/lowering cylinder  
 Electric hand throttle grip  
 Variable boom hoist speed controller  
 Swing neutral-free/brake select switch  
 Side deck for cab  
 Side deck (right side guard)  
 Steps (crawlers)  
 Two front working lights  
 Tools (for routine maintenance)  
 Two rear view mirrors  
 Electric fuel pump  
 Counterweight self removal  
 Crawler self removal  
 Cable roller (for boom)

### Cab/Control

Boom hoist pedal (EU area only)  
 Air conditioner  
 Cup holder  
 Ashtray  
 Cigar lighter  
 Intermittent wiper & window washer (skylight and front window)  
 Sun visor  
 Roof blind  
 Floor mat (cloth)  
 Foot rest  
 Shoe tray  
 Level gauge (operator cabin)

### Safety Device

Load Moment Indicator (with boom lowering slow stop function)  
 LMI release key (for hook over-hoist prevention device and boom over-hoist prevention device)  
 LCD multi display  
 Ultimate stop function for boom over-hoist  
 Function lock lever  
 Propel lever lock  
 Mechanical drum lock pawl (main, aux. and boom hoist)  
 Signal horn  
 Swing parking brake  
 Mechanical swing lock pin (four positions)  
 Swing flashers/warning buzzer  
 Cab window guard (left side)  
 Cab top guard  
 Fire extinguisher  
 External lamp for over-load alarm  
 Life hammer

