

1

2

3

4

5



6

7

8


9

K800 TC2

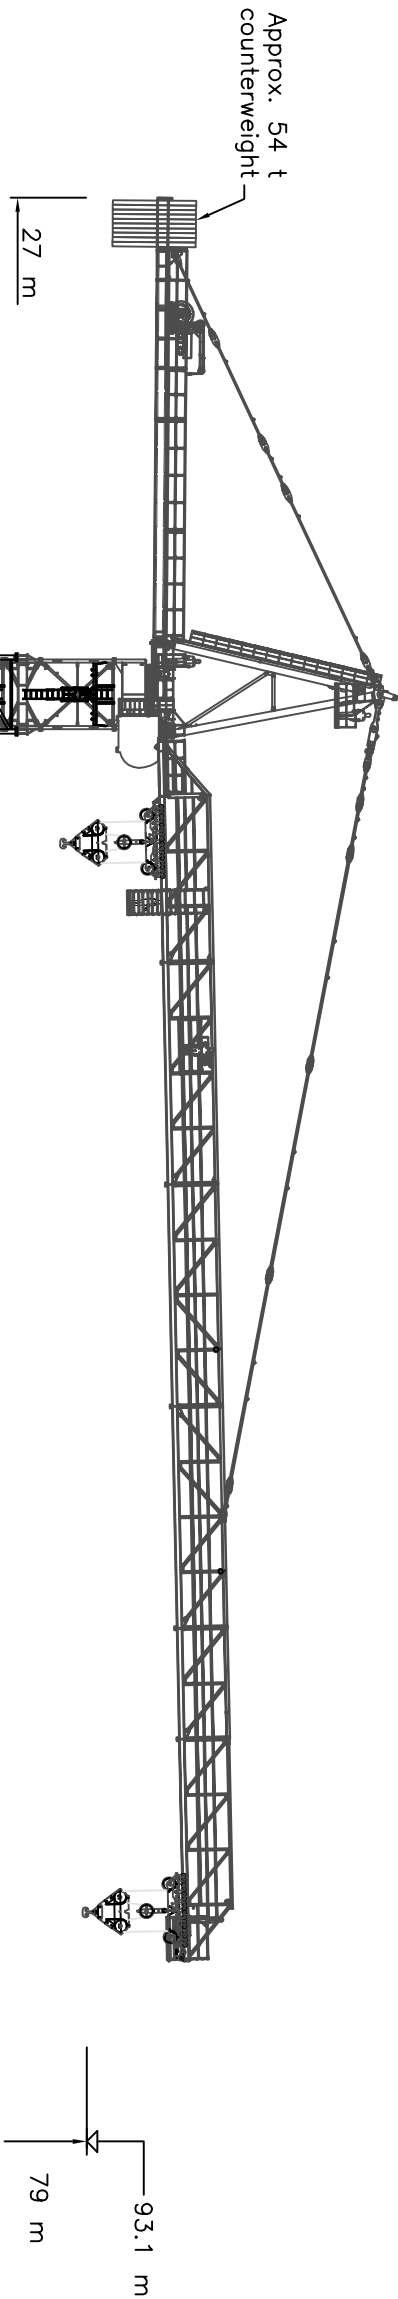

PHASE 6, HUH = 79 m (elevation: 93.1m, required:92.6m)


Wind speed	IN SERVICE 20 m/s	OUT OF SERVICE 50 m/s
M (kNm)	11140	12770
N (kN)	2700	2470
Q (kN)	95	320
M_t (kNm)	1000	0
Corner compression (kN)	2870	3120
Corner tension (kN)	1510	1890

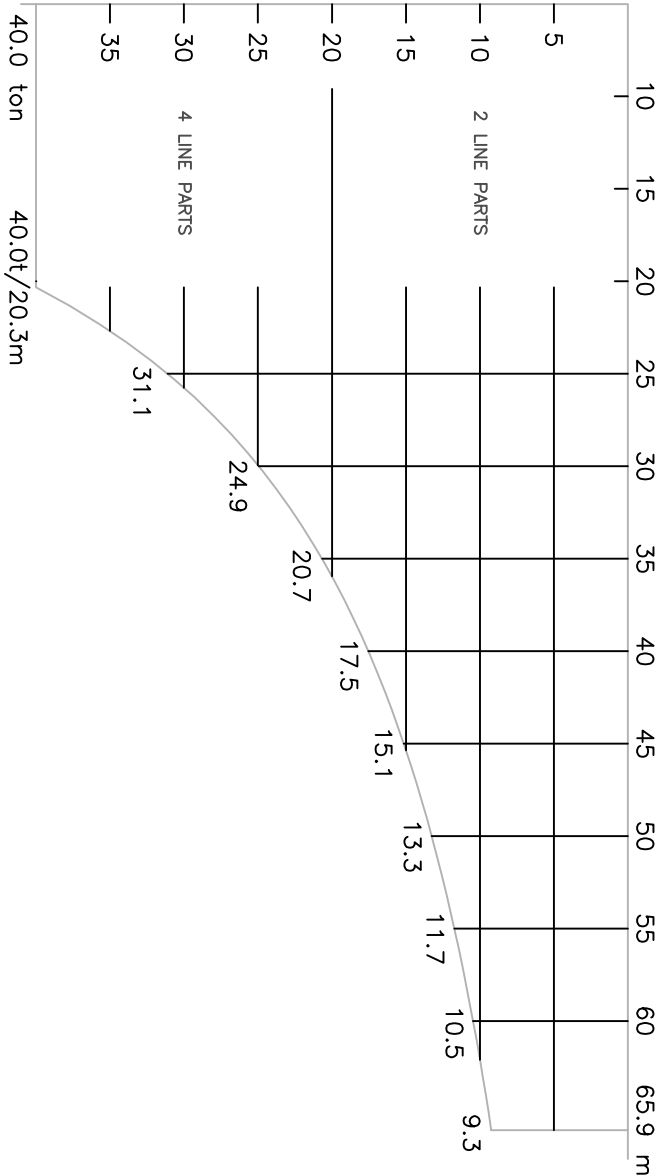

PERFORMANCE

HOIST MOTOR : 85 kW	
2 PARTS	
0-4 t	0-74 m/min
4-8 t	0-44 m/min
8-10 t	0-22 m/min
4 PARTS	
0-8 t	0-37 m/min
8-16 t	0-22 m/min
16-40 t	0-11 m/min
0-40 t	0-70 m/min
0-40 t	0-0.6 rpm
0-40 t	N/A

3 x 380-440 V 50-60 Hz	CONTROL VOLTAGE 24 VDC - 220 VAC
---------------------------	-------------------------------------

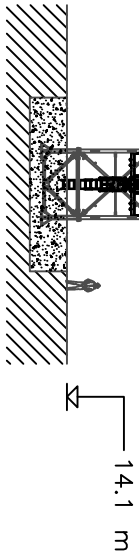

KONST.: 111209 JL	PROJ.	KRANTYPE	STK	SAML.	TEKN.
TEKN.: 111209 JL					
GOOK.: 111209 JL					
ESTATIER:	SKALA:	OVERF. AREAL	OVERLAGE-BEHUURING	MATR.:	
ESTATIEF AF:	1:200	TOTALVAST:	ANT. TEGNING:	DM:	
OPRIJDELSE:	TRANSPORTAAL:	kg	TTBL	ANT. STUKK:	
		m²			
KRÖLL CRANES A/S					
HØRDRØRVEJ 2, 2500 LANGE, DENMARK					
Phone: +45 46 18 80 00					
www.kröllcranes.com					
K800					
Main assembly					
TEKN. NR.					
C1-00.00090801-00					